

Safety, commissioning and performance tester of PV plants


Page 1 of 6

The multifunction instrument PVCHECKs performs prompt and safe electrical checks required for a PV system (DC section) and controls of the functionality of modules / strings in accordance with IEC/EN62446 guidelines.

#### **PVCHECKs:** safety checks

PVCHECKs verifies continuity of protective conductors (and associated connections) and measures insulation resistance of the active conductors on a module, a string, or a photovoltaic field in accordance with IEC/EN62446 guidelines, so avoiding to use any external switch to short-circuit positive and negative terminals.

# PV field not connected to ground

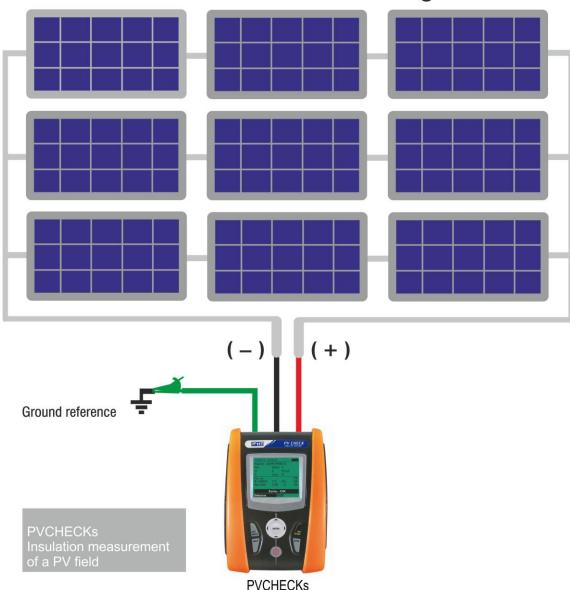

Direct measurement of insulation resistance on a PV Field not connected to ground








Safety, commissioning and performance tester of PV plants

Page 2 of 6

### **PVCHECKs:** functionality checks

PVCHECKs verifies functionality of a PV string in accordance with the IEC/EN62446 guidelines by measuring open circuit voltage and short-circuit current under operating conditions **up to 15A** and extrapolating the results referred to the STC (by measuring the solar radiation). Finally, it displays measurements as well as comparison with the PV strings previously tested.



SOLAR-02

IBR. A TEMPPORT TEMP


PV Module/String

Test IVCK – Automatic measurement of Voc, Isc + Insulation + Continuity on a PV Module/String without irradiance measurement

Test IVCK – Automatic measurement of Voc, Isc + Insulation + Continuity on a PV Module/String with irradiance measurement with optional accessories SOLAR-02 and HT304N

#### **PVCHECKs:** performance checks

PVCHECKs analyses the performance of a PV array (DC) under the operating conditions (connected to the inverter) displaying the generated power and the efficiency of the PV plant in accordance with IEC/EN62446.

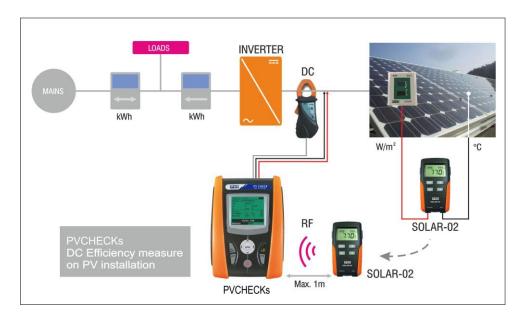







Rel. 3.00 - 29707/24

Page 3 of 6

Safety, commissioning and performance tester of PV plants

## 2. ELECTRICAL SPECIFICATIONS

Accuracy is calculated as  $\pm$  [% readings + (no. of digits) \* resolution] at 23 °C  $\pm$  5 °C, relative humidity <80%HR

### 2.1. PERFORMANCE TEST

DC Voltage		
Range (V)	Resolution (V)	Uncertainty
5.0 ÷ 199.9	0.1	1 (1 00/rdg 1 2dgt)
200.0 ÷ 999.9	0.5	± (1.0%rdg + 2dgt)

DC current (by mean external clamp)		
Range (mV)	Resolution (mV)	Uncertainty
-1100 ÷ -5	0.1	+ (0.50/rdg + 0.6m)/)
5 ÷ 1100	U. I	± (0.5%rdg + 0.6mV)

DC current is always positive ;DC current zeroed if the related voltage value is < 5mV

FS DC clamp [A]	Resolution [A]	Minimum read value [A]
1< FS ≤ 10	0.001	0.05
10< FS ≤ 100	0.01	0.5
100< FS ≤ 1000	0.1	5

DC Power (Vmeas > 150)	<b>V</b> )		
Clamp FS (A)	Range (W])	Resolution (W)	Uncertainty
1< FS ≤ 10	0.000k ÷ 9.999k	0.001k	$\pm$ (1.5%rdg + 3dgt)
10< FS ≤ 100	0.00k ÷ 99.99k	0.01k	(Imeas < 10%FS) ±(1.5%rdg)
100< FS ≤ 1000	0.0k ÷ 999.9k	0.1k	(Imeas ≥ 10%FS)

Irradiance (by mean HT304N)		
Range (mV)	Resolution (mV)	Uncertainty
1 ÷ 40.0	0.02	±(1.0%rdg + 0.1mV)

Temperature (by mean PT300N)			
Range (°C)	Resolution (°C)	Uncertainty	
-20.0 ÷ 100.0	0.1	± (1.0%rdg +1°C)	







Rel. 3.00 - 29707/24

Safety, commissioning and performance tester of PV plants

Page 4 of 6

## 2.2. FUNCTIONALITY TEST

DC Voltage @ OPC		
Range (V)	Resolution (V)	Uncertainty
5.0 ÷ 199.9	0.1	±(1.0%rdg+2dgt)
200 ÷ 999	1	

Minimum VPN voltage to start the test: 15V

DC Current @ OPC		
Range (A)	Resolution (A)	Uncertainty
0.10 ÷ 15.00	0.01	±(1.0%rdg+2dgt)

DC Voltage @ STC		
Range (V)	Resolution (V)	Uncertainty
5.0 ÷ 199.9	0.1	±(4.0%rdg+2dgt)
200 ÷ 999	1	

DC Current @ STC		
Range (A)	Resolution (A)	Uncertainty
0.10 ÷ 15.00	0.01	±(4.0%rdg+2dgt)

Irradiance (by mean HT304N)		
Range (mV)	Resolution (mV)	Uncertainty
1 ÷ 40.0	0.02	±(1.0%rdg + 0.1mV)

Temperature (by mean PT300N)			
Range (°C)	Resolution (°C)	Uncertainty	
-20.0 ÷ 100.0	0.1	± (1.0%rdg +1°C)	







Rel. 3.00 - 29707/24

Safety, commissioning and performance tester of PV plants

Page 5 of 6

### .3. SAFETY TEST

Continuity Test (LOWΩ)			
Range [ $\Omega$ ]	Resolution [ $\Omega$ ]	Uncertainty	
0.00 ÷ 1.99	0.01		
2.0 ÷ 19.9	0.1	$\pm$ (2.0%rdg + 2dgt)	
20 ÷ 199	1		

Test current >200mA DC up to  $2\Omega$  (test leads included), Resolution 1mA, Uncertainty  $\pm (5.0\% \text{rdg} + 5 \text{dgt})$ Open loop voltage

Insulation Test (M $\Omega$ ) – Mode TIMER					
Test voltage [V]	Range [MΩ]	Resolution [M $\Omega$ ]	Uncertainty		
250, 500, 1000	0.01 ÷ 1.99	0.01			
	2.0 ÷ 19.9	0.1	±(5.0%rdg+ 5dgt)		
	20 ÷ 199	1			

Open voltage: Short circuit current: < 1.25 \* nominal test voltage <15mA (peak) for all test voltages

Resolution 1V, uncertainty  $\pm$ (5.0%rdg + 5dgt) @ Rmis> 0.5% FS Generated voltage

> 1mA with load =  $1k\Omega$  x Vnom Test current

Insulation Test (M $\Omega$ ) – Mode FIELD (*), STRING (**)					
Test voltage [V]	Range [MΩ]	Resolution [M $\Omega$ ]	Uncertainty (***)		
250	0.1 ÷ 1.9	0.1	±(20.0%rdg+ 5dgt)		
	2 ÷ 99	1			
500	0.1 ÷ 1.9	0.1			
	2 ÷ 99	1			
1000	0.1 ÷ 1.9	0.1			
	2 ÷ 99	1			

(\*) For FIELD mode (\*\*) For STRING mode if VPN >1V the minimum voltage VEP and VEN for the calculation of Ri(+) and Ri(-) is 1V

minimum VPN voltage to start the test: 15V

Open voltage <1.25 x nominal test voltage

Short circuit current < 15mA (peak) for each test voltage

resolution 1V, accuracy ±(5.0%reading + 5digits) @ Rmis> 0.5% FS Generated voltage

Rated current measured > 1mA with 1k $\Omega$  @ Vnom

add 5 dgts to the accuracy if (\*\*\*) For FIELD mode:







Rel. 3.00 - 29707/24

Page 6 of 6

Safety, commissioning and performance tester of PV plants

## 3. GENERAL SPECIFICATIONS

**DISPLAY AND MEMORY:** 

Features: 128x128pxl custom LCD with backlight

Memory: max 999 test

**POWER SUPPLY:** 

PVCHECK internal power supply: 6x1.5V alkaline batteries type LR6, AA, AM3, MN 1500

Battery life: approx.120 hours (DC efficiency test)

SOLAR-02 power supply: 4x1.5V alkaline batteries type AAA LR03

SOLAR-02 max recording time (@ IP=5s): approx. 1.5h

**OUTPUT INTERFACE** 

PC communication port: optical/USB

Interface with SOLAR-02: wireless RF communication (max distance 1m)

**MECHANICAL FEATURES** 

Size (L x W x H): 235 x 165 x 75mm

Weight (batteries included): 1.2kg

**ENVIRONMENTAL CONDITIONS:** 

Reference temperature:  $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$  Working temperature:  $0^{\circ} \div 40^{\circ}\text{C}$  Working humidity:  $<80^{\circ}\text{HR}$  Storage temperature (remove the batteries):  $-10 \div 60^{\circ}\text{C}$  Storage humidity:  $<80^{\circ}\text{HR}$ 

**GENERAL REFERENCE STANDARDS:** 

Safety: IEC/EN61010-1
EMC: IEC/EN61326-1
Safety of measurement accessories: IEC/EN61010-031

Measurements: IEC/EN62446 (PV performance, IVCK)

IEC/EN 61557-1, 2, -4 (LOWΩ, MΩ))

Insulation: double insulation

Pollution degree: 2

Overvoltage category: CAT III 300V to ground

Max 1000V DC among inputs P, N, E, C

Max height of use: 2000m

This instrument complies with the requirements of the European Low Voltage Directives 2006/95/EC (LVD) and EMC 2004/108/EC

This instrument satisfies the requirements of 2011/65/EU (RoHS) directive and 2012/19/EU (WEEE) directive



