

# xEffect - Industrial Switchgear Range

## Catalog



**EATON**

*Powering Business Worldwide*

We make what matters work.\*



At Eaton, we believe that power is a fundamental part of just about everything people do. That's why we're dedicated to helping our customers find new ways to manage electrical, hydraulic and mechanical power more efficiently, safely and sustainably. To improve people's lives, the communities where we live and work, and the planet our future generations depend upon. Because this is what really matters. And we're here to make sure it works.

To learn more go to: [Eaton.com/whatmatters](http://Eaton.com/whatmatters)

We make what matters work.



Powering Business Worldwide

MCBs and RCCBs for North American market  
UL certified for eOEMs who act worldwide  
providing power distribution systems for  
Power Plants in North America.




High frequency TL lighting is often used in agricultural industry applications (such as barns). Conventional circuit breakers appear to sometimes fail spontaneously, which is very undesirable in barns. Consider a failure of the ventilation systems, feeding systems, manure and egg collection in poultry barns. By using the new digital circuit breaker from Eaton, the problem of undesired switch off can be minimized.




B+ type RCCB for enhanced fire protection and where DC leakage currents occur – data centers, ....



High safety relevant applications e.g. hospitals where digital RCCBs are used in the distribution system, ....

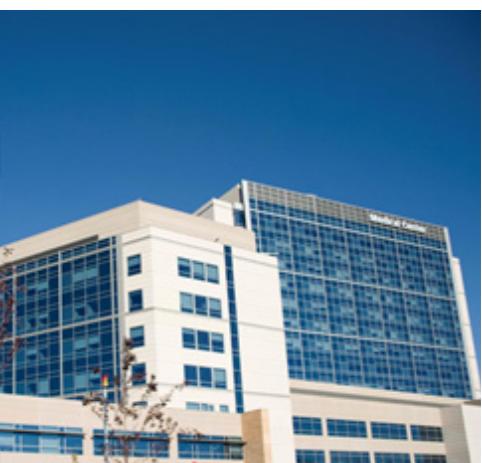

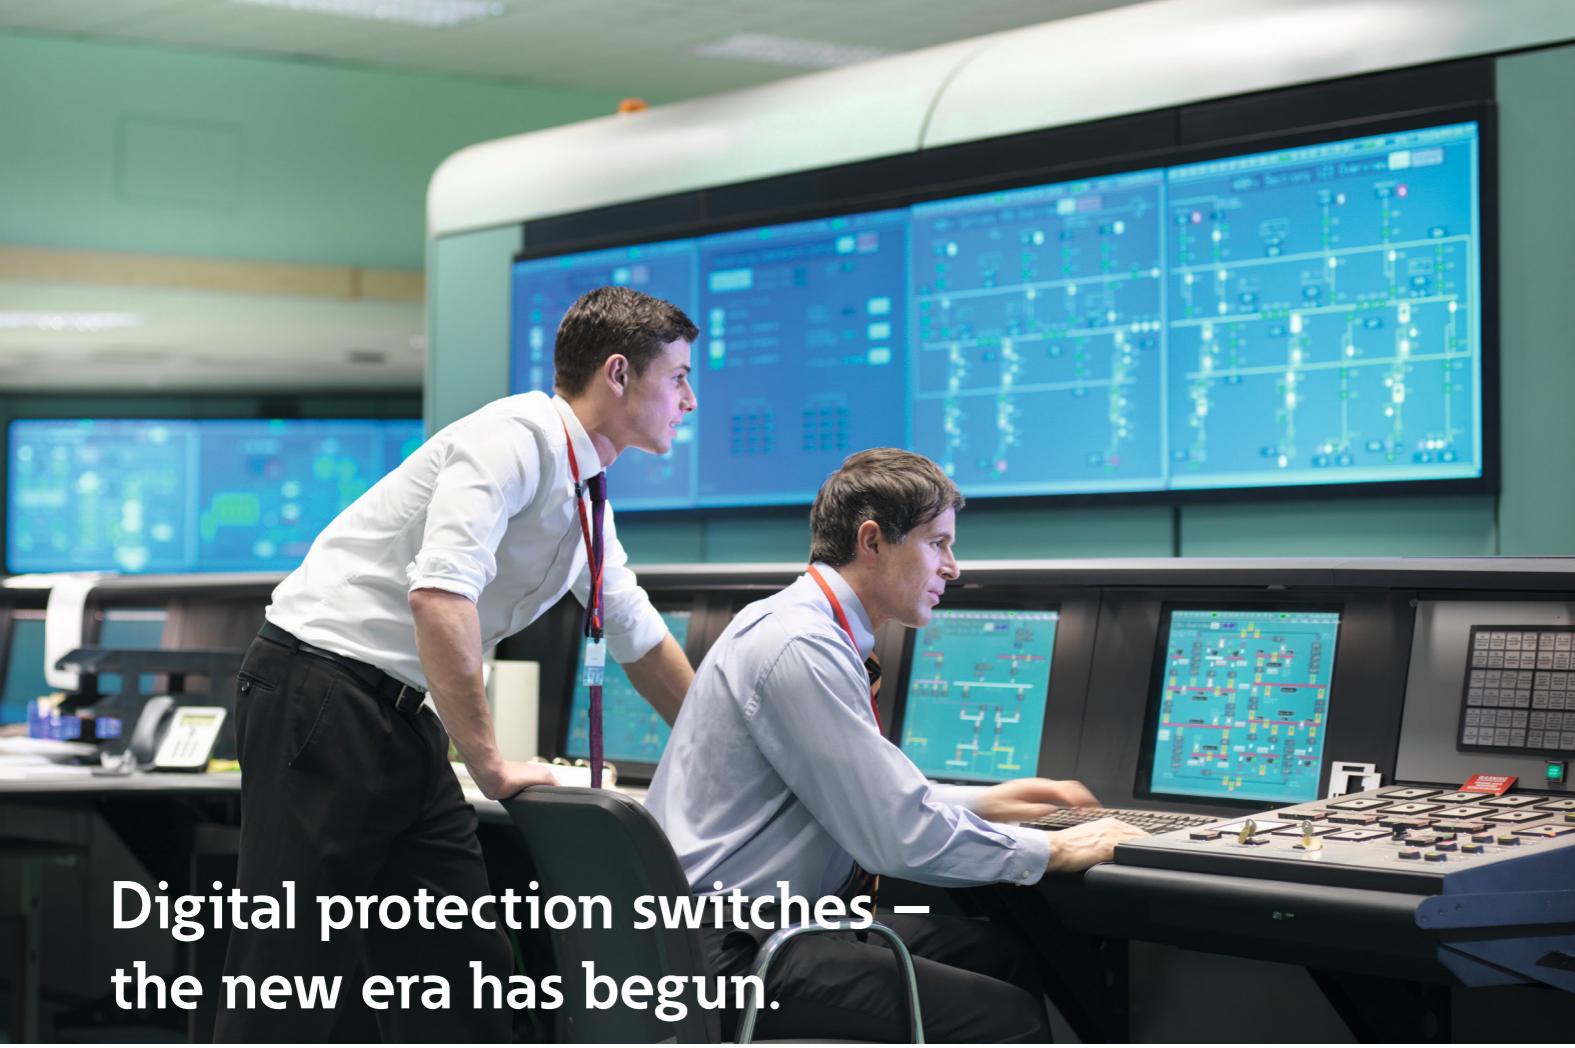

## Digital protection switches – the new era has begun.

### Better security with proactive communication!

The digital RCCB from Eaton's xEffect series are capable to do more than just switch off: They monitor electrical installations and issue advance warnings of critical current flows. Thanks to short time delay and optimized tripping threshold, briefly occurring malfunctions do not induce the digital protection switch to shut down.

When a fault current crops up, the information is reported to the security center of the industrial plant right away and troubleshooting can start before a plant failure occurs. Thus the cause of the fault current can be determined precisely and the system can be serviced easily.

That way, system availability increases and service is crucially improved by the convenient remote control.

### Numerous advantages at a glance

- The difference between harmless and critical fault currents is detected
- Precise switching and reduction of nuisance tripping
- Continuous monitoring of plant/factory status – prompt warning of a change in status quo
- Convenient troubleshooting by precise location of the malfunction
- As easy to install as a conventional RCCB
- Longer intervals between servicing
- Ideal for system monitoring thanks to preventive information
- Warning of tripping at leakage current
- Clear status display of the fault current problem with tri-colored LEDs

- Real contact position indicator
- Indicator for fault current tripping
- Comprehensive range of accessories available
- Can be integrated in several bus systems

## Highly qualified controllers offer their services

### PROMOTION

Allow us to introduce ourselves: **FRCdM** and **FRBdM** would like to work in your switchbox. We're two highly qualified control robots from the famous EATON talent factory – the first of the new digital generation.



It's not only that I work completely reliably as a Residual Current Operated Circuit Breaker with integrated Overcurrent Protection (RCBO), but I also display the cause and extent of the flowing fault current. This enables to take fast actions in order to maintain system availability.

And since I'm the RCCB a fault current protection switch, I don't wait until the tripping threshold is reached; I check the present status and register any possible failures, and send this information by remote warning immediately to the central control system. This increases system safety, application availability and minimizes maintenance costs.

**Hire us – and experience finally communication at eye level!**

The LEDs set off an alarm when fault currents or a shutdown are coming. This makes the troubleshooting faster and much easier. The service mode of the RCBO quickly indicates the extent of the flowing fault current in millamp increments. By pushing the service button, the blinking LED identifies the area where the fault current is located in. The potential-free contact which is integrated in the RCCB offers a connection to a monitoring system.

- Residual current protection and additional protection with other digital functions
- Auto-reclosure is possible



#### Red

When the red LED lights up, the leakage current is already higher than 50 percent of the nominal fault current. Therefore the system is in a critical status: critical status digital RCCB only trips when the fault current continues to increase.

#### Yellow

The yellow LED shows a residual current in the range of 30 to 50 percent of the nominal fault current. Before the system is shut down, professional countermeasures can be taken.

#### Green

If the current flow in the system to ground is in the range from 0 to 30 percent of the nominal fault current, the green LED indicates the proper status.

# FRBdM and FRCdM offer several other advantages



The LED enables a fault current display directly on site. In the service mode, malfunction causes can be determined quickly and without complication.

## Digital RCBO Type A

Protects against special forms of residual pulsating DC which have not been smoothed.

## Digital RCBO Type F

Sensitive to pulsating DC residual current and detection of multifrequency residual currents up to 1 kHz

- Increased protection due to the detection of mixed frequencies
- Higher load rating with DC residual currents up to 10 mA
- Reduction of nuisance tripping thanks to time delayed tripping and increased current withstand capability of 3 kA



The digital display facilitates real-time diagnostics directly at the switch. By means of the LEDs, the system status can be checked anytime, and with one glance.

All models have at least a short time delay to prevent from nuisance tripping due to transient disruptions (lightning, engine start).

## Digital RCCB Type A

Protection in case of sinusoidal AC fault currents and pulsating currents with DC components up to 6 mA.

## Digital RCCB Type F

These types are capable of sensing pulsating residual currents, up to 1 kHz and are not negatively affected by a DC overlay of up to 10 mA. They replace the obsolete Type U due to improvements in standardization as well as technical design.

## Digital RCCB Type B

In addition to fault currents in the AC and pulse current range, type B also detects smooth DC fault currents which can occur in frequency inverter controls, photovoltaic systems and increases safety considerably.

## Digital RCCB Type B+

Complies with the standard VDE 0664-400 (formerly VVDEV 0664-110) for superior fire protection as required by the Association of German Insurance Companies. The type B+ detects high frequency currents up to 20 kHz and the tripping level is limited to max. 420 mA over the defined frequency range.

## Digital RCCB Type Bfq

The type Bfq complies with the requirements of the type B. The tripping curve is extended and allows the detection of high frequency currents up to 50 kHz. The adjusted frequency behaviour (insensitive to higher frequencies) prevents nuisance tripping errors in industrial plants with powerful frequency inverter controllers.

# Residual Current Devices Type F



## Benefits:

- Reliable protection for machines with 1phase frequency converters and 3phase frequency converters if no type B is needed
- Increased protection due to
  - detection of mixed frequencies
  - higher load rating with DC residual currents up to 10 mA
- Reduction of nuisance tripping thanks to
  - time delayed tripping
  - high current withstand capability

## Definition

The type F RCD is defined according to IEC/EN 62423. It provides safe and reliable protection against sinusoidal residual currents and pulsating DC fault currents (like type A devices). It is also capable of handling residual currents with mixed frequencies of up to 1 kHz (10, 50, 1000 Hz) in accordance with the IEC 62423 standard.

Type F RCDs can accept smooth DC residual currents of up to 10 mA without affecting their standard functionality, have

a time delayed tripping and distinguish themselves from other devices thanks to their high resistance to power surges: this ensures minimal false tripping and a high degree of safety.

They are available as RCCBs (2-pole or 4-pole up to 100 A) as well as RCBOs (1N up to 40 A). With three versions for different protection levels (30 mA, 100 mA and 300 mA), the type F functionality is voltage independent and can be used for fault and additional protection.

## Field of Application

Type F residual current devices are designed specifically for use in applications with single phase frequency converters such as pumps, welding units, vibrators or hammer drills. They are also highly recommended for 3 phase frequency converter applications where no Type B is necessary. In this type of application, residual currents with mixed frequencies can arise which residual current devices type AC and A are unable to cope with.

The detection of mixed frequencies and the higher load rating with DC residual currents up to 10 mA enables the RCD type F to provide excellent protection for humans and the system in all applications which contain appliances and motors with single phase frequency converters.


As a result, the recommendations for installations including variable frequency drives have been modified.

Eaton also offers a digital version of the type F RCBO and RCCB. These devices display fault currents in real time.

The time delayed tripping and the high current withstands capability support in addition avoiding nuisance tripping. Overall, the RCD type F enables machine builders and plant manufacturers to develop equipment that is extremely reliable while ensuring high safety levels for the operator and maintenance staff.



## Selection help RCDs Type F / Type B

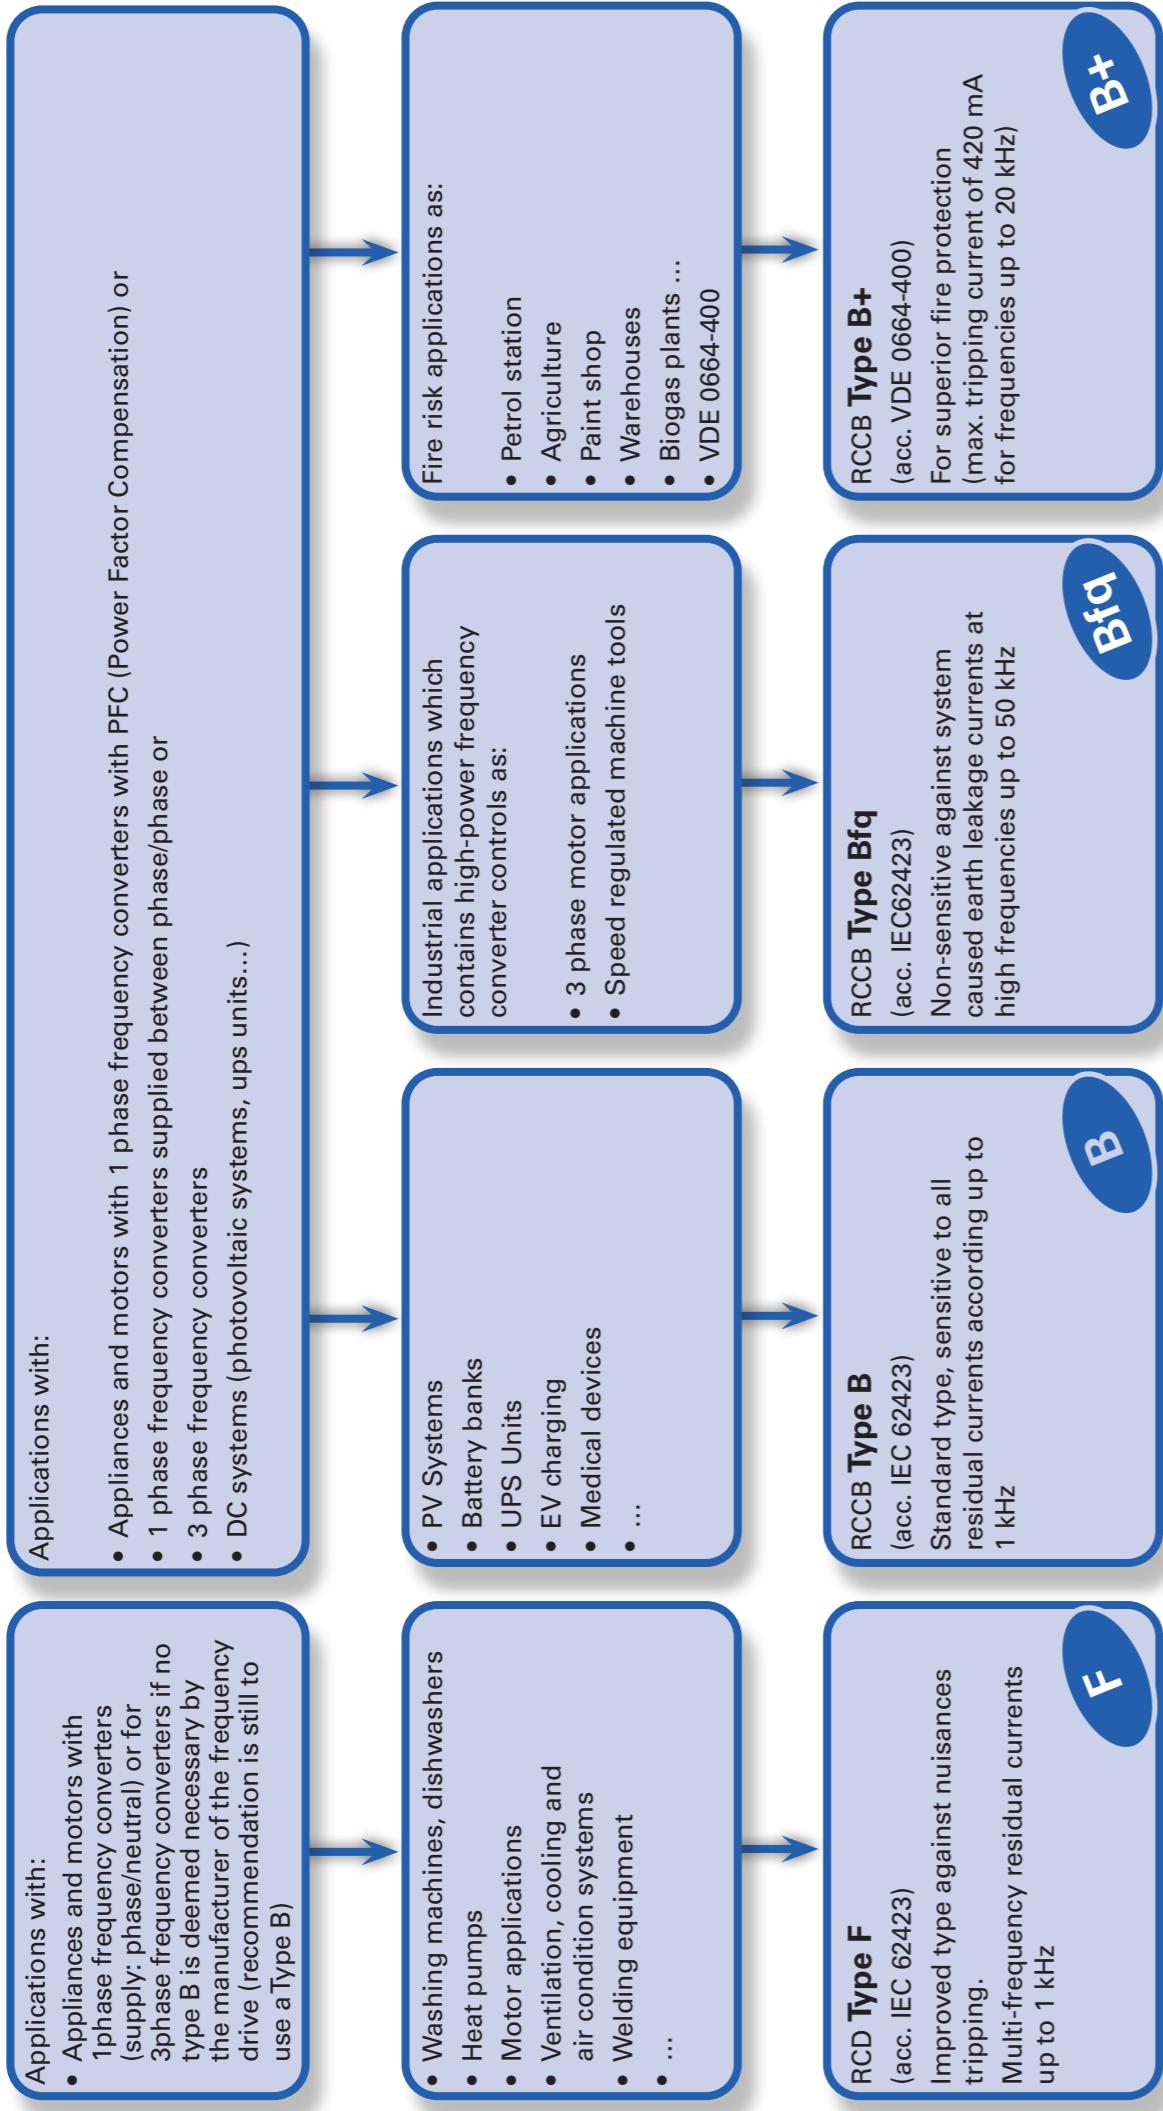

## Lean connectivity for protective devices (MCBs, RCCBs, RCBOs)



The SmartWire-DT MCB module allows a fast and easy connection of protective devices as MCBs, RCCBs and RCBOs to the SmartWire-DT line.

This gives machinery builders and installers the possibility to integrate protective devices comfortable in the Lean automation.


The status (on, off, tripped) of the protective devices is so implement in the control or monitor system of the machinery or the power distribution and supports the service and maintenance teams permanently with information about the system and helps to react immediately in case of problems to keep the system downtime as short as possible.

A further big benefit is also the direct connection on the SmartWire-DT line. This makes the additional I/O level and wiring redundant and machinery builders can reduce so installation time and costs.

- Permanent information of the system
- Decrease system downtime/Increase system uptime
- Direct connection to the SmartWire-DT line
- Reduction of installation time, wiring and costs



### Example: Savings in every step of the life cycle

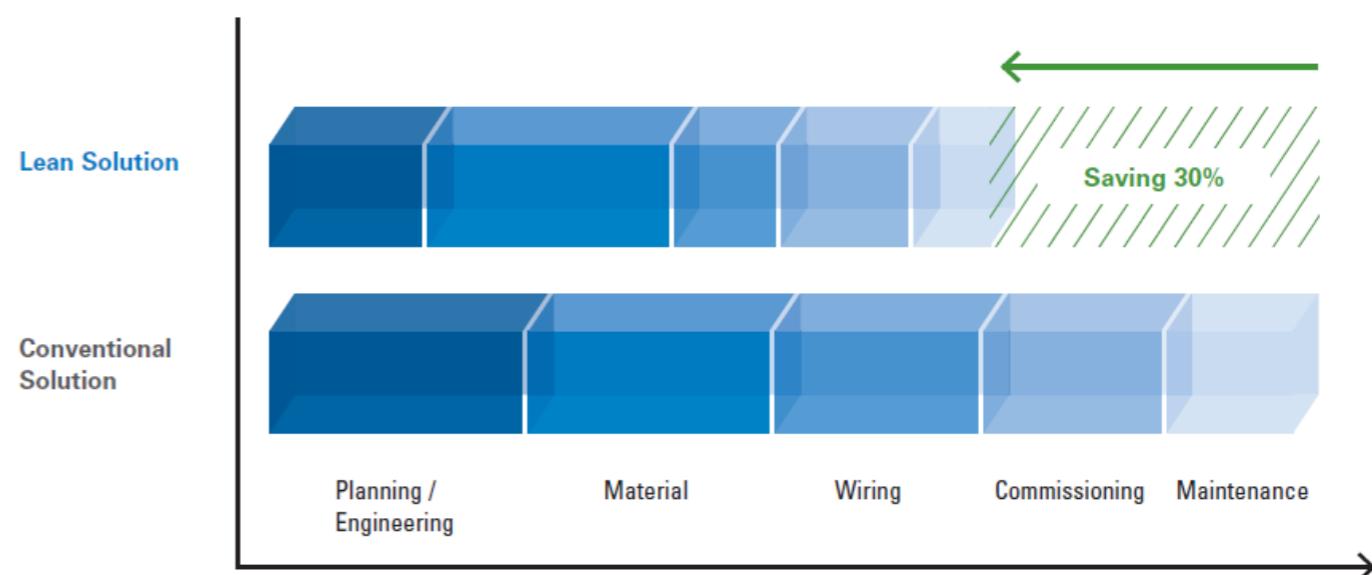

# Eaton help you build better and safer trains

## Compliance

Eaton is offering leading products that guarantee the highest levels of safety and performance according to specific standards such as IEC 61373 (Rolling stock equipment - Shock and vibration tests) or EN 45545-2 (Fire protection on railway vehicles).

Eaton products comply with the usual electrical standards (IEC and UL) for a worldwide usage.

With a unique mix of products, Eaton possesses industry-recognized safety products that are specifically designed for the railway's harsh and hazardous environment.

## Competitiveness

Eaton is providing a large range of standard products covering the major electrical components used in rolling stock, and which are designed to reduce the level of maintenance required even when operating in harsh environmental conditions.

You can optimize your total cost of ownership by reducing the maintenance cost with our proven long life-time products.

Our innovation center and engineering teams are designing customized solutions that enhance productivity. Our engineering services help to optimize investment cost.

## Expertise and Partnerships

With our rail competency center and a network of application engineers, we ensure that new and refurbished trains offer high levels of reliability and help to reduce total cost of ownership.

## Legacy of innovation

With 30 years of experience in rail, our innovative portfolio has grown, including solutions from:

Heinemann	Cooper
Bussmann	Walterscheid
Moeller	Vickers
Martek Power	Aeroquip



Protect your passengers and equipment

## Applications

Protection of electrical equipment such as:

- Motors
- HVAC systems
- Power outlets
- Door control
- Lighting
- Signaling
- Battery box

## Your challenges

- Fire safety
- Harsh environmental conditions
- Long life cycle
- Long cables
- Temperature variation

## Our solutions

Eaton has an unique offer of power protection devices, including:


- Miniature Circuit Breakers (MCB)
- Residual Current Devices (RCD)
- Electronic protection modules (PXS)

## Benefits

- Rail certified MCBs & RCDs from one hand
- Electronic protection modules for safe and reliable protection of 24 VDC circuits
- Special characteristics to avoid nuisance tripping
- Digital RCDs to increase system availability
- RT MCBs & RCDs for safe & reliable electrical connections
- IEC 61373 (Shock & Vibration)
- EN 45545 (Smoke & Fire)

## Safe & reliable connections

- Eaton's xEffect portfolio contains also special RT MCB & RCD ranges.
- The xEffect RT ranges are especially designed for the use with ring cable lugs.
- These ensure the highest safety and reliability for electrical connections.
- The PXS24 electronic protection modules are equipped with push-in terminals, another very reliable type of connection.

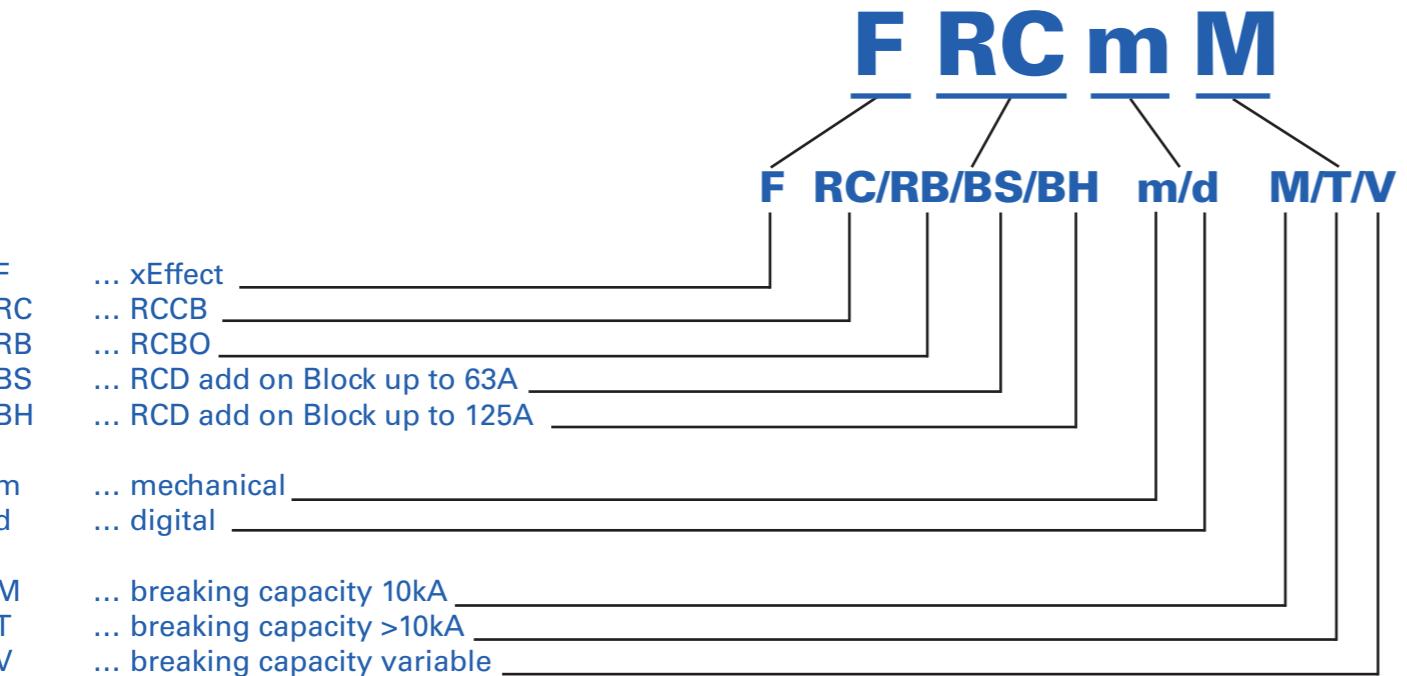

## Protective Devices

### General

#### Residual Current Devices ..... section 1

- 1.18 Residual Current Devices Residual Current Devices FRCdM Type A, F and Digital ..... 1.1
- 1.26 Residual Current Devices Residual Current Devices FRCdM Type B, Bf<sub>q</sub> and B+, Digital ..... 1.2
- 1.37 Residual Current Devices FRCmM Type AC, A and F ..... 1.3
- 1.45 Residual Current Devices FRCmM – RT ..... 1.4
- 1.52 Residual Current Devices FRCmM-110 Type AC, A ..... 1.5
- 1.58 Residual Current Devices FRCmM-NA Type A according to UL1053 & IEC/EN 61008 ..... 1.6
- 1.65 Residual Current Devices FRCmM-NA-110 Type A according to UL1053 & IEC/EN 61008 ..... 1.7
- 1.71 Residual Current Devices FRCmM-125 Type AC, A, B, Bf<sub>q</sub> and B+ ..... 1.8

#### Combined RCD/MCB Devices ..... section 2

- 1.86 Combined RCD/MCB Devices FRBdM 1+N-poles, 2-poles Type G/A and F Digital ..... 2.1
- 1.101 Combined RCD/MCB Devices FRBmM, FRBm6, 1+N-poles ..... 2.1
- 1.110 Combined RCD/MCB Devices FRBmM - RT Type A, 1+N-poles ..... 2.2
- 1.119 Combined RCD/MCB Devices FRBmM, FRBm6, 2-poles, Type AC, A, G/A and F ..... 2.3
- 1.144 Combined RCD/MCB Devices FRBmM, 3-poles, Type A ..... 2.4
- 1.146 Combined RCD/MCB Devices FRBmM - RT Type A, 3-poles ..... 2.5
- 1.156 Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles, Type AC and A ..... 2.6

#### Add-on Residual Current Protection ..... section 3

- 1.165 Add-on Residual Current Protection Unit FBSmV, Type AC and A ..... 3.1
- 1.173 Add-on Residual Current Protection Unit FBHmV, Type AC and A ..... 3.2

#### Protective Devices ..... section 4

- 2.179 PXS24 - Electronic Protective Devices for 24 V DC circuits ..... 4.1

#### Miniature Circuit Breakers ..... section 5

- 2.185 Miniature Circuit Breakers FAZ, FAZ-PN, FAZ-HS ..... 5.1
- 2.232 Miniature Circuit Breakers FAZ-T ..... 5.2
- 2.245 Miniature Circuit Breakers FAZ-DC ..... 5.3
- 2.250 Miniature Circuit Breakers FAZ-NA, FAZ-RT ..... 5.4
- 2.270 Miniature Circuit Breakers FAZ-NA-DC ..... 5.5
- 2.274 FAZ-...-RT-DC Miniature Circuit Breakers ..... 5.6
- 2.279 FAZ6 Miniature Circuit Breakers ..... 5.7
- 2.298 Miniature Circuit Breakers AZ ..... 5.8

#### Photovoltaic - DC-Disconnection ..... section 6

- 2.310 DC Switch-Disconnector PV-DIS 2-poles ..... 6.1

#### Main Load Disconnector Switch ..... section 7

- 2.316 Main Load Disconnector Switch (Isolator) IS- ..... 7.1

#### Accessories for Protective Devices ..... section 8

- 2.320 Accessories for RCDs, MCBs, Combined RCD/MCB Devices ..... 8.1

#### Busbar Systems ..... section 9

- 2.348 xEffect Busbar System BB-EV- ..... 9.1
- 2.356 xEffect Busbar System UL508 BB-UL ..... 9.2
- 2.360 xEffect Busbar System UL489 Z-SV/UL16 ..... 9.3
- 2.365 AFDD Busbar EVG-2PHAS/4AFDD ..... 9.4
- 2.367 Busbar VPS, VPL for auxiliary contact ..... 9.5
- 2.369 Busbar VPS, VPL for auxiliary contact ..... 9.6

## Description type designation MCB's

- FAZ ... MCBs up to 63A
- FAZT ... MCBS up to 40A with braking capacity >10kA
- AZ ... MCBs up to 125A

## General definitions

- RCD ... Residual Current operated Device (umbrella term for RCCB and RCBO)
- RCCB ... Residual Current Circuit Breaker
- RCBO ... Residual Current Operated Circuit Breaker with Overcurrent Protection
- MCB ... Miniature Circuit Breaker

**Residual Current Devices - General Data****Short description of the most important RCD types**

Symbol	Description
	Eaton standard. Suitable for outdoor installation (distribution boxes for outdoor installation and building sites) up to -25° C.
	Conditionally surge-current proof (>250 A, 8/20 µs) for general application.
	Type AC: AC current sensitive RCCB
	Type A: AC and pulsating DC current sensitive RCCB, not affected by smooth DC fault currents up to 6 mA
	Type F: AC and pulsating DC current sensitive RCCB, trips also at frequency mixtures (10 Hz, 50 Hz, 1000 Hz), min. 10 ms time-delayed, min. 3 kA surge current proof, higher load capacity with smooth DC fault currents up to 10 mA
	Frequency range up to 20 kHz
	Trips also at frequency mixtures (10 Hz, 50 Hz, 1000 Hz)
	Type B: All-current sensitive RCD switchgear for applications where DC fault currents may occur. Non-selective, non-delayed. Protection against all kinds of fault currents.
	Type B+: All-current sensitive RCD switchgear for applications where DC fault currents may occur. Non-selective, non-delayed. Protection against all kinds of fault currents. Provides enhanced fire safety.
	RCD of type G (min 10 ms time delay) surge current-proof up to 3 kA. For system components where protection against unwanted tripping is needed to avoid personal injury and damage to property. Also for systems involving long lines with high capacitive reactance. Some versions are sensitive to pulsating DC. Some versions are available in all-current sensitive design.
	RCD of type S (selective, min 40 ms time delay) surge current-proof up to 5 kA. Mainly used as main switch, as well as in combination with surge arresters. This is the only RCD suitable for series connection with other types if the rated tripping current of the downstream RCD does not exceed one third of the rated tripping current of the device of type S. Some versions are sensitive to pulsating DC. Some versions are available in all-current sensitive design.

**Kind of residual current and correct use of RCD Types**

Kind of current	Current profile	Correct use / application field of RCCB types					Tripping current
		AC	A	F	B	/ B+	
Sinusoidal AC residual current		✓	✓	✓	✓	✓	0.5 to 1.0 IΔn
Pulsating DC residual current (positive or negative half-wave)		-	✓	✓	✓	✓	0.35 to 1.4 IΔn
Cut half-wave current		-	✓	✓	✓	✓	Lead angle 90°: 0.25 to 1.4 IΔn Lead angle 135°: 0.11 to 1.4 IΔn
Lead angle 90° el Lead angle 135° el			✓	✓	✓	✓	
Half-wave with smooth DC current of 6 mA		-	✓	✓	✓	✓	max. 1.4 IΔn + 6 mA
Half-wave with smooth DC current of 10 mA		-	-	✓	✓	✓	max. 1.4 IΔn + 10 mA
Smooth DC current		-	-	-	-	✓	0.5 to 2.0 IΔn

**Tripping time****Break time and non-actuating time for alternating residual currents (r.m.s. values) for type AC and A RCCB**


Classification	IΔn mA	IΔn	2xIΔn	5xIΔn	5 x IΔn or 0.25A	500A
Standard RCD Conditionally surge current-proof 250 A	≤30	Max. tripping time (s)	0.3	0.15	0.04	0.04
Standard RCD Conditionally surge current-proof 250 A	>30	Max. tripping time (s)	0.3	0.15	0.04	0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	30	Min. non actuating time(s) Max. tripping time (s)	0.01 0.3	0.01 0.15	0.01 0.04	0.01 0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	>30	Min. non actuating time(s) Max. tripping time (s)	0.01 0.3	0.01 0.15	0.01 0.04	0.01 0.04
RCCB Type S (Selective) Surge current-proof 5 kA	>30	Min. non actuating time(s) Max. tripping time (s)	0.13 0.5	0.06 0.2	0.05 0.15	0.04 0.15

**Break time for half-wave pulsating residual currents (r.m.s. values) for type A RCCB**

Classification	IΔn mA	1.4xIΔn	2xIΔn	2.8xIΔn	4xIΔn	7 x IΔn	0.35 A	0.5 A	350 A
Standard RCD Conditionally surge current-proof 250 A	<30	Max. tripping time (s)	0.3		0.15		0.04	0.04	
Standard RCD Conditionally surge current-proof 250 A	30	Max. tripping time (s)	0.3		0.15		0.04	0.04	
Standard RCD Conditionally surge current-proof 250 A	>30	Max. tripping time (s)	0.3		0.15		0.04	0.04	
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	30	Max. tripping time (s)	0.3		0.15		0.04	0.04	
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	>30	Max. tripping time (s)	0.3		0.15		0.04	0.04	
RCCB Type S (Selective) Surge current-proof 5 kA	>30	Max. tripping time (s)	0.5		0.2		0.15	0.15	

**Tripping Characteristics (IEC/EN 61008)**

**Tripping characteristics, tripping time range and selectivity of instantaneous, surge current-proof „G“ and surge current-proof - selective „S“ residual current devices.**

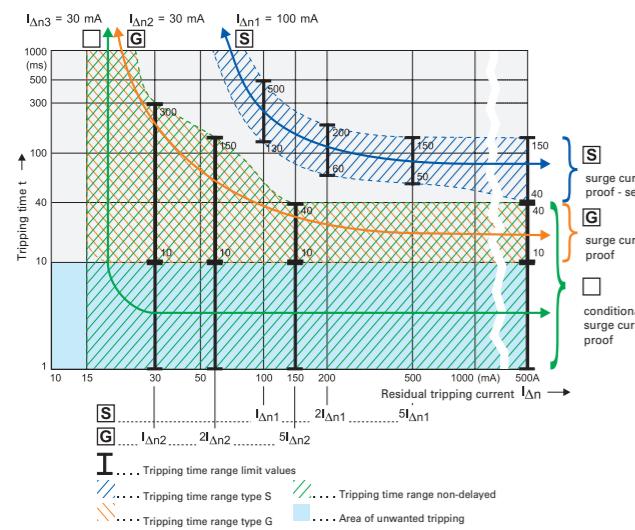

**IEC 60364-4-41** deals with additional protection: The use of RCDs with a rated residual operating current not exceeding 30 mA, is recognized in a.c. systems as additional protection in the event of failure of the provision for basic protection and/or the provision for fault protection or carelessness by users.

**This means when using RCDs for fault current/residual current protection two RCDs must be connected in series.**


**Testing:**

RCDs with tripping time delay (Types -G and -S) may be function tested with conventional testing equipment which must be set according to the instructions for operation of the testing device. Due to reasons inherent in the measuring process, the tripping time determined in this way may be longer than expected in accordance with the specifications of the manufacturer of the measuring instrument.

However, the device is ok if the result of measurement is within the time range specified by the manufacturer of the measuring instrument.


**Applications with frequency converters:**

**Due to the currents flowing off through the filters (designated IF), the sum of currents through the RCD is not exactly zero, which causes unwanted tripping.**

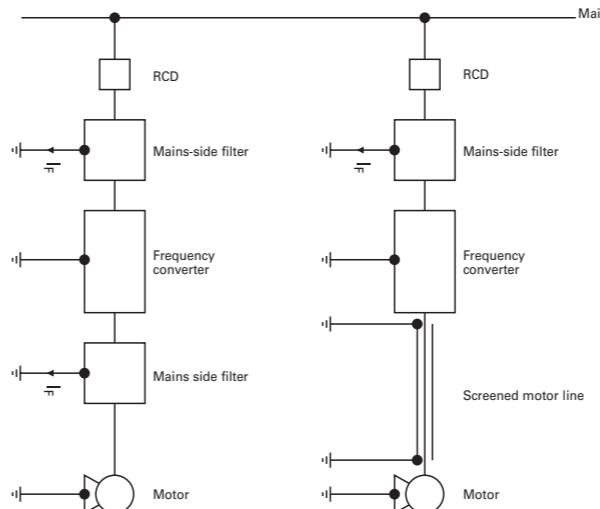

Frequency converters are used in a wide variety of systems and equipment requiring variable speed, such as lifts, escalators, conveyor belts, and large washing machines. Using them for such purposes in circuits with conventional residual current devices causes frequent problems with unwanted tripping.

The technical root cause of this phenomenon is the following: Fast switching operations involving high voltages cause high interference levels which propagate through the lines on the one hand, and in the form of interfering radiation on the other. In order to eliminate this problem, a mains-side filter (also referred to as input filter or EMC-filter) is connected between the RCD and frequency converter. The anti-interference capacitors in the filters produce discharge currents against earth which may cause unwanted tripping of the RCD due to the apparent residual currents. Connecting a filter on the output side between frequency converter and 3-phase AC motor results in the same behaviour.

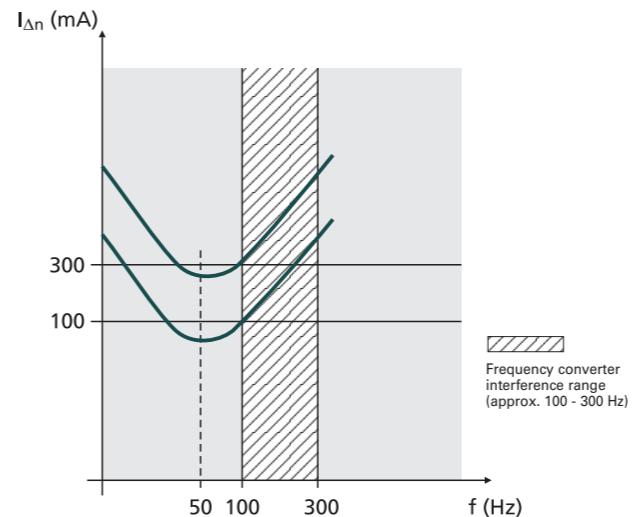**Tripping characteristic**

This sample tripping characteristic of a 100 mA RCD and a 300 mA RCD shows the following: In the frequency range around 50 Hz, the RCDs trip as required (50 - 100 % of the indicated  $I_{\Delta n}$ ). In the range shown hatched in the diagram, i. e. from approx. 100 to 300 Hz, unwanted tripping occurs frequently due to the use of frequency converters. Type F RCCBs are designed to reliably sense higher frequency residual currents, which leads to an enormous increase in the reliability and availability of electrical systems.

**Therefore, we recommend to use RCDs designed for applications with frequency converter!**

These special residual current devices can be recognised by an extension of the type designation („-F“). They meet the requirements of compatibility between RCDs and frequency converters with respect to unwanted tripping.

Eaton stands for highest availability of your system also in applications where frequency drives are used. Therefore a full suite of Type F RCCBs (mechanical and digital assisted) are available in all feasible ratings to assist you in your application needs.

Our RCDs of type „-F“ are characterized by:

- Improved capabilities of reliably sensing residual currents up to 1 kHz
- Improved capabilities of withstand 10 mA DC offset
- 10 ms short time delay minimum (G/F)
- Surge current proofness of 3 kA (G/F) and 5 kA (S/F)

**Description**

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Additional digital functionality for improved system availability as well as system monitoring
- Live status of the system communicated through an integrated auxiliary contact as well as on the device itself
- Digital assisted sensing of residual current to achieve highest levels of system availability
- FRCdM reduces running costs due to a yearly test interval
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type G/A</b>				
<b>Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601) </b>				
<b>4-poles</b>				
25/0.03	50	FRCdM-25/4/003-G/A	168646	1/30
25/0.1	50	FRCdM-25/4/01-G/A	501257	1/30
25/0.3	50	FRCdM-25/4/03-G/A	168647	1/30
40/0.03	50	FRCdM-40/4/003-G/A	168648	1/30
40/0.1	50	FRCdM-40/4/01-G/A	501261	1/30
40/0.3	50	FRCdM-40/4/03-G/A	168649	1/30
63/0.03	50	FRCdM-63/4/003-G/A	168650	1/30
63/0.1	50	FRCdM-63/4/01-G/A	501268	1/30
63/0.3	50	FRCdM-63/4/03-G/A	168651	1/30
80/0.03	50	FRCdM-80/4/003-G/A	168634	1/30
80/0.1	50	FRCdM-80/4/01-G/A	501275	1/30
80/0.3	50	FRCdM-80/4/03-G/A	168635	1/30

**Type S/A****Selective + surge current-proof typ. 5 kA, sensitive to residual pulsating DC, Type S/A** 

<b>4-poles</b>				
40/0.1	50	FRCdM-40/4/01-S/A	501263	1/30
40/0.3	50	FRCdM-40/4/03-S/A	168637	1/30
63/0.1	50	FRCdM-63/4/01-S/A	501270	1/30
63/0.3	50	FRCdM-63/4/03-S/A	168638	1/30
80/0.1	50	FRCdM-80/4/01-S/A	501277	1/30
80/0.3	50	FRCdM-80/4/03-S/A	168639	1/30





$I_{\Delta n}$   
(A)  
Operating frequency  
(Hz)

Type  
Designation

Article No.  
Units per  
package

**Type G/F**

**Surge current-proof 3 kA, sensitive to residual pulsating DC, frequency mixture and 10 mA DC offset, Type G/F (ÖVE E 8601)**  

**4-poles**

25/0.03	50	FRCdM-25/4/003-G/F	501256	1/30
25/0.1	50	FRCdM-25/4/01-G/F	501258	1/30
25/0.3	50	FRCdM-25/4/03-G/F	501259	1/30
40/0.03	50	FRCdM-40/4/003-G/F	501260	1/30
40/0.1	50	FRCdM-63/4/01-G/F	501262	1/30
40/0.3	50	FRCdM-40/4/03-G/F	501265	1/30
63/0.03	50	FRCdM-63/4/003-G/F	501267	1/30
63/0.1	50	FRCdM-63/4/01-G/F	501269	1/30
63/0.3	50	FRCdM-63/4/03-G/F	501272	1/30
80/0.03	50	FRCdM-80/4/003-G/F	501274	1/30
80/0.1	50	FRCdM-80/4/01-G/F	501276	1/30
80/0.3	50	FRCdM-80/4/03-G/F	501279	1/30

**Type S/F**

**Selective current-proof 5 kA, selective, sensitive to residual pulsating DC, frequency mixture and 10 mA DC offset, Type S/F (ÖVE E 8601)**  

**4-poles**

40/0.1	50	FRCdM-40/4/01-S/F	501264	1/30
40/0.3	50	FRCdM-40/4/03-S/F	501266	1/30
63/0.1	50	FRCdM-63/4/01-S/F	501271	1/30
63/0.3	50	FRCdM-63/4/03-S/F	501273	1/30
80/0.1	50	FRCdM-80/4/01-S/F	501278	1/30
80/0.3	50	FRCdM-80/4/03-S/F	501280	1/30

$I_{\Delta n}$   
(A)  
Operating frequency  
(Hz)

Type  
Designation

Article No.  
Units per  
package

**Specifications | Residual Current Devices FRCdM****Description****Design**

- Digital Residual Current Circuit Breakers (RCCBs)
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
  - possibility to seal the toggle
  - possibility to lock the toggle
- The device functions irrespective of the position of installation

**Accessories**

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
  - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
  - Auxiliary switch Z-HK can be mounted subsequently

**Additional information for the application**

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast
- 30mA-RCCBs: 30 units per phase conductor
- 100mA RCCBs: 90 units per phase conductor

Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.
- The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- Independent supply side except applications according to connection diagram (2)
- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

**Test Button**

- The test button "T" must be pressed once every 12 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.
- Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- If red and yellow LED are present simultaneously, please press the test button and follow the instruction stated in the instruction leaflet.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

**Status Indication of digital RCCB**

- System status as seen on the RCCB:
  - The green LED becomes active at 0-30%  $I_{\Delta n}$
  - The yellow LED becomes active at 30-50%  $I_{\Delta n}$ , as well as the integrated auxiliary contact
  - The red LED becomes active at >50%  $I_{\Delta n}$
  - Tolerance of system status indication:  $\pm 5\%$

**Local status indication provided by the digital RCCB**

<b>LED signals</b>	<b>red / yellow / green</b>
Permanent light green	
	Normal operation
Permanent light yellow	
	The currently measured residual current is higher than 30% $I_{\Delta n}$ . The system is currently drawing a fault current, and actions should be taken accordingly.
Permanent light red	
	The currently measured residual current is higher than 50% $I_{\Delta n}$ . The system is currently drawing a critical amount of fault current, and actions should be taken immediately.
Flashing yellow/red	
	Please press the test button (T). If the LEDs are still present, please refer to the instruction leaflet.

**Remotely communicated status indication provided by the digital RCCB**

Integrated contact for use in control circuits. Please adhere to the electrical limits of the NO contacts (0,25A ohmic load @ 240V). Without any additional protective measures (eg.: isolation transformer 1:1 according to IEC/EN 60664) the integrated auxiliary contact may only be supplied from the terminals 2, 4, 6, N. See also connection diagrams (2) and (3) for further details.

**Accessories:**



Auxiliary contact to be mounted on the left side	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device	Z-FW/LP*	248296
	Z-FW-LPD*	265244
	FAZ/FIP-XAWM**	262514
	FAZ/FIP-XDWM**	274404
Remote control unit	Z-FW-MO	284730
I $\Delta n$ testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
Terminal cover 4-poles	Z-RC/AK-4TE	101062

\*reclosing device up to 63 A


\*\*reclosing device 100 A

**Technical Data**

	<b>FRCdM</b>
<b>Electrical</b>	
Design according to	IEC/EN 61008 Type G (G/A, G/F,...) acc. to ÖVE 8601 Type F acc. to IEC/EN 62423 IEC 61373, EN 45545-2
Classified according to	
Current test marks as printed onto the device	
Tripping	instantaneous
Type G	10 ms delay
Type S	40 ms delay - with selective disconnecting function
Rated voltage	$U_n$ 240/415 V AC, 50 Hz
Limits of operation voltage digital functions	50 – 264 V AC
Limits of operation voltage test circuit	
Rated tripping current	$I_{\Delta n}$ 30, 100, 300 mA
Sensitivity	AC and pulsating DC
Rated insulation voltage	$U_i$ 440 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50 $\mu$ s)
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	
Type G (G/A, G/F)	3 kA (8/20 $\mu$ s) surge current-proof
Type S (S/A, S/F)	5 kA (8/20 $\mu$ s) selective + surge current-proof
Rated breaking capacity or rated fault breaking capacity	$I_m$ $I_{\Delta m}$
$I_n = 25-40$ A	500 A
$I_n = 63$ A	630 A
$I_n = 80$ A	800 A
Endurance	
electrical components	$\geq$ 4,000 operating cycles
mechanical components	$\geq$ 20,000 operating cycles
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm <sup>2</sup> single wire 2 x 16 mm <sup>2</sup> multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Contact position indicator	red / green
Tripping indicator	white / blue
<b>Internal contact</b>	
Rated breaking capacity @ 30 V DC (resistive load)	2 A
Rated breaking capacity @ 240 V AC (resistive load)	0.25 A
Maximum switching power (resistive load)	60 W
Maximum switching voltage DC	220 V
Maximum switching voltage AC	240 V
Maximum switching current	2 A
Minimum switching capacity (reference value)	10 $\mu$ A, 10 mV DC
Endurance	
Electrical (at 20 cpm) 2 A 30 V DC resistive load)	>10 <sup>5</sup>
Electrical (at 20 cpm) 1 A 30 V DC resistive load)	>5 x 10 <sup>5</sup>
Terminal capacity	0.25 - 1.5 mm <sup>2</sup>

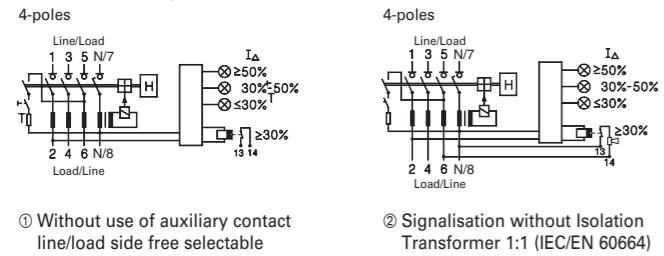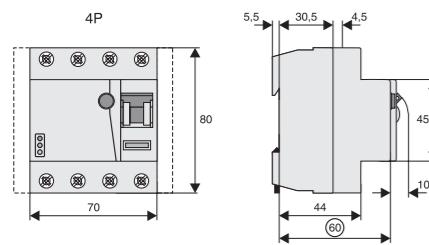**Connection diagram****Dimensions (mm)****Correct connection**

30, 300mA Types:

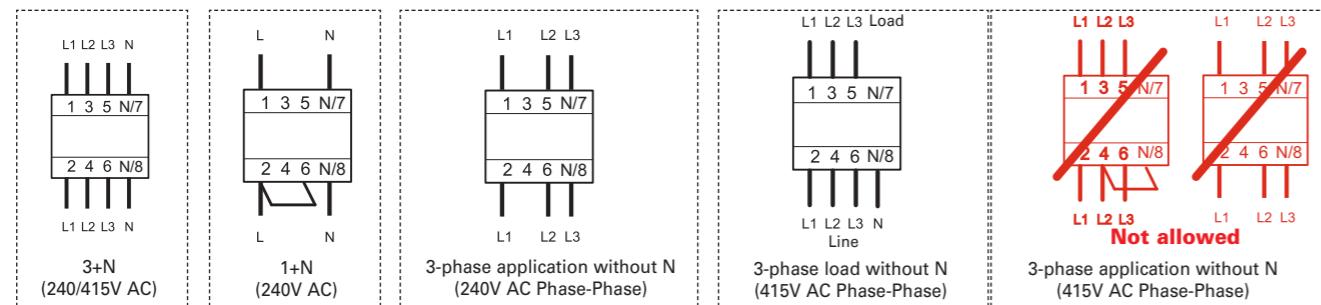

Electronic works within 50-264V AC!

- Disconnect load side of the switch gear, if you make a insulation test of the installation!

**Internal Resistance FRCdM**

At room temperature (single pole)	
In [A]	Z* [mΩ]
25	0.66
40	0.64
63	0.64
80	0.62

\* 50Hz

**Power Loss at In FRCdM**

(entire unit)	
In [A]	P* [W]
25	2.2
40	3.8
63	8.5
80	12.9

\* 50Hz

**Impact of ambient temperature on the maximum permanent current allowed (A) FRCdM type A and F**

Ambient temperature	25A	40A	63A	80A
	4p	4p	4p	4p
40°	25	40	63	80
45°	25	35	55	71
50°	25	30	47	63
55°	23	28	38	54
60°	20	25	30	45
65°	-	-	-	-
70°	-	-	-	-
75°	-	-	-	-

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

**Max. back-up fuse FRCdM**

Rating	Fuses	MCB's (Characteristic B/C)	
In [A]	Short Circuit [A]	Overload [A]	Short Circuit [A]
25	63 gG/gI	25 gG/gI	FAZ-C40
40	63 gG/gI	40 gG/gI	FAZ-C40
63	63 gG/gI	63 gG/gI	FAZ-C40
80	80 gG/gI	80 gG/gI	-

**Important:**

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

**Description**

- All current sensitive RCCBs to fulfil highest safety standards
- Line voltage independent 2 and 4 pole RCCB for fault protection, additional protection as well as fire protection
- As also stated in IEC/EN 62423, the B sensitivity relies on line voltage
- Additional digital functionality for improved system availability as well as system monitoring
- Live status of the system communicated through an integrated auxiliary contact as well as on the device itself
- Digital assisted sensing of residual current to achieve highest levels of system availability
- FRCdM reduce running costs due to a yearly test interval
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification
- B+ types also meet the requirements of superior fire-protection systems according to VDE 0664-400

$I_{\Delta}/I_{\Delta n}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------------	-----------------------------	---------------------	-------------	----------------------

**Type G/B****Surge current-proof 3 kA, AC-DC sensitive, Type G/B (ÖVE E 8601)****2-Pole (4MU)**

25/0.03	50	FRCdM-25/2/003-G/B	300638	1/30
25/0.3	50/60	FRCdM-25/2/03-G/B	302638	1/30
40/0.03	50	FRCdM-40/2/003-G/B	300639	1/30
40/0.3	50/60	FRCdM-40/2/03-G/B	302639	1/30
63/0.03	50	FRCdM-63/2/003-G/B	300640	1/30
63/0.3	50/60	FRCdM-63/2/03-G/B	302640	1/30

**4-poles**

25/0.03	50	FRCdM-25/4/003-G/B	167892	1/30
25/0.3	50/60	FRCdM-25/4/03-G/B	167896	1/30
40/0.03	50	FRCdM-40/4/003-G/B	167893	1/30
40/0.3	50/60	FRCdM-40/4/03-G/B	167897	1/30
63/0.03	50	FRCdM-63/4/003-G/B	167894	1/30
63/0.3	50/60	FRCdM-63/4/03-G/B	167898	1/30

**Type S/B****Selective + surge current-proof 5 kA, Type S/B****2-Pole (4MU)**

25/0.3	50	FRCdM-25/2/03-S/B	302635	1/30
40/0.3	50	FRCdM-40/2/03-S/B	302636	1/30
63/0.3	50	FRCdM-63/2/03-S/B	302637	1/30

**4-poles**

25/0.3	50	FRCdM-25/4/03-S/B	167900	1/30
40/0.3	50	FRCdM-40/4/03-S/B	167901	1/30
63/0.3	50	FRCdM-63/4/03-S/B	167902	1/30

**Type G/Bfq****Surge current-proof 3 kA, AC-DC sensitive, Type G/Bfq (ÖVE E 8601)****4-poles**

25/0.03	50	FRCdM-25/4/003-G/Bfq	179530	1/30
25/0.3	50	FRCdM-25/4/03-G/Bfq-400	306415	1/30
25/0.3	50/60	FRCdM-25/4/03-G/Bfq	167904	1/30
40/0.03	50	FRCdM-40/4/003-G/Bfq	179531	1/30
40/0.03	50	FRCdM-40/4/003-G/Bfq-400	306418	1/30
40/0.3	50/60	FRCdM-40/4/03-G/Bfq	167905	1/30
63/0.03	50	FRCdM-63/4/003-G/Bfq	179532	1/30
63/0.03	50	FRCdM-63/4/003-G/Bfq-400	306421	1/30
63/0.3	50/60	FRCdM-63/4/03-G/Bfq	167906	1/30



## Residual Current Devices

Residual Current Devices FRCdM

## xEFFECT

## xEFFECT

## Residual Current Devices

Residual Current Devices FRCdM - Special types for 60 Hz Networks

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type S/Bfq****Selective + surge current-proof 5 kA, Type S/Bfq**   **4-poles**

25/0.3	50	FRCdM-25/4/03-S/Bfq	167908	1/30
40/0.3	50	FRCdM-40/4/03-S/Bfq	167909	1/30
63/0.3	50	FRCdM-63/4/03-S/Bfq	167910	1/30

**Type G/B+****Surge current-proof 3 kA, Type G/B+ (ÖVE E 8601)**    **4-poles**

25/0.03	50	FRCdM-25/4/003-G/B+	167880	1/30
25/0.03	50	FRCdM-25/4/003-G/B+-400	306422	1/30
25/0.3	50/60	FRCdM-25/4/03-G/B+	167884	1/30
40/0.03	50	FRCdM-40/4/003-G/B+	167881	1/30
40/0.03	50	FRCdM-40/4/003-G/B+-400	306423	1/30
40/0.3	50/60	FRCdM-40/4/03-G/B+	167885	1/30
63/0.03	50	FRCdM-63/4/003-G/B+	167882	1/30
63/0.03	50	FRCdM-63/4/003-G/B+-400	306424	1/30
63/0.3	50/60	FRCdM-63/4/03-G/B+	167886	1/30

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type G/B****Surge current-proof 3 kA, AC-DC sensitive, Type G/B (ÖVE E 8601)**   **4-poles**

25/0.03	60	FRCdM-25/4/003-G/B/60Hz	180418	1/30
40/0.03	60	FRCdM-40/4/003-G/B/60Hz	180421	1/30
63/0.03	60	FRCdM-63/4/003-G/B/60Hz	180424	1/30

**Type S/B+****Selective + surge current-proof 5 kA, Type S/B+**    **4-poles**

25/0.3	50	FRCdM-25/4/03-S/B+	167888	1/30
40/0.3	50	FRCdM-40/4/03-S/B+	167889	1/30
63/0.3	50	FRCdM-63/4/03-S/B+	167890	1/30

**Type G/B+****Surge current-proof 3 kA, Type G/B+ (ÖVE E 8601)**    **4-poles**

25/0.03	60	FRCdM-25/4/003-G/B+/60Hz	180419	1/30
25/0.3	50/60	FRCdM-25/4/03-G/B+	167884	1/30
40/0.03	60	FRCdM-40/4/003-G/B+/60Hz	180422	1/30
40/0.3	50/60	FRCdM-40/4/03-G/B+	167885	1/30
63/0.03	60	FRCdM-63/4/003-G/B+/60Hz	180425	1/30
63/0.3	50/60	FRCdM-63/4/03-G/B+	167886	1/30

**Specifications | Residual Current Devices FRCdM - digital, Type B, Bfq and B+****Description****Design**

- Digital Residual Current Circuit Breakers (RCCBs)
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
  - possibility to seal the toggle
  - possibility to lock the toggle
- The device functions irrespective of the position of installation

**Accessories**

- Busbar positioning optionally above or below. (Please adhere to the supply side of the RCCB)
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
  - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
  - Auxiliary switch Z-HK can be mounted subsequently

**Additional information for the application**

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast
- 30mA-RCCBs: 30 units per phase conductor
- 100mA RCCBs: 90 units per phase conductor
- Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.
- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.
- The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- Independent supply side except applications according to connection diagram (2))
- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

**Test Button**

- The test button "T" must be pressed once every 12 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.
- Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- If red and yellow LED are present simultaneously, please press the test button and follow the instruction stated in the instruction leaflet.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

**Status Indication of digital RCCB**

- System status as seen on the RCCB:
  - The green LED becomes active at 0-30%  $I_{\Delta n}$
  - The yellow LED becomes active at 30-50%  $I_{\Delta n}$ , as well as the integrated auxiliary contact
  - The red LED becomes active at >50%  $I_{\Delta n}$
- Tolerance of system status indication:  $\pm 5\%$

**Local status indication provided by the digital RCCB****LED signals**

Permanent light green

**red / yellow / green**

Normal operation

Permanent light yellow

The currently measured residual current is higher than 30%  $I_{\Delta n}$ . The system is currently drawing a fault current, and actions should be taken accordingly.

Permanent light red

The currently measured residual current is higher than 50%  $I_{\Delta n}$ . The system is currently drawing a critical amount of fault current, and actions should be taken immediately.

Flashing yellow/red



Please press the test button (T). If the LEDs are still present, please refer to the instruction leaflet.

**Remotely communicated status indication provided by the digital RCCB**

Integrated contact for use in control circuits. Please adhere to the electrical limits of the NO contacts (0,25A ohmic load @ 240V). Without any additional protective measures (e.g.: isolation transformer 1:1 according to IEC/EN 60664) the integrated auxiliary contact may only be supplied from the terminals 2, 4, 6, N. See also connection diagrams (2) and (3) for further details.

**Accessories:**

Auxiliary contact to be mounted on the left side	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device	Z-FW/LP*	248296
	Z-FW-LPD*	265244
	FAZ/FIP-XAWM**	262514
	FAZ/FIP-XDWM**	274404
Remote control unit	Z-FW-MO	284730
$I_{\Delta n}$ testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
Terminal cover 4-poles	Z-RC/AK-4TE	101062

\*reclosing device up to 63 A


\*\*reclosing device 100A

**Technical Data****FRCdM Type B, Bfq and B+**

<b>Electrical</b>	
Design according to	Types B and Bfq acc. to IEC/EN 61008, IEC/EN 62423 Types B+ acc. to VDE 0664-400, formerly known as VDE V 0664-110 Type G/B, G/Bfq and G/B+ additional acc. to ÖVE E 8601 IEC 61373, EN 45545-2
Classified according to	
Current test marks as printed onto the device	
Tripping	
Type G	10 ms delay @ 50 Hz
Type S	40 ms delay @ 50 Hz - with selective disconnecting function
Rated voltage	$U_n$ 240/415 V AC 50 Hz and/or 60 Hz – see individual article for operating frequency
Limits operation voltage electronic	50 – 456 V AC
Limits operation voltage test circuit	
30 mA	196 - 264 V AC
30 mA -400	353 - 456 V AC
300 mA	196 - 456 V AC
Rated tripping current	$I_{\Delta n}$ 30, 300 mA
Sensitivity	All types of current
Rated insulation voltage	$U_i$ 440 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	
Type G/B, G/B+ and G/Bfq	3 kA (8/20 μs) surge current-proof
Type S/B, S/B+ and S/Bfq	5 kA (8/20 μs) selective + surge current-proof
Rated breaking capacity	$I_m$
or rated fault breaking capacity	$I_{\Delta m}$ $I_h = 25-40$ A $I_n = 63$ A
Endurance	
electrical components	$\geq 4,000$ operating cycles
mechanical components	$\geq 20,000$ operating cycles
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	open moutched/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm <sup>2</sup> single wire 2 x 16 mm <sup>2</sup> multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-ZZ, Pozidriv PZ2)
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	25-55°C/90-95% relative humidity acc. to IEC 60068-2
Contact position indicator	red / green
Tripping indicator	white / blue
<b>Internal contact</b>	
Rated breaking capacity @ 30 V DC (resistive load)	2 A
Rated breaking capacity @ 240 V AC (resistive load)	0.25 A
Maximum switching power (resistive load)	60 W
Maximum switching voltage DC	220 V
Maximum switching voltage AC	240 V
Maximum switching current	2 A
Minimum switching capacity (reference value)	10 µA, 10 mV DC
Endurance	
Electrical (at 20 cpm) 2 A 30 V DC resistive load	>10 <sup>5</sup>
Electrical (at 20 cpm) 1 A 30 V DC resistive load	>5 x 10 <sup>5</sup>
Terminal capacity	0.25 - 1.5 mm <sup>2</sup>


**Connection diagram**

4-poles (2-Pole)

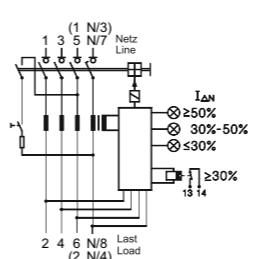


① Basic diagram

4-poles (30mA-400 Types)

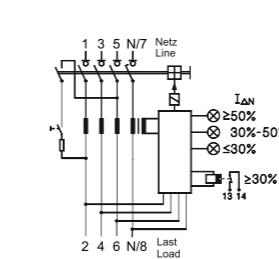


① Basic diagram

4-poles (2-Pole)

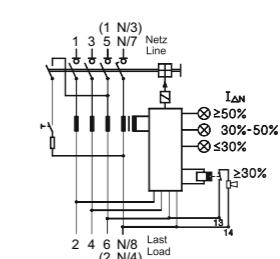

② Signalisation without Isolation Transformer 1:1 (IEC/EN 60664)


4-poles (2-Pole)

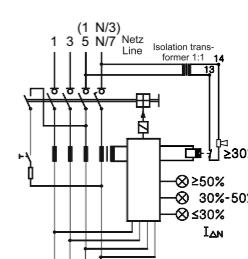

③ Signalisation with Isolation Transformer 1:1 (IEC/EN 60664)

**Dimensions (mm)**


2P &amp; 4P

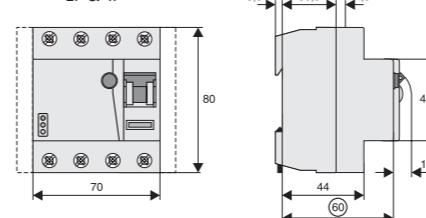


**Correct connection**

2-pole

30, 300mA Types:

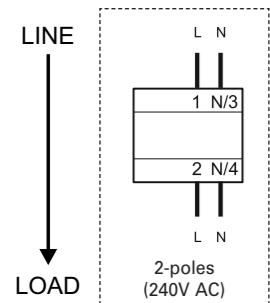


30mA - 400 Types:

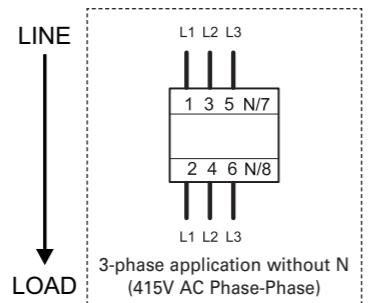


4-pole

30mA Types:






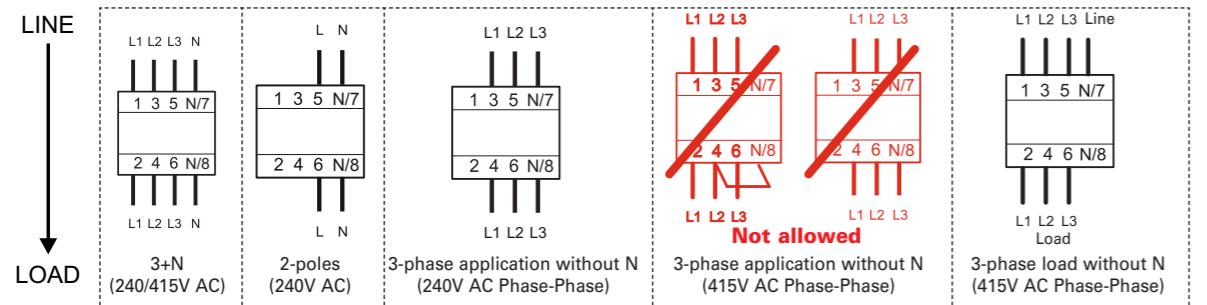


300mA Types:

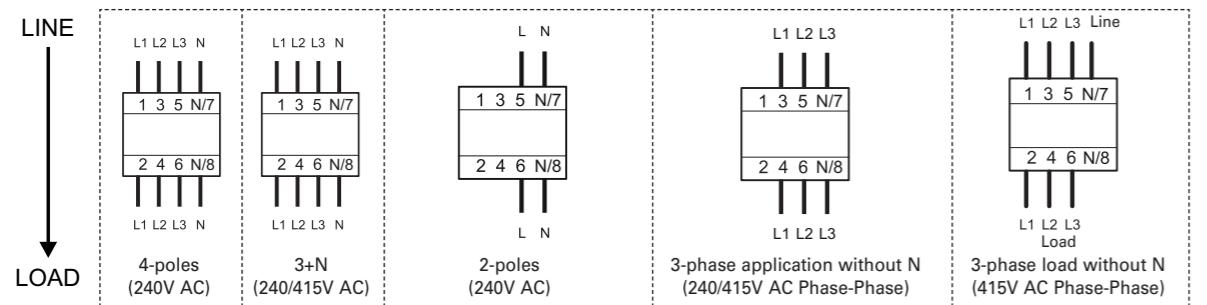

- Disconnect load side of the switch gear, if you make a insulation test of the installation!

- Please take care of supply side and load side!

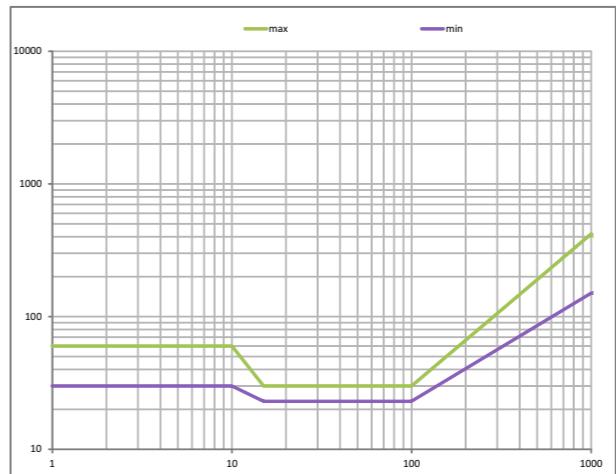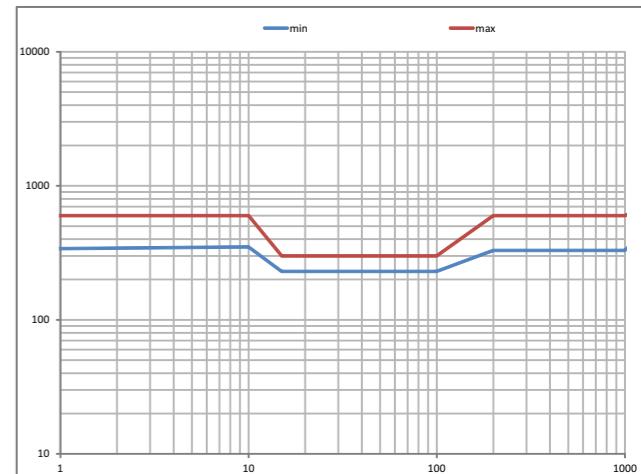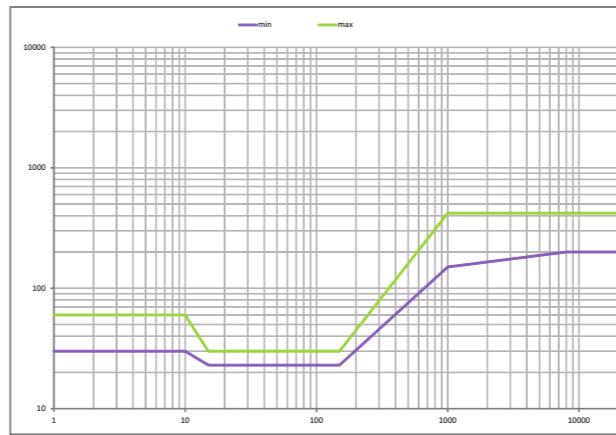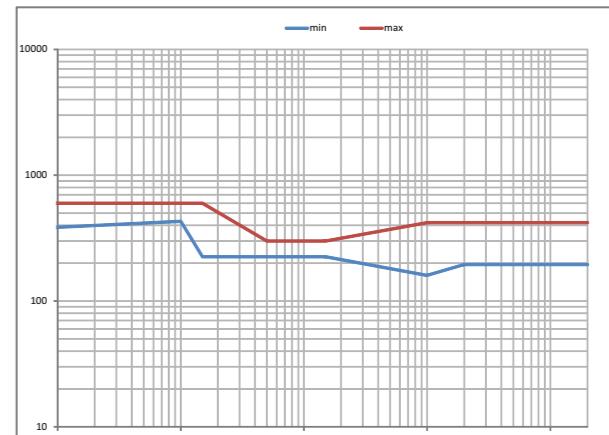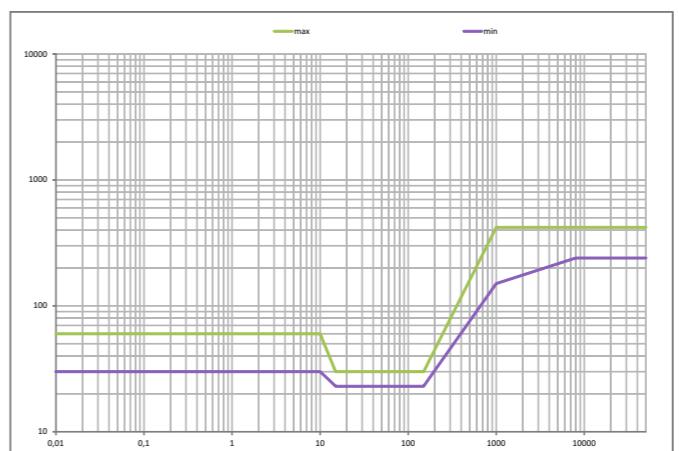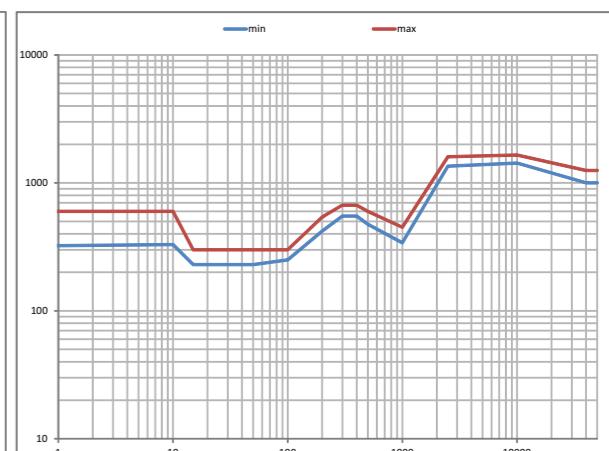**Tripping current frequency response FRCdM Type B, Bfq and B+****Type B 30mA****Type B 300mA****Type B+ 30mA****Type B+ 300mA****Type Bfq 30mA****Type Bfq 300mA**

**Power Loss at  $I_n$  FRCdM**

(entire unit)		
$I_n$ [A]	P* [W]	
2p	4p	
25	3.1	4.6
40	4.1	6.2
63	6.7	10
* 50Hz		

**Impact of ambient temperature on the maximum permanent current allowed (A) FRCdM Type B, Bfq and B+**

Ambient temperature	25A	40A	63A
	2p & 4p	2p & 4p	2p & 4p
40°	25	40	63
45°	25	40	56
50°	25	40	50
55°	25	35	45
60°	25	30	40
65°	-	-	-
70°	-	-	-
75°	-	-	-

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

**Max. back-up fuse FRCdM Type B**

Rating	Fuses	MCB's (Characteristic B/C)		
$I_n$ [A]	Short Circuit [A]	Overload [A]	Short Circuit [A]	Overload [A]
25	63 gG/gI	25 gG/gI	FAZ-C40	FAZ-C25
40	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40
63	63 gG/gI	63 gG/gI	FAZ-C40	FAZ-C40

**Important:**

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

SG02613

**Description**

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Complete range of RCCBs available to fulfil all application needs
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification
- FRCmM Type AC, A and F have bidirectional power supply

## Residual Current Devices

Residual Current Devices FRCmM



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type AC**

Conditionally surge current-proof 250 A, Type AC

**2-poles**

16/0.03	50	FRCmM-16/2/003	170390	1/60
16/0.1	50	FRCmM-16/2/01	170396	1/60
16/0.3	50	FRCmM-16/2/03	170402	1/60
16/0.5	50	FRCmM-16/2/05	170405	1/60
25/0.03	50	FRCmM-25/2/003	170391	1/60
25/0.1	50	FRCmM-25/2/01	170397	1/60
25/0.3	50	FRCmM-25/2/03	170403	1/60
25/0.5	50	FRCmM-25/2/05	170406	1/60
40/0.03	50	FRCmM-40/2/003	170392	1/60
40/0.1	50	FRCmM-40/2/01	170398	1/60
40/0.3	50	FRCmM-40/2/03	170404	1/60
40/0.5	50	FRCmM-40/2/05	170407	1/60
63/0.03	50	FRCmM-63/2/003	170393	1/60
63/0.1	50	FRCmM-63/2/01	170399	1/60
63/0.5	50	FRCmM-63/2/05	170408	1/60
80/0.03	50	FRCmM-80/2/003	170394	1/60
80/0.1	50	FRCmM-80/2/01	170400	1/60
80/0.3	50	FRCmM-80/2/03	180778	1/60
80/0.5	50	FRCmM-80/2/05	180779	1/60
100/0.03	50	FRCmM-100/2/003	170395	1/60
100/0.1	50	FRCmM-100/2/01	170401	1/60
100/0.3	50	FRCmM-100/2/03	180781	1/60

**4-poles**

16/0.03	50	FRCmM-16/4/003	170409	1/30
16/0.1	50	FRCmM-16/4/01	170415	1/30
16/0.3	50	FRCmM-16/4/03	170418	1/30
16/0.5	50	FRCmM-16/4/05	170424	1/30
25/0.03	50	FRCmM-25/4/003	170410	1/30
25/0.1	50	FRCmM-25/4/01	170416	1/30
25/0.3	50	FRCmM-25/4/03	170419	1/30
25/0.5	50	FRCmM-25/4/05	170425	1/30
40/0.03	50	FRCmM-40/4/003	170411	1/30
40/0.1	50	FRCmM-40/4/01	170417	1/30
40/0.3	50	FRCmM-40/4/03	170420	1/30
40/0.5	50	FRCmM-40/4/05	170426	1/30
63/0.03	50	FRCmM-63/4/003	170412	1/30
63/0.1	50	FRCmM-63/4/01	180777	1/30
63/0.3	50	FRCmM-63/4/03	170421	1/30
63/0.5	50	FRCmM-63/4/05	170427	1/30
80/0.03	50	FRCmM-80/4/003	170413	1/30
80/0.1	50	FRCmM-80/4/01	180780	1/30
80/0.3	50	FRCmM-80/4/03	170422	1/30
80/0.5	50	FRCmM-80/4/05	170428	1/30
100/0.03	50	FRCmM-100/4/003	170414	1/30
100/0.1	50	FRCmM-100/4/01	180782	1/30
100/0.3	50	FRCmM-100/4/03	170423	1/30
100/0.5	50	FRCmM-100/4/05	170429	1/30

**xEffect****xEffect**

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type A**

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A

**2-poles**

16/0.03	50/60	FRCmM-16/2/003-A	170430	1/60
16/0.1	50/60	FRCmM-16/2/01-A	170436	1/60
16/0.3	50/60	FRCmM-16/2/03-A	170278	1/60
16/0.5	50	FRCmM-16/2/05-A	170281	1/60
25/0.03	50/60	FRCmM-25/2/003-A	170431	1/60
25/0.1	50/60	FRCmM-25/2/01-A	170437	1/60
25/0.3	50/60	FRCmM-25/2/03-A	170279	1/60
25/0.5	50	FRCmM-25/2/05-A	170282	1/60
40/0.03	50/60	FRCmM-40/2/003-A	170432	1/60
40/0.1	50/60	FRCmM-40/2/01-A	170274	1/60
40/0.3	50/60	FRCmM-40/2/03-A	170280	1/60
40/0.5	50	FRCmM-40/2/05-A	170283	1/60
63/0.03	50/60	FRCmM-63/2/003-A	170433	1/60
63/0.1	50/60	FRCmM-63/2/01-A	170275	1/60
63/0.3	50/60	FRCmM-63/2/03-A	304063	1/60
63/0.5	50	FRCmM-63/2/05-A	170284	1/60
80/0.03	50/60	FRCmM-80/2/003-A	170434	1/60
80/0.1	50/60	FRCmM-80/2/01-A	170276	1/60
80/0.3	50/60	FRCmM-80/2/03-A	304064	1/60
100/0.03	50/60	FRCmM-100/2/003-A	170435	1/60
100/0.1	50/60	FRCmM-100/2/01-A	170277	1/60
100/0.3	50/60	FRCmM-100/2/03-A	304065	1/60

**4-poles**

16/0.03	50/60	FRCmM-16/4/003-A	170285	1/30
16/0.03	50/60	FRCmM-16/4/003-A-400	304101	1/30
16/0.1	50/60	FRCmM-16/4/01-A	170337	1/30
16/0.3	50/60	FRCmM-16/4/03-A	170340	1/30
16/0.5	50	FRCmM-16/4/05-A	170346	1/30
25/0.03	50/60	FRCmM-25/4/003-A	170332	1/30
25/0.03	50/60	FRCmM-25/4/003-A-400	304102	1/30
25/0.1	50/60	FRCmM-25/4/01-A	170338	1/30
25/0.3	50/60	FRCmM-25/4/03-A	170341	1/30
25/0.5	50	FRCmM-25/4/05-A	170347	1/30
40/0.03	50/60	FRCmM-40/4/003-A	170333	1/30
40/0.03	50/60	FRCmM-40/4/003-A-400	304116	1/30
40/0.1	50/60	FRCmM-40/4/01-A	170339	1/30
40/0.3	50/60	FRCmM-40/4/03-A	170342	1/30
40/0.5	50	FRCmM-40/4/05-A	170348	1/30
63/0.03	50/60	FRCmM-63/4/003-A	170334	1/30
63/0.03	50/60	FRCmM-63/4/003-A-400	304167	1/30
63/0.3	50/60	FRCmM-63/4/03-A	170343	1/30
63/0.5	50	FRCmM-63/4/05-A	170349	1/30
80/0.03	50/60	FRCmM-80/4/003-A	170335	1/30
80/0.03	50/60	FRCmM-80/4/003-A-400	304186	1/30
80/0.3</				

## Residual Current Devices

Residual Current Devices FRCmM

SG02713



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type G****Surge current-proof 3 kA, Type G (ÖVE E 8601)** **2-poles**

16/0.03	50/60	FRCmM-16/2/003-G	170352	1/60
16/0.1	50/60	FRCmM-16/2/01-G	170358	1/60
16/0.3	50/60	FRCmM-16/2/03-G	170364	1/60
25/0.03	50/60	FRCmM-25/2/003-G	170353	1/60
25/0.1	50/60	FRCmM-25/2/01-G	170359	1/60
25/0.3	50/60	FRCmM-25/2/03-G	170365	1/60
40/0.03	50/60	FRCmM-40/2/003-G	170354	1/60
40/0.1	50/60	FRCmM-40/2/01-G	170360	1/60
40/0.3	50/60	FRCmM-40/2/03-G	170366	1/60
63/0.03	50/60	FRCmM-63/2/003-G	170355	1/60
63/0.1	50/60	FRCmM-63/2/01-G	170361	1/60
80/0.03	50/60	FRCmM-80/2/003-G	170356	1/60
80/0.1	50/60	FRCmM-80/2/01-G	170362	1/60
100/0.03	50/60	FRCmM-100/2/003-G	170357	1/60
100/0.1	50/60	FRCmM-100/2/01-G	170363	1/60

SG02613

**4-poles**

16/0.03	50/60	FRCmM-16/4/003-G	170367	1/30
16/0.1	50/60	FRCmM-16/4/01-G	170373	1/30
16/0.3	50/60	FRCmM-16/4/03-G	170376	1/30
25/0.03	50/60	FRCmM-25/4/003-G	170368	1/30
25/0.1	50/60	FRCmM-25/4/01-G	170374	1/30
25/0.3	50/60	FRCmM-25/4/03-G	170377	1/30
40/0.03	50/60	FRCmM-40/4/003-G	170369	1/30
40/0.1	50/60	FRCmM-40/4/01-G	170375	1/30
40/0.3	50/60	FRCmM-40/4/03-G	170378	1/30
63/0.03	50/60	FRCmM-63/4/003-G	170370	1/30
63/0.3	50/60	FRCmM-63/4/03-G	170379	1/30
80/0.03	50/60	FRCmM-80/4/003-G	170371	1/30
80/0.3	50/60	FRCmM-80/4/03-G	170380	1/30
100/0.03	50/60	FRCmM-100/4/003-G	170372	1/30
100/0.3	50/60	FRCmM-100/4/03-G	170381	1/30

**xEffect****xEffect**

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type G/A****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)** **2-poles**

16/0.03	50/60	FRCmM-16/2/003-G/A	170382	1/60
16/0.1	50/60	FRCmM-16/2/01-G/A	170388	1/60
16/0.3	50/60	FRCmM-16/2/03-G/A	170290	1/60
25/0.03	50/60	FRCmM-25/2/003-G/A	170383	1/60
25/0.1	50/60	FRCmM-25/2/01-G/A	170389	1/60
25/0.3	50/60	FRCmM-25/2/03-G/A	170291	1/60
40/0.03	50/60	FRCmM-40/2/003-G/A	170384	1/60
40/0.1	50/60	FRCmM-40/2/01-G/A	170286	1/60
40/0.3	50/60	FRCmM-40/2/03-G/A	170292	1/60
63/0.03	50/60	FRCmM-63/2/003-G/A	170385	1/60
63/0.1	50/60	FRCmM-63/2/01-G/A	170287	1/60
80/0.03	50/60	FRCmM-80/2/003-G/A	170386	1/60
80/0.1	50/60	FRCmM-80/2/01-G/A	170288	1/60
100/0.03	50/60	FRCmM-100/2/003-G/A	170387	1/60
100/0.1	50/60	FRCmM-100/2/01-G/A	170289	1/60

wa\_sg26421\_I

**4-poles**

16/0.03	50/60	FRCmM-16/4/003-G/A	170293	1/30
16/0.1	50/60	FRCmM-16/4/01-G/A	170299	1/30
16/0.3	50/60	FRCmM-16/4/03-G/A	170302	1/30
25/0.03	50/60	FRCmM-25/4/003-G/A	170294	1/30
25/0.1	50/60	FRCmM-25/4/01-G/A	170300	1/30
25/0.3	50/60	FRCmM-25/4/03-G/A	170303	1/30
40/0.03	50/60	FRCmM-40/4/003-G/A	170295	1/30
40/0.1	50/60	FRCmM-40/4/01-G/A	170301	1/30
40/0.3	50/60	FRCmM-40/4/03-G/A	170304	1/30
63/0.03	50/60	FRCmM-63/4/003-G/A	170296	1/30
63/0.3	50/60	FRCmM-63/4/03-G/A	170305	1/30
80/0.03	50/60	FRCmM-80/4/003-G/A	170297	1/30
80/0.3	50/60	FRCmM-80/4/03-G/A	170306	1/30
100/0.03	50/60	FRCmM-100/4/003-G/A	170298	1/30
100/0.3	50/60	FRCmM-100/4/03-G/A	170307	1/30

**Residual Current Devices**

Residual Current Devices FRCmM

## Residual Current Devices

Residual Current Devices FRCmM



## Type S

Selective + surge current-proof 5 kA, Type S

## 2-poles

I <sub>Δ</sub> /I <sub>AN</sub>	(A)	Operating frequency	(Hz)	Type	Designation	Article No.	Units per package
16/0.1	50/60			FRCmM-16/2/01-S		170314	1/60
25/0.1	50/60			FRCmM-25/2/01-S		170315	1/60
40/0.1	50/60			FRCmM-40/2/01-S		170316	1/60
40/0.3	50/60			FRCMM-40/2/03-S		180776	1/60
63/0.1	50/60			FRCmM-63/2/01-S		170317	1/60
80/0.1	50/60			FRCmM-80/2/01-S		170318	1/60
100/0.1	50/60			FRCmM-100/2/01-S		170319	1/60

## 4-poles

I <sub>Δ</sub> /I <sub>AN</sub>	(A)	Operating frequency	(Hz)	Type	Designation	Article No.	Units per package
16/0.1	50/60			FRCmM-16/4/01-S		170320	1/30
16/0.3	50/60			FRCmM-16/4/03-S		170324	1/30
25/0.1	50/60			FRCmM-25/4/01-S		170321	1/30
25/0.3	50/60			FRCmM-25/4/03-S		170325	1/30
40/0.1	50/60			FRCmM-40/4/01-S		170322	1/30
40/0.3	50/60			FRCmM-40/4/03-S		170326	1/30
63/0.1	50/60			FRCmM-63/4/01-S		170323	1/30
63/0.3	50/60			FRCmM-63/4/03-S		170327	1/30
80/0.3	50/60			FRCmM-80/4/03-S		170328	1/30
100/0.3	50/60			FRCmM-100/4/03-S		170329	1/30

## Type S/A

Selective + surge current-proof 5 kA, sensitive to residual pulsating DC, Type S/A

## 2-poles

I <sub>Δ</sub> /I <sub>AN</sub>	(A)	Operating frequency	(Hz)	Type	Designation	Article No.	Units per package
16/0.1	50/60			FRCmM-16/2/01-S/A		170330	1/60
25/0.1	50/60			FRCmM-25/2/01-S/A		170331	1/60
40/0.1	50/60			FRCmM-40/2/01-S/A		170438	1/60
63/0.1	50/60			FRCmM-63/2/01-S/A		170439	1/60
63/0.3	50/60			FRCMM-63/2/03-S/A		180636	1/60
80/0.1	50/60			FRCmM-80/2/01-S/A		170440	1/60
100/0.1	50/60			FRCmM-100/2/01-S/A		170441	1/60

## 4-poles

I <sub>Δ</sub> /I <sub>AN</sub>	(A)	Operating frequency	(Hz)	Type	Designation	Article No.	Units per package
16/0.1	50/60			FRCmM-16/4/01-S/A		170442	1/30
16/0.3	50/60			FRCmM-16/4/03-S/A		170446	1/30
25/0.1	50/60			FRCmM-25/4/01-S/A		170443	1/30
25/0.3	50/60			FRCmM-25/4/03-S/A		170447	1/30
40/0.1	50/60			FRCmM-40/4/01-S/A		170444	1/30
40/0.3	50/60			FRCmM-40/4/03-S/A		170448	1/30
63/0.1	50/60			FRCmM-63/4/01-S/A		170445	1/30
63/0.3	50/60			FRCmM-63/4/03-S/A		170449	1/30
80/0.3	50/60			FRCmM-80/4/03-S/A		170450	1/30
100/0.3	50/60			FRCmM-100/4/03-S/A		170451	1/30

## xEffect

## xEffect

I<sub>Δ</sub>/I<sub>AN</sub>  
(A)Operating frequency  
(Hz)Type  
Designation

Article No.

Units per  
packageI<sub>Δ</sub>/I<sub>AN</sub>  
(A)Operating frequency  
(Hz)Type  
Designation

Article No.

Units per  
package

## Type G/F

Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/F (ÖVE E 8601)

## 2-poles

16/0.03	50/60			FRCMM-16/2/003-G/F		187365	1/60
16/0.1	50/60			FRCMM-16/2/01-G/F		187371	1/60
16/0.3	50/60			FRCMM-16/2/03-G/F		187377	1/60
25/0.03	50/60			FRCMM-25/2/003-G/F		187366	1/60
25/0.1	50/60			FRCMM-25/2/01-G/F		187372	1/60
25/0.3	50/60			FRCMM-25/2/03-G/F		187378	1/60
40/0.03	50/60			FRCMM-40/2/003-G/F		187367	1/60
40/0.1	50/60			FRCMM-40/2/01-G/F		187373	1/60
40/0.3	50/60			FRCMM-40/2/03-G/F		187379	1/60
63/0.03	50/60			FRCMM-63/2/003-G/F		187368	1/60
63/0.1	50/60			FRCMM-63/2/01-G/F		187374	1/60
63/0.3	50/60			FRCMM-63/2/03-G/F		187380	1/60
80/0.03	50/60			FRCMM-80/2/003-G/F		187369	1/60
80/0.1	50/60			FRCMM-80/2/01-G/F		187375	1/60
80/0.3	50/60			FRCMM-80/2/03-G/F		187381	1/60
100/0.03	50/60			FRCMM-100/2/003-G/F		187370	1/60
100/0.1	50/60			FRCMM-100/2/01-G/F		187376	1/60
100/0.3	50/60			FRCMM-100/2/03-G/F		187382	1/60

## 4-poles

16/0.03	50/60			FRCMM-16/4/003-G/F		187407	1/30
16/0.1	50/60			FRCMM-16/4/01-G/F		187413	1/30
16/0.3	50/60			FRCMM-16/4/03-G/F		187419	1/30
25/0.03	50/60			FRCMM-25/4/003-G/F		187408	1/30
25/0.1	50/60			FRCMM-25/4/01-G/F		187414	1/30
25/0.3	50/60			FRCMM-25/4/03-G/F		187420	1/30
40/0.03	50/60			FRCMM-40/4/003-G/F		187409	1/30
40/0.1	50/60			FRCMM-40/4/01-G/F		187415	1/30
40/0.3	50/60						

## Residual Current Devices

Residual Current Devices FRCmM



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
----------------------------	-----------------------------	---------------------	-------------	----------------------

**Type S/F****Selective + surge current-proof 5 kA, sensitive to residual pulsating DC, Type S/F**  **2-poles**

16/0.1	50/60	FRCMM-16/2/01-S/F	187389	1/60
16/0.3	50/60	FRCMM-16/2/03-S/F	187395	1/60
25/0.1	50/60	FRCMM-25/2/01-S/F	187390	1/60
25/0.3	50/60	FRCMM-25/2/03-S/F	187396	1/60
40/0.1	50/60	FRCMM-40/2/01-S/F	187391	1/60
40/0.3	50/60	FRCMM-40/2/03-S/F	187397	1/60
63/0.1	50/60	FRCMM-63/2/01-S/F	187392	1/60
63/0.3	50/60	FRCMM-63/2/03-S/F	187398	1/60
80/0.1	50/60	FRCMM-80/2/01-S/F	187393	1/60
80/0.3	50/60	FRCMM-80/2/03-S/F	187399	1/60
100/0.1	50/60	FRCMM-100/2/01-S/F	187394	1/60
100/0.3	50/60	FRCMM-100/2/03-S/F	187400	1/60

**4-poles**

16/0.1	50/60	FRCMM-16/4/01-S/F	187431	1/30
16/0.3	50/60	FRCMM-16/4/03-S/F	187437	1/30
25/0.1	50/60	FRCMM-25/4/01-S/F	187432	1/30
25/0.3	50/60	FRCMM-25/4/03-S/F	187438	1/30
40/0.1	50/60	FRCMM-40/4/01-S/F	187433	1/30
40/0.3	50/60	FRCMM-40/4/03-S/F	187439	1/30
63/0.1	50/60	FRCMM-63/4/01-S/F	187434	1/30
63/0.3	50/60	FRCMM-63/4/03-S/F	187440	1/30
80/0.1	50/60	FRCMM-80/4/01-S/F	187435	1/30
80/0.3	50/60	FRCMM-80/4/03-S/F	187441	1/30
100/0.1	50/60	FRCMM-100/4/01-S/F	187436	1/30
100/0.3	50/60	FRCMM-100/4/03-S/F	187442	1/30

**xEffect****xEffect**

## Residual Current Devices

Residual Current Devices FRCmM - RT

**Description**

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Complete range of RCCBs available to fulfill all application needs
- Special design to allow ring tongues to be fitted easily (terminal screws are removable)
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification



$I_{\Delta} / A$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
-------------------------	-----------------------------	---------------------	-------------	----------------------

**Type A****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A****2-poles**

16/0.03	50/60	FRCmM-16/2/003-A-RT	305061	1/30
16/0.3	50/60	FRCmM-16/2/03-A-RT	305067	1/30
25/0.03	50/60	FRCmM-25/2/003-A-RT	305062	1/30
25/0.3	50/60	FRCmM-25/2/03-A-RT	305068	1/30
40/0.03	50/60	FRCmM-40/2/003-A-RT	305063	1/30
40/0.3	50/60	FRCmM-40/2/03-A-RT	305069	1/30
63/0.03	50/60	FRCmM-63/2/003-A-RT	305064	1/30
63/0.3	50/60	FRCmM-63/2/03-A-RT	305070	1/30

**4-poles**

16/0.03	50/60	FRCMM-16/4/003-A-RT	305081	1/30
16/0.3	50/60	FRCMM-16/4/03-A-RT	305088	1/30
25/0.03	50/60	FRCMM-25/4/003-A-RT	305082	1/30
25/0.3	50/60	FRCMM-25/4/03-A-RT	305090	1/30
40/0.03	50/60	FRCMM-40/4/003-A-RT	305083	1/30
40/0.3	50/60	FRCMM-40/4/03-A-RT	305101	1/30
63/0.03	50/60	FRCMM-63/4/003-A-RT	305084	1/30
63/0.3	50/60	FRCMM-63/4/03-A-RT	305102	1/30

**Type S****Selective + surge current-proof 5 kA, Type S****2-poles**

16/0.3	50/60	FRCMM-16/2/03-S/A-RT	305071	1/30
25/0.3	50/60	FRCMM-25/2/03-S/A-RT	305073	1/30
40/0.3	50/60	FRCMM-40/2/03-S/A-RT	305076	1/30
63/0.3	50/60	FRCMM-63/2/03-S/A-RT	305077	1/30

**4-poles**

16/0.3	50/60	FRCMM-16/4/03-S/A-RT	305104	1/30
25/0.3	50/60	FRCMM-25/4/03-S/A-RT	305109	1/30
40/0.3	50/60	FRCMM-40/4/03-S/A-RT	305110	1/30
63/0.3	50/60	FRCMM-63/4/03-S/A-RT	305111	1/30

Type Designation	Article No.	Units per package
---------------------	-------------	----------------------

**Specifications | Residual Current Devices FRCmM****Description****Design**

- Residual Current Circuit Breakers (RCCBs) for industrial and commercial applications
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Tripping indicator white - blue
- Additional safety due:
  - possibility to seal the toggle
  - possibility to lock the toggle
- The device functions irrespective of the position of installation

**Accessories**

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
  - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
  - Auxiliary switch Z-HK can be mounted subsequently

**Additional information for the application**

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast
  - 30 mA-RCCBs: 30 units per phase conductor
  - 100 mA RCCBs: 90 units per phase conductor
- Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.

The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)

- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

**Test Button**

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.
- Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

**Accessories:**




Auxiliary contact to be mounted on the left side	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device	Z-FW/LP*	248296
	Z-FW-LPD*	265244
	FAZ/FIP-XAWM**	262514
	FAZ/FIP-XDWM**	274404
Remote control unit	Z-FW-MO	284730
$\Delta n$ testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
Terminal cover 4-poles	Z-RC/AK-4TE	101062

\*reclosing device up to 63A


\*\*reclosing device 100 A

**Technical Data****FRCmM**


<b>Electrical</b>	
Design according to	IEC/EN 61008, IEC/EN 62423 for Type F only Type G acc. to ÖVE E 8601
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous
Type G	10 ms delay @ 50 Hz
Type S	40 ms delay @ 50 Hz - with selective disconnecting function
Rated voltage	$U_n$ 240/415 V AC 50 Hz and/or 60 Hz – see individual article for operating frequency
Limits operation voltage test circuit	
2-poles	196 - 264 V~
4-poles 30 mA	196 - 264 V~
4-poles 30 mA -400	353 - 456 V~
4-poles 100, 300, 500 mA	196 - 456 V~
Rated tripping current	$I_{\Delta n}$ 30, 100, 300, 500 mA
Sensitivity	> AC, Type A and Type F
Rated insulation voltage	$U_i$ 440 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	
Type AC, A	250 A (8/20 μs) surge current-proof
Type G, G/A, G/F	3 kA (8/20 μs) surge current-proof, 10 ms delay
Type S, S/A, S/F	5 kA (8/20 μs) surge current-proof, 40 ms delay
Rated breaking capacity	$I_m$
or rated fault breaking capacity	$I_{\Delta m}$ 500 A 630 A 800 A 1,000 A
$I_n = 16-40$ A	
$I_n = 63$ A	
$I_n = 80$ A	
$I_n = 100$ A	
Endurance	
electrical components	$\geq 4,000$ operating cycles
mechanical components	$\geq 20,000$ operating cycles
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	open moutched/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm <sup>2</sup> single wire 2 x 16 mm <sup>2</sup> multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-ZZ, Pozidriv PZ2)
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Contact position indicator	red / green
Tripping indicator	white / blue

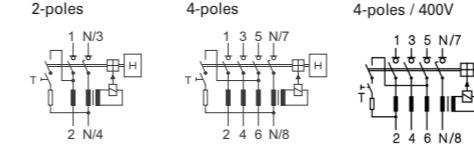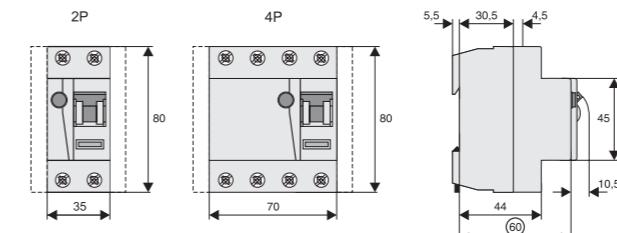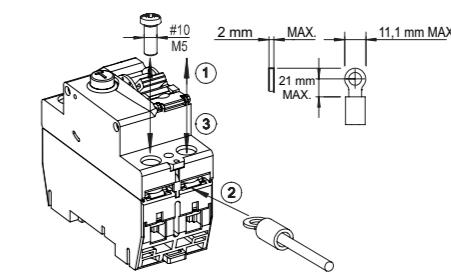**Connection diagram****Dimensions (mm)****Connection of ring cable lugs (only FRC...RT)****Correct connection****2-poles**



30, 100, 300, 500mA Types:

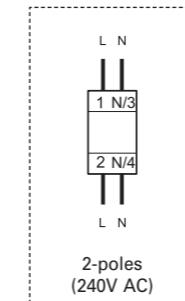**4-poles**

30mA -400 Types:

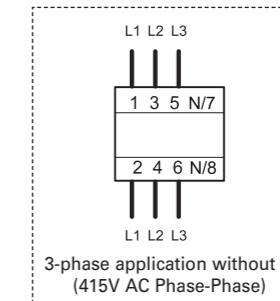**4-poles**

30mA Types:

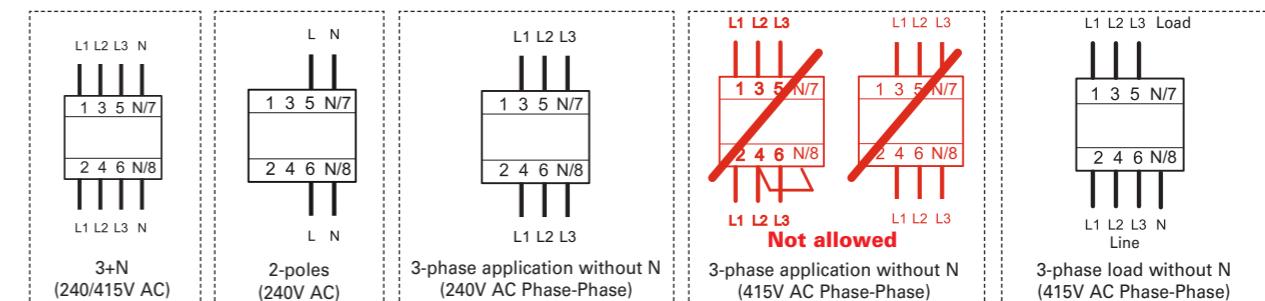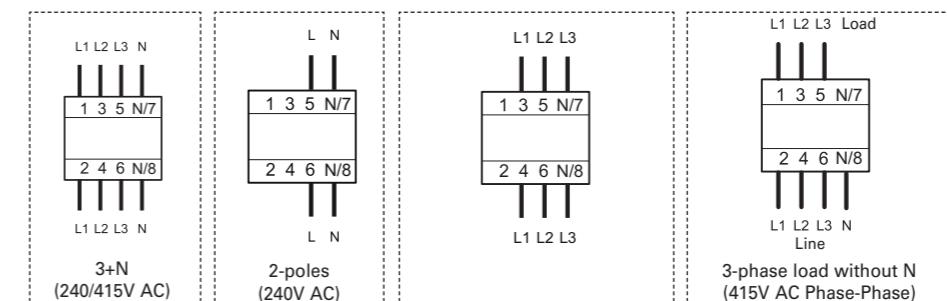**100, 300, 500mA Types:**

**Power Loss at  $I_n$  FRCmM**

(entire unit)		
<b>Tripping: AC</b>		
$I_n$ [A]	$I_{\Delta n}$ [mA]	P [W]
<b>2-poles</b>		
16	10	2.9
25	30	2.0
25	100, 300, 500	1.3
40	30	7.8
40	100, 300, 500	5.5
63	30	9.7
63	100, 300, 500	7.2
80	30	13.5
80	100, 300, 500	8.6
100	30, 100, 300	13.6
<b>4-poles</b>		
25	30	3.1
25	100, 300, 500	2.8
40	30	13.1
40	100, 300, 500	8.8
63	30	13.4
63	100, 300, 500	10.5
80	30, 100, 300, 500	11.4
100	30, 100, 300, 500	18.8

<b>Tripping: A</b>		
$I_n$ [A]	$I_{\Delta n}$ [mA]	P [W]
<b>2-poles</b>		
16	10	2.9
16	30	1.2
25	30	2.0
25	100, 300	1.3
40	30	7.8
40	100, 300, 500	5.5
63	30	9.7
63	100, 300, 500	7.2
80	30	13.5
80	100, 300, 500	8.6
100	30, 100, 300	13.6
<b>4-poles</b>		
25	30	3.1
25	100, 300, 500	2.8
40	30	13.1
40	100, 300, 500	8.8
63	30, 100, 300, 500	10.5
80	30, 300	11.4
100	30, 100, 300, 500	18.8

**Tripping: G, G/A, G/F**

$I_n$ [A]	$I_{\Delta n}$ [mA]	P [W]
<b>2-poles</b>		
25	30, 100 (G)	2.0
40	30, 100 (G)	7.8
<b>4-poles</b>		
40	30 (G)	13.1
40	100 (G, G/A)	8.8
40	30 (G/A)	13.1
63	30 (G)	13.4
63	100 (G, G/A)	10.5
63	30 (G/A)	13.4
100	30, 300 (G/A)	18.8

**Tripping: S, S/A, S/F**

$I_n$ [A]	$I_{\Delta n}$ [mA]	P [W]
<b>2-poles</b>		
40	100 (S, S/A)	7.8
40	300 (S)	5.5
<b>4-poles</b>		
25	100, 300 (S)	2.8
25	100 (S/A)	2.8
40	100, 300 (S, S/A)	8.8
63	100, 300 (S)	10.5
63	100, 300 (S/A)	10.5
80	100, 300 (S)	11.4
80	300 (S/A)	11.4
100	300 (S/A)	18.8

**Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM**

Ambient temperature	25A 2p	40A 4p	63A 2p	80A 4p	100A 2p	100A 4p
40°	25	25	40	40	63	80
45°	21	22	37	37	59	76
50°	18	19	33	34	55	72
55°	14	16	30	31	50	68
60°	—	—	26	27	45	64
65°	—	—	20	24	40	60
70°	—	—	14	19	34	56
75°	—	—	8	15	28	52

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

**Max. back-up fuse FRCmM**

Rating	Fuses	MCB's (Characteristic B/C)
In [A]	Short Circuit [A]	Overload [A]
25	63 gG/gI	25 gG/gI
40	63 gG/gI	FAZ-C40
63	63 gG/gI	FAZ-C40
80	80 gG/gI	FAZ-C40
100	100 gG/gI	FAZ-C40

**Important:**

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

## Residual Current Devices

Residual Current Devices FRCmM-110 Type AC, A

**Description**

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- For use in 110V applications
- Complete range of RCCBs available to fulfil all application needs
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification

## xEffect

## xEffect

## Residual Current Devices

Residual Current Devices FRCmM-110


$I_{\text{c}}/I_{\Delta \text{N}}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type AC</b>				
<b>Conditionally surge current-proof 250 A, Type AC</b>				
<b>2-poles</b>				
25/0.03	50	FRCmM-25/2/003-110	180585	1/60
25/0.3	50	FRCmM-25/2/03-110	180586	1/60
40/0.03	50	FRCmM-40/2/003-110	180587	1/60
40/0.3	50	FRCmM-40/2/03-110	180588	1/60
63/0.03	50	FRCmM-63/2/003-110	180589	1/60
63/0.3	50	FRCmM-63/2/03-110	180590	1/60
80/0.03	50	FRCmM-80/2/003-110	180591	1/60
80/0.3	50	FRCmM-80/2/03-110	180592	1/60
100/0.03	50	FRCmM-100/2/003-110	180593	1/60
100/0.3	50	FRCmM-100/2/03-110	180594	1/60

**4-poles**

25/0.03	50	FRCmM-25/4/003-110	180595	1/30
25/0.3	50	FRCmM-25/4/03-110	180596	1/30
40/0.03	50	FRCmM-40/4/003-110	180597	1/30
40/0.3	50	FRCmM-40/4/03-110	180598	1/30
63/0.03	50	FRCmM-63/4/003-110	180599	1/30
63/0.3	50	FRCmM-63/4/03-110	180600	1/30
80/0.03	50	FRCmM-80/4/003-110	180601	1/30
80/0.3	50	FRCmM-80/4/03-110	180602	1/30
100/0.03	50	FRCmM-100/4/003-110	180603	1/30
100/0.3	50	FRCmM-100/4/03-110	180604	1/30

**Type A****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** **2-poles**

25/0.03	50	FRCmM-25/2/003-A-110	180605	1/60
25/0.3	50	FRCmM-25/2/03-A-110	180606	1/60
40/0.03	50	FRCmM-40/2/003-A-110	180607	1/60
40/0.3	50	FRCmM-40/2/03-A-110	180608	1/60
63/0.03	50	FRCmM-63/2/003-A-110	180609	1/60
80/0.03	50	FRCmM-80/2/003-A-110	180610	1/60
100/0.03	50	FRCmM-100/2/003-A-110	180611	1/60

**4-poles**

25/0.03	50	FRCmM-25/4/003-A-110	180612	1/30
25/0.3	50	FRCmM-25/4/03-A-110	180613	1/30
40/0.03	50	FRCmM-40/4/003-A-110	180614	1/30
40/0.3	50	FRCmM-40/4/03-A-110	180615	1/30
63/0.03	50	FRCmM-63/4/003-A-110	180616	1/30
63/0.3	50	FRCmM-63/4/03-A-110	180617	1/30
80/0.03	50	FRCmM-80/4/003-A-110	180618	1/30
80/0.3	50	FRCmM-80/4/03-A-110	180619	1/30
100/0.03	50	FRCmM-100/4/003-A-110	180620	1/30
100/0.3	50	FRCmM-100/4/03-A-110	180621	1/30

**Specifications | Residual Current Devices FRCmM-110****Description****Design**

- Residual Current Circuit Breakers (RCCBs) for industrial and commercial applications which operate with 110V
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
  - possibility to seal the toggle
  - possibility to lock the toggle
- The device functions irrespective of the position of installation

**Accessories**

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
  - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
  - Auxiliary switch Z-HK can be mounted subsequently

**Additional information for the application**

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.
- The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

**Test Button**

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.
- Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.

**Accessories:**



Auxiliary contact to be mounted on the left side	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device	Z-FW/LP*	248296
	Z-FW-LPD*	265244
	FAZ/FIP-XAWM**	262514
	FAZ/FIP-XDWM**	274404
Remote control unit	Z-FW-MO	284730
IΔn testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
Terminal cover 4-poles	Z-RC/AK-4TE	101062

\*reclosing device up to 63 A

\*\*reclosing device 100 A


**Technical Data**

FRCmM-110	
<b>Electrical</b>	
Design according to	IEC/EN 61008
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous
Rated voltage	$U_h$ 110/190V AC, 50 Hz
Limits operation voltage test circuit	2-poles 94 - 121 V~ 4-poles 30 mA 94 - 121 V~ 4-poles 300 mA 94 - 210 V~
Rated tripping current	$I_{\Delta n}$ 30, 300 mA
Sensitivity	AC and pulsating DC
Rated insulation voltage	$U_i$ 440 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	Type AC, A 250 A (8/20 μs) surge current-proof
Rated breaking capacity or rated fault breaking capacity	$I_m$ $I_{\Delta m}$
$I_h = 16-40$ A	500 A
$I_h = 63$ A	630 A
$I_h = 80$ A	800 A
$I_h = 100$ A	1,000 A
Endurance	electrical components $\geq$ 4,000 operating cycles mechanical components $\geq$ 20,000 operating cycles
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm <sup>2</sup> single wire 2 x 16 mm <sup>2</sup> multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Contact position indicator	red / green
Tripping indicator	white / blue




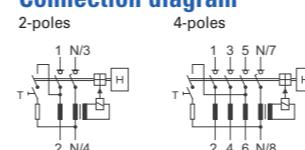
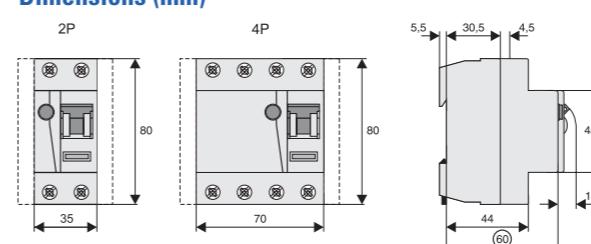
**Connection diagram****Dimensions (mm)**

**Correct connection****2-poles**




30, 300mA Types:

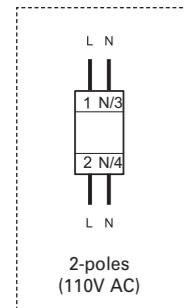**4-poles**

30mA Types:

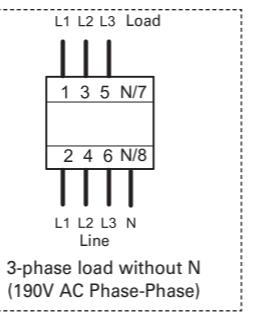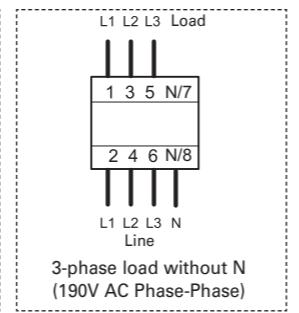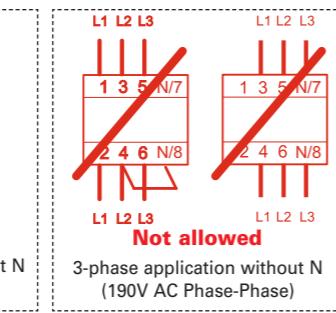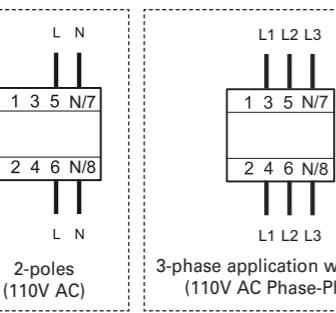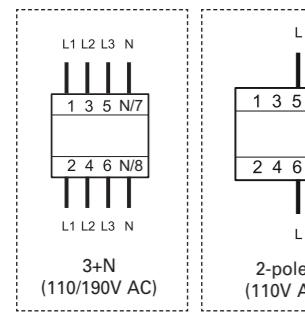

100, 300, 500mA Types:

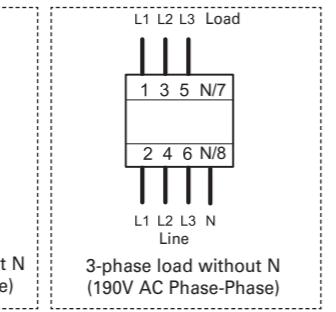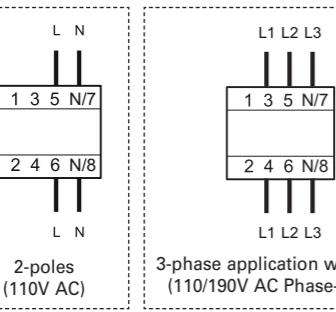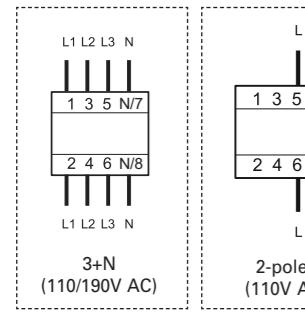

## Residual Current Devices

Residual Current Devices FRCmM-NA Type A according to UL1053 &amp; IEC/EN 61008

**Description**

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Certified according UL 1053 and IEC/EN 61008 to be used in applications worldwide
- Comprehensive range of RCCBs available to fulfil most application needs
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification
- FRCmM-NA has bidirectional power supply

## xEffect

## xEffect

## Residual Current Devices

Residual Current Devices FRCmM-NA

I <sub>A</sub> /I <sub>ΔN</sub> (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
--	-----------------------------	---------------------	-------------	----------------------

**Type A****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A****2-poles**

25/0.03	50/60	FRCmM-25/2/003-A-NA	167113	1/60
25/0.3	50/60	FRCmM-25/2/03-A-NA	167116	1/60
40/0.03	50/60	FRCmM-40/2/003-A-NA	167114	1/60
40/0.3	50/60	FRCmM-40/2/03-A-NA	167117	1/60
63/0.03	50/60	FRCmM-63/2/003-A-NA	167115	1/60
63/0.3	50/60	FRCmM-63/2/03-A-NA	167118	1/60

**4-poles**

25/0.03	50/60	FRCmM-25/4/003-A-NA	167125	1/30
25/0.3	50/60	FRCmM-25/4/03-A-NA	167104	1/30
40/0.03	50/60	FRCmM-40/4/003-A-NA	167102	1/30
40/0.3	50/60	FRCmM-40/4/03-A-NA	167105	1/30
63/0.03	50/60	FRCmM-63/4/003-A-NA	167103	1/30
63/0.3	50/60	FRCmM-63/4/03-A-NA	167106	1/30

**Type G/A****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)****2-poles**

25/0.03	50/60	FRCmM-25/2/003-G/A-NA	167119	1/60
25/0.3	50/60	FRCmM-25/2/03-G/A-NA	167122	1/60
40/0.03	50/60	FRCmM-40/2/003-G/A-NA	167120	1/60
40/0.3	50/60	FRCmM-40/2/03-G/A-NA	167123	1/60
63/0.03	50/60	FRCmM-63/2/003-G/A-NA	167121	1/60
63/0.3	50/60	FRCmM-63/2/03-G/A-NA	167124	1/60

**4-poles**

25/0.03	50/60	FRCmM-25/4/003-G/A-NA	167107	1/30
25/0.3	50/60	FRCmM-25/4/03-G/A-NA	167110	1/30
40/0.03	50/60	FRCmM-40/4/003-G/A-NA	167108	1/30
40/0.3	50/60	FRCmM-40/4/03-G/A-NA	167111	1/30
63/0.03	50/60	FRCmM-63/4/003-G/A-NA	167109	1/30
63/0.3	50/60	FRCmM-63/4/03-G/A-NA	167112	1/30

**Specifications | Residual Current Devices FRCmM-NA****Description****Design**

- Residual Current Circuit Breakers (RCCBs) for worldwide industrial and commercial applications
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
  - possibility to seal the toggle
  - possibility to lock the toggle
- The device functions irrespective of the position of installation

**Accessories**

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
  - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
  - Auxiliary switch Z-HK can be mounted subsequently

**Additional information for the application**

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast

- 30 mA-RCCBs: 30 units per phase conductor
- 100 mA RCCBs: 90 units per phase conductor

Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.

The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)

- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

**Accessories:**

Auxiliary contact to be mounted on the left side *)	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device *)	Z-FW/LP*	248296
	Z-FW-LPD*	265244
	FAZ/FIP-XAWM**	262514
	FAZ/FIP-XDWM**	274404
Remote control unit *)	Z-FW-MO	284730
IΔn testing module *)	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
Terminal cover 4-poles *)	Z-RC/AK-4TE	101062

\*) without UL certification

\*reclosing device up to 63 A



\*\*) reclosing device 100 A

**Technical Data**


FRCmM-NA	
<b>Electrical according to IEC/EN 61008</b>	
Design according to	IEC/EN 61008, ÖVE E 8601
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous
Type G	10 ms delay at 50 Hz
Rated voltage	$U_n$ 240/415 V; 50/60 Hz
Limits operation voltage test circuit	
2-poles	196 - 264 V~
4-poles 30 mA	196 - 264 V~
4-poles 300 mA	196 - 456 V~
Rated tripping current	$I_{\Delta n}$ 30, 300 mA
Sensitivity	AC and pulsating DC
Rated insulation voltage	$U_i$ 440 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	
Type A	250 A (8/20 μs) surge current-proof
Type G/A	3 kA (8/20 μs) surge current-proof, 10 ms delay
Rated breaking capacity or rated fault breaking capacity	$I_m$ 500 A $I_{\Delta m}$ 630 A
$I_h = 25-40$ A	
$I_h = 63$ A	
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 10,000 operating cycles
<b>Electrical according to UL1053</b>	
Design according to	UL1053
Current test marks as printed onto the device	
Tripping	instantaneous
Type G	8 ms delay at 60 Hz
Rated voltage	$U_n$ 480Y/277 V, 60 Hz
Limits operation voltage test circuit	
2-poles	196 - 305 V~
4-poles 30 mA	196 - 305 V~
4-poles 300 mA	196 - 528 V~
Pick-up current	
30 mA Types	22 mA
300 mA Types	200 mA
Sensitivity	AC and pulsating DC
Overshoot tested	530 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 5 kA acc. to CSA
Rated breaking capacity or rated fault breaking capacity	$I_m$ $I_{\Delta m}$
$I_h = 25-40$ A	500 A
$I_h = 63$ A	630 A
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 10,000 operating cycles

**Mechanical**


Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm <sup>2</sup> single wire 2 x 16 mm <sup>2</sup> multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Humidity	5-95 %
Pollution degree	2
Contact position indicator	red / green
Tripping indicator	white / blue

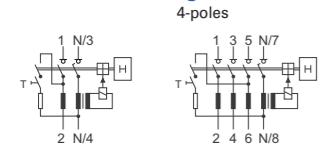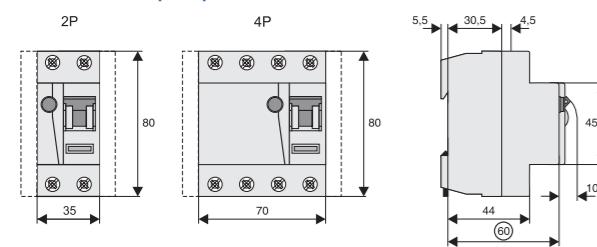**Connection diagram****Dimensions (mm)****Correct connection****2-poles acc. to IEC61008/UL1053**


30, 300mA Types:

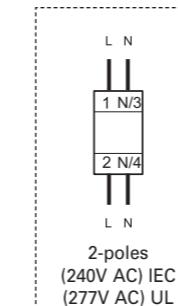**4-poles acc. to IEC61008**


30mA Types:

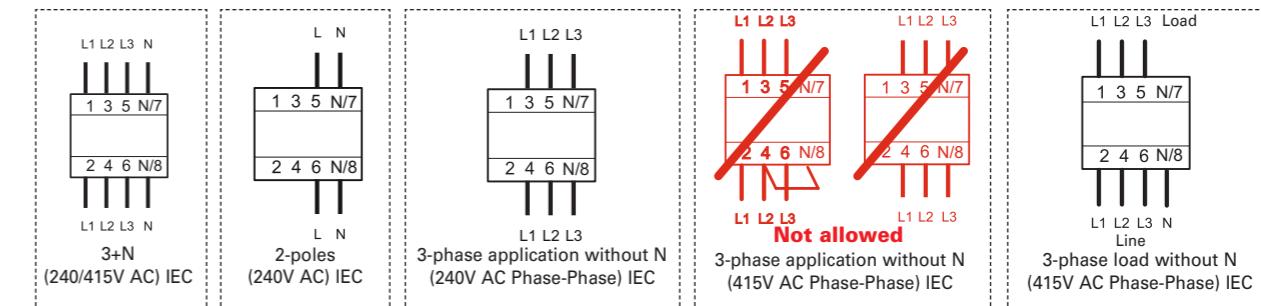

300mA Types:

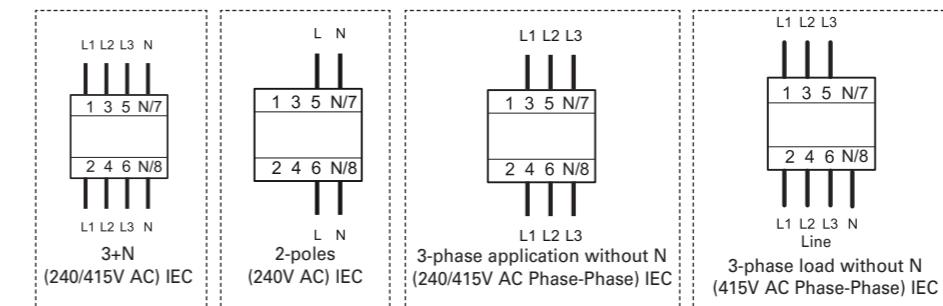**4-poles acc. to UL1053**

30, 300mA Types:

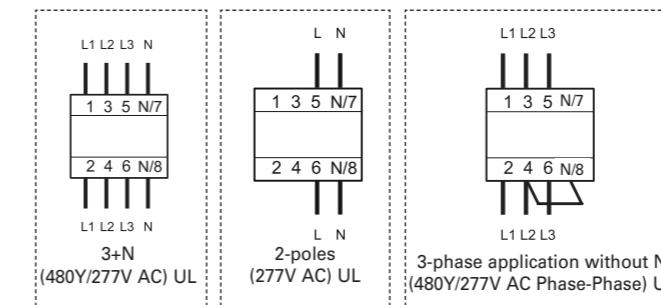

**Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM-NA**

Ambient temperature	25A	40A	63A	2p	4p	2p	4p	2p	4p
40°	25	25	40	40	63	63			
45°	21	22	37	37	59	59			
50°	18	19	33	34	55	55			
55°	14	16	30	31	50	50			
60°	—	—	26	27	45	45			
65°	—	—	20	24	40	41			
70°	—	—	14	19	34	37			
75°	—	—	8	15	28	31			

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

**Max. back-up fuse FRCmM-NA (acc. to IEC)**

Rating	Fuses	MCB's (Characteristic B/C)
In [A]	Short Circuit [A] Overload [A]	Short Circuit [A] Overload [A]
25	63 gG/gl	25 gG/gl FAZ-C40 FAZ-C25
40	63 gG/gl	40 gG/gl FAZ-C40 FAZ-C40
63	63 gG/gl	40 gG/gl FAZ-C40 FAZ-C40

**Important:**

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

**Max. back-up fuse FRCmM-NA (acc. to UL)**

In [A]	Short Circuit [A]
25-63	70 J-Class Fuse

**Important:**

The maximal possible operating current of the electrical installation may not exceed the rated current of the RCD (VDE 0100-520 Bl. 2).

wa\_sg60721\_1

**Description**

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Certified according UL 1053 and IEC/EN 61008 to be used in 110V applications worldwide
- Comprehensive range of RCCBs available to fulfil most application needs
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification



$I_{\Delta} / I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
------------------------------	-----------------------------	---------------------	-------------	----------------------

**Type A****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** **4-poles**

25/0.03	50/60	FRCmM-25/4/003-A-NA-110	167699	1/30
25/0.3	50/60	FRCmM-25/4/03-A-NA-110	167702	1/30
40/0.03	50/60	FRCmM-40/4/003-A-NA-110	167700	1/30
40/0.3	50/60	FRCmM-40/4/03-A-NA-110	167703	1/30
63/0.03	50/60	FRCmM-63/4/003-A-NA-110	167701	1/30
63/0.3	50/60	FRCmM-63/4/03-A-NA-110	167704	1/30

**Type G/A****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)** **2-poles**

25/0.03	50/60	FRCmM-25/2/003-G/A-NA-110	167693	1/60
25/0.3	50/60	FRCmM-25/2/03-G/A-NA-110	167696	1/60
40/0.03	50/60	FRCmM-40/2/003-G/A-NA-110	167694	1/60
40/0.3	50/60	FRCmM-40/2/03-G/A-NA-110	167697	1/60
63/0.03	50/60	FRCmM-63/2/003-G/A-NA-110	167695	1/60
63/0.3	50/60	FRCmM-63/2/03-G/A-NA-110	167698	1/60

**4-poles**

25/0.03	50/60	FRCmM-25/4/003-G/A-NA-110	167705	1/30
25/0.3	50/60	FRCmM-25/4/03-G/A-NA-110	167708	1/30
40/0.03	50/60	FRCmM-40/4/003-G/A-NA-110	167706	1/30
40/0.3	50/60	FRCmM-40/4/03-G/A-NA-110	167709	1/30
63/0.03	50/60	FRCmM-63/4/003-G/A-NA-110	167707	1/30
63/0.3	50/60	FRCmM-63/4/03-G/A-NA-110	167710	1/30

**Specifications | Residual Current Devices FRCmM-NA-110****Description****Design**

- Residual Current Circuit Breakers (RCCBs) for worldwide industrial and commercial applications which operate with 110V
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
  - possibility to seal the toggle
  - possibility to lock the toggle
- The device functions irrespective of the position of installation

**Accessories**

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
  - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
  - Auxiliary switch Z-HK can be mounted subsequently

**Additional information for the application**

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast
- 30 mA-RCCBs: 30 units per phase conductor
- 100 mA RCCBs: 90 units per phase conductor
- Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.
- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.
- The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

**Accessories:**

Auxiliary contact to be mounted on the left side	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device	Z-FW/LP*	248296
	Z-FW-LPD*	265244
	FAZ/FIP-XAWM**	262514
	FAZ/FIP-XDWM**	274404
Remote control unit	Z-FW-MO	284730
$\Delta I$ testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
Terminal cover 4-poles	Z-RC/AK-4TE	101062

\*reclosing device up to 63 A



\*\*reclosing device 100 A

**Technical Data**

FRCmM-NA-110	
<b>Electrical according to IEC/EN 61008</b>	
Design according to	IEC/EN 61008, ÖVE E 8601
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous
Type G	10 ms delay at 50 Hz
Rated voltage	$U_n$ 110/190 V, 50/60Hz
Limits operation voltage test circuit	
2-poles	94 - 121 V~
4-poles 30 mA	94 - 121 V~
4-poles 300 mA	94 - 210 V~
Rated tripping current	$I_{\Delta n}$ 30, 300 mA
Sensitivity	AC and pulsating DC
Rated insulation voltage	$U_i$ 440 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	
Type A	250 A (8/20 μs) surge current-proof
Type G/A	3 kA (8/20 μs) surge current-proof, 10 ms delay
Rated breaking capacity or rated fault breaking capacity	$I_m$
$I_n = 25-40$ A	500 A
$I_n = 63$ A	630 A
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 10,000 operating cycles
<b>Electrical according to UL1053</b>	
Design according to	UL1053
Current test marks as printed onto the device	
Tripping	instantaneous
Type G	8 ms delay at 60 Hz
Rated voltage	$U_n$ 208/120 V, 60 Hz
Limits operation voltage test circuit	
2-poles	94 - 132 V~
4-poles 30 mA	94 - 132 V~
4-poles 300 mA	94 - 230 V~
Pick-up current	
30 mA Types	22 mA
300 mA Types	200 mA
Sensitivity	AC and pulsating DC
Overvoltage tested	530 V
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Rated short circuit capacity	$I_{cn}$ 5 kA acc. to CSA
Rated breaking capacity or rated fault breaking capacity	$I_m$
$I_n = 25-40$ A	500 A
$I_n = 63$ A	630 A
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 10,000 operating cycles


**Mechanical**

Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm <sup>2</sup> single wire 2 x 16 mm <sup>2</sup> multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Humidity	5-95 %
Pollution degree	2
Contact position indicator	red / green
Tripping indicator	white / blue

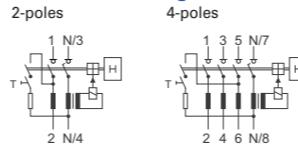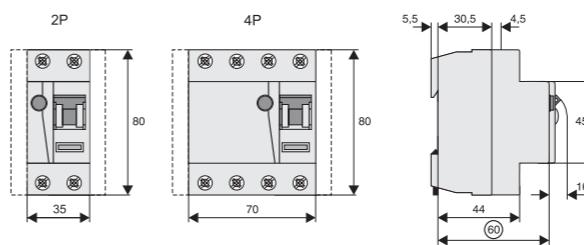
**Connection diagram****Dimensions (mm)**

**Correct connection****2-poles**

30, 300mA Types:

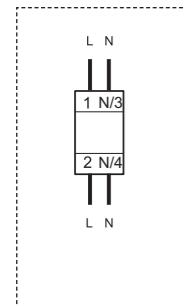**4-poles**

30, 300mA Types:

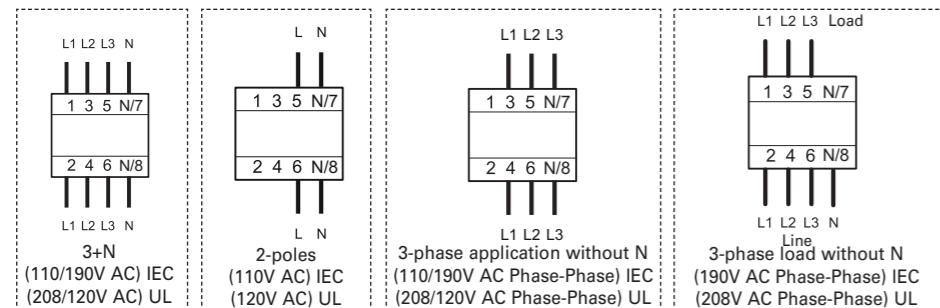

SG08013

**Description**

- Comprehensive range of RCCBs with a rating of 125A
- All current sensitive Type B RCCBs to fulfil highest safety standards
- Line voltage independent 2 and 4 pole RCCB for fault protection, additional protection as well as fire protection
- As also stated in IEC/EN 62423, the B sensitivity relies on line voltage
- FRCmM-125 Type AC, A, B, Bfg and B+ have bidirectional power supply

**Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM-NA-110**

Ambient temperature	25A		40A		63A	
	2p	4p	2p	4p	2p	4p
40°	25	25	40	40	63	63
45°	21	22	37	37	59	59
50°	18	19	33	34	55	55
55°	14	16	30	31	50	50
60°	—	—	26	27	45	45
65°	—	—	20	24	40	41
70°	—	—	14	19	34	37
75°	—	—	8	15	28	31

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

**Max. back-up fuse FRCmM-NA-110 (acc. to IEC)**

Rating	Fuses	MCB's (Characteristic B/C)	
In [A]	Short Circuit [A]	Overload [A]	Short Circuit [A]
25	63 gG/gl	25 gG/gl	FAZ-C40
40	63 gG/gl	40 gG/gl	FAZ-C40
63	63 gG/gl	40 gG/gl	FAZ-C40

**Important:**

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

**Max. back-up fuse FRCmM-NA-110 (acc. to UL)**

In [A]	Short Circuit [A]
25-63	70 J-Class Fuse

**Important:**

The maximal possible operating current of the electrical installation may not exceed the rated current of the RCD (VDE 0100-520 Bbl. 2).

## Residual Current Devices

Residual Current Devices FRCmM-125

## xEFFECT

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type AC</b>				
<b>Conditionally surge current-proof 250 A, Type AC</b> 				
<b>2-poles</b>				
125/0,03	50	FRCMM-125/2/003	187810	1/60
125/0,1	50	FRCMM-125/2/01	187811	1/60
125/0,3	50	FRCMM-125/2/03	187812	1/60
125/0,5	50	FRCMM-125/2/05	187813	1/60



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type A</b>				
<b>Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A</b> 				
<b>2-poles</b>				
125/0,03	50	FRCMM-125/2/003-A	171164	1/60
125/0,1	50	FRCMM-125/2/01-A	171165	1/60
125/0,3	50	FRCMM-125/2/03-A	171166	1/60
125/0,5	50	FRCMM-125/2/05-A	171167	1/60



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>4-poles</b>				
<b>Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A</b> 				
125/0,03	50	FRCMM-125/4/003-A	171174	1/30
125/0,1	50	FRCMM-125/4/01-A	171175	1/30
125/0,3	50	FRCMM-125/4/03-A	171176	1/30
125/0,5	50	FRCMM-125/4/05-A	171177	1/30



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type G/A</b>				
<b>Short-time delayed, surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A</b> 				
<b>2-poles</b>				
125/0,03	50	FRCMM-125/2/003-G/A	171168	1/60
125/0,1	50	FRCMM-125/2/01-G/A	171169	1/60
125/0,3	50	FRCMM-125/2/03-G/A	171170	1/60



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type S/A</b>				
<b>Selective + surge current-proof 5 kA, sensitive to residual pulsating DC, Type S/A</b> 				
<b>2-poles</b>				
125/0,1	50	FRCMM-125/2/01-S/A	171171	1/60
125/0,3	50	FRCMM-125/2/03-S/A	171172	1/60
125/0,5	50	FRCMM-125/2/05-S/A	171173	1/60



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>4-poles</b>				
<b>Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A</b> 				
125/0,03	50	FRCMM-125/4/003-A	171181	1/30
125/0,1	50	FRCMM-125/4/01-A	171182	1/30
125/0,3	50	FRCMM-125/4/03-A	171183	1/30
125/0,5	50	FRCMM-125/4/05-A	171184	1/30



## Residual Current Devices

Residual Current Devices FRCmM-125



$I_{n/A_n}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
--------------------	-----------------------------	---------------------	-------------	----------------------

**Type B****Surge current-proof 3 kA, all-current sensitive, Type B** **4-poles**

125/0.03	50	FRCMM-125/4/003-B	171184	1/30
125/0.1	50	FRCMM-125/4/01-B	171185	1/30
125/0.3	50	FRCMM-125/4/03-B	171186	1/30
125/0.5	50	FRCMM-125/4/05-B	171187	1/30

**Type G/B****Short-time delayed, surge current-proof 3 kA, all-current sensitive, Type G/B** **4-poles**

125/0.03	50	FRCMM-125/4/003-G/B	171188	1/30
----------	----	---------------------	--------	------

**Type S/Bfq****Selective + surge current-proof 5 kA, all-current sensitive, Type S/Bfq** **4-poles**

125/0.3	50	FRCMM-125/4/03-S/BFQ	171190	1/30
125/0.5	50	FRCMM-125/4/05-S/BFQ	171191	1/30

**Type G/B+****Short-time delayed, surge current-proof 3 kA, all-current sensitive, Type G/B+** **4-poles**

125/0.03	50	FRCMM-125/4/003-G/B+	171189	1/30
----------	----	----------------------	--------	------

**Specifications | Residual Current Devices FRCmM-125, Type A****Description****Design**

- Residual Current Circuit Breakers (RCCBs) for application with higher rated nominal current
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- The device functions irrespective of the position of installation

**Accessories**

- Auxiliary contact Z-HD to be mounted onto the device

**Additional information for the application**

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.
- The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)

**Test Button**

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.
- Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

- **Type A:** These types are capable of sensing pulsating residual currents and are not negatively affected by a DC overlay of up to 6mA. These devices (depended on the range) are also available as:

- G/A short time delayed devices which are surge current proof up to 3 kA. These devices enable a reliable and safe installation with increased system availability
- S/A selective RCCBs with improved surge current capabilities up to 5 kA. These devices are selective (conditions apply) to other RCDs and enable special applications and root installations.

- **Type G:** G Types offer a 10ms time delayed tripping curve and surge current proof capabilities up to 3kA and are highly recommended to be used for applications and installations where system availability is an important factor. Since "G" states a tripping curve and not a sensitivity, these devices (dependent on the range) will be found as:

- A Type RCCBs (-G/A)

- **Type S:** S Types offer a 40ms time delayed tripping curve and surge current proof capabilities up to 5kA and are known as "selective" types. These devices are mainly used in root applications with additional RCDs deployed in series in the system. Since "S" states a tripping curve and not a sensitivity, these devices (dependent on the range) will be found as:

- S/A Type RCCBs

**Accessories:**

Auxiliary switch for subsequent installation to the left	Z-HD	265620
--	------	--------

**Technical Data****FRCmM-125A, Type AC, A, G/A and S/A****Electrical**

Design according to IEC/EN 61008

Current test marks as printed onto the device

Tripping instantaneous

Type G/A 10 ms delay

Type S/A 50 ms delay - with selective disconnecting function

Rated voltage  $U_n$  240/415 V; 50 Hz

Limits operation voltage test circuit

30 mA 150 - 250 V~

100, 300, 500 mA 185 - 440 V~

Rated tripping current  $I_{\Delta n}$  30, 100, 300, 500 mA

Sensitivity AC and pulsating DC

Rated insulation voltage  $U_i$  400 VRated impulse withstand voltage  $U_{imp}$  2,5 kVRated short circuit capacity  $I_{cn}$  10 kA with back-up fuse

Peak withstand current

Type A 250 A (8/20μs), surge current-proof

Type G/A 3 kA (8/20μs), surge current-proof, 10 ms delay

Type S/A 5 kA (8/20μs), surge current-proof, 40 ms delay

Maximum back-up fuse Short circuit protection Overload protection

125 A gG/gL 80 A gG/gL

Rated breaking capacity  $I_m$ or rated fault breaking capacity  $I_{\Delta m}$  1250 A

Endurance

electrical components  $\geq 4,000$  operating cyclesmechanical components  $\geq 10,000$  operating cycles**Mechanical**

Frame size 45 mm

Device height 80 mm

Device width 35 mm (2MU), 70 mm (4MU)

Mounting quick fastening with DIN rail EN50022

Degree of protection, built-in IP40

Upper and lower terminals open mouthed/lift terminals

Terminal protection finger and hand touch safe, DGUV VS3, EN 50274

Terminal capacity 1,5 - 50 mm<sup>2</sup>

Busbar thickness 0.8 - 2 mm

Operation temperature -25°C to +40°C



Storage- and transport temperature -25°C to +60°C

Resistance to climatic conditions 25-55°C/90-95% relative humidity acc. to IEC 60068-2

Mounting position any

**Power Loss at  $I_n$  FRCmM-125 - Type AC, A, G/A and S/A**

$I_n$ [A]	P [W]
<b>2-poles</b>	
125	18
<b>4-poles</b>	
125	22.5

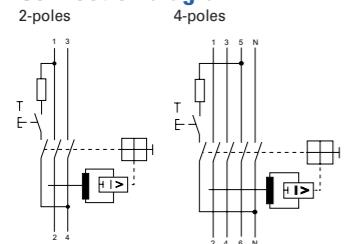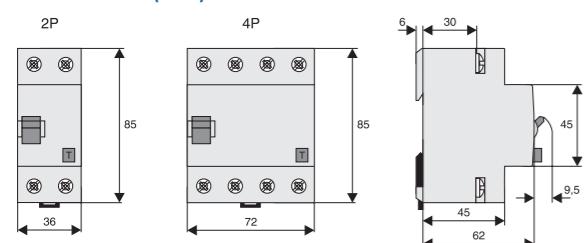**Connection diagram****Dimensions (mm)**

**Specifications | Residual Current Devices FRCmM-125, Type B, Bfg and B+****Description****Design**

- All current sensitive Residual Current Circuit Breakers (RCCBs) for application with higher rated nominal current
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- The device functions irrespective of the position of installation

**Accessories**

- Auxiliary contact Z-HD to be mounted onto the device

**Additional information for the application**

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.
- The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- As also stated in IEC/EN 62423, the B sensitivity relies on line voltage

**Test Button**

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.
- Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

**Accessories:**

Auxiliary switch for subsequent installation to the left

- Type B (fq, +):** These types offer the highest safety levels in electrical systems due to their all-current sensitivity and best in class reliability and system availability. Special type B from Eaton are available:

- B+ limit the possibility of electrical ignited fires and should be considered for fire hazard applications as also mentioned in VDE-0664-400
- Bfq are capable of reliably sensing residual currents up to 100 kHz

- Type G:** G Types offer a 10 ms time delayed tripping curve and surge current proof capabilities up to 3 kA and are highly recommended to be used for applications and installations where system availability is an important factor.

Since "G" states a tripping curve and not a sensitivity, these devices (dependent on the range) will be found as:

- B/B+ Type RCCBs (-G/B(+))

- Type S:** S Types offer a 40 ms time delayed tripping curve and surge current proof capabilities up to 5 kA and are known as "selective" types. These devices are mainly used in root applications with additional RCDs deployed in series in the system.

Since "S" states a tripping curve and not a sensitivity, these devices (dependent on the range) will be found as:

- S/Bfq Type RCCBs

**Technical Data****FRCmM-125A, Type B, Bfg and B+****Electrical**

Design according to  
Current test marks as printed onto the device

IEC/EN 61008

**Tripping**

- |                   |   |
|-------------------|---|
| Type B, G/B, G/B+ | short-time delayed                                  |
| Type S/Bfq        | 50 ms delay - with selective disconnecting function |

**Rated voltage**

$U_n$  240/415 V; 50 Hz

**Limits operation voltage test circuit**

- |                  |              |
|------------------|--------------|
| 30 mA            | 250 - 440 V~ |
| 100, 300, 500 mA | 185 - 440 V~ |

**Rated tripping current**

$I_{\Delta n}$  30, 100, 300, 500 mA

**Sensitivity**

All types of current

**Rated insulation voltage**

$U_i$  400 V

**Rated impulse withstand voltage**

$U_{imp}$  2,5 kV

**Rated short circuit capacity**

$I_{cn}$  10 kA with back-up fuse

**Peak withstand current**

- |                       |   |
|-----------------------|---|
| Type B                | 3 kA (8/20μs), surge current-proof              |
| Type G/B, G/Bfg, G/B+ | 3 kA (8/20μs), surge current-proof, 10 ms delay |
| Type S/Bfq            | 5 kA (8/20μs), surge current-proof, 40 ms delay |

**Maximum back-up fuse**

Short circuit protection Overload protection

125 A gG/gL 80 A gG/gL

**Rated breaking capacity or rated fault breaking capacity**

$I_m$  1250 A

**Endurance**

electrical components  $\geq$  4,000 operating cycles

mechanical components  $\geq$  10,000 operating cycles

**Mechanical****Frame size**

45 mm

**Device height**

80 mm

**Device width**

70 mm (4MU) für 2-poles and 4-poles

**Mounting**

quick fastening with DIN rail EN50022

**Degree of protection, built-in**

IP40

**Upper and lower terminals**

open mouthed/lift terminals

**Terminal protection**

finger and hand touch safe, DGUV VS3, EN 50274

**Terminal capacity**

1,5 - 50 mm<sup>2</sup>

**Busbar thickness**

0,8 - 2 mm

**Operation temperature**

-25°C to +40°C

**Storage- and transport temperature**



-25°C to +60°C

**Resistance to climatic conditions**

25-55°C/90-95% relative humidity acc. to IEC 60068-2

**Mounting position**

any

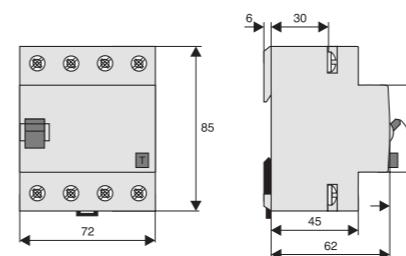**Connection diagram****4-poles****Dimensions (mm)**


**Power Loss at  $I_n$  FRCmM-125 - Type B, Bfg and B+**

(entire unit)


$I_n$ [A]	P [W]
4-poles 125	22.5

**Tripping current frequency response FRCmM-125 - Type B, Bfg and B+**


Tripping current frequency response 30 mA Type B

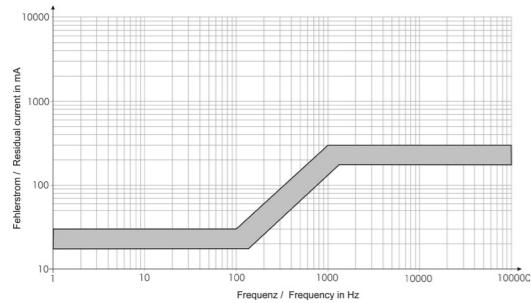


Tripping current frequency response 30 mA Type G/B+

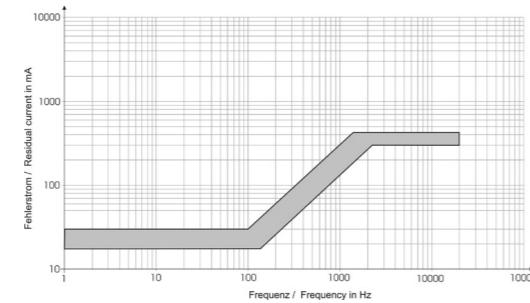


Tripping current frequency response 30 mA Type G/B

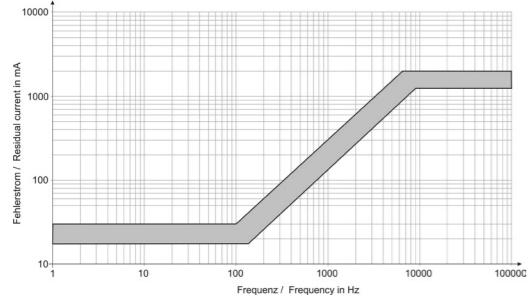


Tripping current frequency response 100 mA Type B

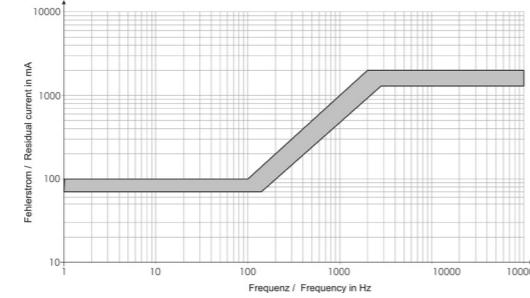

Tripping current frequency response 300 mA Type S/Bfq

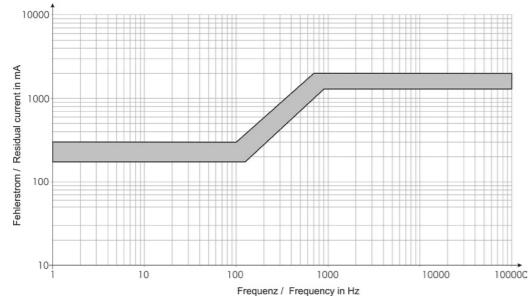

Tripping current frequency response 500 mA Type S/Bfq

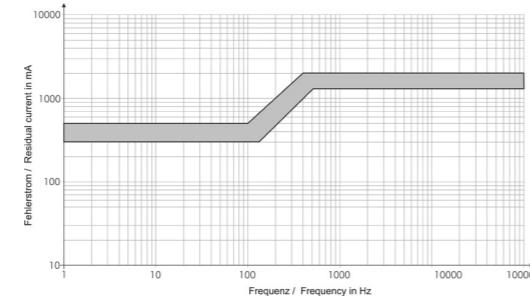

SG08113

**Description**

- Comprehensive range of RCCBs with a rating of up to 80A
- Higher tripping currents for special applications
- All current sensitive Type B RCCBs to fulfil highest safety standards
- Line voltage independent 2 and 4 pole RCCB for fault protection, additional protection as well as fire protection



$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type B</b>				
<b>Conditionally surge current-proof 250 A, Type B</b>				
<b>4-poles</b>				
40/0.1	50	FRCMM-40/4/01-B	187804	1/30
63/0.1	50	FRCMM-63/4/01-B	187805	1/30
63/0.5	50	FRCMM-63/4/05-B	303861	1/30
80/0.03	50	FRCMM-80/4/003-B	187806	1/30
80/0.1	50	FRCMM-80/4/01-B	187807	1/30
80/0.3	50	FRCMM-80/4/03-B	187808	1/30
80/0.5	50	FRCMM-80/4/05-B	303862	1/30

$I_{\Delta}/I_{AN}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
<b>Type S/B</b>				
<b>Selective + surge current-proof 5 kA, all-current sensitive, Type S/B</b>				
<b>4-poles</b>				
80/0.3	50	FRCMM-80/4/03-S/B	187809	1/30

**Specifications | Residual Current Devices FRCmM, Type B****Description****Design**

- All current sensitive Residual Current Circuit Breakers (RCCBs) for special applications
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- The device functions irrespective of the position of installation

**Accessories**

- Auxiliary contact Z-HD to be mounted onto the device

**Additional information for the application**

- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.

The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)

- As also stated in IEC/EN 62423, the B sensitivity relies on line voltage

**Test Button**

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.

Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.

- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

**Accessories:**

Auxiliary switch for subsequent installation to the left

Z-HD



265620

**Technical Data****FRCmM, Type B**

<b>Electrical</b>	
Design according to	IEC/EN 61008, IEC/EN 62423
Current test marks as printed onto the device	
Tripping	
Type B	short-time delayed
Type S/B	50 ms delay - with selective disconnecting function
Rated voltage	$U_n$ 230/400 V; 50 Hz
Limits operation voltage test circuit	
30 mA	250 - 440 V~
100, 300, 500 mA	185 - 440 V~
Rated tripping current	$I_{\Delta n}$ 30, 100, 300, 500 mA
Sensitivity	All types of current
Rated insulation voltage	$U_i$ 400 V
Rated impulse withstand voltage	$U_{imp}$ 2,5 kV
Rated short circuit capacity	$I_{cn}$ 10 kA with back-up fuse
Peak withstand current	
Type B	3 kA (8/20μs), surge current-proof, 10 ms delay
Type S/B	5 kA (8/20μs), surge current-proof, 40 ms delay
Maximum back-up fuse	
$I_n = 40$ A	Short circuit protection
$I_n = 63$ A	Overload protection
$I_n = 80$ A	100 A gG/gL
100 A gG/gL	40 A gG/gL
100 A gG/gL	63 A gG/gL
100 A gG/gL	80 A gG/gL
Rated breaking capacity or rated fault breaking capacity	
$I_n = 40$ A	$I_m$ 500 A
$I_n = 63$ A	$I_{\Delta m}$ 630 A
$I_n = 80$ A	800 A
Endurance	
electrical components	$\geq 4,000$ operating cycles
mechanical components	$\geq 10,000$ operating cycles
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	70 mm (4MU)
Mounting	quick fastening with DIN rail EN50022
Degree of protection, built-in	IP40
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1,5 - 50 mm <sup>2</sup>
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-25°C to +60°C
Resistance to climatic conditions	25-55°C/90-95% relative humidity acc. to IEC 60068-2
Mounting position	any

**Connection diagram**

4-poles

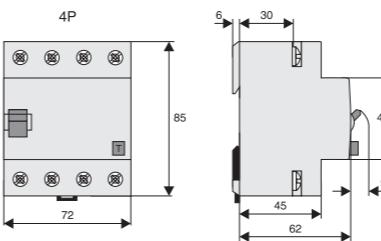**Dimensions (mm)****Power Loss at  $I_n$  FRCmM - Type B**

(entire unit)

$I_n$ [A]	P [W]
<b>4-poles</b>	
40	1.3
63	3.1
80	5.0

## Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBdM 1+N-poles, 2-poles Type G/A and F Digital

SG05613

**Description**

- High-quality residual current device / miniature circuit breaker combination
- Tripping characteristics B, C, D
- 1+N-poles and 2-poles
- Increased protection in applications with 1-phase frequency converter due to the detection of mixed frequencies (type F)
- Reduction of nuisance tripping (type F or G/A) thanks to
  - time delayed tripping
  - increased current withstand capability
  - 3 kA
- Higher load rating with DC residual currents up to 10 mA (Type F)
- Contact position indicator red - green
- Tripping indicator white - blue
- New level of accuracy due to electronic fault current detection
- Local status indication of residual current through 3 LEDs
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents

## xEffect

## xEffect

## Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBdM 1+N-poles

$I_{\text{tr}}/I_{\text{AN}}$ (A)	Type Designation	Article No.	Units per package
--------------------------------------	---------------------	-------------	----------------------

**Type F****10 kA, 1+N-poles**

Sensitive to residual pulsating DC, surge current proof 3000 A, type F

**Characteristic B**

10/0.01	FRBdM-B10/1N/001-F	300539	1/60
13/0.01	FRBdM-B13/1N/001-F	300567	1/60
16/0.01	FRBdM-B16/1N/001-F	300587	1/60
10/0.03	FRBdM-B10/1N/003-F	300540	1/60
13/0.03	FRBdM-B13/1N/003-F	300568	1/60
16/0.03	FRBdM-B16/1N/003-F	300588	1/60
10/0.1	FRBdM-B10/1N/01-F	300538	1/60
13/0.1	FRBdM-B13/1N/01-F	300566	1/60
16/0.1	FRBdM-B16/1N/01-F	300586	1/60

**Characteristic C**

6/0.01	FRBdM-C6/1N/001-F	300518	
10/0.01	FRBdM-C10/1N/001-F	300546	
13/0.01	FRBdM-C13/1N/001-F	300570	
16/0.01	FRBdM-C16/1N/001-F	300590	
20/0.01	FRBdM-C20/1N/001-F	300612	
25/0.01	FRBdM-C25/1N/001-F	300629	
6/0.03	FRBdM-C6/1N/003-F	300519	
10/0.03	FRBdM-C10/1N/003-F	300547	
13/0.03	FRBdM-C13/1N/003-F	300571	
16/0.03	FRBdM-C16/1N/003-F	300591	
20/0.03	FRBdM-C20/1N/003-F	300613	
25/0.03	FRBdM-C25/1N/003-F	300630	
6/0.1	FRBdM-C6/1N/01-F	300517	
10/0.1	FRBdM-C10/1N/01-F	300541	
13/0.1	FRBdM-C13/1N/01-F	300569	
16/0.1	FRBdM-C16/1N/01-F	300589	
20/0.1	FRBdM-C20/1N/01-F	300611	
25/0.1	FRBdM-C25/1N/01-F	300628	

**Characteristic D**

6/0.01	FRBdM-D6/1N/001-F	300521	
10/0.01	FRBdM-D10/1N/001-F	300549	
13/0.01	FRBdM-D13/1N/001-F	300573	
16/0.01	FRBdM-D16/1N/001-F	300593	
20/0.01	FRBdM-D20/1N/001-F	300615	
25/0.01	FRBdM-D25/1N/001-F	300632	
6/0.03	FRBdM-D6/1N/003-F	300522	
10/0.03	FRBdM-D10/1N/003-F	300550	
13/0.03	FRBdM-D13/1N/003-F	300574	
16/0.03	FRBdM-D16/1N/003-F	300594	
20/0.03	FRBdM-D20/1N/003-F	300616	
25/0.03	FRBdM-D25/1N/003-F	300633	
6/0.1	FRBdM-D6/1N/01-F	300520	
10/0.1	FRBdM-D10/1N/01-F	300548	
13/0.1	FRBdM-D13/1N/01-F	300572	
16/0.1	FRBdM-D16/1N/01-F	300592	
20/0.1	FRBdM-D20/1N/01-F	300614	
25/0.1	FRBdM-D25/1N/01-F	300631	

## Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBdM 1+N-poles

**Type G/A****10 kA, 1+N-poles****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)** **Characteristic B**

10/0.01	FRBdM-B10/1N/001-G/A	168249	1/60
13/0.01	FRBdM-B13/1N/001-G/A	168250	1/60
16/0.01	FRBdM-B16/1N/001-G/A	168251	1/60
10/0.03	FRBdM-B10/1N/003-G/A	168264	1/60
13/0.03	FRBdM-B13/1N/003-G/A	168265	1/60
16/0.03	FRBdM-B16/1N/003-G/A	168266	1/60
10/0.1	FRBdM-B10/1N/01-G/A	168279	1/60
13/0.1	FRBdM-B13/1N/01-G/A	168280	1/60
16/0.1	FRBdM-B16/1N/01-G/A	168281	1/60

**Characteristic C**

6/0.01	FRBdM-C6/1N/001-G/A	168252	1/60
10/0.01	FRBdM-C10/1N/001-G/A	168253	1/60
13/0.01	FRBdM-C13/1N/001-G/A	168254	1/60
16/0.01	FRBdM-C16/1N/001-G/A	168255	1/60
20/0.01	FRBdM-C20/1N/001-G/A	168256	1/60
25/0.01	FRBdM-C25/1N/001-G/A	168257	1/60
6/0.03	FRBdM-C6/1N/003-G/A	168267	1/60
10/0.03	FRBdM-C10/1N/003-G/A	168268	1/60
13/0.03	FRBdM-C13/1N/003-G/A	168269	1/60
16/0.03	FRBdM-C16/1N/003-G/A	168270	1/60
20/0.03	FRBdM-C20/1N/003-G/A	168271	1/60
25/0.03	FRBdM-C25/1N/003-G/A	168272	1/60
6/0.1	FRBdM-C6/1N/01-G/A	168282	1/60
10/0.1	FRBdM-C10/1N/01-G/A	168283	1/60
13/0.1	FRBdM-C13/1N/01-G/A	168284	1/60
16/0.1	FRBdM-C16/1N/01-G/A	168285	1/60
20/0.1	FRBdM-C20/1N/01-G/A	168286	1/60
25/0.1	FRBdM-C25/1N/01-G/A	168287	1/60

**Characteristic D**

6/0.01	FRBdM-D6/1N/001-G/A	168258	1/60
10/0.01	FRBdM-D10/1N/001-G/A	168259	1/60
13/0.01	FRBdM-D13/1N/001-G/A	168260	1/60
16/0.01	FRBdM-D16/1N/001-G/A	168261	1/60
20/0.01	FRBdM-D20/1N/001-G/A	168262	1/60
25/0.01	FRBdM-D25/1N/001-G/A	168263	1/60
6/0.03	FRBdM-D6/1N/003-G/A	168273	1/60
10/0.03	FRBdM-D10/1N/003-G/A	168274	1/60
13/0.03	FRBdM-D13/1N/003-G/A	168275	1/60
16/0.03	FRBdM-D16/1N/003-G/A	168276	1/60
20/0.03	FRBdM-D20/1N/003-G/A	168277	1/60
25/0.03	FRBdM-D25/1N/003-G/A	168278	1/60
6/0.1	FRBdM-D6/1N/01-G/A	168288	1/60
10/0.1	FRBdM-D10/1N/01-G/A	168289	1/60
13/0.1	FRBdM-D13/1N/01-G/A	168290	1/60
16/0.1	FRBdM-D16/1N/01-G/A	168291	1/60
20/0.1	FRBdM-D20/1N/01-G/A	168292	1/60
25/0.1	FRBdM-D25/1N/01-G/A	168293	1/60

**xEffect****xEffect**

## Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBdM 2-poles

 $I/I_{AN}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type F****10 kA, 2-poles****Sensitive to residual pulsating DC, surge current proof 3000 A, Type F** **Characteristic B**

10/0.01	FRBdM-B10/2/001-F	300524	1/60
13/0.01	FRBdM-B13/2/001-F	300553	1/60
16/0.01	FRBdM-B16/2/001-F	300577	1/60
10/0.03	FRBdM-B10/2/003-F	300525	1/60
13/0.03	FRBdM-B13/2/003-F	300554	1/60
16/0.03	FRBdM-B16/2/003-F	300578	1/60
10/0.1	FRBdM-B10/2/01-F	300523	1/60
13/0.1	FRBdM-B13/2/01-F	300551	1/60
16/0.1	FRBdM-B16/2/01-F	300575	1/60

**Characteristic C**

6/0.01	FRBdM-C6/2/001-F	300512	1/60
10/0.01	FRBdM-C10/2/001-F	300529	1/60
13/0.01	FRBdM-C13/2/001-F	300556	1/60
16/0.01	FRBdM-C16/2/001-F	300580	1/60
20/0.01	FRBdM-C20/2/001-F	300599	1/60
25/0.01	FRBdM-C25/2/001-F	300623	1/60
6/0.03	FRBdM-C6/2/003-F	300513	1/60
10/0.03	FRBdM-C10/2/003-F	300531	1/60
13/0.03	FRBdM-C13/2/003-F	300557	1/60
16/0.03	FRBdM-C16/2/003-F	300581	1/60
20/0.03	FRBdM-C20/2/003-F	300607	1/60
25/0.03	FRBdM-C25/2/003-F	300624	1/60
6/0.1	FRBdM-C6/2/01-F	300511	1/60
10/0.1	FRBdM-C10/2/01-F	300527	1/60
13/0.1	FRBdM-C13/2/01-F	300555	1/60
16/0.1	FRBdM-C16/2/01-F	300579	1/60
20/0.1	FRBdM-C20/2/01-F	300597	1/60
25/0.1	FRBdM-C25/2/01-F	300622	1/60

**Characteristic D**

6/0.01	FRBdM-D6/2/001-F	300515	1/60
10/0.01	FRBdM-D10/2/001-F	300535	1/60
13/0.01	FRBdM-D13/2/001-F	300563	1/60
16/0.01	FRBdM-D16/2/001-F	300583	1/60
20/0.01	FRBdM-D20/2/001-F	300609	1/60
25/0.01	FRBdM-D25/2/001-F	300626	1/60
6/0.03	FRBdM-D6/2/003-F	300516	1/60
10/0.03	FRBdM-D10/2/003-F	300537	1/60
13/0.03	FRBdM-D13/2/003-F	300565	1/60
16/0.03	FRBdM-D16/2/003-F	300584	1/60
20/0.03	FRBdM-D20/2/003-F	300610	1/60
25/0.03	FRBdM-D25/2/003-F	300627	1/60
6/0.1	FRBdM-D6/2/01-F	300514	1/60
10/0.1	FRBdM-D10/2/01-F	300534	1/60
13/0.1	FRBdM-D13/2/01-F	300562	1/60
16/0.1	FRBdM-D16/2/01-F	300582	1/60
20/0.1	FRBdM-D20/2/01-F	300608	1/60
25/0.1	FRBdM-D25/2/01-F	300625	1/60

## Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBdM 2-poles

 $I_{\Delta}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type G/A****10 kA, 2-poles****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)****Characteristic B**

10/0.01	FRBdM-B10/2/001-G/A	168294	1/60
13/0.01	FRBdM-B13/2/001-G/A	168295	1/60
16/0.01	FRBdM-B16/2/001-G/A	168296	1/60
10/0.03	FRBdM-B10/2/003-G/A	168198	1/60
13/0.03	FRBdM-B13/2/003-G/A	168199	1/60
16/0.03	FRBdM-B16/2/003-G/A	168200	1/60
10/0.1	FRBdM-B10/2/01-G/A	168213	1/60
13/0.1	FRBdM-B13/2/01-G/A	168214	1/60
16/0.1	FRBdM-B16/2/01-G/A	168215	1/60

**Characteristic C**

6/0.01	FRBdM-C6/2/001-G/A	168297	1/60
10/0.01	FRBdM-C10/2/001-G/A	168298	1/60
13/0.01	FRBdM-C13/2/001-G/A	168299	1/60
16/0.01	FRBdM-C16/2/001-G/A	168300	1/60
20/0.01	FRBdM-C20/2/001-G/A	168301	1/60
25/0.01	FRBdM-C25/2/001-G/A	168302	1/60
6/0.03	FRBdM-C6/2/003-G/A	168201	1/60
10/0.03	FRBdM-C10/2/003-G/A	168202	1/60
13/0.03	FRBdM-C13/2/003-G/A	168203	1/60
16/0.03	FRBdM-C16/2/003-G/A	168204	1/60
20/0.03	FRBdM-C20/2/003-G/A	168205	1/60
25/0.03	FRBdM-C25/2/003-G/A	168206	1/60
6/0.1	FRBdM-C6/2/01-G/A	168216	1/60
10/0.1	FRBdM-C10/2/01-G/A	168217	1/60
13/0.1	FRBdM-C13/2/01-G/A	168218	1/60
16/0.1	FRBdM-C16/2/01-G/A	168219	1/60
20/0.1	FRBdM-C20/2/01-G/A	168220	1/60
25/0.1	FRBdM-C25/2/01-G/A	168221	1/60

**Characteristic D**

6/0.01	FRBdM-D6/2/001-G/A	168303	1/60
10/0.01	FRBdM-D10/2/001-G/A	168304	1/60
13/0.01	FRBdM-D13/2/001-G/A	168305	1/60
16/0.01	FRBdM-D16/2/001-G/A	168195	1/60
20/0.01	FRBdM-D20/2/001-G/A	168196	1/60
25/0.01	FRBdM-D25/2/001-G/A	168197	1/60
6/0.03	FRBdM-D6/2/003-G/A	168207	1/60
10/0.03	FRBdM-D10/2/003-G/A	168208	1/60
13/0.03	FRBdM-D13/2/003-G/A	168209	1/60
16/0.03	FRBdM-D16/2/003-G/A	168210	1/60
20/0.03	FRBdM-D20/2/003-G/A	168211	1/60
25/0.03	FRBdM-D25/2/003-G/A	168212	1/60
6/0.1	FRBdM-D6/2/01-G/A	168222	1/60
10/0.1	FRBdM-D10/2/01-G/A	168223	1/60
13/0.1	FRBdM-D13/2/01-G/A	168224	1/60
16/0.1	FRBdM-D16/2/01-G/A	168225	1/60
20/0.1	FRBdM-D20/2/01-G/A	168226	1/60
25/0.1	FRBdM-D25/2/01-G/A	168227	1/60

**xEffect**

Combined RCD/MCB Devices FRBdM 2-poles

EATON CORPORATION CA003002EN

**xEffect**Combined RCD/MCB Devices FRBdM, digital  
SG05613

91

**Combined RCD/MCB Devices**

Combined RCD/MCB Devices FRBdM - Technical Data

**1.91****Specifications | Combined RCD/MCB Devices FRBdM, digital****Description**

- Combined RCD/MCB device
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories suitable for subsequent installation
- The test key "T" must be pressed every year. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have


not been smoothed.

- **Type -G/A:** High reliability against unwanted tripping. Suitable for any circuit where personal injury or damage to property may occur in case of unwanted tripping. Additionally protects against special forms of residual pulsating DC which have not been smoothed.


- **Type -F:** Sensitive to pulsating DC residual currents up to 1 kHz
    - Increased protection due to the detection of mixed frequencies
    - Higher load rating with DC residual currents up to 10mA
    - Reduction of nuisance tripping thanks to time delayed tripping and increased current withstand capability of 3 kA
- Recommended for washing machines, dish washers, or motor applications with single-phase drives.

**Accessories:**

Auxiliary switch for subsequent installation	ZP-IHK	286052
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover 2-poles	Z-TC/SD-2P	178099

**Local Indication RCD**

Self check (power ON) 2 s

 $I_{\Delta} \geq 50\% I_{\Delta n}$  $I_{\Delta} = 30-50\% I_{\Delta n}$  $I_{\Delta} \leq 30\% I_{\Delta n}$ **Service Mode (measuring of residual current  $I_{\Delta}$ )**

Pressing test button twice to activate Service-Mode



Measurement delimiter red


Measurement delimiter ON time 400 ms

10 mA measurement color amber

1 mA measurement color green

Double-pressing test button to activate Service Mode press (0.1-0.4 s) -&gt; release (0.1-0.4 s) -&gt; press (0.1-0.4 s)

Time duration of Service Mode 4 min (during activated Service Mode all protection functions are still working)

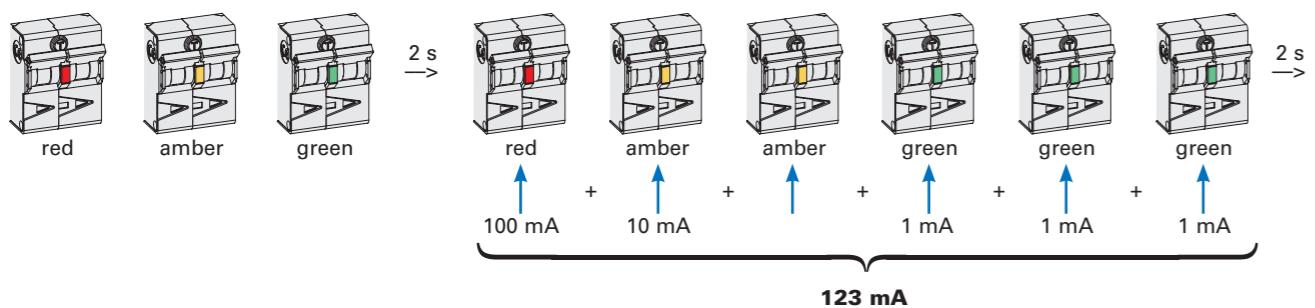**Lamp test****Technical Data****FRBdM****Electrical**

Design according to

IEC/EN 61009

Current test marks as printed onto the device

Type G according to ÖVE E 8601

Number of protected poles

1+N-poles

1

2-poles

2

**Tripping**

Type G / Type F

line voltage-dependent, 10 ms delay 3 kA (8/20μs), surge current-proof

Rated voltage

 $U_n$ 

240 V AC, 50 Hz

Rated operational voltage

 $U_e$ 

204-260 V AC

Voltage range test circuit

195-264 V AC

Rated tripping current

 $I_{\Delta n}$ 

10, 30, 100 mA

Rated non-tripping current

 $I_{\Delta no}$ 0.55  $I_{\Delta n}$ 

Sensitivity

AC and pulsating DC, Type F according to IEC 62423

Press of test button duration

&gt; 0.5 s

Selectivity class

3

Service short circuit capacity

 $I_{cs}$ 

7.5 kA

Rated short circuit capacity

 $I_{cn}$ 

10 kA

Rated current

6 - 25 A

Rated impulse withstand voltage

 $U_{imp}$ 

4 kV (1.2/50μs)

Characteristic

B, C, D

Maximum back-up fuse (short circuit protection)

100 A gL (&gt;10 kA)

**Endurance**

electrical components

 $\geq 4,000$  operating cycles ( $I_n, U_n, \cos\phi = 0.87$ )

mechanical components

 $\geq 10,000$  operating cycles**Mechanical**

Frame size

45 mm

Device height

80 mm

Device width

35 mm (2MU)

Mounting

3-position DIN rail clip, permits removal from existing busbar system

Degree of protection switch

IP20

Degree of protection, built-in

IP40

Upper and lower terminals

open mouthed/lift terminals

Terminal protection

finger and hand touch safe, DGUV VS3, EN 50274

Terminal capacity

1 - 25 mm<sup>2</sup>

Terminal screw

M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)

Terminal torque

2 - 2.4 Nm

Busbar thickness

0.8 - 2 mm

Operation temperature

-25°C to +40°C

Storage- and transport temperature

-35°C to +60°C

Resistance to climatic conditions



acc. to IEC 68-2 (25..55°C / 90..95% RH)

Line side (supply)


lower terminals

Load side

upper terminals

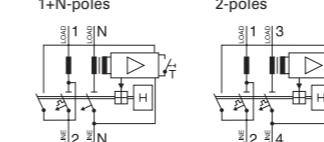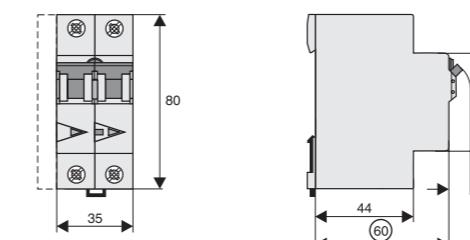**Connection diagram****Dimensions (mm)**

## Tripping Characteristic FRBdM, Characteristics B, C and D

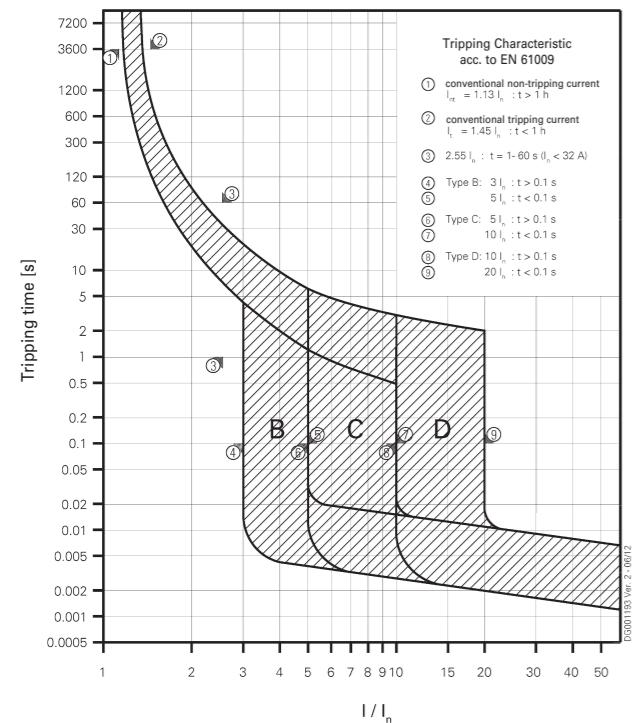

## Internal Resistance FRBdM

## Type B

At room temperature (single pole)

$I_n [\text{A}]$	$R^* [\text{m}\Omega]$
10	17.9
13	12.3
16	7.6
* 50Hz	

## Type C

At room temperature (single pole)

$I_n [\text{A}]$	$R^* [\text{m}\Omega]$
6	28.5
10	17.7
13	9.0
16	6.7
20	5.5
25	3.0
* 50Hz	

## Type D

At room temperature (single pole)

$I_n [\text{A}]$	$R^* [\text{m}\Omega]$
6	28.5
10	14.9
13	9.0
16	6.7
20	5.5
25	3.0
* 50Hz	

Power Loss at  $I_n$  FRBdM

## Type B

(entire unit)

$I_n [\text{A}]$	$P^* [\text{W}]$
10	4.0
13	4.9
16	4.5
* 50Hz and ambient temperature	

## Type C

(entire unit)

$I_n [\text{A}]$	$P^* [\text{W}]$
6	2.1
10	4.0
13	3.4
16	3.9
20	5.0
25	4.2
* 50Hz and ambient temperature	


## Type D

(entire unit)


$I_n [\text{A}]$	$P^* [\text{W}]$
6	2.1
10	3.2
13	3.4
16	3.9
20	5.0
25	4.2
* 50Hz and ambient temperature	

**Let-through Energy FRBdM**


Let-through Energy FRBdM, Characteristic B

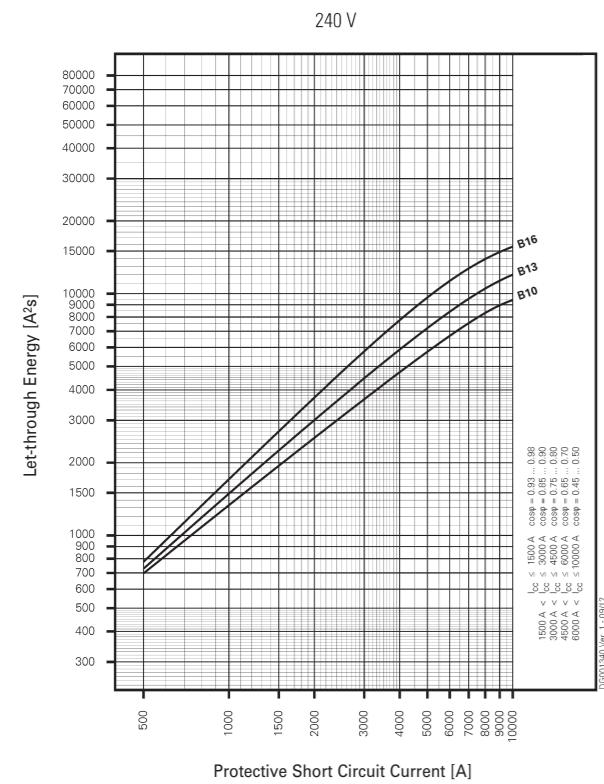


Let-through Energy FRBdM, Characteristic C

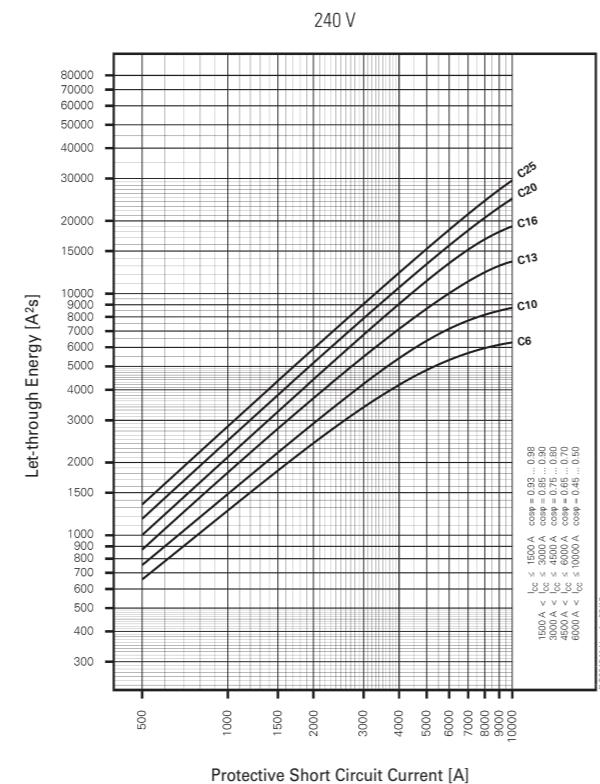**Let-through Energy FRBdM, Characteristic D**


240 V

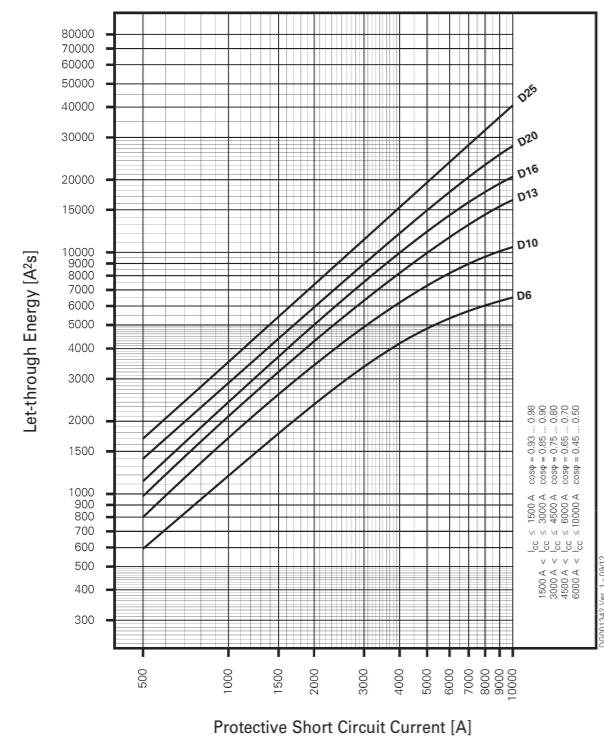**Let-through Current FRBdM**


Let-through Current FRBdM, Characteristic B

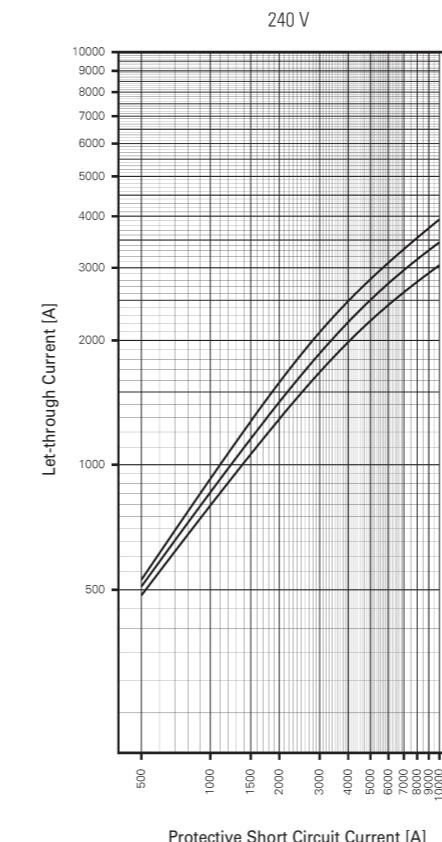

Let-through Current FRBdM, Characteristic C

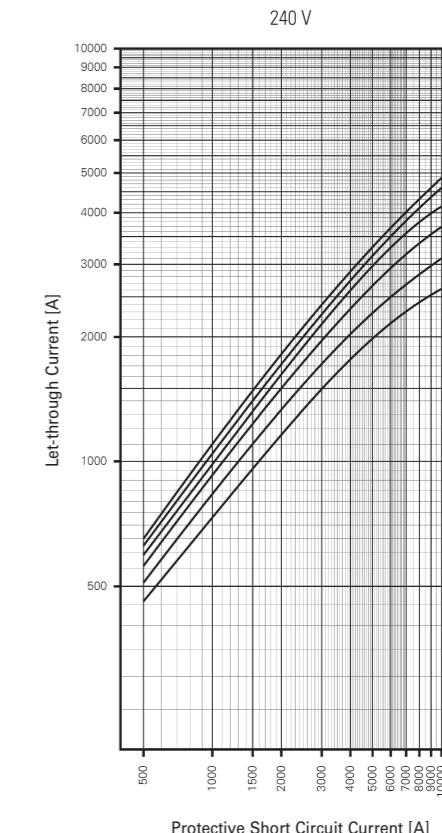**Let-through Current FRBdM, Characteristic D**

240 V

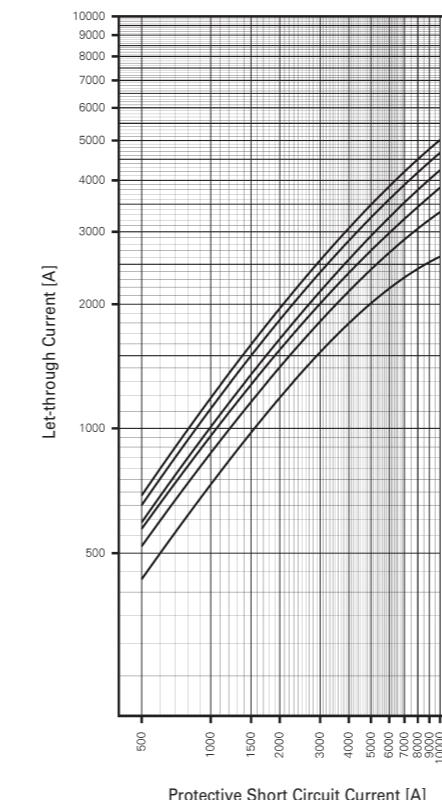

**Short-circuit Selectivity FRBdM**

In case of a short-circuit, selectivity is provided up to the specified selective current values  $I_s$  (kA) applicable between the FRBdM RCD/MCB circuit breakers and the up-stream protective devices.

When a short-circuit occurs, this means that with  $I_{KS}$  current values below  $I_s$  only the MCB will trip. However, in case of short-circuit currents beyond these values both protective devices will trip.

**FRBdM and NZMB(C)(N)(H)1-A..., NZMB(C)(N)(H)2-A...**

Short circuit currents in kA, rated currents of fuses in A.

Overload and short-circuit release unit NZM at max. value

FRBdM	NZM.1-A...					
	FRBdM NZM.2-A...					
	$I_{cu} = 25 (36) (50) (100)$ kA					
<b>B10</b>	40	50	63	80	100	125
<b>B10</b>	1.2	1.5	2	2	4	10
<b>B13</b>	1	1.5	2	2	4	10
<b>B16</b>	1	1.2	1.5	2	3	8
<b>C+D6</b>	1.2	1.5	2	2	4	10
<b>C+D10</b>	1.2	1.5	2	2	4	10
<b>C+D13</b>	1	1.5	2	2	4	10
<b>C+D16</b>	1	1.2	1.5	2	3	8
<b>C+D20</b>	0.8	1.2	1.5	1.5	3	8
<b>C+D25</b>	0.7	1.1	1.3	1.3	2.5	6
	$I_{cu} = 25 (36) (50) (150)$ kA					
<b>B10</b>	40	50	63	80	100	125
<b>B10</b>	1	1.5	2.5	3	10	10
<b>B13</b>	1	1.2	2	3	10	10
<b>B16</b>	1	1.2	1.5	2.5	10	10
<b>C+D6</b>	1	1.5	2.5	3	10	10
<b>C+D10</b>	1	1.5	2.5	3	10	10
<b>C+D13</b>	1	1.2	2	3	10	10
<b>C+D16</b>	1	1.2	1.5	2.5	10	10
<b>C+D20</b>	1	1.2	1.5	1.5	10	10
<b>C+D25</b>	0.9	1.1	1.3	1.3	10	10

NZMB1(C1)(N1)(H1):  $I_{cu}$  (400/415V) = 25(36)(50)(100) kA (acc. to IEC/EN 60947-2)

NZMB2(C2)(N2)(H2):  $I_{cu}$  (400/415V) = 25(36)(50)(150) kA (acc. to IEC/EN 60947-2)

**FRBdM and NH000/NH00/NH1 gG**

Short circuit currents in kA, rated currents of fuses in A.

FRBdM	NH000/NH00/NH1 gG										
	16	20	25	32	35	40	50	63	80	100	125
<b>B10</b>	<0.5	<0.5	0.9	1.7	2.3	3.4	5.2	6.9	>10	>10	>10
<b>B13</b>	<0.5	<0.5	0.8	1.4	1.9	2.7	4.1	5.2	8.5	>10	>10
<b>B16</b>	<0.5	<0.5	0.7	1.2	1.6	2.2	3.1	3.8	5.7	>10	>10
<b>C6</b>	<0.5	0.5	0.9	1.8	2.5	3.8	8.2	>10	>10	>10	>10
<b>C10</b>	<0.5	<0.5	0.8	1.5	2.0	2.9	4.5	6.6	>10	>10	>10
<b>C13</b>	<0.5	<0.5	0.6	1.2	1.5	2.2	3.3	4.2	6.7	>10	>10
<b>C16</b>	<0.5	<0.5	0.6	1.0	1.3	1.8	2.6	3.3	4.8	>10	>10
<b>C20</b>	<0.5	<0.5	0.5	0.9	1.1	1.6	2.3	2.8	4.1	8.6	>10
<b>C25</b>	<0.5	<0.5	<0.5	0.8	1.0	1.4	2.0	2.5	3.6	7.1	>10
<b>D6</b>	<0.5	0.5	1.0	1.8	2.5	3.8	7.8	>10	>10	>10	>10
<b>D10</b>	<0.5	<0.5	0.7	1.2	1.6	2.4	3.8	5.2	>10	>10	>10
<b>D13</b>	<0.5	<0.5	0.6	1.0	1.3	1.9	2.8	3.6	5.6	>10	>10
<b>D16</b>	<0.5	<0.5	0.5	0.9	1.1	1.6	2.3	2.9	4.3	>10	>10
<b>D20</b>	<0.5	<0.5	<0.5	0.8	1.0	1.4	2.0	2.5	3.6	7.5	>10
<b>D25</b>	<0.5	<0.5	<0.5	0.7	0.8	1.1	1.6	2.1	3.1	5.5	7.7

Rated breaking capacity (NH) AC 500 V = 120 kA (acc. to IEC/EN 60269)

**FRBdM and PLSM-OV/PLHT-OV...**

Short circuit currents in kA, rated currents of fuses in A.

FRBdM	PLSM-OV/PLHT-OV						
	$I_{cu} = 10$ kA						
	$I_{cu} = 10$ kA						
<b>B10</b>	25	32	40	50	56	63	80
<b>B10</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B13</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B16</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>C+D6</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>C+D10</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>C+D13</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>C+D16</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>C+D20</b>	-	1.5	1.5	1.5	1.5	1.5	1.5
<b>C+D25</b>	-	-	1.5	1.5	1.5	1.5	1.5

**Back-up Protection FRBdM**

The up-stream protective devices will protect the down-stream FRBdM up to the short-circuit current specified.

**FRBdM and NZM.1-A..., 240 V**

Short circuit currents in kA.

FRBdM	NZM.1-A...			
	$U_e = 240$ V	<b>B</b>	<b>C</b>	<b>D</b>
<b>6</b>	-	25	25	
<b>10</b>	25	25	25	
<b>13</b>	25	25	25	
<b>16</b>	25	25	25	
<b>20</b>	-	20	20	
<b>25</b>	-	20	20	

Short circuit currents in kA.

FRBdM	NZM.1-A...			
	$U_e = 240$ V	<b>B</b>	<b>C</b>	<b>D</b>
<b>6</b>	-	40	40	
<b>10</b>	40	40	40	
<b>13</b>	40	40	40	
<b>16</b>	40	40	40	
<b>20</b>	-	20	20	
<b>25</b>	-	20	20	

# 1.100 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBdM - Technical Data

## FRBdM and NH00-125 A, 240 V

Short circuit currents in kA.

FRBdM	NH00-125A gG	
	U <sub>e</sub> = 240 V	
B	C	D
<b>6</b>	-	40
<b>10</b>	40	40
<b>13</b>	40	40
<b>16</b>	40	40
<b>20</b>	-	20
<b>25</b>	-	10

U<sub>e</sub> = 240V: I<sub>cn</sub> (FRBdM) = 10 kA (acc. to IEC/EN 61009)

AC 500 V (NH00-125A gG) = 120 kA (acc. to IEC/EN 60269)

## FRBdM and PLSM-OV63, 230 V

Short circuit currents in kA.

FRBdM	PLSM-OV63/2, 3, 4, 3N	
	IT-system U = 230 V	
B	C	D
<b>6</b>	-	10
<b>10</b>	10	10
<b>13</b>	10	10
<b>16</b>	10	10
<b>20</b>	-	10
<b>25</b>	-	10

U<sub>e</sub> = 240V: I<sub>cn</sub> (FRBdM) = 10 kA (acc. to IEC/EN 61009)

U<sub>e</sub> = 230/400V: I<sub>cu</sub> (PLSM-OV63) = 10 kA (acc. to IEC/EN 60947-2)

## xEffect

## xEffect

# Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM, FRBm6, 1+N-poles

# 1.101

SG03013



### Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Increased protection in applications with 1-phase frequency converter due to the detection of mixed frequencies (type F)
- Reduction of nuisance tripping (type F, G, or G/A) thanks to
  - time delayed tripping
  - increased current withstand capability >3 kA
- Higher load rating with DC residual currents up to 10 mA (type F)
- Contact position indicator red - green
- Fault current tripping indicator
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 40 A
- Tripping characteristics B, C, D
- Rated breaking capacity acc. to IEC/EN 61009 10 kA
- Rated breaking capacity acc. to IEC/EN 60947-2 up to 15 kA
- Classified for the use in rail rolling stock
- Has an unidirectional power supply



$I_{\text{tr}}/I_{\Delta I}$ (A)	Type Designation	Article No.	Units per package
<b>Type F</b>			
<b>10 kA, 1+N-poles</b>			
<b>Selective + surge current-proof 3 kA, sensitive to residual pulsating DC, Type F</b> 			
<b>Characteristic B</b>			
13/003	FRBmM-B13/1N/003-F	193479	1/60
16/003	FRBmM-B16/1N/003-F	193480	1/60
20/003	FRBmM-B20/1N/003-F	193481	1/60
25/003	FRBmM-B25/1N/003-F	193488	1/60
32/003	FRBmM-B32/1N/003-F	193489	1/60
40/003	FRBmM-B40/1N/003-F	193490	1/60
13/03	FRBmM-B13/1N/03-F	193494	1/60
16/03	FRBmM-B16/1N/03-F	193495	1/60
20/03	FRBmM-B20/1N/03-F	193496	1/60
25/03	FRBmM-B25/1N/03-F	193503	1/60
32/03	FRBmM-B32/1N/03-F	193504	1/60
40/03	FRBmM-B40/1N/03-F	193505	1/60
13/01	FRBmM-B13/1N/01-F	193509	1/60
16/01	FRBmM-B16/1N/01-F	193510	1/60
20/01	FRBmM-B20/1N/01-F	193514	1/60
25/01	FRBmM-B25/1N/01-F	193521	1/60
32/01	FRBmM-B32/1N/01-F	193522	1/60
40/01	FRBmM-B40/1N/01-F	193523	1/60

<b>Characteristic C</b>			
13/003	FRBmM-C13/1N/003-F	193482	1/60
16/003	FRBmM-C16/1N/003-F	193483	1/60
20/003	FRBmM-C20/1N/003-F	193484	1/60
25/003	FRBmM-C25/1N/003-F	193491	1/60
32/003	FRBmM-C32/1N/003-F	193492	1/60
40/003	FRBmM-C40/1N/003-F	193493	1/60
13/03	FRBmM-C13/1N/03-F	193497	1/60
16/03	FRBmM-C16/1N/03-F	193498	1/60
20/03	FRBmM-C20/1N/03-F	193499	1/60
25/03	FRBmM-C25/1N/03-F	193506	1/60
32/03	FRBmM-C32/1N/03-F	193507	1/60
40/03	FRBmM-C40/1N/03-F	193508	1/60
13/01	FRBmM-C13/1N/01-F	193515	1/60
16/01	FRBmM-C16/1N/01-F	193516	1/60
20/01	FRBmM-C20/1N/01-F	193517	1/60
25/01	FRBmM-C25/1N/01-F	193524	1/60
32/01	FRBmM-C32/1N/01-F	193525	1/60
40/01	FRBmM-C40/1N/01-F	193526	1/60

**Characteristic D**

13/003	FRBmM-D13/1N/003-F	193485	1/60
16/003	FRBmM-D16/1N/003-F	193486	1/60
20/003	FRBmM-D20/1N/003-F	193487	1/60
13/03	FRBmM-D13/1N/03-F	193500	1/60
16/03	FRBmM-D16/1N/03-F	193501	1/60
20/03	FRBmM-D20/1N/03-F	193502	1/60
13/01	FRBmM-D13/1N/01-F	193518	1/60
16/01	FRBmM-D16/1N/01-F	193519	1/60
20/01	FRBmM-D20/1N/01-F	193520	1/60

 $I_{\text{A}}/I_{\Delta \text{A}}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type G/A****10 kA, 1+N-poles**

Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)

**Characteristic B**

13/0.03	FRBmM-B13/1N/003-G/A	170716	1/60
16/0.03	FRBmM-B16/1N/003-G/A	170717	1/60
20/0.03	FRBmM-B20/1N/003-G/A	170528	1/60
25/0.03	FRBmM-B25/1N/003-G/A	170529	1/60
32/0.03	FRBmM-B32/1N/003-G/A	170530	1/60
40/0.03	FRBmM-B40/1N/003-G/A	170531	1/60

**Characteristic C**

13/0.03	FRBmM-C13/1N/003-G/A	170630	1/60
16/0.03	FRBmM-C16/1N/003-G/A	170631	1/60
20/0.03	FRBmM-C20/1N/003-G/A	170632	1/60
25/0.03	FRBmM-C25/1N/003-G/A	170633	1/60
32/0.03	FRBmM-C32/1N/003-G/A	170634	1/60
40/0.03	FRBmM-C40/1N/003-G/A	170635	1/60

**Characteristic D**

13/0.03	FRBmM-D13/1N/003-G/A	170653	1/60
16/0.03	FRBmM-D16/1N/003-G/A	170654	1/60
20/0.03	FRBmM-D20/1N/003-G/A	170655	1/60

 $I_{\text{A}}/I_{\Delta \text{A}}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type G****10 kA, 1+N-poles**

Surge current-proof 3 kA, Type G (ÖVE E 8601)

**Characteristic B**

13/0.03	FRBmM-B13/1N/003-G	170710	1/60
16/0.03	FRBmM-B16/1N/003-G	170711	1/60
20/0.03	FRBmM-B20/1N/003-G	170712	1/60
25/0.03	FRBmM-B25/1N/003-G	170713	1/60
32/0.03	FRBmM-B32/1N/003-G	170714	1/60
40/0.03	FRBmM-B40/1N/003-G	170715	1/60

**Characteristic C**

13/0.03	FRBmM-C13/1N/003-G	170624	1/60
16/0.03	FRBmM-C16/1N/003-G	170625	1/60
20/0.03	FRBmM-C20/1N/003-G	170626	1/60
25/0.03	FRBmM-C25/1N/003-G	170627	1/60
32/0.03	FRBmM-C32/1N/003-G	170628	1/60
40/0.03	FRBmM-C40/1N/003-G	170629	1/60

**Characteristic D**

13/0.03	FRBmM-D13/1N/003-G	170650	1/60
16/0.03	FRBmM-D16/1N/003-G	170651	1/60
20/0.03	FRBmM-D20/1N/003-G	170652	1/60
13/0.3	FRBmM-D13/1N/03-G	170869	1/60
16/0.3	FRBmM-D16/1N/03-G	170870	1/60
20/0.3	FRBmM-D20/1N/03-G	170871	1/60



$I_{nA}$ (A)	Type Designation	Article No.	Units per package
<b>Type A</b>			
<b>10 kA, 1+N-poles bedingt surge current-proof 250A, pulsstromsensitiv, Type A</b>			
6/0.01	FRBmM-B6/1N/001-A	170975	1/60
10/0.01	FRBmM-B10/1N/001-A	170976	1/60
13/0.01	FRBmM-B13/1N/001-A	170977	1/60
16/0.01	FRBmM-B16/1N/001-A	170978	1/60
6/0.03	FRBmM-B6/1N/003-A	170702	1/60
10/0.03	FRBmM-B10/1N/003-A	170703	1/60
13/0.03	FRBmM-B13/1N/003-A	170704	1/60
16/0.03	FRBmM-B16/1N/003-A	170705	1/60
20/0.03	FRBmM-B20/1N/003-A	170706	1/60
25/0.03	FRBmM-B25/1N/003-A	170707	1/60
32/0.03	FRBmM-B32/1N/003-A	170708	1/60
40/0.03	FRBmM-B40/1N/003-A	170709	1/60
6/0.1	FRBmM-B6/1N/01-A	170664	1/60
10/0.1	FRBmM-B10/1N/01-A	170665	1/60
13/0.1	FRBmM-B13/1N/01-A	170666	1/60
16/0.1	FRBmM-B16/1N/01-A	170667	1/60
20/0.1	FRBmM-B20/1N/01-A	170668	1/60
25/0.1	FRBmM-B25/1N/01-A	170669	1/60
32/0.1	FRBmM-B32/1N/01-A	170670	1/60
40/0.1	FRBmM-B40/1N/01-A	170671	1/60
6/0.3	FRBmM-B6/1N/03-A	170607	1/60
10/0.3	FRBmM-B10/1N/03-A	170608	1/60
13/0.3	FRBmM-B13/1N/03-A	170609	1/60
16/0.3	FRBmM-B16/1N/03-A	170610	1/60
20/0.3	FRBmM-B20/1N/03-A	170611	1/60
25/0.3	FRBmM-B25/1N/03-A	170552	1/60
32/0.3	FRBmM-B32/1N/03-A	170553	1/60
40/0.3	FRBmM-B40/1N/03-A	170554	1/60

<b>Characteristic C</b>			
2/0.01	FRBmM-C2/1N/001-A	170904	1/60
4/0.01	FRBmM-C4/1N/001-A	170905	1/60
6/0.01	FRBmM-C6/1N/001-A	170906	1/60
10/0.01	FRBmM-C10/1N/001-A	170907	1/60
13/0.01	FRBmM-C13/1N/001-A	170908	1/60
16/0.01	FRBmM-C16/1N/001-A	170921	1/60
2/0.03	FRBmM-C2/1N/003-A	170614	1/60
4/0.03	FRBmM-C4/1N/003-A	170615	1/60
6/0.03	FRBmM-C6/1N/003-A	170616	1/60
10/0.03	FRBmM-C10/1N/003-A	170617	1/60
13/0.03	FRBmM-C13/1N/003-A	170618	1/60
16/0.03	FRBmM-C16/1N/003-A	170619	1/60
20/0.03	FRBmM-C20/1N/003-A	170620	1/60
25/0.03	FRBmM-C25/1N/003-A	170621	1/60
32/0.03	FRBmM-C32/1N/003-A	170622	1/60
40/0.03	FRBmM-C40/1N/003-A	170623	1/60
2/0.1	FRBmM-C2/1N/01-A	170682	1/60
4/0.1	FRBmM-C4/1N/01-A	170683	1/60
6/0.1	FRBmM-C6/1N/01-A	170684	1/60
10/0.1	FRBmM-C10/1N/01-A	170685	1/60
13/0.1	FRBmM-C13/1N/01-A	170686	1/60
16/0.1	FRBmM-C16/1N/01-A	170687	1/60
20/0.1	FRBmM-C20/1N/01-A	170688	1/60
25/0.1	FRBmM-C25/1N/01-A	170689	1/60
32/0.1	FRBmM-C32/1N/01-A	170690	1/60
40/0.1	FRBmM-C40/1N/01-A	170691	1/60
2/0.3	FRBmM-C2/1N/03-A	170571	1/60
4/0.3	FRBmM-C4/1N/03-A	170572	1/60
6/0.3	FRBmM-C6/1N/03-A	170573	1/60
10/0.3	FRBmM-C10/1N/03-A	170574	1/60
13/0.3	FRBmM-C13/1N/03-A	170575	1/60
16/0.3	FRBmM-C16/1N/03-A	170576	1/60
20/0.3	FRBmM-C20/1N/03-A	170577	1/60
25/0.3	FRBmM-C25/1N/03-A	170578	1/60
32/0.3	FRBmM-C32/1N/03-A	170579	1/60
40/0.3	FRBmM-C40/1N/03-A	170580	1/60

**xEffect****xEffect****Combined RCD/MCB Devices****1.107**

Combined RCD/MCB Devices FRBmM, FRBm6 1+N-poles

**Characteristic D**

2/0.01	FRBmM-D2/1N/001-A	170914	1/60
4/0.01	FRBmM-D4/1N/001-A	170915	1/60
6/0.01	FRBmM-D6/1N/001-A	170916	1/60
10/0.01	FRBmM-D10/1N/001-A	170917	1/60
13/0.01	FRBmM-D13/1N/001-A	170918	1/60
16/0.01	FRBmM-D16/1N/001-A	170919	1/60
2/0.03	FRBmM-D2/1N/003-A	170643	1/60
4/0.03	FRBmM-D4/1N/003-A	170644	1/60
6/0.03	FRBmM-D6/1N/003-A	170645	1/60
10/0.03	FRBmM-D10/1N/003-A	170646	1/60
13/0.03	FRBmM-D13/1N/003-A	170647	1/60
16/0.03	FRBmM-D16/1N/003-A	170648	1/60
20/0.03	FRBmM-D20/1N/003-A	170649	1/60
2/0.1	FRBmM-D2/1N/01-A	170544	1/60
4/0.1	FRBmM-D4/1N/01-A	170545	1/60
6/0.1	FRBmM-D6/1N/01-A	170546	1/60
10/0.1	FRBmM-D10/1N/01-A	170547	1/60
13/0.1	FRBmM-D13/1N/01-A	170548	1/60
16/0.1	FRBmM-D16/1N/01-A	170549	1/60
20/0.1	FRBmM-D20/1N/01-A	170550	1/60
2/0.3	FRBmM-D2/1N/03-A	170594	1/60
4/0.3	FRBmM-D4/1N/03-A	170595	1/60
6/0.3	FRBmM-D6/1N/03-A	170596	1/60
10/0.3	FRBmM-D10/1N/03-A	170597	1/60
13/0.3	FRBmM-D13/1N/03-A	170598	1/60
16/0.3	FRBmM-D16/1N/03-A	170599	1/60
20/0.3	FRBmM-D20/1N/03-A	170868	1/60



$I_{\text{AN}}^{\text{A}} / \text{A}$ (A)	Type Designation	Article No.	Units per package
<b>Type AC</b>			
<b>10 kA, 1+N-poles</b>			
<b>Conditionally surge current-proof 250 A, Type AC</b> 			
<b>Characteristic B</b>			
6/0.01	FRBmM-B6/1N/001	170971	1/60
10/0.01	FRBmM-B10/1N/001	170972	1/60
13/0.01	FRBmM-B13/1N/001	170973	1/60
16/0.01	FRBmM-B16/1N/001	170974	1/60
6/0.03	FRBmM-B6/1N/003	170920	1/60
10/0.03	FRBmM-B10/1N/003	170695	1/60
13/0.03	FRBmM-B13/1N/003	170696	1/60
16/0.03	FRBmM-B16/1N/003	170697	1/60
20/0.03	FRBmM-B20/1N/003	170698	1/60
25/0.03	FRBmM-B25/1N/003	170699	1/60
32/0.03	FRBmM-B32/1N/003	170700	1/60
40/0.03	FRBmM-B40/1N/003	170701	1/60
6/0.1	FRBmM-B6/1N/01	170656	1/60
10/0.1	FRBmM-B10/1N/01	170657	1/60
13/0.1	FRBmM-B13/1N/01	170658	1/60
16/0.1	FRBmM-B16/1N/01	170659	1/60
20/0.1	FRBmM-B20/1N/01	170660	1/60
25/0.1	FRBmM-B25/1N/01	170661	1/60
32/0.1	FRBmM-B32/1N/01	170662	1/60
40/0.1	FRBmM-B40/1N/01	170663	1/60
6/0.3	FRBmM-B6/1N/03	170551	1/60
10/0.3	FRBmM-B10/1N/03	170600	1/60
13/0.3	FRBmM-B13/1N/03	170601	1/60
16/0.3	FRBmM-B16/1N/03	170602	1/60
20/0.3	FRBmM-B20/1N/03	170603	1/60
25/0.3	FRBmM-B25/1N/03	170604	1/60
32/0.3	FRBmM-B32/1N/03	170605	1/60
40/0.3	FRBmM-B40/1N/03	170606	1/60

<b>Characteristic C</b>			
2/0.01	FRBmM-C2/1N/001	170979	1/60
4/0.01	FRBmM-C4/1N/001	170980	1/60
6/0.01	FRBmM-C6/1N/001	170981	1/60
10/0.01	FRBmM-C10/1N/001	170982	1/60
13/0.01	FRBmM-C13/1N/001	170983	1/60
16/0.01	FRBmM-C16/1N/001	170984	1/60
2/0.03	FRBmM-C2/1N/003	170532	1/60
4/0.03	FRBmM-C4/1N/003	170533	1/60
6/0.03	FRBmM-C6/1N/003	170534	1/60
10/0.03	FRBmM-C10/1N/003	170535	1/60
13/0.03	FRBmM-C13/1N/003	170536	1/60
16/0.03	FRBmM-C16/1N/003	170537	1/60
20/0.03	FRBmM-C20/1N/003	170538	1/60
25/0.03	FRBmM-C25/1N/003	170539	1/60
32/0.03	FRBmM-C32/1N/003	170612	1/60
40/0.03	FRBmM-C40/1N/003	170613	1/60
2/0.1	FRBmM-C2/1N/01	170672	1/60
4/0.1	FRBmM-C4/1N/01	170673	1/60
6/0.1	FRBmM-C6/1N/01	170674	1/60
10/0.1	FRBmM-C10/1N/01	170675	1/60
13/0.1	FRBmM-C13/1N/01	170676	1/60
16/0.1	FRBmM-C16/1N/01	170677	1/60
20/0.1	FRBmM-C20/1N/01	170678	1/60
25/0.1	FRBmM-C25/1N/01	170679	1/60
32/0.1	FRBmM-C32/1N/01	170680	1/60
40/0.1	FRBmM-C40/1N/01	170681	1/60
2/0.3	FRBmM-C2/1N/03	170561	1/60
4/0.3	FRBmM-C4/1N/03	170562	1/60
6/0.3	FRBmM-C6/1N/03	170563	1/60
10/0.3	FRBmM-C10/1N/03	170564	1/60
13/0.3	FRBmM-C13/1N/03	170565	1/60
16/0.3	FRBmM-C16/1N/03	170566	1/60
20/0.3	FRBmM-C20/1N/03	170567	1/60
25/0.3	FRBmM-C25/1N/03	170568	1/60
32/0.3	FRBmM-C32/1N/03	170569	1/60
40/0.3	FRBmM-C40/1N/03	170570	1/60

**Characteristic D**

2/0.01	FRBmM-D2/1N/001	170922	1/60
4/0.01	FRBmM-D4/1N/001	170909	1/60
6/0.01	FRBmM-D6/1N/001	170910	1/60
10/0.01	FRBmM-D10/1N/001	170911	1/60
13/0.01	FRBmM-D13/1N/001	170912	1/60
16/0.01	FRBmM-D16/1N/001	170913	1/60
2/0.03	FRBmM-D2/1N/003	170636	1/60
4/0.03	FRBmM-D4/1N/003	170637	1/60
6/0.03	FRBmM-D6/1N/003	170638	1/60
10/0.03	FRBmM-D10/1N/003	170639	1/60
13/0.03	FRBmM-D13/1N/003	170640	1/60
16/0.03	FRBmM-D16/1N/003	170641	1/60
20/0.03	FRBmM-D20/1N/003	170642	1/60
2/0.1	FRBmM-D2/1N/01	170692	1/60
4/0.1	FRBmM-D4/1N/01	170693	1/60
6/0.1	FRBmM-D6/1N/01	170694	1/60
10/0.1	FRBmM-D10/1N/01	170540	1/60
13/0.1	FRBmM-D13/1N/01	170541	1/60
16/0.1	FRBmM-D16/1N/01	170542	1/60
20/0.1	FRBmM-D20/1N/01	170543	1/60
2/0.3	FRBmM-D2/1N/03	170587	1/60
4/0.3	FRBmM-D4/1N/03	170588	1/60
6/0.3	FRBmM-D6/1N/03	170589	1/60
10/0.3	FRBmM-D10/1N/03	170590	1/60
13/0.3	FRBmM-D13/1N/03	170591	1/60
16/0.3	FRBmM-D16/1N/03	170592	1/60
20/0.3	FRBmM-D20/1N/03	170593	1/60

**Type G/A**

**6 kA, 1+N-poles**  
**Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)** 

**Characteristic B**

13/003	FRBm6-B13/1N/003-G/A	177847	1/60
16/003	FRBm6-B16/1N/003-G/A	177848	1/60
20/003	FRBm6-B20/1N/003-G/A	177849	1/60
25/003	FRBm6-B25/1N/003-G/A	177850	1/60
32/003	FRBm6-B32/1N/003-G/A	177851	1/60
40/003	FRBm6-B40/1N/003-G/A	177852	1/60

**Characteristic C**

13/003	FRBm6-C13/
--------	------------

# 1.110 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM - RT Type A, 1+N-poles



## Description

- A range of residual current device / miniature circuit breaker combination for a wide range of applications with the added benefit of accepting cables fitted with Ring Tongue connections - as used on applications such as Rail rolling stock etc.
- Line voltage independent
- Contact position indicator red - green
- Fault current tripping indicator
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 40 A
- Tripping characteristics B, C, D
- Rated breaking capacity acc. to IEC/EN 61009 10 kA
- Rated breaking capacity acc. to IEC/EN 60947-2 up to 15 kA
- Classified for the use in rail rolling stock

## xEffect

## xEffect

# Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM - RT Type A, 1+N-poles

# 1.111

$I_{BS}/I_{AN}$   
(A)

Type  
Designation

Article No.  
Units per  
package

### Type A

**10 kA, 1+N-poles**

**Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A**

### Characteristic B



2/003	FRBMM-B2/1N/003-A-RT	305112	1/60
4/003	FRBMM-B4/1N/003-A-RT	305113	1/60
6/003	FRBMM-B6/1N/003-A-RT	305114	1/60
10/003	FRBMM-B10/1N/003-A-RT	305115	1/60
13/003	FRBMM-B13/1N/003-A-RT	305116	1/60
16/003	FRBMM-B16/1N/003-A-RT	305121	1/60
20/003	FRBMM-B20/1N/003-A-RT	305122	1/60
25/003	FRBMM-B25/1N/003-A-RT	305123	1/60
32/003	FRBMM-B32/1N/003-A-RT	305124	1/60
40/003	FRBMM-B40/1N/003-A-RT	305125	1/60
2/03	FRBMM-B2/1N/03-A-RT	305171	1/60
4/03	FRBMM-B4/1N/03-A-RT	305172	1/60
6/03	FRBMM-B6/1N/03-A-RT	305173	1/60
10/03	FRBMM-B10/1N/03-A-RT	305174	1/60
13/03	FRBMM-B13/1N/03-A-RT	305175	1/60
16/03	FRBMM-B16/1N/03-A-RT	305176	1/60
20/03	FRBMM-B20/1N/03-A-RT	305177	1/60
25/03	FRBMM-B25/1N/03-A-RT	305178	1/60
32/03	FRBMM-B32/1N/03-A-RT	305179	1/60
40/03	FRBMM-B40/1N/03-A-RT	305180	1/60

### Characteristic C



2/003	FRBMM-C2/1N/003-A-RT	305126	1/60
4/003	FRBMM-C4/1N/003-A-RT	305129	1/60
6/003	FRBMM-C6/1N/003-A-RT	305130	1/60
10/003	FRBMM-C10/1N/003-A-RT	305131	1/60
13/003	FRBMM-C13/1N/003-A-RT	305132	1/60
16/003	FRBMM-C16/1N/003-A-RT	305135	1/60
20/003	FRBMM-C20/1N/003-A-RT	305137	1/60
25/003	FRBMM-C25/1N/003-A-RT	305138	1/60
32/003	FRBMM-C32/1N/003-A-RT	305139	1/60
40/003	FRBMM-C40/1N/003-A-RT	305140	1/60
2/03	FRBMM-C2/1N/03-A-RT	305181	1/60
4/03	FRBMM-C4/1N/03-A-RT	305182	1/60
6/03	FRBMM-C6/1N/03-A-RT	305183	1/60
10/03	FRBMM-C10/1N/03-A-RT	305184	1/60
13/03	FRBMM-C13/1N/03-A-RT	305185	1/60
16/03	FRBMM-C16/1N/03-A-RT	305186	1/60
20/03	FRBMM-C20/1N/03-A-RT	305187	1/60
25/03	FRBMM-C25/1N/03-A-RT	305188	1/60
32/03	FRBMM-C32/1N/03-A-RT	305189	1/60
40/03	FRBMM-C40/1N/03-A-RT	305190	1/60

 $I_{\Delta}/I_{\Delta n}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type A****10 kA, 1+N-poles****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A****Characteristic D**

2/03	FRBMM-D2/1N/003-A-RT	305141	1/60
4/03	FRBMM-D4/1N/003-A-RT	305143	1/60
6/03	FRBMM-D6/1N/003-A-RT	305144	1/60
10/03	FRBMM-D10/1N/003-A-RT	305146	1/60
13/03	FRBMM-D13/1N/003-A-RT	305147	1/60
16/03	FRBMM-D16/1N/003-A-RT	305148	1/60
20/03	FRBMM-D20/1N/003-A-RT	305149	1/60
2/03	FRBMM-D2/1N/03-A-RT	305192	1/60
4/03	FRBMM-D4/1N/03-A-RT	305193	1/60
6/03	FRBMM-D6/1N/03-A-RT	305194	1/60
10/03	FRBMM-D10/1N/03-A-RT	305195	1/60
13/03	FRBMM-D13/1N/03-A-RT	305196	1/60
16/03	FRBMM-D16/1N/03-A-RT	305197	1/60
20/03	FRBMM-D20/1N/03-A-RT	305198	1/60

**Specifications | Combined RCD/MCB Devices FRBm., 1+N-poles****Description**

- Combined RCD/MCB device
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Contact position indicator red - green
- Comprehensive range of accessories suitable for subsequent installation
- Nameplate
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.

- **Type -G:** High reliability against unwanted tripping. Suitable for any circuit where personal injury or damage to property may occur in case of unwanted tripping.

- **Type -F:** Increased protection in applications with 1phase frequency converter due to the detection of mixed frequencies, higher load capacity with smooth DC fault currents up to 10 mA.

**Accessories:**


Auxiliary switch for subsequent installation	ZP-IHK	286052
Tripping signal switch for subsequent installation	ZP-WHK	286053
Shunt trip release	ZP-NHK	248437
Tripping module	Z-ASA/..	248438, 248439
Terminal cover 2-poles	Z-KAM	248294
	Z-TC/SD-2P	178099

### Technical Data


FRBm., 1+N-poles	
<b>Electrical</b>	
Design according to	IEC/EN 61009, IEC/EN 60479-2
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping line voltage-independent	instantaneous 250A (8/20µs), surge current-proof
Type G, F	10 ms delay 3kA (8/20µs), surge current-proof
Rated voltage	$U_n$ 240 V AC, 50 Hz AC, A types: 50/60 Hz
Rated tripping current	$I_{\Delta n}$ 10, 30, 100, 300 mA
Rated non-tripping current	$I_{\Delta no}$ 0.5 $I_{\Delta n}$
Sensitivity	AC and pulsating DC
Selectivity class	3
Rated short circuit capacity	
FRBmM acc. to IEC/EN 61009	$I_{cn}$ 10 kA
acc. to IEC/EN 60947-2: 2A - 20A:	$I_{cu}$ 15 kA $I_{cs}$ 7.5 kA
acc. to IEC/EN 60947-2: 25A-40A:	$I_{cn}$ 10 kA $I_{cs}$ 5 kA $I_{cn}$ 6 kA
FRBm6 acc. to IEC/EN 61009	$I_{cn}$ 6 kA
acc. to IEC/EN 60947-2: 2A-20A:	$I_{cu}$ 6 kA $I_{cs}$ 6 kA
acc. to IEC/EN 60947-2: 25A-40A:	$I_{cu}$ 6 kA $I_{cs}$ 5 kA $I_{cs}$ 5 kA
Rated current	2 - 40 A
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50µs)
Characteristic	B, C, D
Maximum back-up fuse (short circuit protection)	100 A gL (>10 kA)
Endurance	
electrical components	$\geq$ 4,000 operating cycles
mechanical components	$\geq$ 10,000 operating cycles
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU)
Mounting	3-position DIN rail clip, permits removal from existing busbar system
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1 - 25 mm <sup>2</sup>
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +70°C
Resistance to climatic conditions	acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)

### Connection diagram


1+N-poles




### Dimensions (mm)

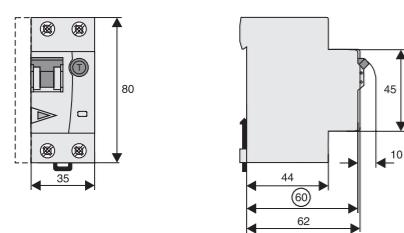

### Connection of ring cable lugs (only FRB...RT)

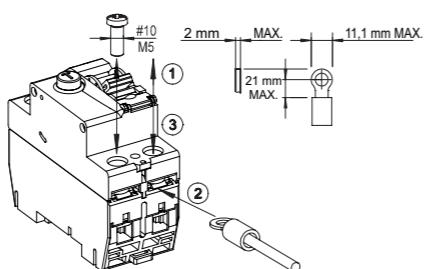

### Tripping Characteristic FRBm.-./1N/, Characteristics B, C and D

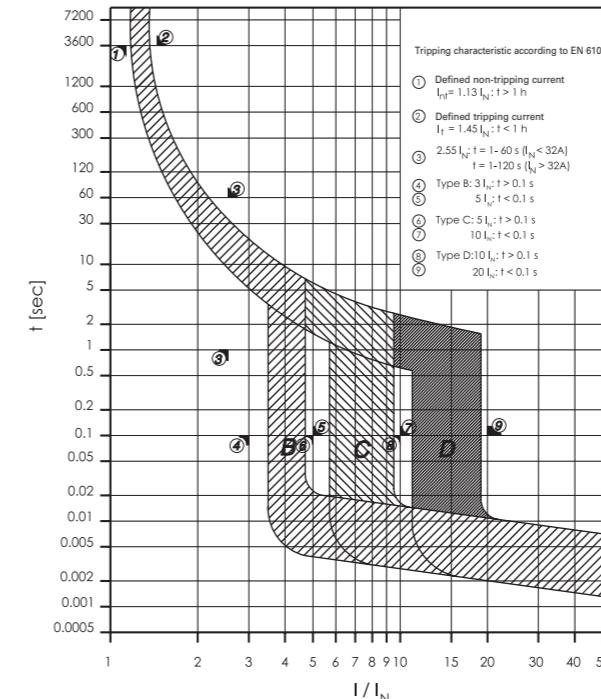


### Effect of ambient temperature FRBm.-./1N/

#### Effect of ambient temperature (MCB component)


$I_n$ [A]	Ambient Temperature T [°C]										
	-25	-15	-5	10	30	40	45	55	60	65	70
2	2.3	2.3	2.2	2.1	2	1.9	1.9	1.8	1.7	1.7	1.6
4	4.8	4.7	4.5	4.3	4	3.8	3.7	3.6	3.5	3.4	3.3
6	7.0	6.8	6.6	6.4	6	5.7	5.6	5.3	5.2	5.1	4.9
10	12.3	11.9	11.4	10.8	10	9.5	9.3	8.8	8.6	8.4	8.1
13	15.1	14.7	14.3	13.7	13	12.5	12.3	11.8	11.6	11.3	11.1
16	19.1	18.6	18.0	17.1	16	15.2	14.9	14.1	13.8	13.4	13.0
20	24.8	23.9	23.0	21.7	20	19.0	18.5	17.5	17.0	16.5	16.1
25	31.4	30.2	29.1	27.3	25	23.9	23.3	22.1	21.6	21.1	20.4
32	40.1	38.6	37.1	34.9	32	30.4	29.6	28.0	27.3	26.5	25.7
40	51.0	49.0	47.0	44.0	40	38.1	37.1	35.1	34.1	33.1	32.1

## Let-through Energy FRBmM-../1N/


Let-through Energy FRBmM, Characteristic B, 1+Npolig

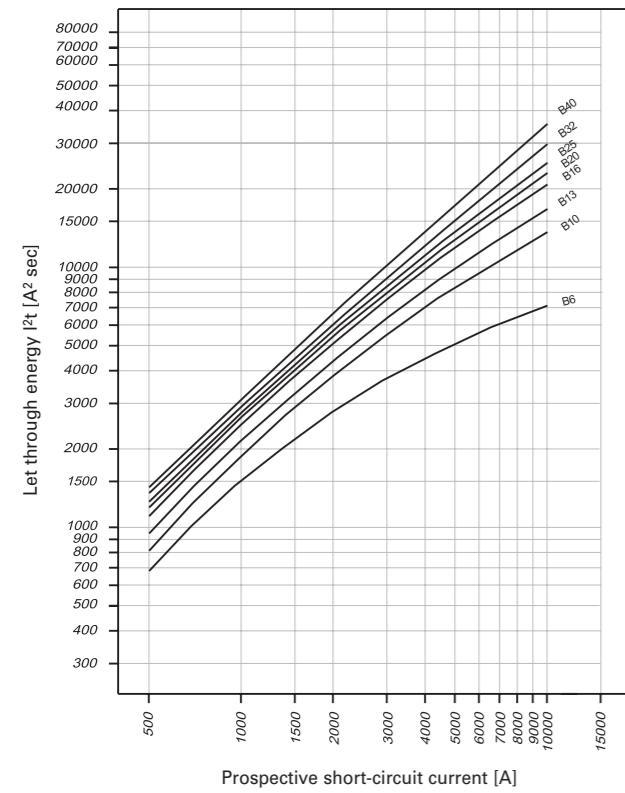

Let-through Energy FRBmM, Characteristic C, 1+Npolig

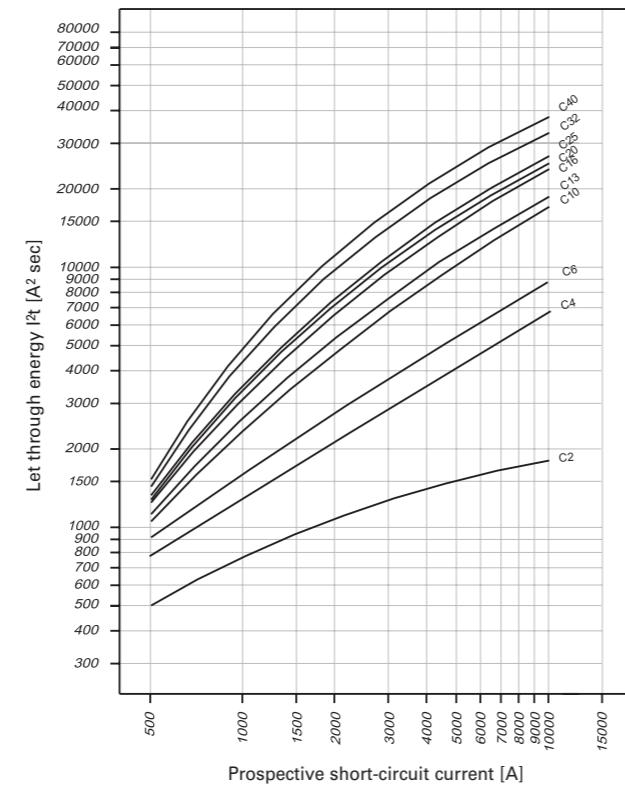

Let-through Energy FRBmM, Characteristic D, 1+Npolig

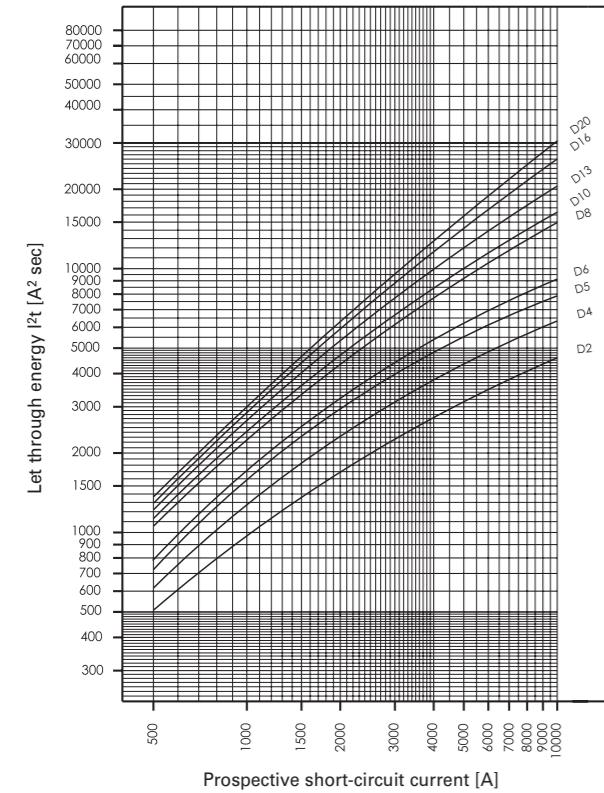

## Short-circuit Selectivity FRBmM-../1N/

In case of a short-circuit, selectivity is provided up to the specified selective current values  $I_s$  (kA) applicable between the FRBmM RCD/MCB circuit breakers and the up-stream protective devices.

When a short-circuit occurs, this means that with  $I_{KS}$  current values below  $I_s$  only the MCB will trip. However, in case of short-circuit currents beyond these values both protective devices will trip.

### FRBmM-../1N/ and DII-DIV fuse link

Short-circuit Selectivity **Characteristic B** towards fuse link **DII-DIV\***)

#### FRBmM DII-DIV gL/gG

$I_n$ [A]	10	16	20	25	35	50	63	80	100
6	<0.5 <sup>1)</sup>	0.7	1.0	2.9	6.9	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
10		0.6	0.9	1.9	3.3	7.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
13		0.5	0.7	1.6	2.8	5.7	9.0	10.0 <sup>2)</sup>	
16			0.7	1.4	2.4	4.4	7.0	10.0 <sup>2)</sup>	
20				1.3	2.2	4.0	6.3	10.0 <sup>2)</sup>	
25					1.3	2.1	3.8	5.8	10.0 <sup>2)</sup>
32						2.0	3.5	5.2	9.5
40							3.1	4.5	8.1

<sup>1)</sup> Selectivity-limit current  $I_s$  under 0.5 kA.

<sup>2)</sup> Selectivity-limit current  $I_s$  = Rated breaking capacity  $I_{cn}$  of the RCD/MCB device  
Darker areas: no selectivity

Short-circuit Selectivity **Characteristic C** towards fuse link **DII-DIV\***)

#### FRBmM DII-DIV gL/gG

$I_n$ [A]	10	16	20	25	35	50	63	80	100
2	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	1.7	6.0	10.0 <sup>2)</sup>				
4	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.7	1.3	4.2	8.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
6	<0.5 <sup>1)</sup>	0.6	1.0	2.9	5.8	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
10		<0.5	0.7	1.5	2.6	5.3	9.0	10.0 <sup>2)</sup>	
13			1.4	2.3	4.6	7.6	10.0 <sup>2)</sup>		
16				1.2	1.8	3.4	5.5	10.0 <sup>2)</sup>	
20					1.2	1.7	3.1	5.0	10.0 <sup>2)</sup>
25						1.6	2.9	4.6	10.0 <sup>2)</sup>
32							2.3	3.4	7.7
40								2.9	6.2

Short-circuit Selectivity **Characteristic D** towards fuse link **DII-DIV\***)

#### FRBmM DII-DIV gL/gG

$I_n$ [A]	10	16	20	25	35	50	63	80	100
2	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	1.0	1.8	6.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
4	<0.5 <sup>1)</sup>	0.8	1.3	3.8	9.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
6		0.6	0.9	2.3	4.7	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
10			0.7	1.5	2.6	5.5	9.4	10.0 <sup>2)</sup>	
13				1.4	2.2	4.4	7.0	10.0 <sup>2)</sup>	
16					2.0	3.7	5.5	10.0 <sup>2)</sup>	
20						1.9	3.4	5.0	10.0 <sup>2)</sup>



# 1.118 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM, 1+N-poles - Technical Data

## xEffect

### FRBmM-./1N/ and D01-D03 fuse link

Short-circuit Selectivity **Characteristic B** towards fuse link **D01-D03\***

FRBmM	D01-D03 gL/gG									
I <sub>n</sub> [A]	10	16	20	25	35	50	63	80	100	
6	<0.5 <sup>1)</sup>	0.5	0.8	2.4	8.2	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
10		0.5	0.8	1.6	3.7	6.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>		
13		0.6	0.7	1.4	3.0	4.7	9.0	10.0 <sup>2)</sup>		
16		0.6	1.2	2.6	3.9	7.0	10.0 <sup>2)</sup>			
20		1.2	2.5	3.6	6.2	10.0 <sup>2)</sup>				
25		1.2	2.3	3.3	5.7	10.0 <sup>2)</sup>				
32		2.3	3.1	5.1	10.0 <sup>2)</sup>					
40		2.8	4.5	9.5						

<sup>1)</sup> Selectivity-limit current I<sub>s</sub> under 0.5 kA.

<sup>2)</sup> Selectivity-limit current I<sub>s</sub> = Rated breaking capacity I<sub>cn</sub> of the RCD/MCB device  
Darker areas: no selectivity



Short-circuit Selectivity **Characteristic C** towards fuse link **D01-D03\***

FRBmM	D01-D03 gL/gG									
I <sub>n</sub> [A]	10	16	20	25	35	50	63	80	100	
2	<0.5 <sup>1)</sup>	0.5	0.5	2.4	10.0 <sup>2)</sup>					
4	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.9	3.4	9.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
6	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.8	2.3	6.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>		
10		<0.5	0.6	1.3	2.9	4.5	8.9	10.0 <sup>2)</sup>		
13				1.2	2.5	3.9	7.6	10.0 <sup>2)</sup>		
16				1.0	2.1	3.0	5.5	10.0 <sup>2)</sup>		
20				1.0	2.0	2.7	5.0	10.0 <sup>2)</sup>		
25				1.9	2.6	4.5	10.0 <sup>2)</sup>			
32				2.1	3.4	10.0 <sup>2)</sup>				
40				3.0	8.7					

Short-circuit Selectivity **Characteristic D** towards fuse link **D01-D03\***

FRBmM	D01-D03 gL/gG									
I <sub>n</sub> [A]	10	16	20	25	35	50	63	80	100	
2	<0.5 <sup>1)</sup>	0.5	0.8	1.2	5.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
4	<0.5 <sup>1)</sup>	0.7	1.0	3.0	10.0 <sup>2)</sup>					
6	0.5	0.8	1.9	5.5	10.0 <sup>2)</sup>					
10		0.6	1.3	2.9	4.7	9.2	10.0 <sup>2)</sup>			
13			1.2	2.5	3.8	7.0	10.0 <sup>2)</sup>			
16				2.3	3.2	5.5	10.0 <sup>2)</sup>			
20				2.2	3.0	3.9	10.0 <sup>2)</sup>			

### FRBmM-./1N/ and NH-00 fuse link

Short-circuit Selectivity **Characteristic B** towards fuse link **NH-00\***

FRBmM	NH-00 gL/gG														
I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100	125	160			
6	<0.5 <sup>1)</sup>	0.5	0.8	1.4	2.2	3.3	7.0	10.0 <sup>2)</sup>							
10	<0.5 <sup>1)</sup>	0.7	0.9	1.5	2.1	3.4	4.3	7.3	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>			
13	<0.5 <sup>1)</sup>	0.6	0.8	1.4	1.8	2.8	3.6	5.7	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>			
16	0.6	0.7	1.2	1.5	2.4	3.0	4.5	10.0 <sup>2)</sup>							
20	0.7	1.1	1.5	2.2	2.8	4.2	9.2	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>						
25	0.7	1.1	1.4	2.1	2.6	4.0	8.2	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>						
32	1.0	1.4	2.0	2.5	3.7	7.1	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>							
40		2.3	3.4	6.2	8.8	10.0 <sup>2)</sup>									

Short-circuit Selectivity **Characteristic D** towards fuse link **NH-00\***

FRBmM	NH-00 gL/gG														
I <sub>n</sub> [A]	16	20	25	32	35	40	50	63	80	100	125	160			
2	<0.5 <sup>1)</sup>	0.6	1.3	2.5	4.7	7.7	10.0 <sup>2)</sup>								
4	<0.5 <sup>1)</sup>	0.5	0.9	1.6	2.8	4.3	9.2	10.0 <sup>2)</sup>							
6	<0.5 <sup>1)</sup>	0.7	1.2	1.8	2.6	4.9	7.0	10.0 <sup>2)</sup>							
10	0.5	0.8	1.2	1.7	2.7	3.5	5.6	10.0 <sup>2)</sup>							
13			1.1	1.5	2.3	2.9	4.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)&lt;/sup</sup>			

 $I_{\text{AN}}/I_{\text{RN}}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type F****10 kA, 2-poles**Sensitive to residual pulsating DC, surge current proof 3000 A, Type F  **Characteristic B**

10/0.03	FRBmM-B10/2/003-F	196976	1/60
13/0.03	FRBmM-B13/2/003-F	196977	1/60
16/0.03	FRBmM-B16/2/003-F	196978	1/60
20/0.03	FRBmM-B20/2/003-F	196979	1/60
25/0.03	FRBmM-B25/2/003-F	196980	1/60

**Characteristic C**

6/0.03	FRBmM-C6/2/003-F	196967	1/60
10/0.03	FRBmM-C10/2/003-F	196968	1/60
13/0.03	FRBmM-C13/2/003-F	196969	1/60
16/0.03	FRBmM-C16/2/003-F	196970	1/60
20/0.03	FRBmM-C20/2/003-F	196971	1/60
25/0.03	FRBmM-C25/2/003-F	196972	1/60

**Type G/A****10 kA, 2-poles**Sensitive to residual pulsating DC, surge current proof 3000 A, Type G/A **Characteristic B**

10/0.03	FRBmM-B10/2/003-G/A	196960	1/60
13/0.03	FRBmM-B13/2/003-G/A	196961	1/60
16/0.03	FRBmM-B16/2/003-G/A	196962	1/60
20/0.03	FRBmM-B20/2/003-G/A	196963	1/60
25/0.03	FRBmM-B25/2/003-G/A	196964	1/60

**Characteristic C**

6/0.03	FRBmM-C6/2/003-G/A	196951	1/60
10/0.03	FRBmM-C10/2/003-G/A	196952	1/60
13/0.03	FRBmM-C13/2/003-G/A	196953	1/60
15/0.03	FRBmM-C16/2/003-G/A	196954	1/60
16/0.03	FRBmM-C20/2/003-G/A	196955	1/60
20/0.03	FRBmM-C25/2/003-G/A	196956	1/60

 $I_{\text{AN}}/I_{\text{RN}}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type Super A****10 kA, 2-poles**Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, short-time delayed, Type Super A **Characteristic B**

10/0.03	FRBmM-B10/2/003-LiA	170886	1/60
13/0.03	FRBmM-B13/2/003-LiA	170887	1/60
16/0.03	FRBmM-B16/2/003-LiA	170888	1/60
20/0.03	FRBmM-B20/2/003-LiA	170889	1/60
25/0.03	FRBmM-B25/2/003-LiA	170890	1/60
10/0.1	FRBmM-B10/2/01-LiA	170810	1/60
13/0.1	FRBmM-B13/2/01-LiA	170811	1/60
16/0.1	FRBmM-B16/2/01-LiA	170812	1/60
20/0.1	FRBmM-B20/2/01-LiA	170813	1/60
25/0.1	FRBmM-B25/2/01-LiA	170814	1/60

**Characteristic C**

6/0.03	FRBmM-C6/2/003-LiA	170795	1/60
10/0.03	FRBmM-C10/2/003-LiA	170796	1/60
13/0.03	FRBmM-C13/2/003-LiA	170797	1/60
16/0.03	FRBmM-C16/2/003-LiA	170798	1/60
20/0.03	FRBmM-C20/2/003-LiA	170799	1/60
25/0.03	FRBmM-C25/2/003-LiA	170800	1/60
6/0.1	FRBmM-C6/2/01-LiA	170829	1/60
10/0.1	FRBmM-C10/2/01-LiA	170830	1/60
13/0.1	FRBmM-C13/2/01-LiA	170831	1/60
16/0.1	FRBmM-C16/2/01-LiA	170832	1/60
20/0.1	FRBmM-C20/2/01-LiA	170833	1/60
25/0.1	FRBmM-C25/2/01-LiA	170834	1/60

 $I_{\Delta} / I_{AN}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type A****10 kA, 2-poles****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** **Characteristic B**

10/0.03	FRBmM-B10/2/003-A	170879	1/60
13/0.03	FRBmM-B13/2/003-A	170880	1/60
16/0.03	FRBmM-B16/2/003-A	170881	1/60
20/0.03	FRBmM-B20/2/003-A	170882	1/60
25/0.03	FRBmM-B25/2/003-A	170883	1/60
10/0.1	FRBmM-B10/2/01-A	170803	1/60
13/0.1	FRBmM-B13/2/01-A	170804	1/60
16/0.1	FRBmM-B16/2/01-A	170805	1/60
20/0.1	FRBmM-B20/2/01-A	170806	1/60
25/0.1	FRBmM-B25/2/01-A	170807	1/60
10/0.3	FRBmM-B10/2/03-A	170844	1/60
13/0.3	FRBmM-B13/2/03-A	170845	1/60
16/0.3	FRBmM-B16/2/03-A	170846	1/60
20/0.3	FRBmM-B20/2/03-A	170847	1/60
25/0.3	FRBmM-B25/2/03-A	170848	1/60

**Characteristic C**

6/0.03	FRBmM-C6/2/003-A	170785	1/60
10/0.03	FRBmM-C10/2/003-A	170786	1/60
13/0.03	FRBmM-C13/2/003-A	170787	1/60
16/0.03	FRBmM-C16/2/003-A	170788	1/60
20/0.03	FRBmM-C20/2/003-A	170789	1/60
25/0.03	FRBmM-C25/2/003-A	170790	1/60
6/0.1	FRBmM-C6/2/01-A	170819	1/60
10/0.1	FRBmM-C10/2/01-A	170820	1/60
13/0.1	FRBmM-C13/2/01-A	170821	1/60
16/0.1	FRBmM-C16/2/01-A	170822	1/60
20/0.1	FRBmM-C20/2/01-A	170823	1/60
25/0.1	FRBmM-C25/2/01-A	170824	1/60
6/0.3	FRBmM-C6/2/03-A	170863	1/60
10/0.3	FRBmM-C10/2/03-A	170864	1/60
13/0.3	FRBmM-C13/2/03-A	170865	1/60
16/0.3	FRBmM-C16/2/03-A	170866	1/60
20/0.3	FRBmM-C20/2/03-A	170867	1/60
25/0.3	FRBmM-C25/2/03-A	170730	1/60

 $I_{\Delta} / I_{AN}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type AC****10 kA, 2-poles****Conditionally surge current-proof 250 A, Type AC** **Characteristic B**

10/0.03	FRBmM-B10/2/003-A	170872	1/60
13/0.03	FRBmM-B13/2/003-A	170873	1/60
16/0.03	FRBmM-B16/2/003-A	170874	1/60
20/0.03	FRBmM-B20/2/003-A	170875	1/60
25/0.03	FRBmM-B25/2/003-A	170876	1/60
10/0.3	FRBmM-B10/2/03-A	170837	1/60
13/0.3	FRBmM-B13/2/03-A	170838	1/60
16/0.3	FRBmM-B16/2/03-A	170839	1/60
20/0.3	FRBmM-B20/2/03-A	170840	1/60
25/0.3	FRBmM-B25/2/03-A	170841	1/60

**Characteristic C**

6/0.03	FRBmM-C6/2/003-A	170721	1/60
10/0.03	FRBmM-C10/2/003-A	170722	1/60
13/0.03	FRBmM-C13/2/003-A	170723	1/60
16/0.03	FRBmM-C16/2/003-A	170724	1/60
20/0.03	FRBmM-C20/2/003-A	170725	1/60
25/0.03	FRBmM-C25/2/003-A	170726	1/60
6/0.3	FRBmM-C6/2/03-A	170853	1/60
10/0.3	FRBmM-C10/2/03-A	170854	1/60
13/0.3	FRBmM-C13/2/03-A	170855	1/60
16/0.3	FRBmM-C16/2/03-A	170856	1/60
20/0.3	FRBmM-C20/2/03-A	170857	1/60
25/0.3	FRBmM-C25/2/03-A	170858	1/60

 $I_{\text{A}}^{\text{L}}$ (A)  
Type  
DesignationArticle No.  
Units per  
package**Type A****10 kA, 2-poles****120 V, Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** **Characteristic B**

10/0.03	FRBmM-B10/2/003-A-120	302367	1/60
13/0.03	FRBmM-B13/2/003-A-120	302368	1/60
15/0.03	FRBmM-B15/2/003-A-120-OL	302359	1/60
16/0.03	FRBmM-B16/2/003-A-120	302369	1/60
20/0.03	FRBmM-B20/2/003-A-120	302370	1/60
25/0.03	FRBmM-B25/2/003-A-120	302371	1/60

 $I_{\text{A}}^{\text{L}}$ (A)  
Type  
DesignationArticle No.  
Units per  
package**Type F****6 kA, 2-poles****Sensitive to residual pulsating DC, surge current proof 3000 A, Type F** **Characteristic B**

32/0.03	FRBm6-B32/2/003-F	196981	1/60
40/0.03	FRBm6-B40/2/003-F	196982	1/60

**Characteristic C**

32/0.03	FRBm6-C32/2/003-F	196973	1/60
40/0.03	FRBm6-C40/2/003-F	196974	1/60

**Type G/A****6 kA, 2-poles****Sensitive to residual pulsating DC, surge current proof 3000 A, Type G/A** **Characteristic B**

32/0.03	FRBm6-B32/2/003-G/A	196965	1/60
40/0.03	FRBm6-B40/2/003-G/A	196966	1/60

**Characteristic C**

32/0.03	FRBm6-C32/2/003-G/A	196957	1/60
40/0.03	FRBm6-C40/2/003-G/A	196958	1/60

**Type Super A****6 kA, 2-poles**

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, short-time delayed, Type Super A

**Characteristic B**

		Article No.	Units per package
32/0.03	FRBm6-B32/2/003-LiA	170891	1/60
40/0.03	FRBm6-B40/2/003-LiA	170718	1/60
32/0.1	FRBm6-B32/2/01-LiA	170815	1/60
40/0.1	FRBm6-B40/2/01-LiA	170816	1/60

**Characteristic C**

		Article No.	Units per package
32/0.03	FRBm6-C32/2/003-LiA	170801	1/60
40/0.03	FRBm6-C40/2/003-LiA	170802	1/60
32/0.1	FRBm6-C32/2/01-LiA	170835	1/60
40/0.1	FRBm6-C40/2/01-LiA	170836	1/60

 $I_{\text{tr}}/I_{\Delta I}$   
(A) $I_{\text{tr}}/I_{\Delta I}$   
(A) $I_{\text{tr}}/I_{\Delta I}$   
(A)Type  
Designation

Article No.

Units per  
packageType  
Designation

Article No.

Units per  
package**Type AC****6 kA, 2-poles**

Conditionally surge current-proof 250 A, Type AC

**Characteristic B**

		Article No.	Units per package
32/0.03	FRBm6-B32/2/003	170877	1/60
40/0.03	FRBm6-B40/2/003	170878	1/60
32/0.3	FRBm6-B32/2/03	170842	1/60
40/0.3	FRBm6-B40/2/03	170843	1/60

**Type A****6 kA, 2-poles**

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A

**Characteristic B**

		Article No.	Units per package
32/0.03	FRBm6-B32/2/003-A	170884	1/60
40/0.03	FRBm6-B40/2/003-A	170885	1/60
32/0.1	FRBm6-B32/2/01-A	170808	1/60
40/0.1	FRBm6-B40/2/01-A	170809	1/60
32/0.3	FRBm6-B32/2/03-A	170849	1/60
40/0.3	FRBm6-B40/2/03-A	170850	1/60

**Characteristic C**

		Article No.	Units per package
32/0.03	FRBm6-C32/2/003-A	170791	1/60
40/0.03	FRBm6-C40/2/003-A	170792	1/60
32/0.1	FRBm6-C32/2/01-A	170825	1/60
40/0.1	FRBm6-C40/2/01-A	170826	1/60
32/0.3	FRBm6-C32/2/03-A	170731	1/60
40/0.3	FRBm6-C40/2/03-A	170732	1/60

**Specifications | Combined RCD/MCB Devices FRBmM, FRBm6, 2-poles****Description**

- Combined RCD/MCB device
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories suitable for subsequent installation
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -Super A:** High reliability against unwanted tripping. Suitable any circuit where personal injury or damage to property may occur in case of unwanted tripping.
- **Type -G/A:** High reliability against unwanted tripping. Suitable for any circuit where personal injury or damage to property may occur in case of unwanted tripping. Additionally protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -F:** Sensitive to pulsating DC residual current and detection of multifrequency residual currents up to 1 kHz
  - Increased protection due to the detection of mixed frequencies
  - Higher load rating with DC residual currents up to 10mA
  - Reduction of nuisance tripping thanks to time delayed tripping and increased current withstand capability of 3 kA
- Recommended for washing machines, dish washers, or motor applications with single-phase drives.

**Accessories:**

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover 2-poles	Z-TC/SD-2P	178099

**Technical Data****FRBmM, FRBm6 2-poles****Electrical**

Design according to	IEC/EN 61009 Type G according to ÖVE E 8601 IEC 61373, EN 45545-2
Classified according to	Current test marks as printed onto the device
Tripping line voltage-independent	instantaneous tripping, conditional surge current proof 250 A (8/20 µs) surge current proof 3 kA (8/20 µs) (F, -G/A)

**Rated voltage**

FRBmM, FRBm6	$U_n$	240 V AC, 50 Hz
FRBmM 120 V	$U_n$	120 V AC, 50/60 Hz

**Rated tripping current**

FRBmM, FRBm6	$I_{\Delta n}$	30, 100, 300 mA
FRBmM 120 V	$I_{\Delta n}$	30 mA

**Rated non-tripping current**

FRBmM	$I_{\Delta no}$	0.5 $I_{\Delta n}$
-------	-----------------	--------------------

**Sensitivity**

FRBmM	AC and pulsating DC, Type F according to IEC/EN 62423
-------	---

**Selectivity class**

FRBmM	3
-------	---

**Rated short circuit capacity**

FRBmM	$I_{cn}$	10 kA
FRBm6	$I_{cn}$	6 kA

**Rated current**

FRBmM, FRBm6	6 - 40 A
FRBmM 120 V	6 - 25 A

FRBmM	$I_{cn}$	4 kV (1.2/50µs)
-------	----------	-----------------

**Characteristic**

FRBmM	B, C
-------	------

**Maximum back-up fuse (short circuit protection)**

FRBmM	100 A gL (>10 kA)
-------	-------------------

**Endurance**



electrical components	$\geq 4,000$ operating cycles
mechanical components	$\geq 10,000$ operating cycles

**Mechanical**


Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU)
Mounting	3-position DIN rail clip, permits removal from existing busbar system
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1 - 25 mm <sup>2</sup>
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)

**Connection diagram**

2-poles

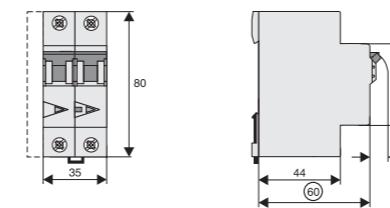**Dimensions (mm)**

### Tripping Characteristic FRBm. 2-poles, Characteristics B and C

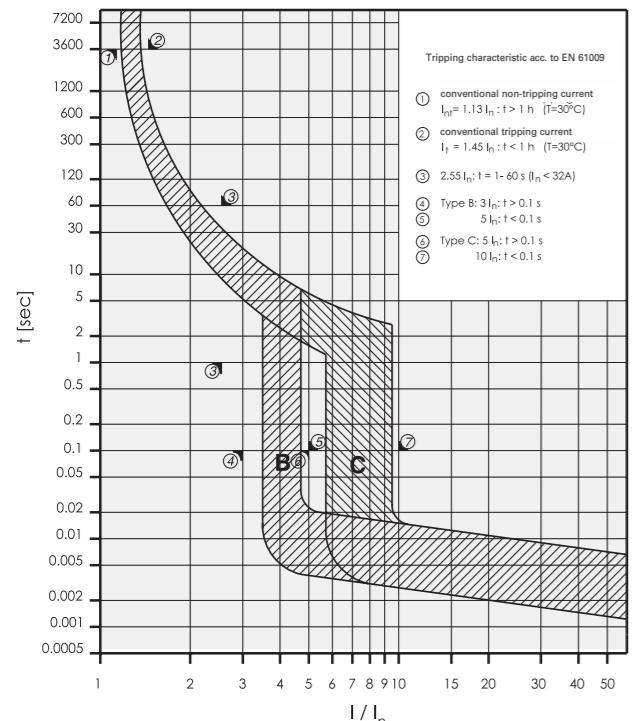

### Internal Resistance FRBmM 2-poles

Type B	Type C
At room temperature (single pole)	
I <sub>n</sub> [A]	R* [mΩ]
6	29,7
10	19,1
13	17,4
16	12,2
20	9,3
25	4,9
32	5,6
40	4,6
* 50Hz	

### Power Loss at I<sub>n</sub> FRBmM 2-poles

Type B	Type C
(entire unit)	
I <sub>n</sub> [A]	P* [W]
6	2,2
10	4,3
13	4,0
16	5,0
20	5,9
25	4,6
32	5,5
40	6,7
* 50Hz and ambient temperature	

### FRBmM: Influence of ambient temperature on load carrying capacity

- Values = max. allowed current in Ampere at the specific temperature
- Temperature factor (%/K) = 0.5

Ambient temperature / °C										
I <sub>n</sub> [A]	-40	-30	-25	-20	-10	0	10	20	30	40
6	8.1	7.8	7.7	7.5	7.2	6.9	6.6	6.3	6.0	5.7
10	13.5	13.0	12.8	12.5	12.0	11.5	11.0	10.5	10.0	9.5
13	17.6	16.9	16.6	16.3	15.6	15.0	14.3	13.7	13.0	12.4
16	21.6	20.8	20.4	20.0	19.2	18.4	17.6	16.8	16.0	15.2
20	27.0	26.0	25.5	25.0	24.0	23.0	22.0	21.0	20.0	19.0

### FRBm6: Influence of ambient temperature on load carrying capacity

- Values = max. allowed current in Ampere at the specific temperature
- Temperature factor (%/K) = 0.5

Ambient temperature / °C										
I <sub>n</sub> [A]	-40	-30	-25	-20	-10	0	10	20	30	40
25	33.8	32.5	31.9	31.3	30.0	28.8	27.5	26.3	25.0	23.8
32	43.2	41.6	40.8	40.0	38.4	36.8	35.2	33.6	32.0	30.4
40	54.0	52.0	51.0	50.0	48.0	46.0	44.0	42.0	40.0	38.0

### Internal Resistance FRBm6 2-poles


Type B/C	
At room temperature (single pole)	
I <sub>n</sub> [A]	R* [mΩ]
10	36.1
13	25.9
16	18.6
20	14.2
25	8.0
32	7.3
40	5.6
* 50Hz	

### Power Loss at I<sub>n</sub> FRBm6 2-poles


Type B/C	
(entire unit)	
I <sub>n</sub> [A]	P* [W]
10	4.1
13	5.2
16	5.7
20	7.0
25	5.6
32	8.7
40	10.9
* 50Hz and ambient temperature	

## Let-through Energy FRBmM 2-poles

Let-through Energy FRBmM, Characteristic B, 2polig

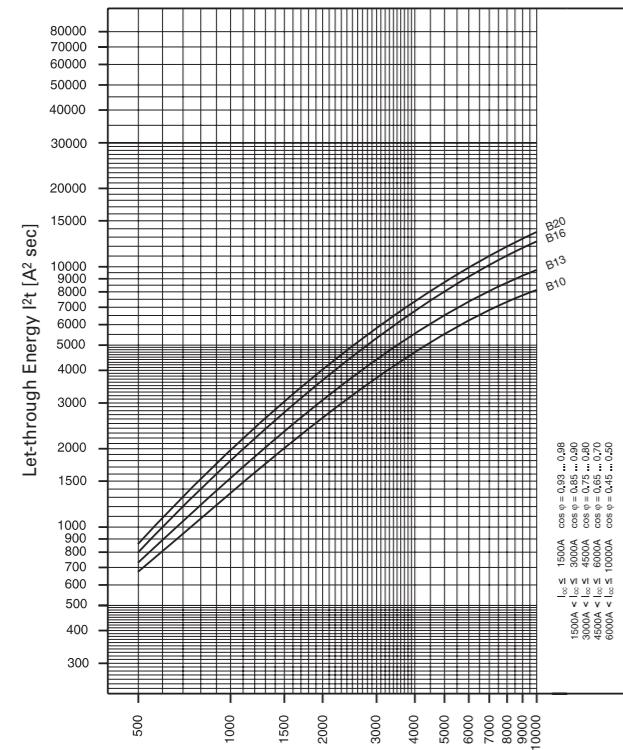


Let-through Energy FRBmM, Characteristic C, 2polig

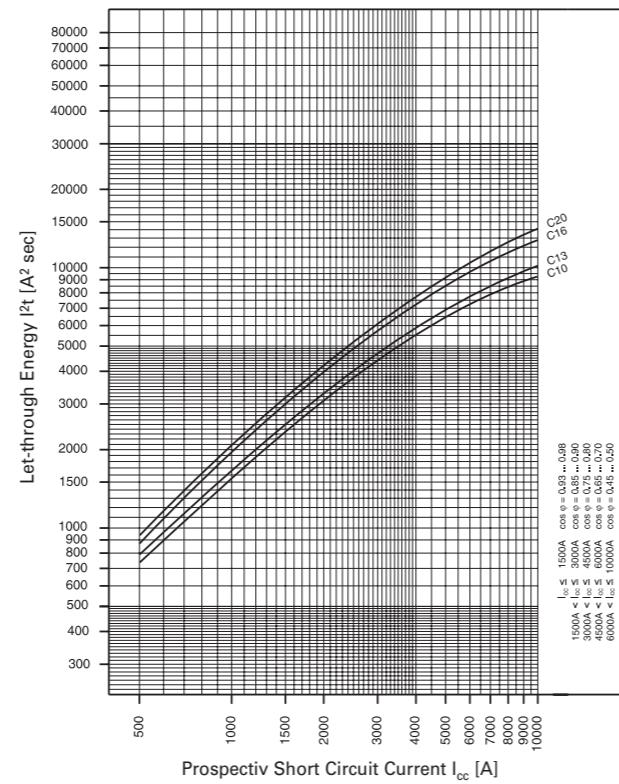


## Let-through Energy FRBm6 2-poles

Let-through Energy FRBm6, Characteristic B, 2polig

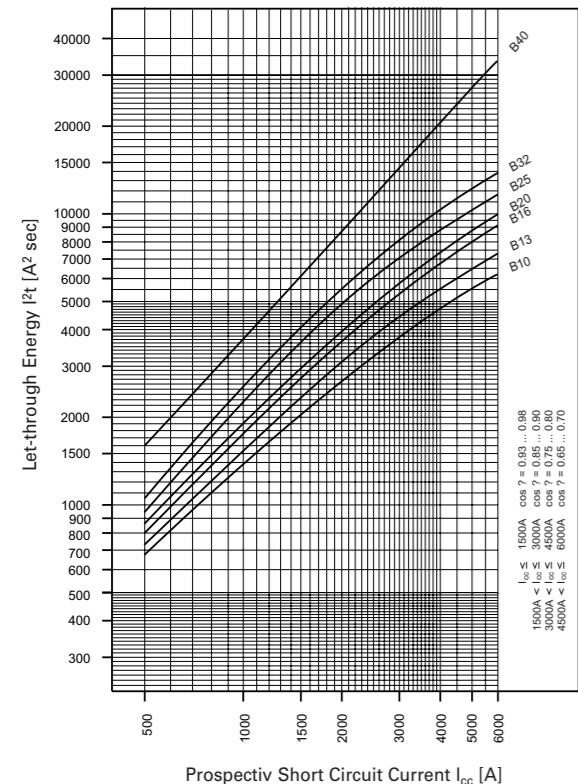


Let-through Energy FRBm6, Characteristic C, 2polig

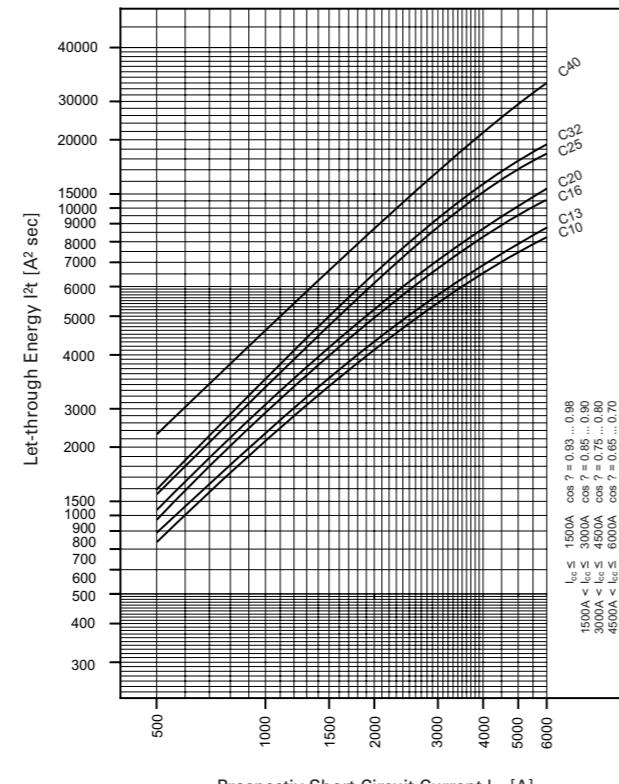


## Let-through Current FRBmM 2-poles

Characteristic B

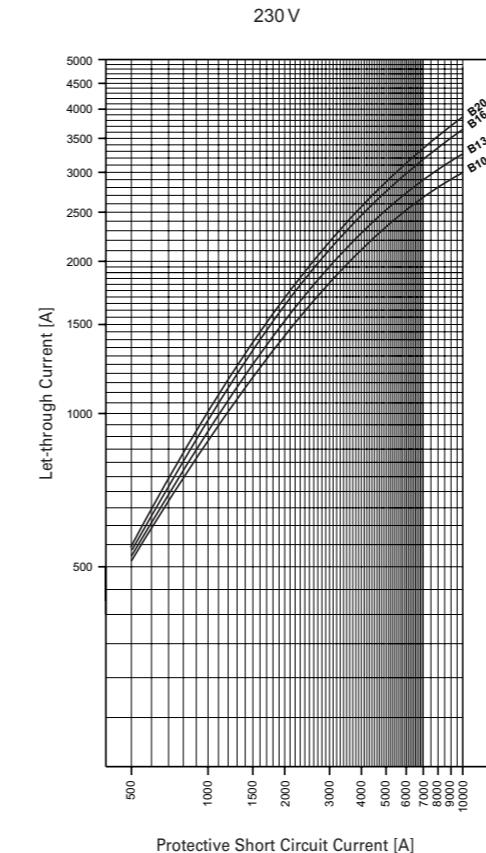

Characteristic C

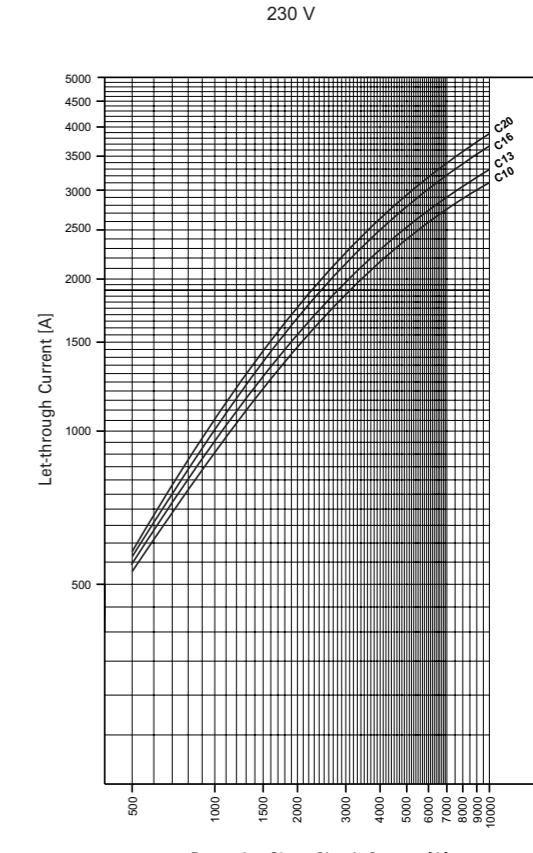

### Short-circuit Selectivity FRBmM 2-poles

In case of a short-circuit, selectivity is provided up to the specified selective current values  $I_s$  (kA) applicable between the FRBmM RCD/MCB circuit breakers and the up-stream protective devices.

When a short-circuit occurs, this means that with  $I_{KS}$  current values below  $I_s$  only the MCB will trip. However, in case of short-circuit currents beyond these values both protective devices will trip.

### FRBmM 2-poles and NZM1/NZM2

Short circuit currents in kA, rated currents of fuses in A.

Overload and short-circuit release unit NZM at max. value

#### FRBmM NZM...1-A...

$I_{cu} = 25$  (50) kA

	40	50	63	80	100	125
<b>B10</b>	1.2	1.5	2	2	4	10
<b>B13</b>	1	1.5	2	2	4	10
<b>B16</b>	1	1.2	1.5	2	3	8
<b>B20</b>	0.8	1.2	1.5	1.5	3	8
<b>C10</b>	1.2	1.5	2	2	4	10
<b>C13</b>	1	1.5	2	2	4	10
<b>C16</b>	1	1.2	1.5	2	3	8
<b>C20</b>	0.8	1.2	1.5	1.5	3	8

#### FRBmM NZM...2-A...

$I_{cu} = 25$  (50)(100)(150) kA

	40	50	63	80	100	125	160	200	250
<b>B10</b>	1	1.5	2.5	3	10	10	10	10	10
<b>B13</b>	1	1.2	2	3	10	10	10	10	10
<b>B16</b>	1	1.2	1.5	2.5	10	10	10	10	10
<b>B20</b>	1	1.2	1.5	1.5	10	10	10	10	10
<b>C10</b>	1	1.5	2.5	3	10	10	10	10	10
<b>C13</b>	1	1.2	2	3	10	10	10	10	10
<b>C16</b>	1	1.2	1.5	2.5	10	10	10	10	10
<b>C20</b>	1	1.2	1.5	1.5	10	10	10	10	10

### FRBmM 2-poles and PLSM-0V/PLHT-0V

Short circuit currents in kA, rated currents of fuses in A.

#### FRBmM PLSM-0V/PLHT-0V

$I_{cu} = 10$  kA

	25	32	40	50	56	63	80
<b>B+C10</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C13</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C16</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C20</b>	-	1.5	1.5	1.5	1.5	1.5	1.5

### FRBmM 2-poles and Neozed<sup>1)</sup> / Diazed<sup>2)</sup> / NH00<sup>3)</sup>

Short circuit currents in kA, Rated currents of fuses in A

Short-circuit Selectivity FRBmM towards fuse link Neozed<sup>1)</sup>

#### FRBmM Neozed<sup>1)</sup>

	16	20	25	32	35	40	50	63	80	100
<b>B10</b>	<0,5	0,5	0,9	2	2,3	3,7	8	10	10	10
<b>B13</b>	<0,5	0,5	0,8	1,7	1,9	3	6	10	10	10
<b>B16</b>	-	0,5	0,7	1,5	1,7	2,4	4,4	6,8	10	10
<b>B20</b>	-	-	0,7	1,4	1,5	2,2	3,9	6	9,2	10
<b>C10</b>	<0,5	0,5	0,8	1,7	1,9	3	6,1	10	10	10
<b>C13</b>	<0,5	0,5	0,7	1,6	1,8	2,8	5,5	9,5	10	10
<b>C16</b>	-	<0,5	0,7	1,3	1,5	2,2	4	6,2	10	10
<b>C20</b>	-	-	0,6	1,3	1,4	2,1	3,7	5,6	8,5	10

Short-circuit Selectivity FRBmM towards fuse link Diazed<sup>2)</sup>

#### FRBmM Diazed<sup>2)</sup>

	16	20	25	32	35	40	50	63	80	100
<b>B10</b>	<0,5	0,5	0,9	1,8	2,9	5,6	10	10	10	10
<b>B13</b>	<0,5	0,5	0,8	1,5	2,4	4,5	10	10	10	10
<b>B16</b>	-	0,5	0,8	1,3	2	3,4	8	10	10	10
<b>B20</b>	-	-	0,7	1,3	1,9	3,1	7,1	10	10	10
<b>C10</b>	<0,5	0,5	0,8	1,5	2,4	4,4	10	10	10	10
<b>C13</b>	<0,5	0,5	0,8	1,4	2,3	4,2	10	10	10	10
<b>C16</b>	-	<0,5	0,7	1,2	1,9	3,2	7,6	10	10	10
<b>C20</b>	-	-	0,7	1,2	1,8	2,9	6,5	9,7	10	10

### Short-circuit Selectivity FRBmM towards fuse link NH00<sup>3)</sup>

#### FRBmM NH00<sup>3)</sup>

	16	20	25	32	35	40	50	63	80	100	125	160
<b>B10</b>	<0,5	<0,5	0,8	1,5	2,3	3,2	5,7	9,1	10	10	10	10
<b>B13</b>	<0,5	<0,5	0,8	1,3	1,9	2,7	4,4	6,5	10	10	10	10
<b>B16</b>	-	<0,5	0,7	1,1	1,6	2,2	3,4	4,8	8	10	10	10
<b>B20</b>	-	-	0,6	1	1,4	2	3,1	4,3	7	10	10	10
<b>C10</b>	<0,5	<0,5	0,7	1,3	1,9	2,7	4,5	6,9	10	10	10	10
<b>C13</b>	<0,5	<0,5	0,7	1,2	1,8	2,5	4,1	6,1	10	10	10	10
<b>C16</b>	-	<0,5	0,6	1	1,5	2	3,1	4,4	7,5	10	10	10
<b>C20</b>	-	-	0,6	0,9	1,4	1,9	2,9	4,1	6,5	10	10	10

<sup>1)</sup> SIEMENS Type 5SE2; Size: D01, D02, D03; Operating class gG; Rated voltage: AC 400 V/DC 250 V

<sup>2)</sup> SIEMENS Type 5SB2, 5SB4, 5SC2; Size: DII, DIII, DIV; Operating class gG; Rated voltage: AC 500 V/DC 500 V

<sup>3)</sup> SIEMENS Type 3NA3 8, 3NA6 8, 3NA7 8; Size: 000, 00; Operating class gG; Rated voltage: AC 500 V/DC 250 V

### FRBm6 2-poles and NZM1/NZM2

Short circuit currents in kA, rated currents of fuses in A.

Overload and short-circuit release unit NZM at max. value

FRBm6	NZMB(C)(N)(H)1-A...					
	$I_{cu} = 25 (36)(50)(100)$ kA					
	40	50	63	80	100	125
<b>B10</b>	1	1.3	1.6	1.6	3.5	6
<b>B13</b>	0.9	1.3	1.6	1.6	3.5	6
<b>B16</b>	0.9	1	1.5	1.6	2.5	6
<b>B20</b>	0.6	1	1.3	1.3	2.5	6
<b>B25</b>	0.6	1	1.3	1.3	2.5	6
<b>B32</b>	-	1	0.9	1.3	1.6	5
<b>B40</b>	-	-	0.9	1.3	1.6	4.3
<b>C10</b>	1	1.3	1.6	1.6	3.5	6
<b>C13</b>	0.9	1.3	1.6	1.6	3.5	6
<b>C16</b>	0.9	1	1.5	1.6	2.5	6
<b>C20</b>	0.6	1	1.3	1.3	2.5	6
<b>C25</b>	0.6	1	1.3	1.3	2.5	6
<b>C32</b>	-	1	0.9	1.3	1.6	5
<b>C40</b>	-	-	0.9	1.3	1.6	4.3

FRBm6	NZMB(C)(N)(H)2-A...					
	$I_{cu} = 25 (36)(50)(150)$ kA					
	40	50	63	80	100	125
<b>B10</b>	0.9	1.3	2.5	2.5	6	6
<b>B13</b>	0.9	1	1.6	2.5	6	6
<b>B16</b>	0.9	1	1.3	2.1	6	6
<b>B20</b>	0.9	1	1.3	1.3	6	6
<b>B25</b>	0.6	0.9	1.3	1.6	6	6
<b>B32</b>	-	0.9	1.3	1.6	6	6
<b>B40</b>	-	-	1	1.3	5	5
<b>C10</b>	0.9	1.3	2.5	2.5	6	6
<b>C13</b>	0.9	1	1.6	2.5	6	6
<b>C16</b>	0.9	1	1.3	2.1	6	6
<b>C20</b>	0.9	1	1.3	1.3	6	6
<b>C25</b>	0.6	0.9	1.3	1.6	6	6
<b>C32</b>	-	0.9	1.3	1.6	6	6
<b>C40</b>	-	-	1	1.3	5	5

### FRBm6 2-poles and PLSM-OV/PLHT-OV

Short circuit currents in kA, rated currents of fuses in A.

FRBm6	PLSM-OV/PLHT-OV						
	$I_{cu} = 10$ kA						
	25	32	40	50	56	63	80
<b>B+C10</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C13</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C16</b>	1.5	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C20</b>	-	1.5	1.5	1.5	1.5	1.5	1.5
<b>B+C25</b>	-	-	1.5	1.5	1.5	1.5	1.5
<b>B+C32</b>	-	-	-	1.5	1.5	1.5	1.5
<b>B+C40</b>	-	-	-	-	1.5	1.5	1.5

### FRBm6 2-poles and Neozed<sup>1)</sup> / Diazed<sup>2)</sup> / NH00<sup>3)</sup>

Short circuit currents in kA, Rated currents of fuses in A

Short-circuit Selectivity FRBm6 towards fuse link Neozed<sup>1)</sup>

FRBm6	Neozed <sup>1)</sup>									
	16	20	25	32	35	40	50	63	80	100
<b>B25</b>	-	-	-	1,2	1,3	1,8	3,1	4,7	6	6
<b>B32</b>	-	-	-	-	1,2	1,7	2,7	3,8	5,5	6
<b>B40</b>	-	-	-	-	-	1,3	1,7	2,2	2,7	4,2
<b>C25</b>	-	-	-	1,1	1,3	1,8	2,8	3,9	5,6	6
<b>C32</b>	-	-	-	-	1,2	1,7	2,6	3,6	5,1	6
<b>C40</b>	-	-	-	-	-	1,3	1,9	3,3	3,2	5,8

Short-circuit Selectivity FRBm6 towards fuse link Diazed<sup>1)</sup>

FRBm6	Diazed <sup>2)</sup>									
	16	20	25	32	35	40	50	63	80	100
<b>B25</b>	-	-	-	-	1,1	1,5	2,4	5,5	6	6
<b>B32</b>	-	-	-	-	-	1,4	2,1	4,3	6	6
<b>B40</b>	-	-	-	-	-	-	1,4	2,4	2,9	5,1
<b>C25</b>	-	-	-	1,1	1,5	2,3	4,4	6	6	6
<b>C32</b>	-	-	-	-	1,4	2,2	4,1	5,6	6	6
<b>C40</b>	-	-	-	-	-	-	1,6	2,8	3,6	6

Short-circuit Selectivity FRBm6 towards fuse link NH00<sup>3)</sup>

FRBm6	NH00 <sup>3)</sup>									
	16	20	25	32	35	40	50	63	80	100
<b>B25</b>	-	-	-	0,9	1,2	1,6	2,4	3,4	5,5	6
<b>B32</b>	-	-	-	-	1,1	1,4	2,1	2,9	4,3	6
<b>B40</b>	-	-	-	-	-	-	1,4	1,9	2,8	4,1
<b>C25</b>	-	-	-	0,9	1,2	1,6	2,3	3	4,6	6
<b>C32</b>	-	-	-	-	1,1	1,5	2,1	2,8	4,3	6
<b>C40</b>	-	-	-	-	-	-	1,5			

### Back-up Protection FRBmM 2-poles

The up-stream protective devices will protect the down-stream FRBmM up to the short-circuit current specified.

#### FRBmM 2-poles and NZM1

Short circuit currents in kA.

FRBmM	NZMB1
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	15

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMB1) = 25 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

FRBmM	NZMN1
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	25
<b>13</b>	25
<b>16</b>	25
<b>20</b>	20

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMN1) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , (O - t - CO)

#### FRBmM 2-poles and NZM2

Short circuit currents in kA.

FRBmM	NZMB2
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	25
<b>13</b>	25
<b>16</b>	25
<b>20</b>	25

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMB2) = 25 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

FRBmM	NZMN2
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	40
<b>13</b>	40
<b>16</b>	40
<b>20</b>	40

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMN2) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , (O - t - CO)

### FRBmM 2-poles and LZM1

Short circuit currents in kA.

FRBmM	LZMB1
	IT-system U = 230 V

**B, C, D**

<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	15

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMB1) = 25 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

FRBmM	LZMN1
	IT-system U = 230 V

**B, C, D**

<b>10</b>	25
<b>13</b>	25
<b>16</b>	25
<b>20</b>	20

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMN1) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , (O - t - CO)

Short circuit currents in kA.

FRBmM	LZMC1
	IT-system U = 230 V

**B, C, D**

<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	20

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMC1) = 36 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

FRBmM	LZMS1
	IT-system U = 230 V

**B, C, D**

<b>10</b>	30
<b>13</b>	30
<b>16</b>	30
<b>20</b>	20

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMS1) = 70 kA (acc. to IEC/EN 60947-2)

### FRBmM 2-poles and LZM2

Short circuit currents in kA.

FRBmM	LZMB2
	IT-system U = 230 V

**B, C, D**

<b>10</b>	25
<b>13</b>	25
<b>16</b>	25
<b>20</b>	25

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMB2) = 25 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

FRBmM	LZMN2
	IT-system U = 230 V

**B, C, D**

<b>10</b>	40
<b>13</b>	40
<b>16</b>	40
<b>20</b>	40

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMN2) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , (O - t - CO)

### FRBmM 2-poles and PLSM-OV, NH00 gG/gL

Short circuit currents in kA.

<b>FRBmM</b>	<b>PLSM-OV63/2, 3, 4, 3N</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	10
<b>13</b>	10
<b>16</b>	10
<b>20</b>	10

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
 $U_e = 230/400 \text{ V}$ :  $I_{cu}$  (PLSM-OV63) = 10 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , ( $O - t - CO$ )

Short circuit currents in kA.

<b>FRBmM</b>	<b>NH00 125 A gG/gL</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	40
<b>13</b>	40
<b>16</b>	40
<b>20</b>	40

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBmM2) = 10 kA (acc. to IEC/EN 61009)  
AC 500 V: (NH00 125A gG/gL) = 120 kA (acc. to IEC60269)

### Back-up Protection FRBm6 2-poles

The up-stream protective devices will protect the down-stream FRBm6 up to the short-circuit current specified.

#### FRBm6 2-poles and NZM1

Short circuit currents in kA.

<b>FRBm6</b>	<b>NZMB1-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	15
<b>25</b>	15
<b>32</b>	15
<b>40</b>	15

Short circuit currents in kA.

<b>FRBm6</b>	<b>NZMN1-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	25
<b>13</b>	25
<b>16</b>	25
<b>20</b>	20
<b>25</b>	20
<b>32</b>	20
<b>40</b>	20

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMN1) = 25 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , ( $O - t - CO$ )

Short circuit currents in kA.

<b>FRBm6</b>	<b>NZMC1-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	20
<b>25</b>	20
<b>32</b>	20
<b>40</b>	20

Short circuit currents in kA.

<b>FRBm6</b>	<b>NZMH1-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	15
<b>25</b>	15
<b>32</b>	15
<b>40</b>	15

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMH1) = 100 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , ( $O - t - CO$ )

#### FRBm6 2-poles and NZM2

Short circuit currents in kA.

<b>FRBm6</b>	<b>NZMB2-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	20
<b>13</b>	20
<b>16</b>	20
<b>20</b>	15
<b>25</b>	15
<b>32</b>	15
<b>40</b>	10

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMB2) = 25 kA (acc. to IEC/EN 60947-2)

<b>FRBm6</b>	<b>NZMN2-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	30
<b>13</b>	30
<b>16</b>	30
<b>20</b>	20
<b>25</b>	20
<b>32</b>	20
<b>40</b>	10

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMN2) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_e$ , ( $O - t - CO$ )

<b>FRBm6</b>	<b>NZMC2-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	25
<b>13</b>	25
<b>16</b>	25
<b>20</b>	20
<b>25</b>	20
<b>32</b>	20
<b>40</b>	10

<b>FRBm6</b>	<b>NZMH2-A...</b>
	IT-system U = 230 V
<b>B, C, D</b>	
<b>10</b>	30
<b>13</b>	30
<b>16</b>	30
<b>20</b>	25
<b>25</b>	25
<b>32</b>	25
<b>40</b>	10

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)  
 $U_e = 400/415 \text{ V}$ :  $I_{cu}$  (NZMH2) = 100 kA (acc. to IEC/EN 60947-2)

### FRBm6 2-poles and LZM1

Short circuit currents in kA.

<b>FRBm6</b>	<b>LZMB1-A...</b>	IT-system U = 230 V
<b>10</b>	20	
<b>13</b>	20	
<b>16</b>	20	
<b>20</b>	15	
<b>25</b>	15	
<b>32</b>	15	
<b>40</b>	15	

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)

$U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMB1) = 25 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

<b>FRBm6</b>	<b>LZMN1-A...</b>	IT-system U = 230 V
<b>10</b>	25	
<b>13</b>	25	
<b>16</b>	25	
<b>20</b>	20	
<b>25</b>	20	
<b>32</b>	20	
<b>40</b>	20	

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)

$U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMN1) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_{er}$ , (O - t - CO)

### FRBm6 2-poles and LZM2

Short circuit currents in kA.

<b>FRBm6</b>	<b>LZMB2-A...</b>	IT-system U = 230 V
<b>10</b>	20	
<b>13</b>	20	
<b>16</b>	20	
<b>20</b>	15	
<b>25</b>	15	
<b>32</b>	15	
<b>40</b>	10	

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)

$U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMB2) = 25 kA (acc. to IEC/EN 60947-2)

Short circuit currents in kA.

<b>FRBm6</b>	<b>LZMN2-A...</b>	IT-system U = 230 V
<b>10</b>	25	
<b>13</b>	25	
<b>16</b>	25	
<b>20</b>	20	
<b>25</b>	20	
<b>32</b>	20	
<b>40</b>	20	

$U_e = 230 \text{ V}$ :  $I_{cu}$  (FRBm62) = 6 kA (acc. to IEC/EN 61009)

$U_e = 400/415 \text{ V}$ :  $I_{cu}$  (LZMN2) = 50 kA (acc. to IEC/EN 60947-2)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_{er}$ , (O - t - CO)

Backup tests acc. to IEC/EN 60947-2, app. A:  $U = 1.05 U_{er}$ , (O - t - CO)

# 1.144 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM, 3-poles, Type A

SG02013



## Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 32 A
- Tripping characteristics B, C, D
- Rated breaking capacity acc. to IEC/EN 61009 10kA
- Rated breaking capacity acc. to IEC/EN 60947-2 15kA
- Classified for the use in rail rolling stock

## xEffect

## xEffect

## xEffect

# Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM 3-poles

# 1.145

Type  
Designation

Article No.

Units per  
package

$I_{\text{tr}}/I_{\Delta}$   
(A)



## Type A

### 3-poles

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A



## Characteristic B

10/0.03	FRBmM-B10/3/003-A	170733	1/30
13/0.03	FRBmM-B13/3/003-A	170734	1/30
16/0.03	FRBmM-B16/3/003-A	170735	1/30
20/0.03	FRBmM-B20/3/003-A	170736	1/30
10/0.1	FRBmM-B10/3/01-A	170780	1/30
13/0.1	FRBmM-B13/3/01-A	170781	1/30
16/0.1	FRBmM-B16/3/01-A	170782	1/30
20/0.1	FRBmM-B20/3/01-A	170783	1/30

## Characteristic C

6/0.03	FRBmM-C6/3/003-A	170737	1/30
10/0.03	FRBmM-C10/3/003-A	170738	1/30
13/0.03	FRBmM-C13/3/003-A	170739	1/30
16/0.03	FRBmM-C16/3/003-A	170740	1/30
20/0.03	FRBmM-C20/3/003-A	170741	1/30
25/0.03	FRBmM-C25/3/003-A	170772	1/30
32/0.03	FRBmM-C32/3/003-A	170773	1/30
6/0.1	FRBmM-C6/3/01-A	170742	1/30
10/0.1	FRBmM-C10/3/01-A	170743	1/30
13/0.1	FRBmM-C13/3/01-A	170744	1/30
16/0.1	FRBmM-C16/3/01-A	170745	1/30
20/0.1	FRBmM-C20/3/01-A	170746	1/30
25/0.1	FRBmM-C25/3/01-A	170747	1/30
32/0.1	FRBmM-C32/3/01-A	170748	1/30

## Characteristic D

6/0.03	FRBmM-D6/3/003-A	170774	1/30
10/0.03	FRBmM-D10/3/003-A	170775	1/30
13/0.03	FRBmM-D13/3/003-A	170776	1/30
16/0.03	FRBmM-D16/3/003-A	170777	1/30
20/0.03	FRBmM-D20/3/003-A	170778	1/30
25/0.03	FRBmM-D25/3/003-A	170779	1/30
6/0.1	FRBmM-D6/3/01-A	170749	1/30
10/0.1	FRBmM-D10/3/01-A	170750	1/30
13/0.1	FRBmM-D13/3/01-A	170751	1/30
16/0.1	FRBmM-D16/3/01-A	170752	1/30
20/0.1	FRBmM-D20/3/01-A	170753	1/30
25/0.1	FRBmM-D25/3/01-A	170754	1/30

# 1.146 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM - RT Type A, 3-poles



## Description

- A range of residual current device / miniature circuit breaker combination for a wide range of applications with the added benefit of accepting cables fitted with Ring Tongue connections - as used on applications such as Rail rolling stock etc.
- Line voltage independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 32 A
- Tripping characteristics B, C, D
- Rated breaking capacity acc. to IEC/EN 61009 10 kA
- Rated breaking capacity acc. to IEC/EN 60947-2 up to 15 kA
- Classified for the use in rail rolling stock

## xEffect

## xEffect

# Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBmM - RT Type A, 3-poles

# 1.147

$I_{\Delta n}$   
(A)

Type  
Designation

Article No.  
Units per  
package

### Type A

**10 kA, 3-poles**

**Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A**

### Characteristic B



### Characteristic C



### Characteristic D



### Specifications | Combined RCD/MCB Devices FRBmM, 3-poles

#### Description

- Combined RCD/MCB device
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories suitable for subsequent installation
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -G:** High reliability against unwanted tripping. Suitable any circuit where personal injury or damage to property may occur in case of unwanted tripping.

#### Accessories:

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover 4-poles	Z-TC/SD-4P	178101

### Technical Data

#### FRBmM, 3-poles

##### Electrical


Design according to	IEC/EN 61009, IEC60947-2
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping line voltage-independent	instantaneous 250A (8/20μs), surge current-proof
Type G	10 ms delay, surge current-proof
Rated voltage	$U_n$ 30 mA types: 415 V AC; 50 Hz 100 mA types: 240/415 V AC; 50 Hz
Rated tripping current	$I_{\Delta n}$ 30, 100 mA
Rated non-tripping current	$I_{\Delta no}$ 0.5 $I_{\Delta n}$
Sensitivity	AC and pulsating DC
Selectivity class	3
Rated short circuit capacity (acc. to IEC/EN 61009)	$I_{cn}$ 10 kA
Rated short circuit capacity (acc. to IEC/EN 60947-2)	$I_{cu}$ 15 kA
Short-circuit breaking capacity (acc. to IEC/EN 60947-2)	$I_{cs}$ 6 kA
Rated current (acc. to IEC/EN 61009)	6 - 32 A
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Characteristic	B, C, D
Maximum back-up fuse (short circuit protection)	100 A gL (>10 kA)
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 10,000 operating cycles

##### Mechanical


Frame size	45 mm
Device height	80 mm
Device width	70 mm (4MU)
Mounting	3-position DIN rail clip, permits removal from existing busbar system
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1 - 25 mm <sup>2</sup>
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC 68-2 (25..55°C / 90..95% RH)

### Connection diagram


3-poles




### Dimensions (mm)

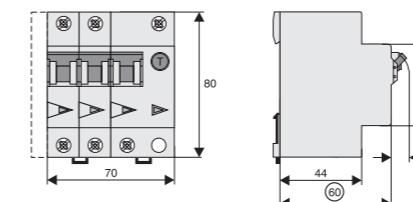

### Connection of ring cable lugs (only FRB...RT)

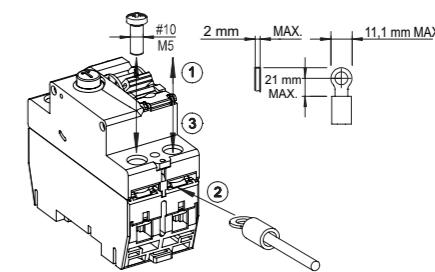


**Tripping Characteristic FRBmM 3-poles, Characteristics B, C and D**

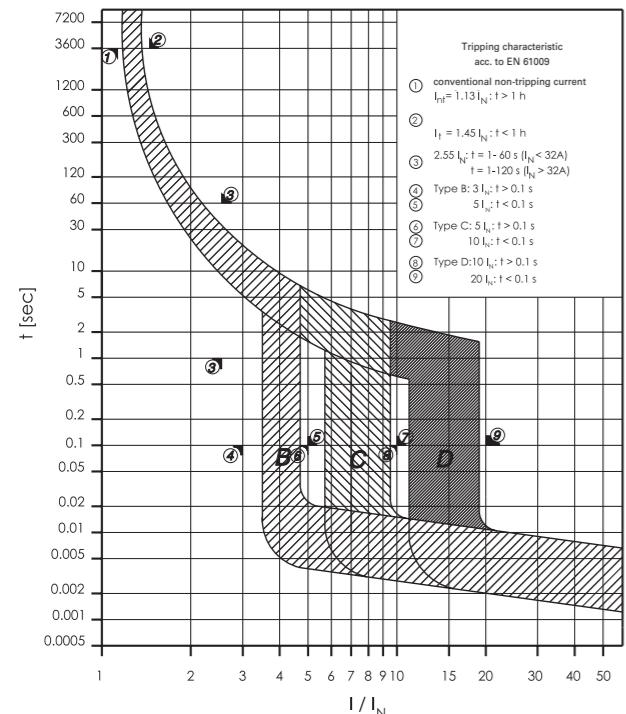


**Maximale Let-through Energy FRBmM 3-poles**

Type B

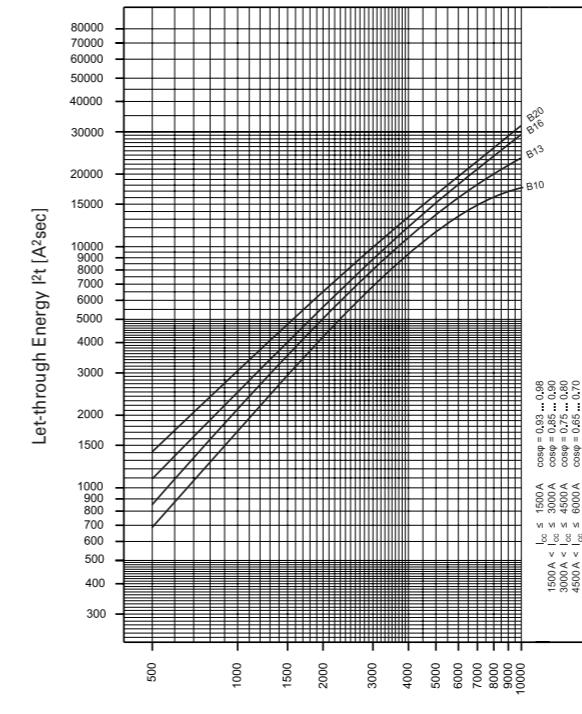

Type C

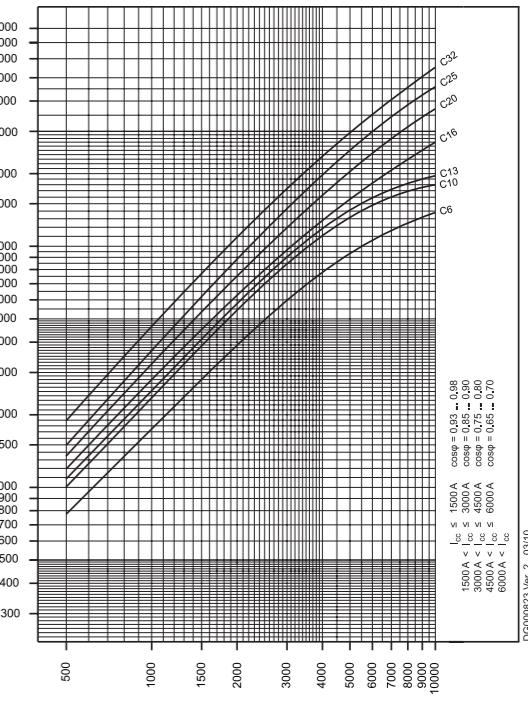

**Internal Resistance FRBmM 3-poles**

	Type B	Type C	Type D
At room temperature (single pole)			
$I_N$ [A]	$Z^*$ [ $\text{m}\Omega$ ]	$Z^*$ [ $\text{m}\Omega$ ]	$Z^*$ [ $\text{m}\Omega$ ]
6	-	34	34
10	22	56	20
13	38	31	9.8
16	28	27	9.3
20	7.4	6.4	6.6
25	-	4.2	3.9
32	-	3.1	-


\* 50Hz

**Power Loss at  $I_N$  FRBmM 3-poles**

	Type B	Type C	Type D
(entire unit)			
$I_N$ [A]	$P^*$ [W]	$P^*$ [W]	$P^*$ [W]
6	-	4.0	4.0
10	7.6	6.3	6.5
13	8.9	9.0	5.9
16	8.3	8.6	9.0
20	11.3	9.2	9.7
25	-	9.4	9.2
32	-	12.8	-


\* 50Hz

Type D

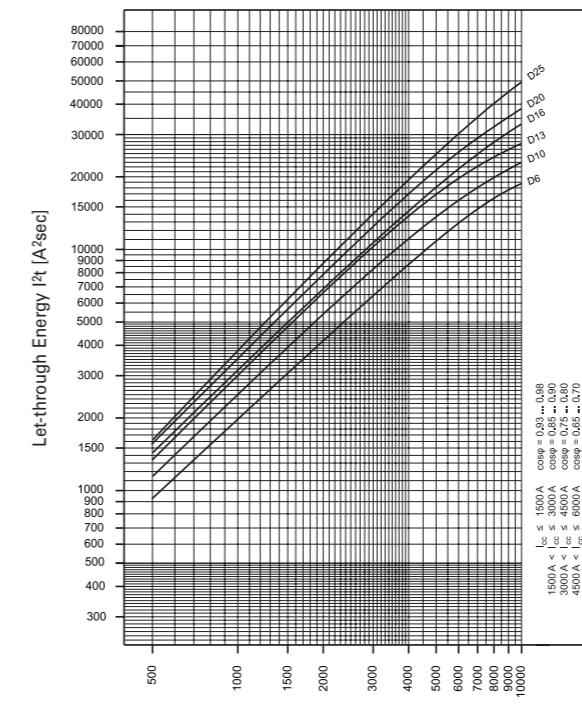


**Maximaler Let-through Current FRBmM 3-poles**


Type B

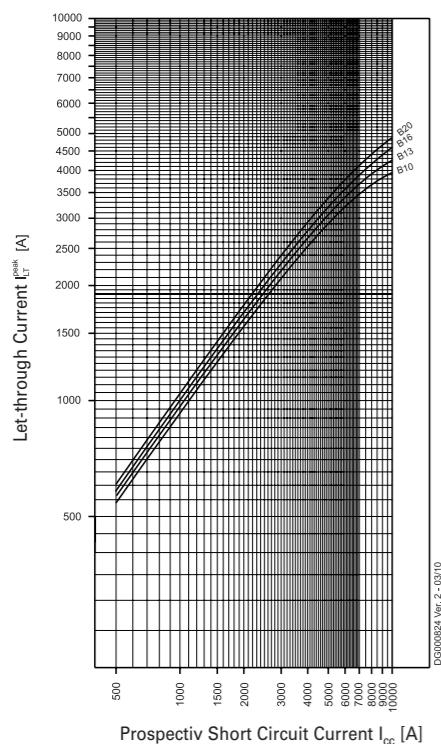

Type C

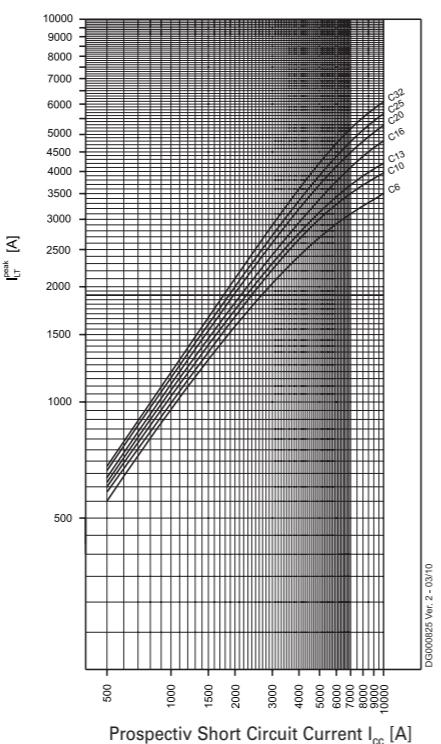

Type D

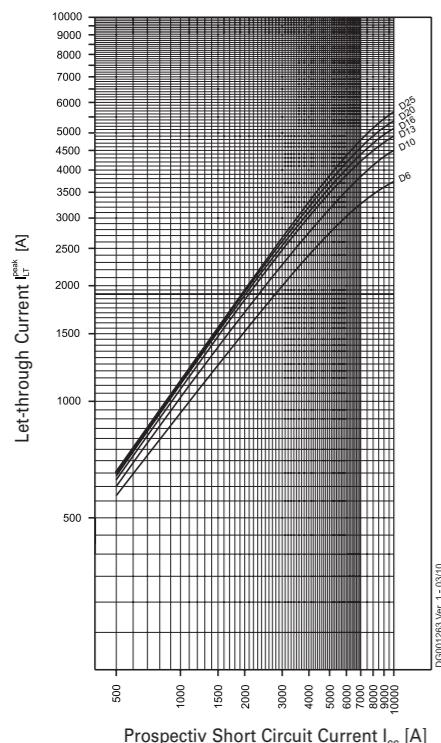


**Short-circuit Selectivity FRBmM, 3-poles**

In case of a short-circuit, selectivity is provided up to the specified selective current values  $I_s$  (kA) applicable between the FRBmM RCD/MCB circuit breakers and the up-stream protective devices.

When a short-circuit occurs, this means that with  $I_{KS}$  current values below  $I_s$  only the MCB will trip. However, in case of short-circuit currents beyond these values both protective devices will trip.

**FRBmM, 3-poles, Characteristic B and NZM 1/2**



Selectivity-limit current  $I_s$  [kA] for selectivity between FRBmM.../B and NZM (overload and short-circuit release unit NZM at max. value).

**FRBmM-B NZM...1-A...**

$I_{cu} = 25(36)(50)(100)$  kA bei  $U_e = 400/415$  V


$I_n$ [A]	40	50	63	80	100	125
10	1.2	1.5	2	2	4	10
13	1	1.5	2	2	4	10
16	1	1.2	1.5	2	3	8
20	0.8	1.2	1.5	1.5	3	8

**FRBmM-B NZM...2-A...**

$I_{cu} = 25(36)(50)(150)$  kA bei  $U_e = 400/415$  V

$I_n$ [A]	40	50	63	80	100	125	160	200	250
10	1	1.5	2.5	3	10	10	10	10	10
13	1	1.2	2	3	10	10	10	10	10
16	1	1.2	1.5	2.5	10	10	10	10	10
20	1	1.2	1.5	1.5	10	10	10	10	10
20	1	1.2	1.5	1.5	10	10	10	10	10

**FRBmM, 3-poles, Characteristic C and NZM 1/2**



Selectivity-limit current  $I_s$  [kA] for selectivity between FRBmM.../C and NZM (overload and short-circuit release unit NZM at max. value).

**FRBmM-C NZM...1-A...**

$I_{cu} = 25(36)(50)(100)$  kA bei  $U_e = 400/415$  V


$I_n$ [A]	40	50	63	80	100	125
6	1.2	2	2.5	3	5	10
10	1.2	1.5	2	2	4	10
13	1	1.5	2	2	4	10
16	1	1.2	1.5	2	3	8
20	0.8	1.2	1.5	1.5	3	8
25	0.7	1.2	1.5	1.5	3	7
32	-	1.2	1	1.5	2	6

**FRBmM-C NZM...2-A...**

$I_{cu} = 25(36)(50)(150)$  kA bei  $U_e = 400/415$  V

$I_n$ [A]	40	50	63	80	100	125	160	200	250
6	1.2	1.5	2.5	3	10	10	10	10	10
10	1	1.5	2.5	3	10	10	10	10	10
13	1	1.2	2	3	10	10	10	10	10
16	1	1.2	1.5	2.5	10	10	10	10	10
20	1	1.2	1.5	1.5	10	10	10	10	10
25	0.8	1	1.5	2	10	10	10	10	10
32	-	1	1.5	2	6	6	6	6	6

**FRBmM, 3-poles, Characteristic D and NZM 1/2**



Selectivity-limit current  $I_s$  [kA] for selectivity between FRBmM.../D and NZM (overload and short-circuit release unit NZM at max. value).

**FRBmM-D NZM...1-A...**

$I_{cu} = 25(36)(50)(100)$  kA bei  $U_e = 400/415$  V

$I_n$ [A]	40	50	63	80	100	125
6	1.2	2	2.5	3	5	10
10	1.2	1.5	2	2	4	10
13	1	1.5	2	2	4	10
16	1	1.2	1.5	2	3	8
20	0.8	1.2	1.5	1.5	3	8
25	0.7	1.2	1.5	1.5	3	7

**FRBmM-D NZM...2-A...**

$I_{cu} = 25(36)(50)(150)$  kA bei  $U_e = 400/415$  V

$I_n$ [A]	40	50	63	80	100	125	160	200	250
6	1.2	1.5	2.5	3	10	10	10	10	10
10	1	1.5	2.5	3	10	10	10	10	10
13	1	1.2	2	3	10	10	10	10	10
16	1	1.2	1.5	2.5	10	10	10	10	10
20	1	1.2	1.5	1.5	10	10	10	10	10
25	0.8	1	1.5	2	10	10	10	10	10

## Back-up Protection FRBmM 3-poles

The up-stream protective devices will protect the down-stream FRBmM up to the short-circuit current specified.

### FRBmM 3-poles and NZMB(C)(N)(H)1

#### FRBmM 3-poles and NZMB1

$U_e = 133 / 230 V$

FRBmM	NZMB1	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	25kA	25kA	
<b>10</b>	25kA	25kA	25kA	
<b>13</b>	25kA	25kA	25kA	
<b>16</b>	25kA	25kA	25kA	
<b>20</b>	25kA	25kA	25kA	
<b>25</b>	-	25kA	25kA	
<b>32</b>	-	25kA	-	

### FRBmM 3-poles and NZMN1

$U_e = 133 / 230 V$

FRBmM	NZMN1	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	50kA	50kA	
<b>10</b>	50kA	50kA	50kA	
<b>13</b>	50kA	50kA	50kA	
<b>16</b>	50kA	50kA	50kA	
<b>20</b>	50kA	50kA	50kA	
<b>25</b>	-	50kA	50kA	
<b>32</b>	-	50kA	-	

### FRBmM 3-poles and NZMB(C)(N)(H)2

#### FRBmM 3-poles and NZMB2

$U_e = 133 / 230 V$

FRBmM	NZMB2	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	25kA	25kA	
<b>10</b>	25kA	25kA	25kA	
<b>13</b>	25kA	25kA	25kA	
<b>16</b>	25kA	25kA	25kA	
<b>20</b>	25kA	25kA	25kA	
<b>25</b>	-	25kA	25kA	
<b>32</b>	-	25kA	-	

### FRBmM 3-poles and NZMN2

$U_e = 133 / 230 V$

FRBmM	NZMN2	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	50kA	50kA	
<b>10</b>	50kA	50kA	50kA	
<b>13</b>	50kA	50kA	50kA	
<b>16</b>	50kA	50kA	50kA	
<b>20</b>	50kA	50kA	50kA	
<b>25</b>	-	50kA	50kA	
<b>32</b>	-	50kA	-	

## xEffect

## xEffect

## Combined RCD/MCB Devices

# 1.155

Combined RCD/MCB Devices FRBmM 3-poles - Technical Data

## FRBmM 3-poles and NH00

### FRBmM 3-poles and NH00 125A gG/gL

$U_e = 133 / 230 V$

FRBmM	NH00 125A gG/gL	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	70kA	70kA	
<b>10</b>	70kA	70kA	70kA	
<b>13</b>	70kA	70kA	70kA	
<b>16</b>	70kA	70kA	70kA	
<b>20</b>	70kA	70kA	70kA	
<b>25</b>	-	70kA	70kA	
<b>32</b>	-	70kA	-	

### FRBmM 3-poles and NZMC1

$U_e = 133 / 230 V$

FRBmM	NZMC1	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	36kA	36kA	
<b>10</b>	36kA	36kA	36kA	
<b>13</b>	36kA	36kA	36kA	
<b>16</b>	36kA	36kA	36kA	
<b>20</b>	36kA	36kA	36kA	
<b>25</b>	-	36kA	36kA	
<b>32</b>	-	36kA	-	

### FRBmM 3-poles and NZMH1

$U_e = 133 / 230 V$

FRBmM	NZMH1	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	70kA	70kA	
<b>10</b>	70kA	70kA	70kA	
<b>13</b>	70kA	70kA	70kA	
<b>16</b>	70kA	70kA	70kA	
<b>20</b>	70kA	70kA	70kA	
<b>25</b>	-	70kA	70kA	
<b>32</b>	-	70kA	-	

### FRBmM 3-poles and NZMC2

$U_e = 133 / 230 V$

FRBmM	NZMC2	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	36kA	36kA	
<b>10</b>	36kA	36kA	36kA	
<b>13</b>	36kA	36kA	36kA	
<b>16</b>	36kA	36kA	36kA	
<b>20</b>	36kA	36kA	36kA	
<b>25</b>	-	36kA	36kA	
<b>32</b>	-	36kA	-	

### FRBmM 3-poles and NZMH2

$U_e = 133 / 230 V$

FRBmM	NZMH2	$I_{\text{p}}/3(B(C)(D)/003(01) 03)$		
		Type B	Type C	Type D
<b>6</b>	-	70kA	70kA	
<b>10</b>	70kA	70kA</		

# 1.156 Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles, Type AC and A

SG02213



## Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Wide variety of rated tripping currents
- Rated currents up to 32 A
- Tripping characteristics B, C, D
- Rated breaking capacity 6 kA or 4.5 kA acc. to IEC/EN 61009 & IEC/EN 60947
- Classified for the use in rail rolling stock
- Has an unidirectional power supply

## xEffect

## xEffect

## Combined RCD/MCB Devices

Combined RCD/MCB Devices FRBm6 3+N-poles

# 1.157

$I_{\text{tr}}/I_{\Delta I}$   
(A)

Type  
Designation

Article No.  
Units per  
package

### Type A

6 kA, 3+N-poles

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A



Characteristic B		
13/0.03	FRBm6-B13/3N/003-A	170987 1/30
16/0.03	FRBm6-B16/3N/003-A	170988 1/30
13/0.1	FRBm6-B13/3N/01-A	170989 1/30
16/0.1	FRBm6-B16/3N/01-A	170989 1/30
13/0.3	FRBm6-B13/3N/03-A	170945 1/30
16/0.3	FRBm6-B16/3N/03-A	170946 1/30



Characteristic C		
6/0.03	FRBm6-C6/3N/003-A	170996 1/30
10/0.03	FRBm6-C10/3N/003-A	170997 1/30
13/0.03	FRBm6-C13/3N/003-A	170998 1/30
16/0.03	FRBm6-C16/3N/003-A	170999 1/30
6/0.1	FRBm6-C6/3N/01-A	170926 1/30
10/0.1	FRBm6-C10/3N/01-A	170927 1/30
13/0.1	FRBm6-C13/3N/01-A	170928 1/30
16/0.1	FRBm6-C16/3N/01-A	170929 1/30
6/0.3	FRBm6-C6/3N/03-A	170954 1/30
10/0.3	FRBm6-C10/3N/03-A	170955 1/30
13/0.3	FRBm6-C13/3N/03-A	170956 1/30
16/0.3	FRBm6-C16/3N/03-A	170957 1/30



Characteristic D		
6/0.03	FRBm6-D6/3N/003-A	171008 1/30
10/0.03	FRBm6-D10/3N/003-A	170892 1/30
13/0.03	FRBm6-D13/3N/003-A	170893 1/30
16/0.03	FRBm6-D16/3N/003-A	170894 1/30
6/0.1	FRBm6-D6/3N/01-A	170938 1/30
10/0.1	FRBm6-D10/3N/01-A	170939 1/30
13/0.1	FRBm6-D13/3N/01-A	170940 1/30
16/0.1	FRBm6-D16/3N/01-A	170941 1/30
6/0.3	FRBm6-D6/3N/03-A	170966 1/30
10/0.3	FRBm6-D10/3N/03-A	170967 1/30
13/0.3	FRBm6-D13/3N/03-A	170968 1/30
16/0.3	FRBm6-D16/3N/03-A	170969 1/30

 $I_{\text{A}}^{\text{L/N}}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type AC****6 kA, 3+N-poles****Conditionally surge current-proof 250 A, Type AC** **Characteristic B**

13/0.03	FRBm6-B13/3N/003	170985	1/30
16/0.03	FRBm6-B16/3N/003	170986	1/30
13/0.1	FRBm6-B13/3N/01	170896	1/30
16/0.1	FRBm6-B16/3N/01	170897	1/30
13/0.3	FRBm6-B13/3N/03	170943	1/30
16/0.3	FRBm6-B16/3N/03	170944	1/30

**Characteristic C**

6/0.03	FRBm6-C6/3N/003	170989	1/30
10/0.03	FRBm6-C10/3N/003	170990	1/30
13/0.03	FRBm6-C13/3N/003	170991	1/30
16/0.03	FRBm6-C16/3N/003	170992	1/30
6/0.1	FRBm6-C6/3N/01	170900	1/30
10/0.1	FRBm6-C10/3N/01	170901	1/30
13/0.1	FRBm6-C13/3N/01	170902	1/30
16/0.1	FRBm6-C16/3N/01	170903	1/30
6/0.3	FRBm6-C6/3N/03	170947	1/30
10/0.3	FRBm6-C10/3N/03	170948	1/30
13/0.3	FRBm6-C13/3N/03	170949	1/30
16/0.3	FRBm6-C16/3N/03	170950	1/30

**Characteristic D**

6/0.03	FRBm6-D6/3N/003	171003	1/30
10/0.03	FRBm6-D10/3N/003	171004	1/30
13/0.03	FRBm6-D13/3N/003	171005	1/30
16/0.03	FRBm6-D16/3N/003	171006	1/30
6/0.1	FRBm6-D6/3N/01	170933	1/30
10/0.1	FRBm6-D10/3N/01	170934	1/30
13/0.1	FRBm6-D13/3N/01	170935	1/30
16/0.1	FRBm6-D16/3N/01	170936	1/30
6/0.3	FRBm6-D6/3N/03	170961	1/30
10/0.3	FRBm6-D10/3N/03	170962	1/30
13/0.3	FRBm6-D13/3N/03	170963	1/30
16/0.3	FRBm6-D16/3N/03	170964	1/30

 $I_{\text{A}}^{\text{L/N}}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type A****4.5 kA, 3+N-poles****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** **Characteristic C**

20/0.03	FRBm4-C20/3N/003-A	171000	1/30
25/0.03	FRBm4-C25/3N/003-A	171001	1/30
32/0.03	FRBm4-C32/3N/003-A	171002	1/30
20/0.1	FRBm4-C20/3N/01-A	170930	1/30
25/0.1	FRBm4-C25/3N/01-A	170931	1/30
32/0.1	FRBm4-C32/3N/01-A	170932	1/30
20/0.3	FRBm4-C20/3N/03-A	170958	1/30
25/0.3	FRBm4-C25/3N/03-A	170959	1/30
32/0.3	FRBm4-C32/3N/03-A	170960	1/30

**Characteristic D**

20/0.03	FRBm4-D20/3N/003-A	170895	1/30
20/0.1	FRBm4-D20/3N/01-A	170942	1/30
20/0.3	FRBm4-D20/3N/03-A	170970	1/30

 $I_{\Delta}$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type AC****4.5 kA, 3+N-poles****Conditionally surge current-proof 250 A, Type AC** **Characteristic C**

20/0.03	FRBm4-C20/3N/003	170993	1/30
25/0.03	FRBm4-C25/3N/003	170994	1/30
32/0.03	FRBm4-C32/3N/003	170995	1/30
20/0.1	FRBm4-C20/3N/01	170923	1/30
25/0.1	FRBm4-C25/3N/01	170924	1/30
32/0.1	FRBm4-C32/3N/01	170925	1/30
20/0.3	FRBm4-C20/3N/03	170951	1/30
25/0.3	FRBm4-C25/3N/03	170952	1/30
32/0.3	FRBm4-C32/3N/03	170953	1/30

**Characteristic D**

20/0.03	FRBm4-D20/3N/003	171007	1/30
20/0.1	FRBm4-D20/3N/01	170937	1/30
20/0.3	FRBm4-D20/3N/03	170965	1/30

**Specifications | Combined RCD/MCB Devices FRBm6, FRBm4, 3+N-poles****Description**

- Combined RCD/MCB device
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Contact position indicator red - green
- Fault current tripping indicator white - blue
- Comprehensive range of accessories suitable for subsequent installation
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.

**Accessories:**

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover 4-poles	Z-TC/SD-4P	178101

### Technical Data

#### FRBm6, FRBm4, 3+N-poles

##### Electrical

Design according to IEC/EN 61009, IEC/EN 60947  
Classified according to IEC 61373, EN 45545-2

Tripping line voltage-independent instantaneous 250A (8/20μs), surge current-proof, N protected

Rated voltage  $U_n$  240/415V AC, 50Hz

Rated tripping current  $I_{\Delta n}$  30, 100, 300 mA

Rated non-tripping current  $I_{\Delta n0}$  0.5  $I_{\Delta n}$

Sensitivity AC and pulsating DC

Selectivity class 3

Rated short circuit capacity

FRBm6 acc. to IEC/EN1009: 6A...16A

acc. to IEC/EN60947-2: 6A...16A

$I_{cn}$  6 kA

$I_{cu}$  6 kA

$I_{cs}$  3 kA

FRBm4 acc. to IEC/EN1009: 6A...32A

acc. to IEC/EN60947-2: 6A...32A

$I_{cn}$  4.5 kA

$I_{cu}$  4.5 kA

$I_{cs}$  3 kA

Rated current 6 - 32 A

Rated impulse withstand voltage  $U_{imp}$  4 kV (1.2/50μs)

Characteristic B, C, D

Maximum back-up fuse (short circuit protection) 100 A gL (>10 kA)

Endurance

electrical components  $\geq 4,000$  operating cycles

mechanical components  $\geq 10,000$  operating cycles

##### Mechanical

Frame size 45 mm

Device height 80 mm

Device width 70 mm (4MU)

Mounting 3-position DIN rail clip, permits removal from existing busbar system

Degree of protection switch IP20

Degree of protection, built-in IP40

Upper and lower terminals open mouthed/lift terminals

Terminal protection finger and hand touch safe, DGUV VS3, EN 50274

Terminal capacity 1 - 25 mm<sup>2</sup>

Terminal torque 2 - 2.4 Nm

Busbar thickness 0.8 - 2 mm


Operation temperature -25°C to +40°C

Storage- and transport temperature -35°C to +70°C


Resistance to climatic conditions acc. to IEC 68-2 (25.55°C / 90.95% RH)

### Connection diagram


3+N-poles



### Dimensions (mm)

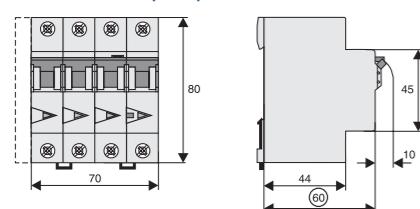

### Tripping Characteristic FRBm. 3+N-poles, Characteristics B, C and D

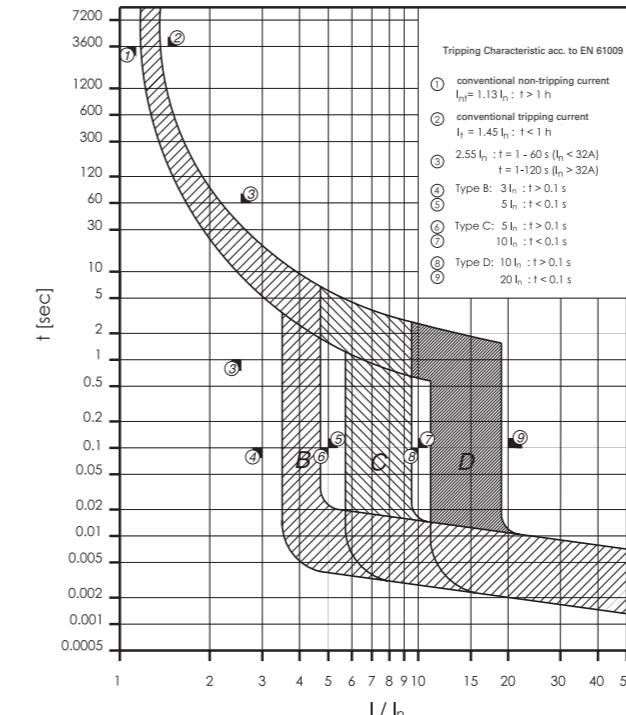

### Internal Resistance FRBm. 3+N-poles

	Type B		Type C		Type D	
	$I_n$ [A]	$R^*$ [mΩ]	$I_n$ [A]	$R^*$ [mΩ]	$I_n$ [A]	$R^*$ [mΩ]
6	-	-	34.3	28.2	28.8	34.3
10	-	-	19.3	15.3	18.1	19.7
13	11.8	12.6	12.2	11.9	12.7	9.1
16	9.8	9.3	7.8	9.5	8.8	9.9
20	-	-	-	6.5	5.9	6.6
25	-	-	-	4.3	3.7	3.5

\* 50Hz

### Power Loss at $I_n$ FRBm. 3+N-poles

(entire unit)	Type B	Type C	Type D	Ambient Temperature T [°C]											
	$I_n$ [A]	P* [W]	P* [W]	P* [W]	-25	-15	-5	10	30	40	45	55	60	65	70
6	7.7	7.4	7.1	6.6	6	5.7	5.6	5.2	5.1	4.9	4.8				
10	12.6	12.1	11.6	10.9	10	9.5	9.3	8.8	8.6	8.3	8.1				
13	16.8	16.1	15.4	14.4	13	12.4	12.1	11.4	11.0	10.7	10.3				
16	19.8	19.1	18.4	17.4	16	15.3	14.9	14.2	13.9	13.5	13.2				
20	24.8	23.9	23.1	21.7	20	19.1	18.6	17.8	17.3	16.9	16.4				
25	32.9	31.4	30.1	27.8	25	23.5	22.7	21.3	20.6	19.8	19.1				
32	40.2	38.7	37.2	35.0	32	30.5	29.7	28.2	27.5	26.7	26.0				

\* 50Hz and ambient temperature

### Back-up Protection FRBm4/FRBm6

The up-stream protective devices will protect the down-stream FRBm4/FRBm6 up to the short-circuit current specified.

#### FRBm and NZM1

Short circuit currents in kA.

FRBm4/ FRBm6	NZMB1(C1)(N1)(H1)-A... U <sub>e</sub> = 415 V	Type B	Type C	Type D
<b>6</b>	-	20	20	
<b>10</b>	-	20	20	
<b>13</b>	20	20	20	
<b>16</b>	20	20	20	
<b>20</b>	-	20	20	
<b>25</b>	-	20	-	

U<sub>e</sub> = 415V: I<sub>cn</sub> (FRBm4) = 4.5 kA (acc. to IEC/EN 61009)

U<sub>e</sub> = 415V: I<sub>cu</sub> (FRBm6) = 6 kA (acc. to IEC/EN 61009)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMB1) = 25 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMC1) = 36 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMN1) = 50 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMH1) = 100 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMH2) = 150 kA (acc. to IEC/EN 60947-2)

#### FRBm and NZM2

Short circuit currents in kA.

FRBm4/ FRBm6	NZMB2(C2)(N2)(H2)-A... U <sub>e</sub> = 415 V	Type B	Type C	Type D
<b>6</b>	-	20	20	
<b>10</b>	-	20	20	
<b>13</b>	20	20	20	
<b>16</b>	20	20	20	
<b>20</b>	-	20	20	
<b>25</b>	-	20	-	

U<sub>e</sub> = 415V: I<sub>cn</sub> (FRBm4) = 4.5 kA (acc. to IEC/EN 61009)

U<sub>e</sub> = 415V: I<sub>cu</sub> (FRBm6) = 6 kA (acc. to IEC/EN 61009)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMB2) = 25 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMC2) = 36 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMN2) = 50 kA (acc. to IEC/EN 60947-2)

U<sub>e</sub> = 400/415V: I<sub>cn</sub> (NZMH2) = 150 kA (acc. to IEC/EN 60947-2)

### FRBm4, FRBm6: Influence of ambient temperature on load carrying capacity

I <sub>n</sub> [A]	-25	-30	-5	10	30	40	45	50	55	60	65	70
6	7.7	7.4	7.1	6.6	6	5.7	5.6	5.4	5.2	5.1	4.9	4.8
10	12.6	12.1	11.6	10.9	10	9.5	9.3	9.1	8.8	8.6	8.3	8.1
13	16.8	16.1	15.4	14.4	13	12.4	12.0	11.7	11.4	11.0	10.7	10.3
16	19.8	19.1	18.4	17.4	16	15.3	14.9	14.6	14.2	13.9	13.5	13.2
20	24.8	23.9	23.0	21.7	20	19.1	18.6	18.2	17.8	17.3	16.9	16.4
25	32.9	31.4	30.0	27.8	25	23.5	22.7	22.0	21.3	20.6	19.8	19.1
32	40.2	38.7	37.2	35.0	32	30.5	29.7	29.0	28.2	27.5	26.7	26.0

SG03613



### Description

- Combining this device with a top-quality miniature circuit breaker of Type FAZ (except FAZ-PN) will form a top-quality RCBO unit (combined RCD/MCB device)
- Draw-out connection bar locked in installation position
- For subsequent mounting onto 2-, 3-, 3+N- and 4-pole miniature circuit breakers FAZ
- Rated current 40 and 63 A
- 120 V Types
- Classified for the use in rail rolling stock
- Has a bidirectional power supply

 $I_{\Delta} / A$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type AC**

Conditionally surge current-proof 250 A, Type AC

**2-poles**

40/0.03	FBSmV-40/2/003	170177	1/20
40/0.03	FBSmV-40/2/003-400	180632	1/20
63/0.03	FBSmV-63/2/003	170178	1/20
63/0.03	FBSmV-63/2/003-400	180633	1/20
40/0.1	FBSmV-40/2/01	170179	1/20
63/0.1	FBSmV-63/2/01	170180	1/20
40/0.3	FBSmV-40/2/03	170181	1/20
63/0.3	FBSmV-63/2/03	170182	1/20
40/0.5	FBSmV-40/2/05	170183	1/20
63/0.5	FBSmV-63/2/05	170184	1/20
40/1	FBSmV-40/2/1	170185	1/20
63/1	FBSmV-63/2/1	170186	1/20

**3-poles**

40/0.03	FBSmV-40/3/003	170187	1/20
63/0.03	FBSmV-63/3/003	170188	1/20
40/0.1	FBSmV-40/3/01	170189	1/20
63/0.1	FBSmV-63/3/01	170190	1/20
40/0.3	FBSmV-40/3/03	170191	1/20
63/0.3	FBSmV-63/3/03	170192	1/20
40/0.5	FBSmV-40/3/05	170193	1/20
63/0.5	FBSmV-63/3/05	170194	1/20
40/1	FBSmV-40/3/1	170195	1/20
63/1	FBSmV-63/3/1	170196	1/20

**4-poles**

40/0.03	FBSmV-40/4/003	170197	1/13
63/0.03	FBSmV-63/4/003	170198	1/13
40/0.1	FBSmV-40/4/01	170199	1/13
63/0.1	FBSmV-63/4/01	170200	1/13
40/0.3	FBSmV-40/4/03	170201	1/13
63/0.3	FBSmV-63/4/03	170202	1/13
40/0.5	FBSmV-40/4/05	170203	1/13
63/0.5	FBSmV-63/4/05	170204	1/13
40/1	FBSmV-40/4/1	170205	1/13
63/1	FBSmV-63/4/1	170206	1/13

 $I_{\Delta} / A$   
(A)Type  
DesignationArticle No.  
Units per  
package**Type A**

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A

**2-poles**

40/0.03	FBSmV-40/2/003-A	170207	1/20
40/0.03	FBSmV-40/2/003-A-120	180622	1/20
40/0.03	FBSmV-40/2/003-A-400	180623	1/20
63/0.03	FBSmV-63/2/003-A	170208	1/20
63/0.03	FBSmV-63/2/003-A-120	180626	1/20
63/0.03	FBSmV-63/2/003-A-400	180627	1/20
40/0.1	FBSmV-40/2/01-A	170209	1/20
63/0.1	FBSmV-63/2/01-A	170210	1/20
40/0.3	FBSmV-40/2/03-A	170211	1/20
63/0.3	FBSmV-63/2/03-A	170212	1/20
63/0.3	FBSmV-63/2/03-A-120	180631	1/20
40/0.5	FBSmV-40/2/05-A	170213	1/20
63/0.5	FBSmV-63/2/05-A	170214	1/20
40/1	FBSmV-40/2/1-A	170215	1/20
63/1	FBSmV-63/2/1-A	170216	1/20

**3-poles**

40/0.03	FBSmV-40/3/003-A	170217	1/20
40/0.03	FBSmV-40/3/003-A-230	180624	1/20
63/0.03	FBSmV-63/3/003-A	170218	1/20
63/0.03	FBSmV-63/3/003-A-230	180628	1/20
40/0.1	FBSmV-40/3/01-A	170219	1/20
63/0.1	FBSmV-63/3/01-A	170220	1/20
40/0.3	FBSmV-40/3/03-A	170221	1/20
63/0.3	FBSmV-63/3/03-A	170222	1/20
40/0.5	FBSmV-40/3/05-A	170223	1/20
63/0.5	FBSmV-63/3/05-A	170224	1/20
40/1	FBSmV-40/3/1-A	170225	1/20
63/1	FBSmV-63/3/1-A	170226	1/20

**4-poles**

40/0.03	FBSmV-40/4/003-A	170227	1/13
40/0.03	FBSmV-40/4/003-A-230	180625	1/13
63/0.03	FBSmV-63/4/003-A	170228	1/13
63/0.03	FBSmV-63/4/003-A-230	180629	1/13
40/0.1	FBSmV-40/4/01-A	170229	1/13
63/0.1	FBSmV-63/4/01-A	170230	1/13
40/0.3	FBSmV-40/4/03-A	170231	1/13
63/0.3	FBSmV-63/4/03-A	170232	1/13
40/0.5	FBSmV-40/4/05-A	170233	1/13
63/0.5	FBSmV-63/4/05-A	170234	1/13
40/1	FBSmV-40/4/1-A	170235	1/13
63/1	FBSmV-63/4/1-A	170236	1/13

# 1.168 Add-on Residual Current Protection

Add-on Residual Current Protection Unit FBSmV

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>Type G</b>			
<b>Surge current-proof 3 kA, Type G (ÖVE E 8601) </b>			
<b>2-poles</b>			
40/0.03	FBSmV-40/2/003-G	170237	1/20

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>3-poles</b>			
40/0.03	FBSmV-40/3/003-G	170238	1/20

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>4-poles</b>			
40/0.03	FBSmV-40/4/003-G	170239	1/13

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>2-poles</b>			
40/0.1	FBSmV-40/2/01-S	170240	1/20
63/0.1	FBSmV-63/2/01-S	170241	1/20
40/0.3	FBSmV-40/2/03-S	170142	1/20
63/0.3	FBSmV-63/2/03-S	170143	1/20
40/1	FBSmV-40/2/1-S	170144	1/20
63/1	FBSmV-63/2/1-S	170145	1/20

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>3-poles</b>			
40/0.1	FBSmV-40/3/01-S	170146	1/20
63/0.1	FBSmV-63/3/01-S	170147	1/20
40/0.3	FBSmV-40/3/03-S	170148	1/20
63/0.3	FBSmV-63/3/03-S	170149	1/20
40/1	FBSmV-40/3/1-S	170150	1/20
63/1	FBSmV-63/3/1-S	170151	1/20

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>4-poles</b>			
40/0.1	FBSmV-40/4/01-S	170152	1/13
63/0.1	FBSmV-63/4/01-S	170153	1/13
40/0.3	FBSmV-40/4/03-S	170154	1/13
63/0.3	FBSmV-63/4/03-S	170155	1/13
40/1	FBSmV-40/4/1-S	170156	1/13
63/1	FBSmV-63/4/1-S	170157	1/13

# xEffect

## Type S/A

Selective + surge current-proof typ. 5 kA, sensitive to residual pulsating DC, Type S/A

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>2-poles</b>			
40/0.1	FBSmV-40/2/01-S/A	170158	1/20
63/0.1	FBSmV-63/2/01-S/A	170159	1/20
40/0.3	FBSmV-40/2/03-S/A	170160	1/20
63/0.3	FBSmV-63/2/03-S/A	170161	1/20

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>3-poles</b>			
40/0.1	FBSmV-40/3/01-S/A	170162	1/20
63/0.1	FBSmV-63/3/01-S/A	170163	1/20
40/0.3	FBSmV-40/3/03-S/A	170164	1/20
63/0.3	FBSmV-63/3/03-S/A	170165	1/20

$I_{\Delta}/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
<b>4-poles</b>			
40/0.1	FBSmV-40/4/01-S/A	170166	1/13
63/0.1	FBSmV-63/4/01-S/A	170167	1/13
40/0.3	FBSmV-40/4/03-S/A	170168	1/13
63/0.3	FBSmV-63/4/03-S/A	170169	1/13

# Add-on Residual Current Protection

Add-on Residual Current Protection Unit FBSmV

# 1.169

**Specifications | Add-on Residual Current Protection Unit FBSmV**

**Description**

- Add-on residual current unit
- Line voltage-independent tripping
- By combining this device with a top-quality miniature circuit breaker type FAZ (except FAZ-PN) a top-quality RCBO unit (combined RCD/MCB device) is formed
- Rated current 40 and 63 A
- Permits combinations with a variety of characteristics thanks to the different rated currents and characteristics of the FAZ-miniature circuit breakers which can be connected
- Comprehensive range of accessories suitable for subsequent installation onto FAZ
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -G:** High reliability against unwanted tripping. Suitable for any circuit where personal injury or damage to property may occur in case of unwanted tripping.
- **Type -S:** Selective residual current device sensitive to AC, Type -S. Suitable for systems with surge arresters downstream of the RCD.
- **Type -S/A:** Additionally protects against special forms of residual pulsating DC which have not been smoothed.

**Accessories:**

Cover cap for draw-out connection bar	included
Slotted one-way cheese head screw	included


**Accessories (on FAZ):**

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote testing module	Z-FW/001	248297
	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
	Z-FW/050	248301
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA	258288, 248289, 248290
	Z-USD	248292, 248291
Terminal cover		
1-pole	Z-TC/MCB-1P	178102
2-poles	Z-TC/SD-2P	178099
3-poles	Z-TC/SD-3P	178100
4-poles	Z-TC/SD-4P	178101


**Technical Data**

FBSmV	
<b>Electrical</b>	
Design according to	IEC/EN 61009
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous 250A (8/20μs), surge current-proof
Type G	10 ms delay 3kA (8/20μs), surge current-proof
Type S	40 ms delay 5kA (8/20μs) with selective disconnecting function, surge current-proof
Rated voltage	$U_n$ 240/415V AC
Voltage range test circuit	
2-poles, 30mA	196-264 V~
2-poles, 30mA-120	102-132 V~
2-poles, 30mA-400	340-456 V~
2-poles, 100, 300, 500, 1000mA	196-456 V~
3-poles, 30mA	340-456 V~
3-poles, 30mA-230	196-264 V~
3-poles, 100, 300, 500, 1000mA	196-456 V~
4-poles, 30mA	340-456 V~
4-poles, 30mA-230	196-264 V~
4-poles, 100, 300, 500, 1000mA	196-456 V~
Rated frequency	50 Hz
Rated tripping current	$I_{\Delta n}$ 30, 100, 300, 500, 1000 mA
Rated non-tripping current	$I_{\Delta no}$ 0.5 $I_{\Delta n}$
Sensitivity	AC and pulsating DC
Rated current	$I_n$ $\leq$ 40 A, $\leq$ 63 A
Rated short circuit capacity	$I_{cn}$ same as connected FAZ, up to max. 10 kA
<b>Mechanical</b>	
Frame size	45 mm
Device height	90 mm
Device width	70 mm (2p), 107.5 mm (3p), 125 mm (4p)
Mounting	fix mounted onto FAZ
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Fastening screw	M2.5 (slotted one-way cheese head screw)
Screw head breaking torque	> 0.6 Nm
Upper and lower terminals	lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	
rigid conductors	1 x (1 - 35) mm <sup>2</sup>
flexible conductors (with wire end sleeve)	1 x (0.75 - 35) mm <sup>2</sup>
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC 68-2 (25..55°C / 90..95% RH)

**Connection diagram**

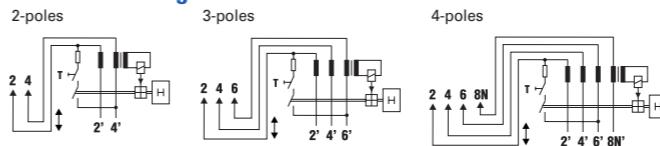

**Dimensions (mm)**

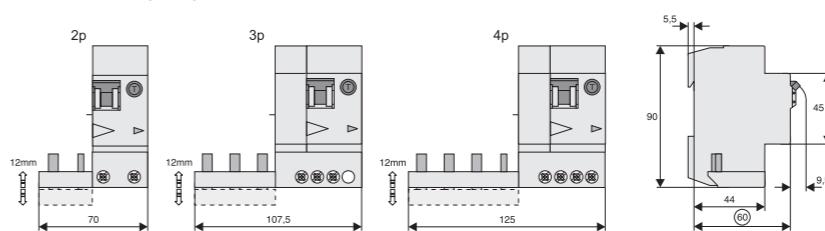

# 1.172 Add-on Residual Current Protection

Add-on Residual Current Protection Unit FBHmV, Type AC and A

SG03913



## Description

- By combining this device with a top-quality miniature circuit breaker of type AZ a top-quality RCBO unit (combined RCD/MCB device) is formed.
- Add-on residual current unit (screw connection) for 80 or 125 A (2-pole and 4-pole)
- High flexibility and ease of installation thanks to variable wiring
- Free selection of main power supply
- Auxiliary switch 1 make contact included as standard in all FBHmV versions
- Permits combinations with a variety of characteristics thanks to the different rated currents and characteristics of the miniature circuit breakers AZ which can be connected
- For commercial and industry applications
- For subsequent mounting onto 2, 3, 3+N and 4-pole-miniature circuit breakers AZ
- The screw connection to the AZ-device can be unscrewed at any time. Consequently, in case of modifications of the systems to be protected, the installation can be adapted to new requirements at any time.
- Classified for the use in rail rolling stock
- Has a bidirectional power supply

## xEffect

## xEffect

# Add-on Residual Current Protection

Add-on Residual Current Protection Unit FBHmV

# 1.173

$I_{\Delta}/I_{AN}$   
(A)

Type  
Designation

Article No.  
Units per  
package

SG03813



## Type AC

Sensitive to residual current, conditionally surge-current-proof 250 A, Type AC

### 2-poles

80/0.03	FBHmV-80/2/003	170266	1/4
125/0.03	FBHmV-125/2/003	170242	1/4
80/0.3	FBHmV-80/2/03	170243	1/4
125/0.3	FBHmV-125/2/03	170244	1/4
80/0.5	FBHmV-80/2/05	170245	1/4
125/0.5	FBHmV-125/2/05	170246	1/4
80/1	FBHmV-80/2/1	170247	1/4
125/1	FBHmV-125/2/1	170248	1/4

SG04013



### 4-poles

80/0.03	FBHmV-80/4/003	170249	1/4
125/0.03	FBHmV-125/4/003	170250	1/4
80/0.3	FBHmV-80/4/03	170251	1/4
125/0.3	FBHmV-125/4/03	170252	1/4
80/0.5	FBHmV-80/4/05	170253	1/4
125/0.5	FBHmV-125/4/05	170254	1/4
80/1	FBHmV-80/4/1	170255	1/4
125/1	FBHmV-125/4/1	170256	1/4

SG03813



## Type A

Sensitive to residual pulsating DC, conditionally surge current-proof 250 A, Type A

### 2-poles

80/0.03	FBHmV-80/2/003-A	170257	1/4
125/0.03	FBHmV-125/2/003-A	170258	1/4
80/0.3	FBHmV-80/2/03-A	170259	1/4
125/0.3	FBHmV-125/2/03-A	170260	1/4
80/0.5	FBHmV-80/2/05-A	170261	1/4
125/0.5	FBHmV-125/2/05-A	170262	1/4
80/1	FBHmV-80/2/1-A	170263	1/4
125/1	FBHmV-125/2/1-A	170264	1/4

SG03913



### 4-poles

80/0.03	FBHmV-80/4/003-A	170265	1/4
125/0.03	FBHmV-125/4/003-A	170130	1/4
80/0.3	FBHmV-80/4/03-A	170131	1/4
125/0.3	FBHmV-125/4/03-A	170132	1/4
80/0.5	FBHmV-80/4/05-A	170133	1/4
125/0.5	FBHmV-125/4/05-A	170134	1/4
80/1	FBHmV-80/4/1-A	170135	1/4
125/1	FBHmV-125/4/1-A	170136	1/4



**Type S/A**

Selective + surge current-proof 5 kA, Type S/A

**2-poles**

80/0.3	FBHmV-80/2/03-S/A	170137	1/4
125/0.3	FBHmV-125/2/03-S/A	170138	1/4
80/0.5	FBHmV-80/2/05-S/A	170139	1/4
125/0.5	FBHmV-125/2/05-S/A	170140	1/4
80/1	FBHmV-80/2/1-S/A	170141	1/4
125/1	FBHmV-125/2/1-S/A	170170	1/4

**4-poles**

80/0.3	FBHmV-80/4/03-S/A	170171	1/4
125/0.3	FBHmV-125/4/03-S/A	170172	1/4
80/0.5	FBHmV-80/4/05-S/A	170173	1/4
125/0.5	FBHmV-125/4/05-S/A	170174	1/4
80/1	FBHmV-80/4/1-S/A	170175	1/4
125/1	FBHmV-125/4/1-S/A	170176	1/4

**Specifications | Add-on Residual Current Protection Unit FBHmV**

**Description**

- By combination with miniature circuit breaker AZ => RCBO-Unit (MCCB)
- Add-on residual current unit (screw connection) for 80 or 125 A (2-pole and 4-pole)
- High flexibility and ease of installation thanks to variable wiring (400 mm flexible connection wires 2p = 2 units, 4p = 4 units included in the set)
- Free selection of main power supply
- Auxiliary switch 1 NO included as standard in all FBHmV versions
- Permits combinations with a variety of characteristics thanks to the different rated currents and characteristics of the miniature circuit breakers AZ which can be connected
- For trade and industry applications
- For subsequent mounting onto 2, 3, 3+N and 4-pole-miniature circuit breakers AZ
- Toggle (serves as switch position- and tripping indicator)
- The screw connection to the AZ-device can be unscrewed at any time. Consequently, in case of modifications of the systems to be protected, the installation can be adapted to new requirements at any time.
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven. Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement ( $R_E$ ), or proper checking of the earth conductor condition redundant, which must be performed separately.

**Accessories:**


Flexible connection wires (connection to AZ) are included in the standard set:

2-poles 80 A	2 x 16 mm <sup>2</sup> (400 mm each)
4-poles 80 A	4 x 16 mm <sup>2</sup> (400 mm each)
2-poles 125 A	2 x 35 mm <sup>2</sup> (400 mm each)
4-poles 125 A	4 x 35 mm <sup>2</sup> (400 mm each)
Shunt trip release	Z-BHASA/24 Z-BHASA/230
	248444 248445


**Technical Data**

FBHmV	
<b>Electrical current flow paths</b>	
Design according to	IEC/EN 60947-2
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous 250A (8/20μs), surge current-proof
Type S	40 ms delay 5kA (8/20μs) with selective disconnecting function, surge current-proof
Rated voltage	$U_n$ 240/415V AC
Voltage range test circuit	
2-poles	196-264 V~
4-poles, 30mA	196-264 V~
4-poles, 100, 300, 500, 1000mA	196-456 V~
Rated frequency	50 Hz
Rated tripping current	$I_{\Delta n}$ 30, 300, 500, 1000 mA
Rated non-tripping current	$I_{\Delta no}$ 0.5 $I_{\Delta n}$
Sensitivity	AC and pulsating DC
Rated current	$I_n$ 80, 125 A
Rated short circuit breaking capacity	$I_{cs}$ same as connected AZ
Rated short circuit capacity	$I_{cn}$ same as connected AZ
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50μs)
Endurance	
electrical components	
80A	≥ 1,500 operating cycles
125A	≥ 1,000 operating cycles
mechanical components	
80A	≥ 10,000 operating cycles
125A	≥ 8,000 operating cycles
<b>Electrical Auxiliary Contact</b>	
Category of utilization AC15	
Rated voltage	$U_e$ 250 V AC
Rated operational current	$I_e$ 16 A AC
<b>Mechanical</b>	
Frame size	45 mm
Device height	90 mm
Device width	95 mm (5,5TE)
Depth of central body	60 mm
Mounting	screwed onto AZ 2-, 3-, 4-poles; Z-BHASA
Degree of protection switch	IP20
Degree of protection, built-in	IP40
Upper and lower terminals	lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	
main conductor	2.5 - 50 mm <sup>2</sup>
auxiliary switch	1 - 25 mm <sup>2</sup>
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC 68-2 (25..55°C / 90..95% RH)


**Connection diagram**

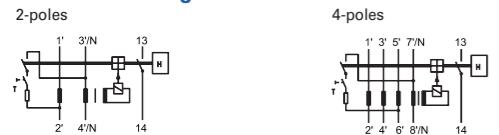


**Dimensions (mm)**

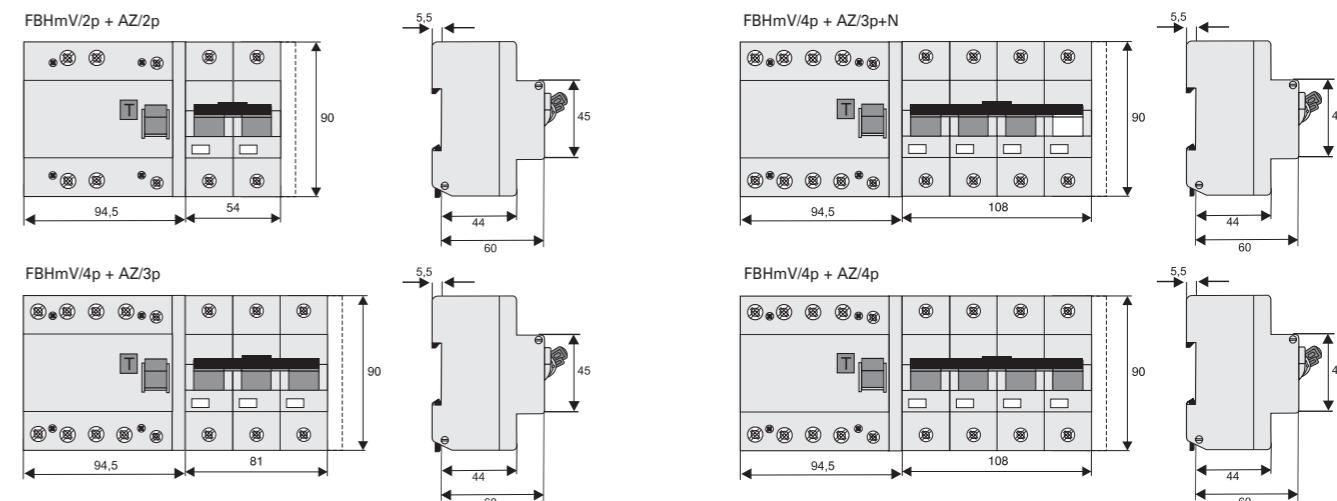


**Wiring options**

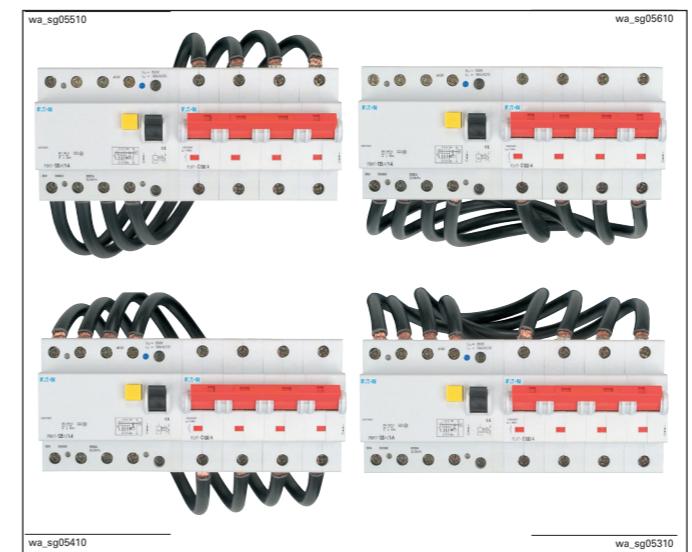


**Mounting FBHmV + AZ**

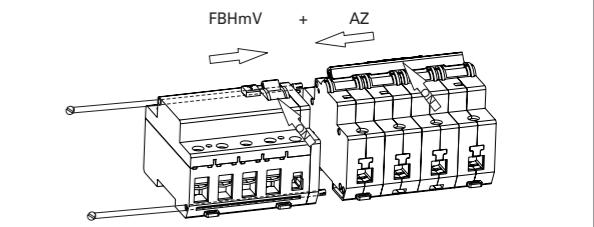

**Connection FBHmV/4p + AZ/3p**

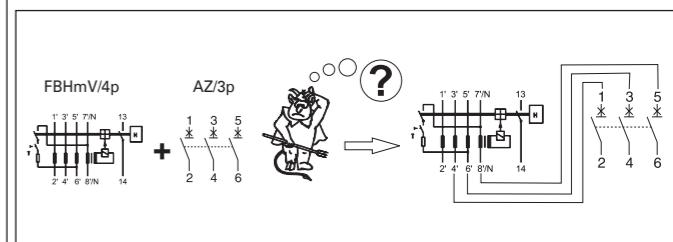

**Mounting arrangement residual current protection unit - shunt trip release - miniature circuit breaker - auxiliary contact**

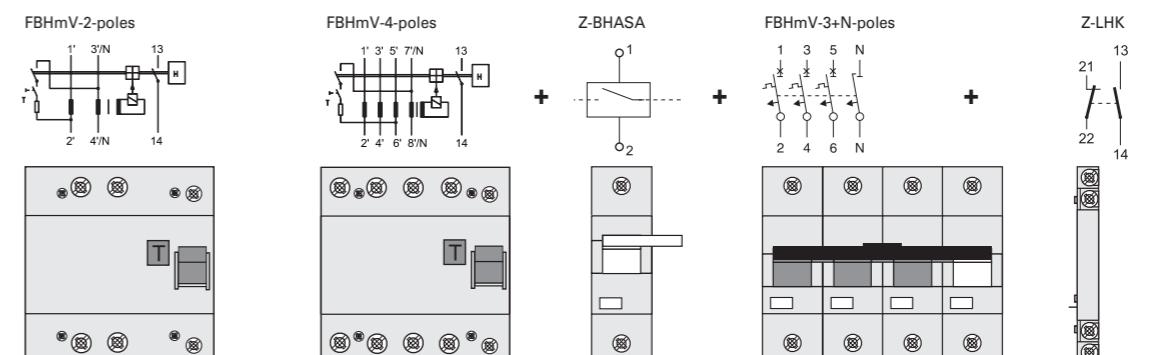

**Specifications | Accessories for FBHmV - Shunt trip release Z-BHASA**

**Description**


- Can be mounted subsequently
- Contact position indicator red - green
- Marking labels can be fitted
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured Z-BHASA/24:  
min. 90 VA
- Screws for mounting included FBHmV => BHASA => AZ

**Technical Data**


	Z-BHASA/24	Z-BHASA/230
<b>Electrical</b>		
Classified according to	IEC 61373, EN 45545-2	
Minimum pulse duration	15 ms	10 ms
Internal resistance	2 Ω	130 Ω
Duty Cycle	100%	100%
Tripping time	< 20 ms	< 20 ms
Peak withstand voltage (1.2/50μs)	2 kV	2 kV
Endurance		
electrical components	≥ 4,000 operating cycles	
mechanical components	≥ 4,000 operating cycles	
<b>AC voltage range</b>		
Responding limit	8 V	70 V
Operational voltage range	12-60 V	110-415 V
Maximum current consumption during switch-on	1.4-7 A	3.4 A (at 230V)
Current flow time at max. current consumption	4.0 ms	4.5 ms
<b>DC voltage range</b>		
Responding limit	11 V	90 V
Operational voltage range	12-60 V	110-230 V
Maximum current consumption during switch-on	1.7 A typ.	1.7 A typ.
Current flow time at max. current consumption	2 ms	4 ms
<b>Mechanical</b>		
Frame size	45 mm	45 mm
Device height	90 mm	90 mm
Device width	27 mm	27 mm
Mounting	quick fastening on DIN rail IEC/EN 60715	
Degree of protection switch	IP20	IP20
Degree of protection, built-in	IP40	IP40
Upper and lower terminals	lift terminals	lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274	
Terminal capacity	2.5 - 30 mm <sup>2</sup>	2.5 - 30 mm <sup>2</sup>
Terminal torque	4 Nm	4 Nm

**Connection diagram**

2-poles



**Dimensions (mm)**

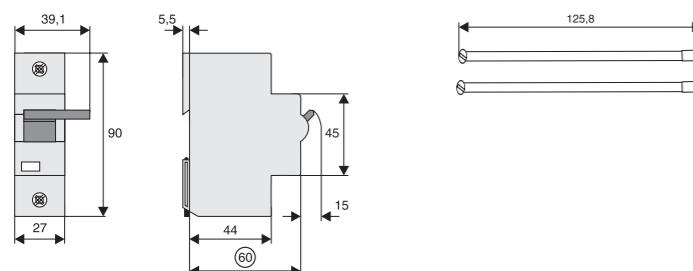

sg05317



**Description**

- The highest standards of safety and reliability at 24 V DC circuits
- Direct connection of up to 3 loads
- Simple and quick installation with push-in terminals and busbars
- Active current limitation
- Sequence control - easy linking of channels
- Modular system
- Individual and collective fault messages
- ON-OFF remote reset function
- Subsequent switching of system in fault situation
- PLC compatible conform to IEC/EN 61131-2
- Local sliding switch
- UL approval
- Classified for the use in rail rolling stock



xEffect

Operating voltage	Length	Type Designation	Article No.	Units per package
<b>Feed-In terminals (insulated)</b>				
	<ul style="list-style-type: none"> <li>• 2 pieces per power supply are required!</li> <li>• Terminal capacity 1.5 - 16 mm<sup>2</sup></li> </ul>	AKI16/10	184515	1/1
				
<b>Feed-In terminals (not insulated)</b>				
	<ul style="list-style-type: none"> <li>• 2 pieces per power supply are required!</li> <li>• Terminal capacity 1.5 - 16 mm<sup>2</sup> with or without end-sleeves, rigid and flexible</li> <li>• Max. load current: 60 A (at 55 °C ambient temperature, only in connection with PXS24-BB...)</li> </ul>	PXS24-IT	PXS24ACC0001	1/1
				



xEffect

Technical Data	
Mark	CE
Certification	UL508 + UL2367 (Section 10 and 12)
Product Standard	Applicable sections of: EN60947-1, EN60947-5-1, EN61009-1, EN61131-2 and EN61000-4-2 Details see In-House Standard WN-PXS24 IEC 61373, EN 45545-2
Classified according to	
Current test marks as printed onto the device	
<b>Electrical</b>	
Operating voltage	$U_B$ 24V DC (15...30 V DC)
Rated current	$I_N$ Fix; 2, 4, 6, 8, 10, 13, 16 A
Overload and short circuit current protection	Typ. $1.3 \times I_N$ , with active current-limiting up to $1.25 \times I_N$
Trip characteristic	see time / current table
Capacitive Loads	up to 20,000 pF
Inductive Loads	$I_N \leq 6 \text{ A} \dots \tau_{\max} \leq 60 \text{ ms}$ $6 \text{ A} < I_N \leq 10 \text{ A} \dots \tau_{\max} \leq 12 \text{ ms}$ $10 \text{ A} < I_N \leq 16 \text{ A} \dots \tau_{\max} \leq 7.5 \text{ ms}$
Service life when used as a relay	see Time / Current Table
<b>Mechanical</b>	
Number of Channels	1
Width	17.5 (1MU)
Height	92.5 mm
Depth	119.2 mm
Type of terminals	Push-In terminals
Line terminals (optional)	3x LINE (+) and 3x GND (-)
Load terminals	3x LOAD (+) and 3x GND (-)
Terminal capacity Input/Output terminals	2.5 mm <sup>2</sup> (flexible with wire end sleeve) 4 mm <sup>2</sup> (rigid)
Terminal capacity Communication plug	1 mm <sup>2</sup> (flexible with wire end sleeve) 1.5 mm <sup>2</sup> (rigid)
Communication plug	2x control output (internal linked) 2x control input (internal linked) 1x GND
Busbar	LINE (+) and GND (-); max. 80 A in various length up to 1 m
Montage	Snapping on DIN rail TH35 (EN 60715)
Status LED	Bi-colour; Green = OK; Red = tripped; OFF = channel not in use
Sliding switch	ON/OFF/Reset
Control output	Triped; about Communication plug (according to IEC 61131-2), Class: 0.1 A; Typ1/Typ2 and Typ3 Digital Inputs Max. 30 PXS24V Other indication devices up to 0.2 A @ 24 V (EATON RMQ series,...)
Control input	ON/OFF/Reset; about Communication plug (according to IEC 61131-2) Type1/Type3; Max. 30 PXS24
Sequencer	About Communication plug
Text field	17.5 x 6 mm
Degree of protection	IP20
Operation temperature	-30 °C to +55 °C
Storage Temperature	-40 °C to +100 °C

## Time / Current Table

Rated current $I_N$ [A]	Shut-off time [ms]	Active current limiting	Service life when used as a relay $t_{on} = 0.05 \text{ s} / t_{off} = 10 \text{ s}$
2	470	$1.25 \times I_N$	> 10,000,000
4	280	$1.25 \times I_N$	> 10,000,000
6	170	$1.25 \times I_N$	> 10,000,000
8	110	$1.25 \times I_N$	400,000
10	90	$1.25 \times I_N$	10,000
13	80	$1.25 \times I_N$	no usage as relay - only protection
16	70	$1.25 \times I_N$	no usage as relay - only protection

## Overview of the PXS24 features

Feature	Economy	Standard
Rated current (fixed, 2, 4, 6, 8, 10, 13, 16 A)	0-10 A	0-16 A
Active current limiting	X	X
Modular system	X	X
3 load connections (+/-)	X	X
Push-in terminals	X	X
Busbar (+/-)	X	X
Local status LED	X	X
Local switch (on/off/reset)	X	X
Sequencer		X
Digital control outputs (on/off/reset)		X
Digital control inputs (on/off/reset)		X

**Note for UL applications:** The PXS solid state overcurrent protector has been tested in accordance to UL 508 and CSA 22.2 No. 14 for DC general use. Temperature, overload and endurance, dielectric and breakdown of component tests were conducted. Calibration and overloaded operation tests were conducted in accordance with UL 2367.

SG55812



## Description

### FAZ

- High-quality miniature circuit breakers for industrial applications and residential applications
- Contact position indicator red - green
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C, D, K, S, Z
- Rated breaking capacity up to 15 kA according to IEC/EN 60947-2
- Classified for the use in rail rolling stock

### FAZ-PN

- Tripping characteristic B
- Rated breaking capacity up to 6 kA according to IEC/EN 60898-1
- Module width 1MU (1+N-poles)
- Classified for the use in rail rolling stock

### FAZ-HS

- Tripping characteristic B
- Rated breaking capacity up to 10 kA according to IEC/EN 60898-1
- 1- and 2-poles available
- Miniature circuit breaker with reduced Let-through-energy for control circuits to protect the auxiliary switch contacts from welding.

**Characteristic B****1-pole**

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
1	254	10	230	15	277	10	FAZ-B1/1	278520	12/120	
1.5	254	10	230	15	277	10	FAZ-B1,5/1	278521	12/120	
1.6	254	10	230	15	277	10	FAZ-B1,6/1	278522	12/120	
2	254	10	230	15	277	10	FAZ-B2/1	278523	12/120	
2.5	254	10	230	15	277	10	FAZ-B2,5/1	278524	12/120	
3	254	10	230	15	277	10	FAZ-B3/1	278525	12/120	
3.5	254	10	230	15	277	10	FAZ-B3,5/1	278526	12/120	
4	254	10	230	15	277	10	FAZ-B4/1	278527	12/120	
5	254	10	230	15	277	10	FAZ-B5/1	278528	12/120	
6	254	10	230	15	277	10	FAZ-B6/1	278529	12/120	
8	254	10	230	15	277	10	FAZ-B8/1	278530	12/120	
10	254	10	230	15	277	10	FAZ-B10/1	278531	12/120	
12	254	10	230	15	277	10	FAZ-B12/1	278532	12/120	
13	254	10	230	15	277	10	FAZ-B13/1	278533	12/120	
15	254	10	230	15	277	10	FAZ-B15/1	278534	12/120	
16	254	10	230	15	277	10	FAZ-B16/1	278535	12/120	
20	254	10	230	15	277	10	FAZ-B20/1	278536	12/120	
25	254	10	230	15	277	10	FAZ-B25/1	278537	12/120	
32	254	10	230	15	277	10	FAZ-B32/1	278538	12/120	
40	254	10	230	15	277	5	FAZ-B40/1	278539	12/120	
50	230	15	230	15	277	5	FAZ-B50/1	278540	12/120	
63	230	15	230	15	277	5	FAZ-B63/1	278541	12/120	

**1+N-poles**

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
1	254	10	230	15	277	10	FAZ-B1/1N	278633	1/60	
1.5	254	10	230	15	277	10	FAZ-B1,5/1N	278634	1/60	
1.6	254	10	230	15	277	10	FAZ-B1,6/1N	278635	1/60	
2	254	10	230	15	277	10	FAZ-B2/1N	278636	1/60	
2.5	254	10	230	15	277	10	FAZ-B2,5/1N	278637	1/60	
3	254	10	230	15	277	10	FAZ-B3/1N	278638	1/60	
3.5	254	10	230	15	277	10	FAZ-B3,5/1N	278639	1/60	
4	254	10	230	15	277	10	FAZ-B4/1N	278640	1/60	
5	254	10	230	15	277	10	FAZ-B5/1N	278641	1/60	
6	254	10	230	15	277	10	FAZ-B6/1N	278642	1/60	
8	254	10	230	15	277	10	FAZ-B8/1N	278643	1/60	
10	254	10	230	15	277	10	FAZ-B10/1N	278644	1/60	
12	254	10	230	15	277	10	FAZ-B12/1N	278645	1/60	
13	254	10	230	15	277	10	FAZ-B13/1N	278646	1/60	
15	254	10	230	15	277	10	FAZ-B15/1N	278647	1/60	
16	254	10	230	15	277	10	FAZ-B16/1N	278648	1/60	
20	254	10	230	15	277	10	FAZ-B20/1N	278649	1/60	
25	254	10	230	15	277	10	FAZ-B25/1N	278650	1/60	
32	254	10	230	15	277	10	FAZ-B32/1N	278651	1/60	
40	254	10	230	15	277	5	FAZ-B40/1N	278652	1/60	
50	230	15	230	15	277	5	FAZ-B50/1N	278653	1/60	
63	230	15	230	15	277	5	FAZ-B63/1N	278654	1/60	

**xEffect****xEffect****Miniature Circuit Breakers****2.187****FAZ Miniature Circuit Breakers**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
1	440	10	400	15	480Y/277	10	FAZ-B1/2	278719	1/60

**2-poles**

1	440	10	400	15	480Y/277	10	FAZ-B1,5/2	278720	1/60
1.5	440	10	400	15	480Y/277	10	FAZ-B1,6/2	278721	1/60
2	440	10	400	15	480Y/277	10	FAZ-B2/2	278722	1/60
2.5	440	10	400	15	480Y/277	10	FAZ-B2,5/2	278723	1/60
3	440	10	400	15	480Y/277	10	FAZ-B3/2	278724	1/60
3.5	440	10	400	15	480Y/277	10	FAZ-B3,5/2	278725	1/60
4	440	10	400	15	480Y/277	10	FAZ-B4/2	278726	1/60
5	440	10	400	15	480Y/277	10	FAZ-B5/2	278727	1/60
6	440	10	400	15	480Y/277	10	FAZ-B6/2	278728	1/60
7	440	10	400	15	480Y/277	10	FAZ-B7/2	167487	1/60
8	440	10	400	15	480Y/277	10	FAZ-B8/2	278729	1/60
10	440	10	400	15	480Y/277	10	FAZ-B10/2	278730	1/60
12	440	10	400	15	480Y/277	10	FAZ-B12/2	2	

**3+N-poles**

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
1	440	10	400	15	480Y/277	10	FAZ-B1/3N	278934	1/30	
1.5	440	10	400	15	480Y/277	10	FAZ-B1,5/3N	278935	1/30	
1.6	440	10	400	15	480Y/277	10	FAZ-B1,6/3N	278936	1/30	
2	440	10	400	15	480Y/277	10	FAZ-B2/3N	278937	1/30	
2.5	440	10	400	15	480Y/277	10	FAZ-B2,5/3N	278938	1/30	
3	440	10	400	15	480Y/277	10	FAZ-B3/3N	278939	1/30	
3.5	440	10	400	15	480Y/277	10	FAZ-B3,5/3N	278940	1/30	
4	440	10	400	15	480Y/277	10	FAZ-B4/3N	278941	1/30	
5	440	10	400	15	480Y/277	10	FAZ-B5/3N	278942	1/30	
6	440	10	400	15	480Y/277	10	FAZ-B6/3N	278943	1/30	
8	440	10	400	15	480Y/277	10	FAZ-B8/3N	278944	1/30	
10	440	10	400	15	480Y/277	10	FAZ-B10/3N	278945	1/30	
12	440	10	400	15	480Y/277	10	FAZ-B12/3N	278946	1/30	
13	440	10	400	15	480Y/277	10	FAZ-B13/3N	278947	1/30	
15	440	10	400	15	480Y/277	10	FAZ-B15/3N	278948	1/30	
16	440	10	400	15	480Y/277	10	FAZ-B16/3N	278949	1/30	
20	440	10	400	15	480Y/277	10	FAZ-B20/3N	278950	1/30	
25	440	10	400	15	480Y/277	10	FAZ-B25/3N	278951	1/30	
32	440	10	400	15	480Y/277	10	FAZ-B32/3N	278952	1/30	
40	440	10	400	15	480Y/277	5	FAZ-B40/3N	278953	1/30	
50	400	15	400	15	480Y/277	5	FAZ-B50/3N	278954	1/30	
63	400	15	400	15	480Y/277	5	FAZ-B63/3N	278955	1/30	

**4-poles**

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package	
1	440	10	400	15	480Y/277	10	FAZ-B1/4	279020	1/30
1.5	440	10	400	15	480Y/277	10	FAZ-B1,5/4	279021	1/30
1.6	440	10	400	15	480Y/277	10	FAZ-B1,6/4	279022	1/30
2	440	10	400	15	480Y/277	10	FAZ-B2/4	279023	1/30
2.5	440	10	400	15	480Y/277	10	FAZ-B2,5/4	279024	1/30
3	440	10	400	15	480Y/277	10	FAZ-B3/4	279025	1/30
3.5	440	10	400	15	480Y/277	10	FAZ-B3,5/4	279026	1/30
4	440	10	400	15	480Y/277	10	FAZ-B4/4	279027	1/30
5	440	10	400	15	480Y/277	10	FAZ-B5/4	279028	1/30
6	440	10	400	15	480Y/277	10	FAZ-B6/4	279029	1/30
7	440	10	400	15	480Y/277	10	FAZ-B7/2	167463	1/30
8	440	10	400	15	480Y/277	10	FAZ-B8/4	279030	1/30
10	440	10	400	15	480Y/277	10	FAZ-B10/4	279031	1/30
12	440	10	400	15	480Y/277	10	FAZ-B12/4	279032	1/30
13	440	10	400	15	480Y/277	10	FAZ-B13/4	279033	1/30
15	440	10	400	15	480Y/277	10	FAZ-B15/4	279034	1/30
16	440	10	400	15	480Y/277	10	FAZ-B16/4	279035	1/30
20	440	10	400	15	480Y/277	10	FAZ-B20/4	279036	1/30
25	440	10	400	15	480Y/277	10	FAZ-B25/4	279037	1/30
30	440	10	400	15	480Y/277	10	FAZ-B30/2	167464	1/30
32	440	10	400	15	480Y/277	10	FAZ-B32/4	279038	1/30
40	440	10	400	15	480Y/277	5	FAZ-B40/4	279039	1/30
50	400	15	400	15	480Y/277	5	FAZ-B50/4	279040	1/30
63	400	15	400	15	480Y/277	5	FAZ-B63/4	279041	1/30

**xEffect****xEffect****Miniature Circuit Breakers****2.189****FAZ Miniature Circuit Breakers**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.16	254	10	230	15	277	5	FAZ-C0,16/1	278542	12/120

**Characteristic C****1-pole**

0.16	254	10	230	15	277	5	FAZ-C0,16/1	278542	12/120
0.25	254	10	230	15	277	5	FAZ-C0,25/1	278543	12/120
0.5	254	10	230	15	277	10	FAZ-C0,5/1	278544	12/120
0.75	254	10	230	15	277	10	FAZ-C0,75/1	278545	12/120
1	254	10	230	15	277	10	FAZ-C1/1	278546	12/120
1.5	254	10	230	15	277	10	FAZ-C1,5/1	278547	12/120
1.6	254	10	230	15	277	10	FAZ-C1,6/1	278548	12/120
2	254	10	230	15	277	10	FAZ-C2/1	278549	12/120
2.5	254	10	230	15	277	10	FAZ-C2,5/1	278550	12/120
3	254	10	230	15	277	10	FAZ-C3/1	278551</td	

**2-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.16	440	10	400	15	480Y/277 5	FAZ-C0,16/2	278741	1/60	
0.25	440	10	400	15	480Y/277 5	FAZ-C0,25/2	278742	1/60	
0.5	440	10	400	15	480Y/277 10	FAZ-C0,5/2	278743	1/60	
0.75	440	10	400	15	480Y/277 10	FAZ-C0,75/2	278744	1/60	
1	440	10	400	15	480Y/277 10	FAZ-C1/2	278745	1/60	
1.5	440	10	400	15	480Y/277 10	FAZ-C1,5/2	278746	1/60	
1.6	440	10	400	15	480Y/277 10	FAZ-C1,6/2	278747	1/60	
2	440	10	400	15	480Y/277 10	FAZ-C2/2	278748	1/60	
2.5	440	10	400	15	480Y/277 10	FAZ-C2,5/2	278749	1/60	
3	440	10	400	15	480Y/277 10	FAZ-C3/2	278750	1/60	
3.5	440	10	400	15	480Y/277 10	FAZ-C3,5/2	278751	1/60	
4	440	10	400	15	480Y/277 10	FAZ-C4/2	278752	1/60	
5	440	10	400	15	480Y/277 10	FAZ-C5/2	278753	1/60	
6	440	10	400	15	480Y/277 10	FAZ-C6/2	278754	1/60	
8	440	10	400	15	480Y/277 10	FAZ-C8/2	278755	1/60	
10	440	10	400	15	480Y/277 10	FAZ-C10/2	278756	1/60	
12	440	10	400	15	480Y/277 10	FAZ-C12/2	278757	1/60	
13	440	10	400	15	480Y/277 10	FAZ-C13/2	278758	1/60	
15	440	10	400	15	480Y/277 10	FAZ-C15/2	278759	1/60	
16	440	10	400	15	480Y/277 10	FAZ-C16/2	278760	1/60	
20	440	10	400	15	480Y/277 10	FAZ-C20/2	278761	1/60	
25	440	10	400	15	480Y/277 10	FAZ-C25/2	278762	1/60	
32	440	10	400	15	480Y/277 10	FAZ-C32/2	278763	1/60	
40	440	10	400	15	480Y/277 5	FAZ-C40/2	278764	1/60	
50	400	15	400	15	480Y/277 5	FAZ-C50/2	278765	1/60	
63	400	15	400	15	480Y/277 5	FAZ-C63/2	278766	1/60	

**3-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.16	440	10	400	15	480Y/277 5	FAZ-C0,16/3	278854	1/40	
0.25	440	10	400	15	480Y/277 5	FAZ-C0,25/3	278855	1/40	
0.5	440	10	400	15	480Y/277 10	FAZ-C0,5/3	278856	1/40	
0.75	440	10	400	15	480Y/277 10	FAZ-C0,75/3	278857	1/40	
1	440	10	400	15	480Y/277 10	FAZ-C1/3	278858	1/40	
1.5	440	10	400	15	480Y/277 10	FAZ-C1,5/3	278859	1/40	
1.6	440	10	400	15	480Y/277 10	FAZ-C1,6/3	278860	1/40	
2	440	10	400	15	480Y/277 10	FAZ-C2/3	278861	1/40	
2.5	440	10	400	15	480Y/277 10	FAZ-C2,5/3	278862	1/40	
3	440	10	400	15	480Y/277 10	FAZ-C3/3	278863	1/40	
3.5	440	10	400	15	480Y/277 10	FAZ-C3,5/3	278864	1/40	
4	440	10	400	15	480Y/277 10	FAZ-C4/3	278865	1/40	
5	440	10	400	15	480Y/277 10	FAZ-C5/3	278866	1/40	
6	440	10	400	15	480Y/277 10	FAZ-C6/3	278867	1/40	
7	440	10	400	15	480Y/277 10	FAZ-B7/2	167459	1/40	
8	440	10	400	15	480Y/277 10	FAZ-C8/3	278868	1/40	
10	440	10	400	15	480Y/277 10	FAZ-C10/3	278869	1/40	
12	440	10	400	15	480Y/277 10	FAZ-C12/3	278870	1/40	
13	440	10	400	15	480Y/277 10	FAZ-C13/3	278871	1/40	
15	440	10	400	15	480Y/277 10	FAZ-C15/3	278872	1/40	
16	440	10	400	15	480Y/277 10	FAZ-C16/3	278873	1/40	
20	440	10	400	15	480Y/277 10	FAZ-C20/3	278874	1/40	
25	440	10	400	15	480Y/277 10	FAZ-C25/3	278875	1/40	
30	440	10	400	15	480Y/277 10	FAZ-B30/2	167460	1/40	
32	440	10	400	15	480Y/277 10	FAZ-C32/3	278876	1/40	
40	440	10	400	15	480Y/277 5	FAZ-C40/3	278877	1/40	
50	400	15	400	15	480Y/277 5	FAZ-C50/3	278878	1/40	
63	400	15	400	15	480Y/277 5	FAZ-C63/3	278879	1/40	

**xEffect****xEffect****Miniature Circuit Breakers****2.191****3+N-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.16	440	10	400	15	480Y/277 5	FAZ-C0,16/3N	278956	1/30	
0.25	440	10	400	15	480Y/277 5	FAZ-C0,25/3N	278957	1/30	
0.5	440	10	400	15	480Y/277 10	FAZ-C0,5/3N	278958	1/30	
0.75	440	10	400	15	480Y/277 10	FAZ-C0,75/3N	278959	1/30	
1	440	10	400	15	480Y/277 10	FAZ-C1/3N	278960		

**Characteristic D****1-pole**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	230	15	277	5	FAZ-D0,5/1	278568	12/120
1	230	15	277	5	FAZ-D1/1	278569	12/120
1.5	230	15	277	5	FAZ-D1,5/1	278570	12/120
1.6	230	15	277	5	FAZ-D1,6/1	278571	12/120
2	230	15	277	5	FAZ-D2/1	278572	12/120
2.5	230	15	277	5	FAZ-D2,5/1	278573	12/120
3	230	15	277	5	FAZ-D3/1	278574	12/120
3.5	230	15	277	5	FAZ-D3,5/1	278575	12/120
4	230	15	277	5	FAZ-D4/1	278576	12/120
5	230	15	277	5	FAZ-D5/1	278577	12/120
6	230	15	277	5	FAZ-D6/1	278578	12/120
8	230	15	277	5	FAZ-D8/1	278579	12/120
10	230	15	277	5	FAZ-D10/1	278580	12/120
12	230	15	277	5	FAZ-D12/1	278581	12/120
13	230	15	277	5	FAZ-D13/1	278582	12/120
15	230	15	277	5	FAZ-D15/1	278583	12/120
16	230	15	277	5	FAZ-D16/1	278584	12/120
20	230	15	277	5	FAZ-D20/1	278585	12/120
25	230	15	277	5	FAZ-D25/1	278586	12/120
32	230	15	277	5	FAZ-D32/1	278587	12/120
40	230	15	277	5	FAZ-D40/1	278588	12/120
50	230	10	-	-	FAZ-D50/1	115370	12/120
63	230	10	-	-	FAZ-D63/1	115371	12/120

**1+N-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	230	15	277	5	FAZ-D0,5/1N	278681	1/60
1	230	15	277	5	FAZ-D1/1N	278682	1/60
1.5	230	15	277	5	FAZ-D1,5/1N	278683	1/60
1.6	230	15	277	5	FAZ-D1,6/1N	278684	1/60
2	230	15	277	5	FAZ-D2/1N	278685	1/60
2.5	230	15	277	5	FAZ-D2,5/1N	278686	1/60
3	230	15	277	5	FAZ-D3/1N	278687	1/60
3.5	230	15	277	5	FAZ-D3,5/1N	278688	1/60
4	230	15	277	5	FAZ-D4/1N	278689	1/60
5	230	15	277	5	FAZ-D5/1N	278690	1/60
6	230	15	277	5	FAZ-D6/1N	278691	1/60
8	230	15	277	5	FAZ-D8/1N	278692	1/60
10	230	15	277	5	FAZ-D10/1N	278693	1/60
12	230	15	277	5	FAZ-D12/1N	278694	1/60
13	230	15	277	5	FAZ-D13/1N	278695	1/60
15	230	15	277	5	FAZ-D15/1N	278696	1/60
16	230	15	277	5	FAZ-D16/1N	278697	1/60
20	230	15	277	5	FAZ-D20/1N	278698	1/60
25	230	15	277	5	FAZ-D25/1N	278699	1/60
32	230	15	277	5	FAZ-D32/1N	278700	1/60
40	230	15	277	5	FAZ-D40/1N	278701	1/60
50	230	10	-	-	FAZ-D50/1N	115378	1/60
63	230	10	-	-	FAZ-D63/1N	115379	1/60

**2-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	400	15	480Y/277	5	FAZ-D0,5/2	278767	1/60
1	400	15	480Y/277	5	FAZ-D1/2	278768	1/60
1.5	400	15	480Y/277	5	FAZ-D1,5/2	278769	1/60
1.6	400	15	480Y/277	5	FAZ-D1,6/2	278770	1/60
2	400	15	480Y/277	5	FAZ-D2/2	278771	1/60
2.5	400	15	480Y/277	5	FAZ-D2,5/2	278772	1/60
3	400	15	480Y/277	5	FAZ-D3/2	278773	1/60
3.5	400	15	480Y/277	5	FAZ-D3,5/2	278774	1/60
4	400	15	480Y/277	5	FAZ-D4/2	278775	1/60
5	400	15	480Y/277	5	FAZ-D5/2	278776	1/60
6	400	15	480Y/277	5	FAZ-D6/2	278777	1/60
7	400	15	480Y/277	5	FAZ-D7/2	167491	1/60
8	400	15	480Y/277	5	FAZ-D8/2	278778	1/60
10	400	15	480Y/277	5	FAZ-D10/2	278779	1/60
12	400	15	480Y/277	5	FAZ-D12/2	278780	1/60
13	400	15	480Y/277	5	FAZ-D13/2	278781	1/60
15	400	15	480Y/277	5	FAZ-D15/2	278782	1/60
16	400	15	480Y/277	5	FAZ-D16/2	278783	1/60
20	400	15	480Y/277	5	FAZ-D20/2	278784	1/60
25	400	15	480Y/277	5	FAZ-D25/2	278785	1/60
30	400	15	480Y/277	5	FAZ-D30/2	167492	1/60
32	400	15	480Y/277	5	FAZ-D32/2	278786	1/60
40	400	15	480Y/277	5	FAZ-D40/2	278787	1/60
50	400	10	-	-	FAZ-D50/2	115372	1/60
63	400	10	-	-	FAZ-D63/2	115373	1/60

**3-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)</th
----------------------------------	--	---	--------------------------------------

# 2.194 Miniature Circuit Breakers

FAZ Miniature Circuit Breakers



## 3+N-poles

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	400	15	480Y/277 5	FAZ-D0,5/3N	278982	1/30	
1	400	15	480Y/277 5	FAZ-D1/3N	278983	1/30	
1.5	400	15	480Y/277 5	FAZ-D1,5/3N	278984	1/30	
1.6	400	15	480Y/277 5	FAZ-D1,6/3N	278985	1/30	
2	400	15	480Y/277 5	FAZ-D2/3N	278986	1/30	
2.5	400	15	480Y/277 5	FAZ-D2,5/3N	278987	1/30	
3	400	15	480Y/277 5	FAZ-D3/3N	278988	1/30	
3.5	400	15	480Y/277 5	FAZ-D3,5/3N	278989	1/30	
4	400	15	480Y/277 5	FAZ-D4/3N	278990	1/30	
5	400	15	480Y/277 5	FAZ-D5/3N	278991	1/30	
6	400	15	480Y/277 5	FAZ-D6/3N	278992	1/30	
8	400	15	480Y/277 5	FAZ-D8/3N	278993	1/30	
10	400	15	480Y/277 5	FAZ-D10/3N	278994	1/30	
12	400	15	480Y/277 5	FAZ-D12/3N	278995	1/30	
13	400	15	480Y/277 5	FAZ-D13/3N	278996	1/30	
15	400	15	480Y/277 5	FAZ-D15/3N	278997	1/30	
16	400	15	480Y/277 5	FAZ-D16/3N	278998	1/30	
20	400	15	480Y/277 5	FAZ-D20/3N	278999	1/30	
25	400	15	480Y/277 5	FAZ-D25/3N	279000	1/30	
32	400	15	480Y/277 5	FAZ-D32/3N	279001	1/30	
40	400	15	480Y/277 5	FAZ-D40/3N	279002	1/30	
50	400	10	- -	FAZ-D50/3N	115380	1/30	
63	400	10	- -	FAZ-D63/3N	115381	1/30	



## 4-poles

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	400	15	480Y/277 5	FAZ-D0,5/4	279068	1/30	
1	400	15	480Y/277 5	FAZ-D1/4	279069	1/30	
1.5	400	15	480Y/277 5	FAZ-D1,5/4	279070	1/30	
1.6	400	15	480Y/277 5	FAZ-D1,6/4	279071	1/30	
2	400	15	480Y/277 5	FAZ-D2/4	279072	1/30	
2.5	400	15	480Y/277 5	FAZ-D2,5/4	279073	1/30	
3	400	15	480Y/277 5	FAZ-D3/4	279074	1/30	
3.5	400	15	480Y/277 5	FAZ-D3,5/4	279075	1/30	
4	400	15	480Y/277 5	FAZ-D4/4	279076	1/30	
5	400	15	480Y/277 5	FAZ-D5/4	279077	1/30	
6	400	15	480Y/277 5	FAZ-D6/4	279078	1/30	
7	400	15	480Y/277 5	FAZ-D7/4	167467	1/30	
8	400	15	480Y/277 5	FAZ-D8/4	279079	1/30	
10	400	15	480Y/277 5	FAZ-D10/4	279080	1/30	
12	400	15	480Y/277 5	FAZ-D12/4	279081	1/30	
13	400	15	480Y/277 5	FAZ-D13/4	279082	1/30	
15	400	15	480Y/277 5	FAZ-D15/4	279083	1/30	
16	400	15	480Y/277 5	FAZ-D16/4	279084	1/30	
20	400	15	480Y/277 5	FAZ-D20/4	279085	1/30	
25	400	15	480Y/277 5	FAZ-D25/4	279086	1/30	
30	400	15	480Y/277 5	FAZ-D30/4	167468	1/30	
32	400	15	480Y/277 5	FAZ-D32/4	279087	1/30	
40	400	15	480Y/277 5	FAZ-D40/4	279088	1/30	
50	400	10	- -	FAZ-D50/4	115376	1/30	
63	400	10	- -	FAZ-D63/4	115377	1/30	

# xEffect

# xEffect

# Miniature Circuit Breakers

# 2.195

FAZ Miniature Circuit Breakers

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	240	10	277	5	FAZ-K0,5/1	278589	12/120

Characteristic K							
<b>1-pole</b>							

0.5	240	10	277	5	FAZ-K1/1	278590	12/120
1	240	10	277	5	FAZ-K1,6/1	278591	12/120
1.6	240	10	277	5	FAZ-K2/1	278592	12/120
2	240	10	277	5	FAZ-K3/1	278593	12/120
3	240	10	277	5	FAZ-K4/1	278594	12/120
4	240	10	277	5	FAZ-K6/1	278595	12/120
6	240	10	277	5	FAZ-K8/1	278596	12/120
8	240	10	277	5	FAZ-K10/1	278597	12/120
10	240	10	277	5	FAZ-K13/1	278598	12/120
13	240	10	277	5	FAZ-K16/1	278599	12/120
16	240	10	277	5	FAZ-K20/1	278600	12/120
20	240	10	277	5	FAZ-K25/1	278601	12/120
25	240	10	277	5	FAZ-K32/1	278602	12/120
32	240	10	277	5	FAZ-K40/1	278603	12/120
40	240	10	277	5	FAZ-K50/1	278604	12/120
50	240	10	277	5	FAZ-K63/1	278605	12/120



## 1+N-poles

0.5	240	10	277	5	FAZ-K0,5/1N	278702	1/60
1	240	10	277	5	FAZ-K1/1N	278703	1/60
1.6	240	10	277	5	FAZ-K1,6/1N	278704	1/60
2	240	10	277				

**2-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-K0,5/2	278788	1/60	
1	415	10	480Y/277 5	FAZ-K1/2	278789	1/60	
1.6	415	10	480Y/277 5	FAZ-K1,6/2	278790	1/60	
2	415	10	480Y/277 5	FAZ-K2/2	278791	1/60	
3	415	10	480Y/277 5	FAZ-K3/2	278792	1/60	
4	415	10	480Y/277 5	FAZ-K4/2	278793	1/60	
6	415	10	480Y/277 5	FAZ-K6/2	278794	1/60	
8	415	10	480Y/277 5	FAZ-K8/2	278795	1/60	
10	415	10	480Y/277 5	FAZ-K10/2	278796	1/60	
13	415	10	480Y/277 5	FAZ-K13/2	278797	1/60	
16	415	10	480Y/277 5	FAZ-K16/2	278798	1/60	
20	415	10	480Y/277 5	FAZ-K20/2	278799	1/60	
25	415	10	480Y/277 5	FAZ-K25/2	278800	1/60	
32	415	10	480Y/277 5	FAZ-K32/2	278801	1/60	
40	415	10	480Y/277 5	FAZ-K40/2	278802	1/60	
50	415	10	480Y/277 5	FAZ-K50/2	278803	1/60	
63	415	10	480Y/277 5	FAZ-K63/2	278804	1/60	

**3-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-3 (V)	Breaking capacity acc. to IEC/EN 60947-3 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-K0,5/3	278901	1/40	
1	415	10	480Y/277 5	FAZ-K1/3	278902	1/40	
1.6	415	10	480Y/277 5	FAZ-K1,6/3	278903	1/40	
2	415	10	480Y/277 5	FAZ-K2/3	278904	1/40	
3	415	10	480Y/277 5	FAZ-K3/3	278905	1/40	
4	415	10	480Y/277 5	FAZ-K4/3	278906	1/40	
6	415	10	480Y/277 5	FAZ-K6/3	278907	1/40	
8	415	10	480Y/277 5	FAZ-K8/3	278908	1/40	
10	415	10	480Y/277 5	FAZ-K10/3	278909	1/40	
13	415	10	480Y/277 5	FAZ-K13/3	278910	1/40	
16	415	10	480Y/277 5	FAZ-K16/3	278911	1/40	
20	415	10	480Y/277 5	FAZ-K20/3	278912	1/40	
25	415	10	480Y/277 5	FAZ-K25/3	278913	1/40	
32	415	10	480Y/277 5	FAZ-K32/3	278914	1/40	
40	415	10	480Y/277 5	FAZ-K40/3	278915	1/40	
50	415	10	480Y/277 5	FAZ-K50/3	278916	1/40	
63	415	10	480Y/277 5	FAZ-K63/3	278917	1/40	

**3+N-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-3N (V)	Breaking capacity acc. to IEC/EN 60947-3N (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-K0,5/3N	279003	1/30	
1	415	10	480Y/277 5	FAZ-K1/3N	279004	1/30	
1.6	415	10	480Y/277 5	FAZ-K1,6/3N	279005	1/30	
2	415	10	480Y/277 5	FAZ-K2/3N	279006	1/30	
3	415	10	480Y/277 5	FAZ-K3/3N	279007	1/30	
4	415	10	480Y/277 5	FAZ-K4/3N	279008	1/30	
6	415	10	480Y/277 5	FAZ-K6/3N	279009	1/30	
8	415	10	480Y/277 5	FAZ-K8/3N	279010	1/30	
10	415	10	480Y/277 5	FAZ-K10/3N	279011	1/30	
13	415	10	480Y/277 5	FAZ-K13/3N	279012	1/30	
16	415	10	480Y/277 5	FAZ-K16/3N	279013	1/30	
20	415	10	480Y/277 5	FAZ-K20/3N	279014	1/30	
25	415	10	480Y/277 5	FAZ-K25/3N	279015	1/30	
32	415	10	480Y/277 5	FAZ-K32/3N	279016	1/30	
40	415	10	480Y/277 5	FAZ-K40/3N	279017	1/30	
50	415	10	480Y/277 5	FAZ-K50/3N	279018	1/30	
63	415	10	480Y/277 5	FAZ-K63/3N	279019	1/30	

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-K0,5/4	279089	1/30	

**4-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-K1/4	279090	1/30	
1	415	10	480Y/277 5	FAZ-K1,6/4	279091	1/30	
1.6	415	10	480Y/277 5	FAZ-K2/4	279092	1/30	
2	415	10	480Y/277 5	FAZ-K3/4	279093	1/30	
3	415	10	480Y/277 5	FAZ-K4/4	279094	1/30	
4	415	10	480Y/277 5	FAZ-K6/4	279095	1/30	
6	415	10	480Y/277 5	FAZ-K8/4	279096	1/30	
8	415	10	480Y/277 5	FAZ-K10/4	279097	1/30	
10	415	10	480Y/277 5	FAZ-K13/4	279098	1/30	
13	415	10	480Y/277 5	FAZ-K16/4	279099	1/30	
16	415	10	480Y/277 5	FAZ-K20/4	279100	1/30	
20	415	10	480Y/277 5	FAZ-K25/4	279101	1/30	
25	415	10	480Y/277 5	FAZ-K32/4	279102	1/30	
3							

# 2.198 Miniature Circuit Breakers

FAZ Miniature Circuit Breakers

SG53112



## Characteristic S

### 1-pole

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
1	240	10	277	5	FAZ-S1/1	278606	12/120	
2	240	10	277	5	FAZ-S2/1	278607	12/120	
3	240	10	277	5	FAZ-S3/1	278608	12/120	
4	240	10	277	5	FAZ-S4/1	278609	12/120	
6	240	10	277	5	FAZ-S6/1	278610	12/120	
10	240	10	277	5	FAZ-S10/1	278611	12/120	
16	240	10	277	5	FAZ-S16/1	278612	12/120	
20	240	10	277	5	FAZ-S20/1	278613	12/120	
25	240	10	277	5	FAZ-S25/1	278614	12/120	
32	240	10	277	5	FAZ-S32/1	278615	12/120	
40	240	10	277	5	FAZ-S40/1	278616	12/120	

SG55112



### 2-poles

1	415	10	480Y/277	5	FAZ-S1/2	278805	1/60
2	415	10	480Y/277	5	FAZ-S2/2	278806	1/60
3	415	10	480Y/277	5	FAZ-S3/2	278807	1/60
4	415	10	480Y/277	5	FAZ-S4/2	278808	1/60
6	415	10	480Y/277	5	FAZ-S6/2	278809	1/60
10	415	10	480Y/277	5	FAZ-S10/2	278810	1/60
16	415	10	480Y/277	5	FAZ-S16/2	278811	1/60
20	415	10	480Y/277	5	FAZ-S20/2	278812	1/60
25	415	10	480Y/277	5	FAZ-S25/2	278813	1/60
32	415	10	480Y/277	5	FAZ-S32/2	278814	1/60
40	415	10	480Y/277	5	FAZ-S40/2	278815	1/60

# xEffect

# xEffect

# Miniature Circuit Breakers

# 2.199

FAZ Miniature Circuit Breakers

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	240	10	277	5	FAZ-Z0,5/1	278617	12/120

## Characteristic Z

### 1-pole

0.5	240	10	277	5	FAZ-Z0,5/1	278617	12/120
1	240	10	277	5	FAZ-Z1/1	278618	12/120
1.6	240	10	277	5	FAZ-Z1,6/1	278619	12/120
2	240	10	277	5	FAZ-Z2/1	278620	12/120
3	240	10	277	5	FAZ-Z3/1	278621	12/120
4	240	10	277	5	FAZ-Z4/1	278622	12/120
6	240	10	277	5	FAZ-Z6/1	278623	12/120
8	240	10	277	5	FAZ-Z8/1	278624	12/120
10	240	10	277	5	FAZ-Z10/1	278625	12/120
13	240	10	277	5	FAZ-Z13/1	106020	12/120
16	240	10	277	5	FAZ-Z16/1	278626	12/120
20	240	10	277	5	FAZ-Z20/1	278627	12/120
25	240	10	277	5	FAZ-Z25/1	278628	12/120
32	240	10	277	5	FAZ-Z32/1	278629	12/120
40	240	10	277	5	FAZ-Z40/1	278630	12/120
50	240	10	277	5	FAZ-Z50/1	278631	12/120
63	240	10	277	5	FAZ-Z63/1	278632	12/120

### 2-poles

0.5	415	10	480Y/277	5	FAZ-Z0,5/2	278816	1/60
1	415	10	480Y/277	5	FAZ-Z1/2	278817	1/60
1.6	415	10	480Y/277	5	FAZ-Z1,6/2	278818	1/60
2	415	10	480Y/277	5	FAZ-Z2/2	278819	1/60
3	415	10	480Y/277	5	FAZ-Z3/2	278820	1/60
4	415	10	480Y/277	5	FAZ-Z4/2	278821	1/60
6	415	10	480Y/277	5	FAZ-Z6/2	278822	1/60
8	415	10	480Y/277	5	FAZ-Z8/2	278823	1/60
10	415	10	480Y/277	5	FAZ-Z10/2	278824	1/60
13	415	10	480Y/277	5	FAZ-Z13/2	106021	1/60
16	415	10	480Y/277	5	FAZ-Z16/2	278825	1/60
20	415	10	480Y/277	5	FAZ-Z20/2	278826	1/60
25	415	10	480Y/277	5	FAZ-Z25/2	278827	1/60
32	415	10	480Y/277	5	FAZ-Z32/2	278828	1/60
40	415	10	480Y/277	5	FAZ-Z40/2	278829	1/60
50	415	10	480Y/277	5	FAZ-Z50/2	278830	1/60
63	415	10	480Y/277	5	FAZ-Z63/2	278831	1/60

**3-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-Z0,5/3	278918	1/40	
1	415	10	480Y/277 5	FAZ-Z1/3	278919	1/40	
1.6	415	10	480Y/277 5	FAZ-Z1,6/3	278920	1/40	
2	415	10	480Y/277 5	FAZ-Z2/3	278921	1/40	
3	415	10	480Y/277 5	FAZ-Z3/3	278922	1/40	
4	415	10	480Y/277 5	FAZ-Z4/3	278923	1/40	
6	415	10	480Y/277 5	FAZ-Z6/3	278924	1/40	
8	415	10	480Y/277 5	FAZ-Z8/3	278925	1/40	
10	415	10	480Y/277 5	FAZ-Z10/3	278926	1/40	
13	415	10	480Y/277 5	FAZ-Z13/3	106022	1/40	
16	415	10	480Y/277 5	FAZ-Z16/3	278927	1/40	
20	415	10	480Y/277 5	FAZ-Z20/3	278928	1/40	
25	415	10	480Y/277 5	FAZ-Z25/3	278929	1/40	
32	415	10	480Y/277 5	FAZ-Z32/3	278930	1/40	
40	415	10	480Y/277 5	FAZ-Z40/3	278931	1/40	
50	415	10	480Y/277 5	FAZ-Z50/3	278932	1/40	
63	415	10	480Y/277 5	FAZ-Z63/3	278933	1/40	

**4-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL1077 (V)	Breaking capacity acc. to UL1077 (kA)	Type Designation	Article No.	Units per package
0.5	415	10	480Y/277 5	FAZ-Z0,5/4	279106	1/60	
1	415	10	480Y/277 5	FAZ-Z1/4	279107	1/60	
1.6	415	10	480Y/277 5	FAZ-Z1,6/4	279108	1/60	
2	415	10	480Y/277 5	FAZ-Z2/4	279109	1/60	
3	415	10	480Y/277 5	FAZ-Z3/4	279110	1/60	
4	415	10	480Y/277 5	FAZ-Z4/4	279111	1/60	
6	415	10	480Y/277 5	FAZ-Z6/4	279112	1/60	
8	415	10	480Y/277 5	FAZ-Z8/4	279113	1/60	
10	415	10	480Y/277 5	FAZ-Z10/4	279114	1/60	
13	415	10	480Y/277 5	FAZ-Z13/4	106023	1/60	
16	415	10	480Y/277 5	FAZ-Z16/4	279115	1/60	
20	415	10	480Y/277 5	FAZ-Z20/4	279116	1/60	
25	415	10	480Y/277 5	FAZ-Z25/4	279117	1/60	
32	415	10	480Y/277 5	FAZ-Z32/4	279118	1/60	
40	415	10	480Y/277 5	FAZ-Z40/4	279119	1/60	
50	415	10	480Y/277 5	FAZ-Z50/4	279120	1/60	
63	415	10	480Y/277 5	FAZ-Z63/4	279121	1/60	

Rated current I <sub>n</sub> (A)	Rated voltage (V)	Breaking capacity acc. to IEC/EN 60898-1 (kA)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package

**Characteristic B****1+N-poles (1MU)**

6	240	6	10	FAZ-PN-B6/1N	279146	12/120
10	240	6	10	FAZ-PN-B10/1N	279147	12/120
13	240	6	10	FAZ-PN-B13/1N	279148	12/120
16	240	6	10	FAZ-PN-B16/1N	279149	12/120
20	240	6	10	FAZ-PN-B20/1N	279150	12/120
25	240	6	10	FAZ-PN-B25/1N	279151	12/120
32	240	6	10	FAZ-PN-B32/1N	279152	12/120
40	240	6	10	FAZ-PN-B40/1N	279153	12/120

**Characteristic C****1+N-poles (1MU)**

2	240	6	10	FAZ-PN-C2/1N	279154	12/120
4	240	6	10	FAZ-PN-C4/1N	279155	12/120
6	240	6	10	FAZ-PN-C6/1N	279156	12/120
10	240	6	10	FAZ-PN-C10/1N	279157	12/120
13	240	6	10	FAZ-PN-C13/1N	279158	12/120
16	240	6	10	FAZ-PN-C16/1N	279159	12/120
20	240	6	10	FAZ-PN-C20/1N	279160	12/120
25	240	6	10	FAZ-PN-C25/1N	279161	12/120
32	240	6	10	FAZ-PN-C32/1N	279162	12/120
40	240	6	10	FAZ-PN-C40/1N	279163	12/120

wa\_sg00114



Rated current I <sub>n</sub> (A)	Rated voltage (V)	Breaking capacity acc. to IEC/EN 60898-1 (kA)	Type Designation	Article No.	Units per package
4	240	10	FAZ-B4/1-HS	279274	12/120

#### Characteristic B

- Miniature circuit breaker with reduced Let-through-energy for control circuits to protect the auxiliary switch contacts from welding.

##### 1-pole

SG5512



##### 2-poles

4	240	10	FAZ-B4/2-HS	279275	1/60
---	-----	----	-------------	--------	------

#### Miniature Circuit Breakers FAZ

##### Accessories:



Auxiliary switch for subsequent installation	FAZ-XHIN11	286054
	FAZ-XHINW1	286055
Tripping signal contact for subsequent installation	FAZ-XAM002	262414
Shunt trip release	ZP-ASA/..	248438, 248439
	FAZ-XAA/..	278518, 278519
Undervoltage release	FAZ-XUA/..	212049, 212051, 212053
Switching interlock	Z-IS/SPE-1TE	274418
Terminal cover		
1-pole	Z-TC/MCB-1P	178102
2-poles	Z-TC/SD-2P	178099
3-poles	Z-TC/SD-3P	178100
4-poles	Z-TC/SD-4P	178101

#### Technical Data

Electrical	B Characteristic	C Characteristic	D Characteristic
Approvals	CE, VDE		
Classified according to	IEC 61373, EN 45545-2		
Current test marks as printed onto the device			
Standards	IEC/EN 60947-2		
Short-circuit trip response	3–5 I <sub>n</sub>	5–10 I <sub>n</sub>	10–20 I <sub>n</sub>
<b>Supplementary Protectors - UL/CSA</b>			
Current range	1–63 A	0.16–63 A	0.5–40 A
Maximum voltage ratings - UL/CSA			
Single-pole, single-pole + neutral	277 V AC 48 V DC	277 V AC 48 V DC	277 V AC 48 V DC
Two-, three-, four-pole and three-pole + neutral	480Y/277 V AC	480Y/277 V AC	480Y/277 V AC
Two poles in series	96 V DC	96 V DC	96 V DC
<b>Thermal tripping characteristics</b>			
Single-pole	< 1 hour @ 1.35 x I <sub>n</sub> @ 40°C	< 1 hour @ 1.35 x I <sub>n</sub> @ 40°C	< 1 hour @ 1.35 x I <sub>n</sub> @ 40°C
Multi-pole	< 1 hour @ 1.45 x I <sub>n</sub> @ 40°C	< 1 hour @ 1.45 x I <sub>n</sub> @ 40°C	< 1 hour @ 1.45 x I <sub>n</sub> @ 40°C
Short-circuit ratings (at max. voltage)			
Single-pole	10 kA (5 kA for 40–63A device)	10 kA (5 kA for 40–63A device)	5 kA
Two-, three-pole	10 kA (5 kA for 40–63A device)	10 kA (5 kA for 40–63A device)	5 kA
Single-pole	10 kA @ 48 V DC	10 kA @ 48 V DC	10 kA @ 48 V DC
Two poles in series	10 kA @ 96 V DC	10 kA @ 96 V DC	10 kA @ 96 V DC
<b>Miniature Circuit Breaker - IEC</b>			
Current range	1–40 A	50–63 A	0.16–40 A
Maximum voltage ratings - IEC 60947-2			
Single-pole, single-pole + neutral	254 V AC 60 V DC	230 V AC 60 V DC	230 V AC 60 V DC
Two-, three-, four-pole and three-pole + neutral	440 V AC	400 V AC	440 V AC
Maximum voltage ratings - IEC 60898			
Single-pole, single-pole + neutral	240 V AC	240 V AC	240 V AC
Two-, three-, four-pole and three-pole + neutral	415 V AC	415 V AC	415 V AC
Thermal tripping characteristics - IEC 60947-2			
	> 1 hour @ 1.05 x I <sub>n</sub> @ 40°C	> 1 hour @ 1.05 x I <sub>n</sub> @ 40°C	> 1 hour @ 1.05 x I <sub>n</sub> @ 40°C
	< 1 hour @ 1.3 x I <sub>n</sub> @ 40°C	< 1 hour @ 1.3 x I <sub>n</sub> @ 40°C	< 1 hour @ 1.3 x I <sub>n</sub> @ 40°C
Interrupt ratings			
IEC 60947-2 (I <sub>cu</sub> at 400 V AC)	15 kA	15 kA	15 kA
IEC 60947-2 (I <sub>cu</sub> at max. voltage)	10 kA	10 kA	10 kA
IEC 60898 (I <sub>cn</sub> at max. voltage)	10 kA	10 kA	10 kA
Service short circuit breaking capacity- I <sub>cs</sub>	7.5 kA	7.5 kA	7.5 kA
Max. back-up fuse [gL/gG]	125 A	125 A	125 A
Rated impulse withstand voltage - U <sub>imp</sub>	4000 V AC	4000 V AC	4000 V AC
Rated insulation voltage - U <sub>i</sub>	440 V AC	440 V AC	440 V AC
<b>Environmental / General</b>			
Selectivity class	3	3	3
Endurance (operations)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)
Shock (IEC 68-2-22)	10 g / 120 ms	10 g / 120 ms	10 g / 120 ms
Operating temperature range	-40°C up to +75°C	-40°C up to +75°C	-40°C up to +75°C
Storage- and transport temperature	-40°C up to +75°C	-40°C up to +75°C	-40°C up to +75°C
<b>Mechanical</b>			
Device height	80 mm	80 mm	80 mm
Terminal protection	Finger and back-of-hand proof	Finger and back-of-hand proof	Finger and back-of-hand proof
Mounting width per pole	17.5 mm	17.5 mm	17.5 mm
Mounting	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail
Degree of protection	IP20	IP20	IP20
Terminals top and bottom	Twin-purpose terminals	Twin-purpose terminals	Twin-purpose terminals
Supply connection	Line or load side	Line or load side	Line or load side
Terminal capacity [mm <sup>2</sup> ]	1 x 25 / 2 x 10	1 x 25 / 2 x 10	1 x 25 / 2 x 10
Torque of terminals	2.4 Nm	2.4 Nm	2.4 Nm
Thickness of busbar material	0.8 - 2 mm	0.8 - 2 mm	0.8 - 2 mm
Mounting position	As required	As required	As required

**Technical Data**


<b>Electrical</b>	<b>K Characteristic</b>	<b>S Characteristic</b>	<b>Z Characteristic</b>
Approvals	UR (UL 1077), CE	UR (UL 1077), CSA (CSA 22.2 No. 235) for 1-16 A, CE	UR (UL 1077), CE
Standards	IEC/EN 60947-2		
Classified according to	IEC 61373, EN 45545-2		
Current test marks as printed onto the device			
Short-circuit trip response	8–12 $I_n$	13–17 $I_n$	2–3 $I_n$
<b>Supplementary Protectors - UL/CSA</b>			
Current range	1–63 A	1–40 A	0.5–63 A
Maximum voltage ratings - UL/CSA			
Single-pole, single-pole + neutral	277 V AC > 60 V DC	277 V AC > 60 V DC	277 V AC > 60 V DC
Two-, three-, four-pole and three-pole + neutral	480Y/277 V AC > 125 V DC	480Y/277 V AC > 125 V DC	480Y/277 V AC 96 V DC
Two poles in series			
Thermal tripping characteristics			
Single-pole	< 1 hour @ 1.35 x $I_n$ @ 40°C	< 1 hour @ 1.35 x $I_n$ @ 40°C	< 1 hour @ 1.35 x $I_n$ @ 40°C
Multi-pole	< 1 hour @ 1.45 x $I_n$ @ 40°C	< 1 hour @ 1.45 x $I_n$ @ 40°C	< 1 hour @ 1.45 x $I_n$ @ 40°C
Short-circuit ratings (at max. voltage)			
Single-pole	5 kA @ 277 V AC	5 kA @ 277 V AC	5 kA @ 277 V AC
Single-pole + neutral	5 kA @ 277 V AC	5 kA @ 277 V AC	5 kA @ 277 V AC
Two-, three-, four-pole	5 kA @ 480Y/277 V AC	5 kA @ 480Y/277 V AC	5 kA @ 480Y/277 V AC
<b>Miniature Circuit Breaker - IEC</b>			
Current range	0.5–63 A	0.5–40 A	1–63 A
Maximum voltage ratings - IEC 60947-2			
Single-pole, single-pole + neutral	240 V AC > 120 V DC	240 V AC > 120 V DC	240 V AC > 120 V DC
Single-pole	415 V AC	415 V AC	415 V AC
Two-, three-, four-pole and three-pole + neutral			
Thermal tripping characteristics			
> 1 hour @ 1.05 x $I_n$ @ 40°C	> 1 hour @ 1.05 x $I_n$ @ 40°C	> 1 hour @ 1.05 x $I_n$ @ 40°C	
< 1 hour @ 1.3 x $I_n$ @ 40°C	< 1 hour @ 1.3 x $I_n$ @ 40°C	< 1 hour @ 1.3 x $I_n$ @ 40°C	
Interrupt ratings (at max. voltage)			
IEC 60947-2	10 kA	10 kA	10 kA
Service short circuit breaking capacity- $I_{cs}$	5 kA	5 kA	5 kA
Max. back-up fuse [gL/gG]	125 A	125 A	125 A
Rated impulse withstand voltage - $U_{imp}$	4000 V AC	4000 V AC	4000 V AC
Rated insulation voltage - $U_i$	440 V AC	440 V AC	440 V AC
<b>Environmental / General</b>			
Selectivity class	3	3	3
Endurance (operations)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)
Shock (IEC 68-2-22)	10 g / 120 ms	10 g / 120 ms	10 g / 120 ms
Operating temperature range	-40°C up to +75°C	-40°C up to +75°C	-40°C up to +75°C
Storage- and transport temperature	-40°C up to +75°C	-40°C up to +75°C	-40°C up to +75°C
<b>Mechanical</b>			
Device height	80 mm	80 mm	80 mm
Terminal protection	Finger and back-of-hand proof	Finger and back-of-hand proof	Finger and back-of-hand proof
Mounting width per pole	17.5 mm	17.5 mm	17.5 mm
Mounting	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail
Degree of protection	IP20	IP20	IP20
Terminals top and bottom	Twin-purpose terminals	Twin-purpose terminals	Twin-purpose terminals
Supply connection	Line or load side	Line or load side	Line or load side
Terminal capacity [mm <sup>2</sup> ]	1 x 25 / 2 x 10	1 x 25 / 2 x 10	1 x 25 / 2 x 10
Torque of terminals	2.4 Nm	2.4 Nm	2.4 Nm
Thickness of busbar material	0.8 - 2 mm	0.8 - 2 mm	0.8 - 2 mm
Mounting position	As required	As required	As required

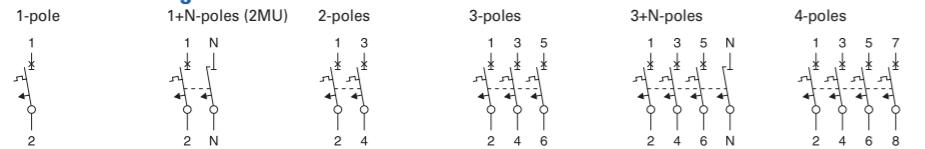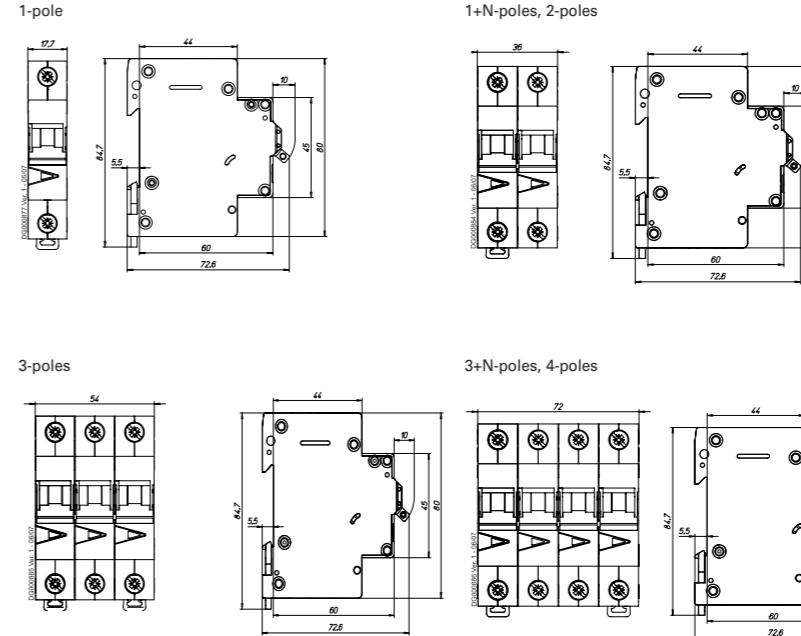**Connection diagram**

**Dimensions (mm) FAZ**

**Additional  $I_{cu}$  values for 2A and 4A FAZ type B and C (IEC/EN 60947-2)**


	<b>100-133 V</b>	<b>220-240 V</b>	<b>380-415 V</b>
1-pole	2A	70	70
	4A	70	70
2-pole	2A	70	70
	4A	70	70
3-pole	2A	70	70
	4A	70	70
4-pole	2A	70	70
	4A	70	70
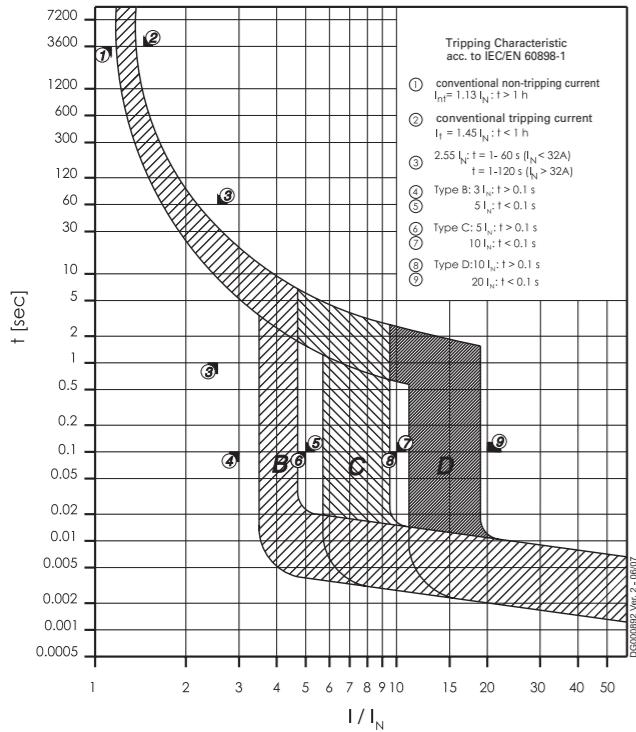
#### Tripping Characteristics FAZ


Characteristics B, C and D - IEC/EN60898-1




Characteristic K - IEC/EN 60947-2

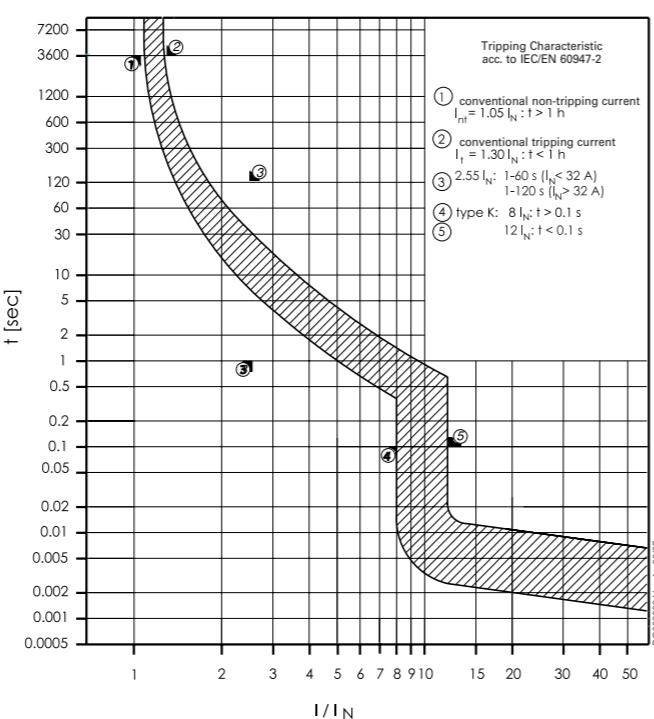

Characteristic S - IEC/EN 60947-2

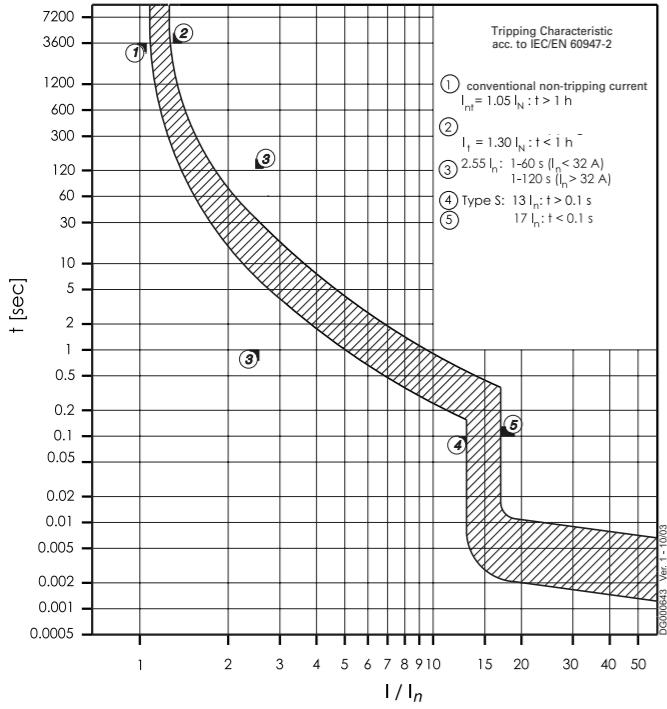


Characteristic S - UL1077

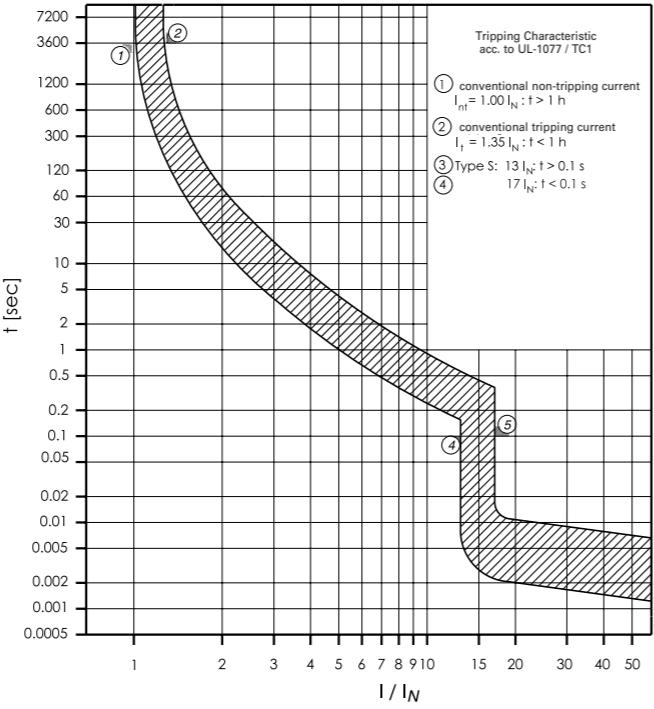


#### Tripping Characteristics FAZ

Characteristic Z - IEC/EN 60947-2

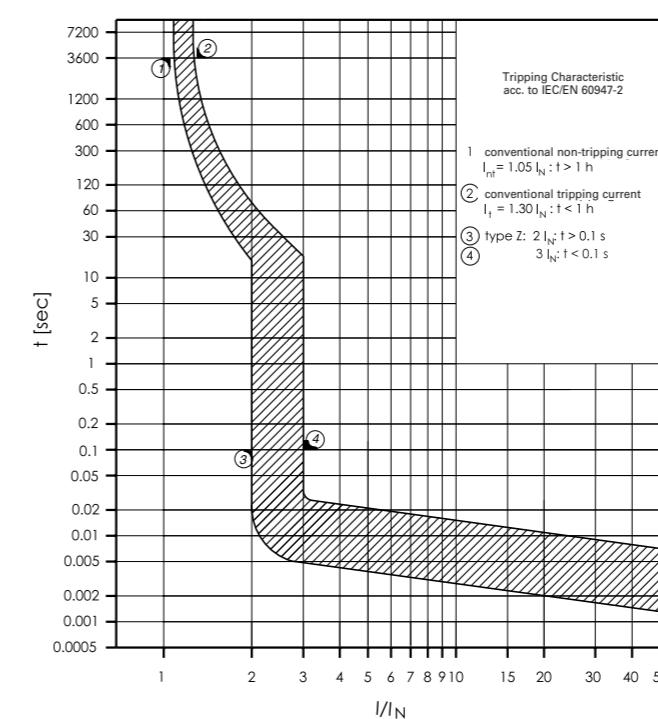

Characteristic Z - UL1077

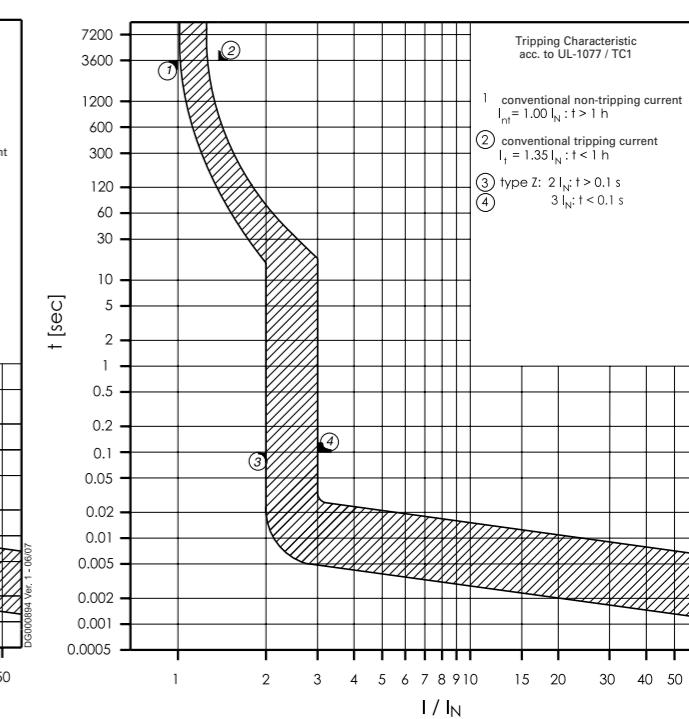

**Internal Resistance FAZ**

<b>Type B</b>		
At room temperature (single pole)		
I <sub>n</sub> [A]	Z* [mΩ]	R* [mΩ]
1	1120	1102
1.5	922	912
1.6	922	912
2	335	333
2.5	234	230
3	211	208
3.5	184	180
4	87.7	87.2
5	73.5	72.8
6	46.8	46.3
8	30.5	30.4
10	17.5	17.4
12	16.9	16.8
13	13.4	13.3
15	8.0	7.9
16	8.0	7.9
20	7.2	7.1
25	5.0	4.9
32	3.7	3.7
40	2.6	2.5
50	2.1	2.1
63	2.0	2.0
* 50 Hz		

<b>Type C</b>		
At room temperature (single pole)		
I <sub>n</sub> [A]	Z* [mΩ]	R* [mΩ]
0.16	68500	68300
0.25	27500	27400
0.5	4680	4670
0.75	2280	2250
1	1120	1100
1.5	589	587
1.6	589	587
2	335	333
2.5	234	230
3	131	130
3.5	143	141
4	87.7	87.2
5	73.5	72.8
6	39.3	39.1
8	30.5	30.4
10	14.1	14.0
12	13.5	13.4
13	13.4	13.3
15	8.0	7.9
16	8.0	7.9
20	7.2	7.1
25	5.0	4.9
32	3.7	3.7
40	2.6	2.5
50	2.1	2.1
63	2.0	2.0
* 50 Hz		

<b>Type D</b>		
At room temperature (single pole)		
I <sub>n</sub> [A]	Z* [mΩ]	R* [mΩ]
0.5	4680	4670
1	772	770
1.5	512	508
1.6	512	508
2	250	249
2.5	153	153
3	131	130
3.5	143	141
4	87.7	87.2
5	65.4	65.1
6	39.3	39.1
8	19.5	19.5
10	14.1	14.0
12	11.3	11.2
13	10.1	10.1
15	8.0	7.9
16	8.0	7.9
20	4.9	4.9
25	3.9	3.8
32	3.5	3.4
40	2.7	2.6
* 50 Hz		

**Fault Loop Impedance FAZ**

Max. allowed value for the Fault Loop Impedance Z<sub>s</sub>  
(acc. to DIN VDE 0100, Teil 410)

U<sub>0</sub> = 230 V

	<b>Type B</b>	<b>Type C</b>	<b>Type D</b>
0.4s			
I <sub>n</sub> [A]	Z <sub>s</sub> * [mΩ]	R* [mΩ]	Z <sub>s</sub> * [mΩ]
1	40.4	40.4	24.3
1.5	26.9	26.9	16.2
2	20.2	20.2	12.2
2.5	16.1	16.1	9.7
3	13.5	13.5	8.1
3.5	11.5	11.5	7.0
4	10.1	10.1	6.1
5	8.1	8.1	4.9
6	6.7	6.7	4.1
8	5.0	5.0	3.0
10	4.0	4.0	2.4
12	3.4	3.4	2.0
13	3.1	3.1	1.9
15	2.7	2.7	1.6
16	2.5	2.5	1.5
20	2.0	2.0	1.2
25	1.6	1.6	1.0
32	1.3	1.3	0.8
40	1.0	1.0	0.6
50	0.8	0.8	0.5
63	0.6	0.6	0.4
			R* [mΩ]

$$Z_s = R_{M.C.B.} + R_{loop}$$

Data/factors taken from the time-current characteristic FAZ

For other rated voltages U<sub>0</sub>:

U<sub>0</sub> = 240 V: Z<sub>s</sub> \* 1.04

U<sub>0</sub> = 127 V: Z<sub>s</sub> \* 0.55

**Power Loss at  $I_n$  FAZ (50/60 Hz)**

<b>Type B</b>					
$I_n$ [A]	P [W]				
1	1.6	1.7	3.1	4.7	4.8
1.5	2.3	2.5	4.6	6.9	7.2
1.6	2.5	2.7	4.9	7.4	7.6
2	1.4	1.5	2.8	4.1	4.3
2.5	1.5	1.7	3.1	4.6	4.7
3	2.5	2.7	5.0	7.6	7.8
3.5	2.5	2.8	5.1	7.8	8.0
4	1.4	1.6	2.9	4.4	4.5
5	1.9	2.1	3.8	5.8	6.0
6	1.8	2.0	3.6	5.5	5.6
8	2.1	2.3	4.1	6.3	6.5
10	1.9	2.1	3.9	5.9	6.1
12	2.8	3.2	5.9	8.7	9.0
13	2.5	2.9	5.3	7.8	8.1
15	2.1	2.4	4.4	6.5	6.7
16	2.2	2.6	4.7	6.9	7.2
20	3.2	3.6	6.6	9.8	10.1
25	3.0	3.5	6.4	9.4	9.7
32	3.7	4.4	8.1	12.1	12.5
40	3.4	4.1	7.5	11.2	11.5
50	4.5	5.4	9.9	14.9	15.3
63	5.2	6.3	11.5	17.2	17.7
* symmetrical load					

**Type C**

$I_n$ [A]	P [W]				
0.16	2.2	2.4	4.4	6.7	6.9
0.25	2.0	2.2	4.0	6.1	6.3
0.5	1.2	1.3	2.4	3.5	3.7
0.75	1.3	1.4	2.6	3.9	4.1
1	1.6	1.7	3.1	4.7	4.8
1.5	1.5	1.6	2.9	4.4	4.6
1.6	1.6	1.7	3.1	4.7	4.9
2	1.4	1.5	2.8	4.1	4.3
2.5	1.5	1.7	3.1	4.6	4.7
3	1.2	1.3	2.4	3.6	3.7
3.5	1.3	1.4	2.6	3.9	4.0
4	1.4	1.6	2.9	4.4	4.5
5	1.9	2.1	3.8	5.8	6.0
6	1.5	1.6	2.9	4.4	4.6
8	2.1	2.3	4.1	6.3	6.5
10	1.5	1.7	3.0	4.6	4.7
12	2.1	2.4	4.4	6.5	6.8
13	2.5	2.9	5.3	7.8	8.1
15	2.1	2.4	4.4	6.5	6.7
16	2.2	2.6	4.7	6.9	7.2
20	3.2	3.6	6.6	9.8	10.1
25	3.0	3.5	6.4	9.4	9.7
32	3.7	4.4	8.1	12.1	12.5
40	3.4	4.1	7.5	11.2	11.5
50	4.5	5.4	9.9	14.9	15.3
63	5.2	6.3	11.5	17.2	17.7
* symmetrical load					

**Type D**

$I_n$ [A]	P [W]				
0.5	1.2	1.3	2.4	3.5	3.7
1	0.8	0.9	1.6	2.4	2.5
1.5	1.2	1.3	2.3	3.5	3.6
1.6	1.3	1.4	2.5	3.8	3.9
2	1.0	1.1	2.0	3.0	3.1
2.5	1.0	1.1	1.9	2.9	3.0
3	1.2	1.3	2.4	3.6	3.7
3.5	1.3	1.4	2.6	3.9	4.0
4	1.4	1.6	2.9	4.4	4.5
5	1.7	1.8	3.3	5.1	5.3
6	1.5	1.6	2.9	4.4	4.6
8	1.3	1.5	2.6	4.0	4.2
10	1.5	1.7	3.0	4.6	4.7
12	1.7	2.0	3.6	5.3	5.4
13	1.9	2.2	4.0	5.9	6.1
15	2.1	2.4	4.4	6.5	6.7
16	2.2	2.6	4.7	6.9	7.2
20	2.0	2.2	4.1	6.1	6.2
25	2.5	2.9	5.2	7.7	7.9
32	3.4	4.0	7.4	11.1	11.4
40	3.2	3.8	7.0	10.4	10.7
* symmetrical load					


**Influence of Ambient Temperature FAZ**

On Load Carrying Capacity (temperature derating)


$I_n$ [A]	Ambient temperature T [°C]																
	-40	-30	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75
0.16	0.2	0.2	0.19	0.19	0.18	0.17	0.17	0.16	0.16	0.15	0.15	0.15	0.14	0.14	0.14	0.13	
0.25	0.32	0.31	0.3	0.29	0.28	0.27	0.26	0.25	0.25	0.24	0.24	0.23	0.23	0.22	0.22	0.21	0.21
0.5	0.64	0.62	0.6	0.58	0.56	0.54	0.52	0.5	0.49	0.48	0.47	0.46	0.45	0.44	0.43	0.42	0.41
0.75	0.96	0.93	0.9	0.87	0.84	0.81	0.78	0.75	0.74	0.73	0.71	0.69	0.68	0.66	0.65	0.64	0.62
1	1.3	1.2	1.2	1.1	1.1	1	1	0.99	0.97	0.95	0.93	0.9	0.89	0.87	0.85	0.83	
1.5	1.9	1.9	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.3	1.3	1.3	1.2	
1.6	2	2	1.9	1.9	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.4	1.3	
2	2.6	2.5	2.4	2.3	2.2	2.1	2	2	1.9	1.9	1.9	1.8	1.8	1.7	1.7	1.7	
2.5	3.2	3.1	3	2.9	2.8	2.7	2.6	2.5	2.5	2.4	2.3	2.3	2.2	2.2	2.1	2.1	
3	3.8	3.7	3.6	3.5	3.4	3.3	3.1	3	3	2.9	2.8	2.8	2.7	2.7	2.6	2.5	2.5
3.5	4.5	4.4	4.2	4.1	3.9	3.8	3.7	3.5	3.4	3.4	3.3	3.2	3.1	3	3	2.9	
4	5.1	5	4.8	4.7	4.5	4.3	4.2	4	3.9	3.9	3.8	3.7	3.6	3.5	3.4	3.3	
5	6.4	6.2	6	5.8	5.6	5.4	5.2	5	4.9	4.8	4.7	4.6	4.5	4.4	4.3	4.2	4.1
6	7.7	7.5	7.2	7	6.7	6.5	6.3										

**Maximum Let-Through Energy FAZ**

Type B (IEC/EN60947-2)

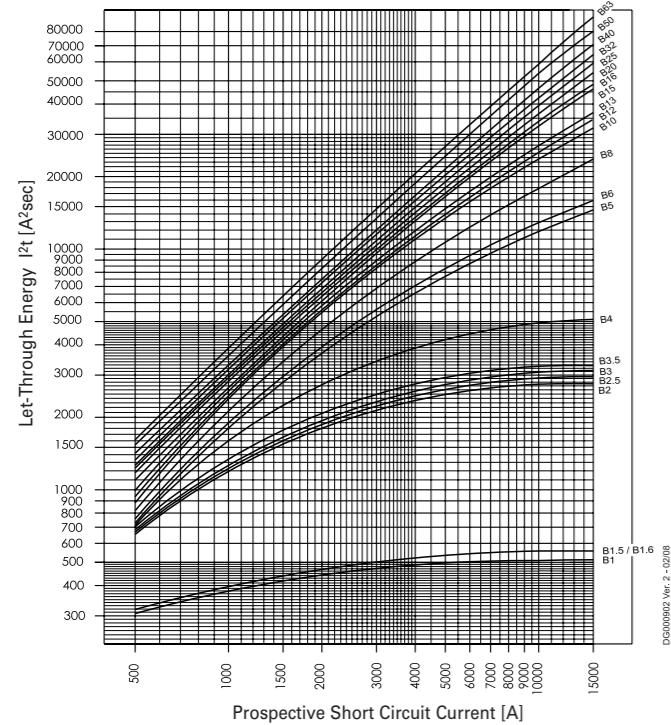


Type C (IEC/EN60947-2)

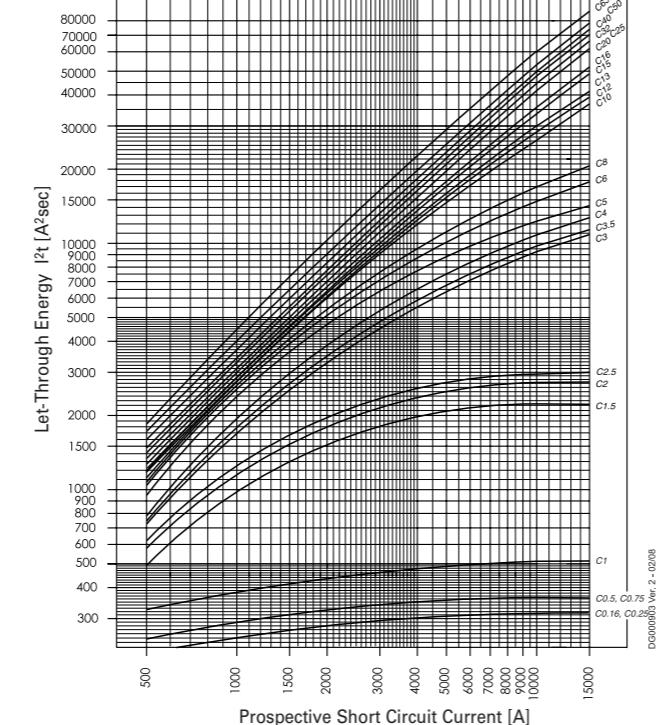


**Maximum Let-Through Energy FAZ**

Type S

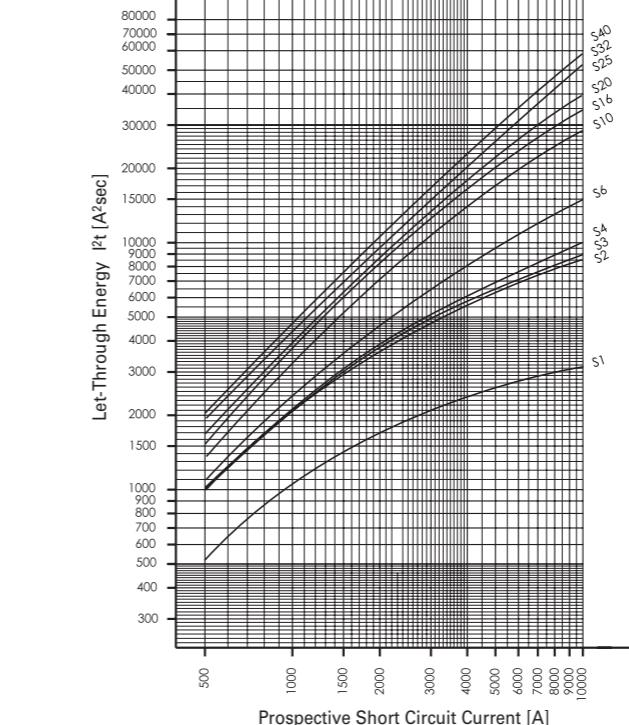


Type Z

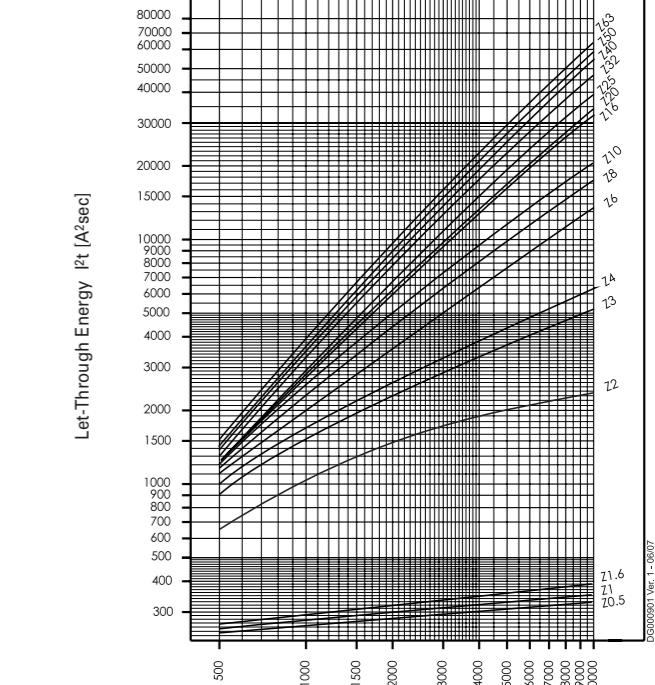


**Maximum Let-Through Current FAZ**


Type B (IEC/EN60898)

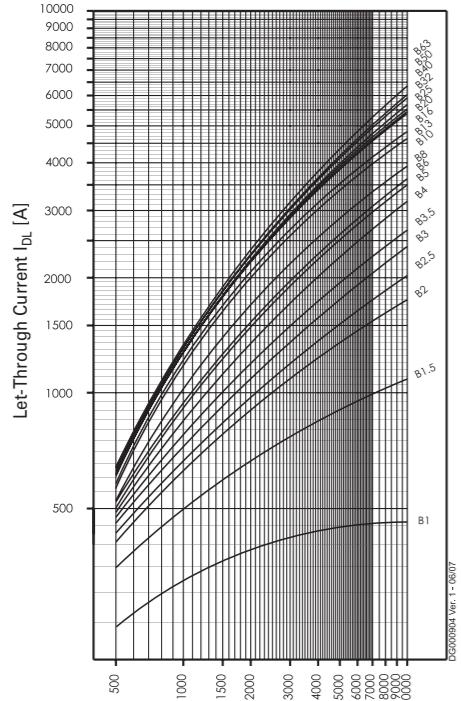


Type C (IEC/EN60898)

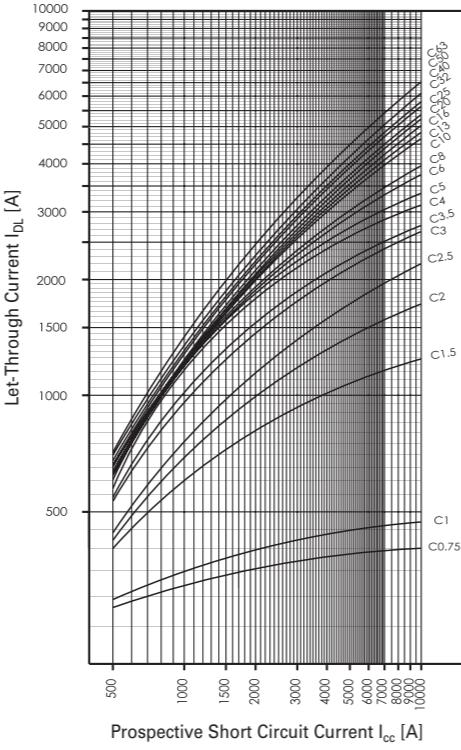

Type D (IEC/EN60898)

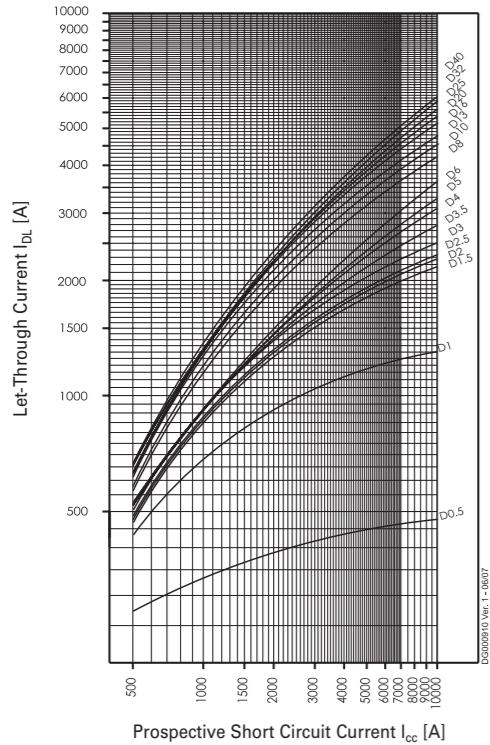


Type K

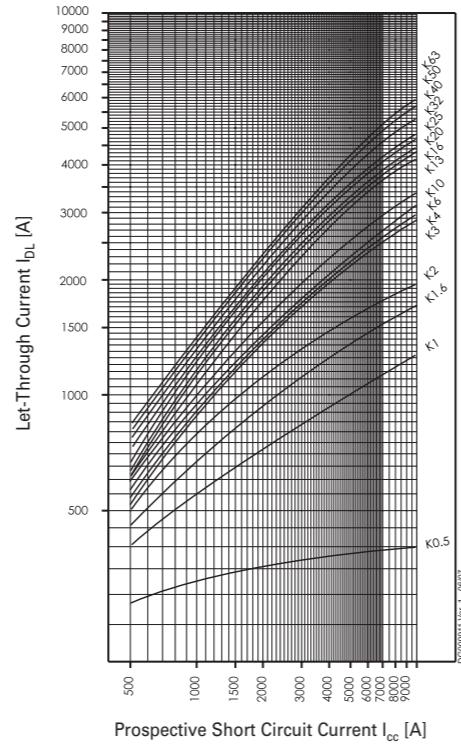


**Maximum Let-Through Current FAZ**


Type S

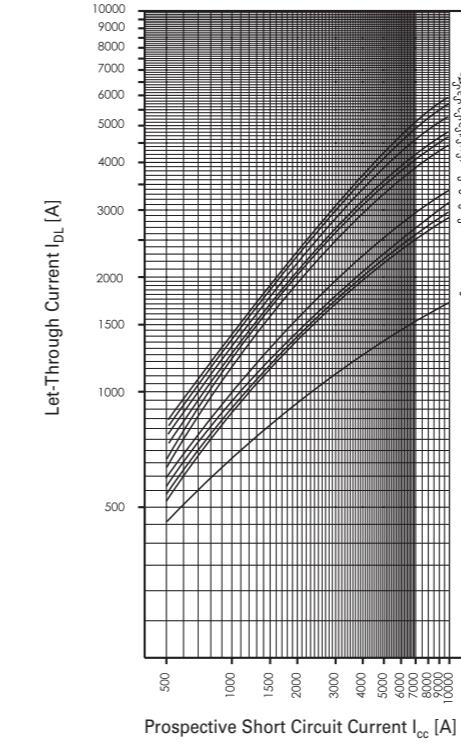


Type B (IEC/EN60947-2)

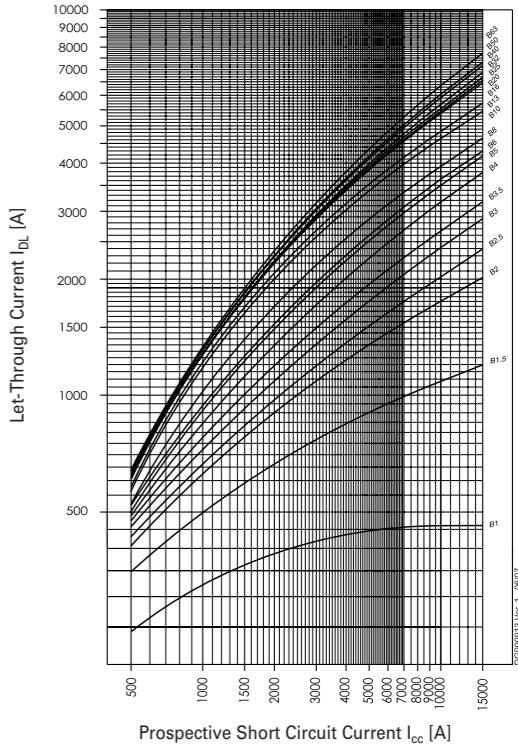

Type C (IEC/EN60947-2)

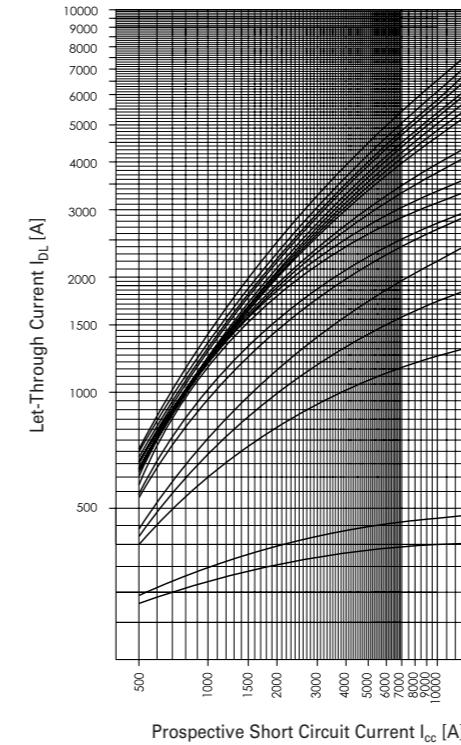

Type D (IEC/EN60947-2)

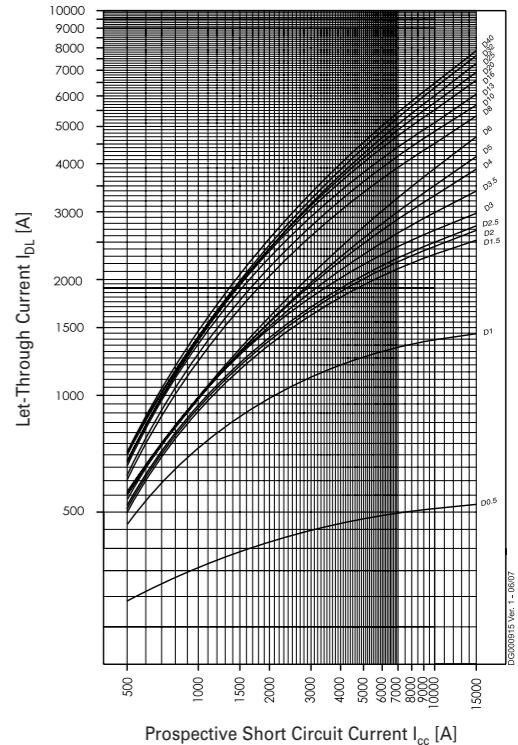

**Short Circuit Selectivity FAZ**

In case of short circuit, there is selectivity between the miniature circuit breakers FAZ and the upstream protection devices up to the specified values of the selectivity limit current  $I_s$  [kA] (i. e. in case of short-circuit currents  $I_{ks}$  under  $I_s$ , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

\*) basically in accordance with EN 60898-1 D.5.2.b

**FAZ towards NH-00 Fuses**

Short circuit selectivity **Characteristic B** towards fuse link **NH-00\***)

FAZ	NH-00 gL/gG											
	16	20	25	32	35	40	50	63	80	100	125	160
$I_n$ [A]	1.0	1.5	2.0	3.0	3.5	4.0	5.0	6.3	8.0	10.0	12.5	16.0
1.0	0.9	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>
1.5	0.8	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>
2.0	<0.5 <sup>1)</sup>	0.5	1.0	2.5	10.0 <sup>2)</sup>							
2.5	<0.5 <sup>1)</sup>	0.5	1.0	2.3	10.0 <sup>2)</sup>							
3.0	<0.5 <sup>1)</sup>	0.5	1.0	2.1	8.0	10.0 <sup>2)</sup>						
3.5	<0.5 <sup>1)</sup>	0.5	1.0	2.1	8.0	10.0 <sup>2)</sup>						
4	<0.5 <sup>1)</sup>	0.8	1.3	2.3	4.3	10.0 <sup>2)</sup>						
5	<0.5 <sup>1)</sup>	0.7	1.1	1.6	2.2	3.6	4.8	8.9	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
6	<0.5 <sup>1)</sup>	0.7	1.1	1.5	2.0	3.3	4.3	7.6	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
8	<0.5 <sup>1)</sup>	0.6	1.0	1.3	1.7	2.6	3.3	5.2	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
10	<0.5 <sup>1)</sup>	0.6	0.9	1.2	1.5	2.2	2.7	4.0	9.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
13	<0.5 <sup>1)</sup>	0.6	0.8	1.1	1.4	2.1	2.6	3.8	7.9	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
16		0.5	0.7	1.0	1.3	1.9	2.4	3.4	6.4	9.3	10.0 <sup>2)</sup>	
20		0.7	1.0	1.3	1.9	2.4	3.3	6.0	8.7	10.0 <sup>2)</sup>		
25		0.7	1.0	1.3	1.8	2.3	3.2	5.7	8.0	10.0 <sup>2)</sup>		
32		0.9	1.2	1.7	2.2	3.1	5.4	7.6	10.0 <sup>2)</sup>			
40						2.1	3.0	5.1	7.2	10.0 <sup>2)</sup>		
50						1.9	2.8	4.7	6.6	9.5		
63								4.4	6.3	8.6		

Short circuit selectivity **Characteristic D** towards fuse link **NH-00\***)

FAZ	NH-00 gL/gG												
	16	20	25	32	35	40	50	63	80	100	125	160	
$I_n$ [A]	0.5	1.0	1.5	2.0	3.0	3.5	4.0	5.0	63	80	100	125	160
0.5	2.1	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	1.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
1.0	<0.5 <sup>1)</sup>	0.6	1.4	4.3	10.0 <sup>2)</sup>								
1.5	<0.5 <sup>1)</sup>	0.9	1.6	2.7	4.0	8.0	10.0 <sup>2)</sup>						
2.0	<0.5 <sup>1)</sup>	0.8	1.3	2.1	3.1	6.0	8.6	10.0 <sup>2)</sup>					
2.5	<0.5 <sup>1)</sup>	0.7	1.2	1.8	2.6	4.8	6.9	10.0 <sup>2)</sup>					
3.0	<0.5 <sup>1)</sup>	0.7	1.1	1.7	2.4	4.3	6.0	10.0 <sup>2)</sup>					
3.5	<0.5 <sup>1)</sup>	0.7	1.1	1.7	2.4	4.2	5.6	10.0 <sup>2)</sup>					
4	<0.5 <sup>1)</sup>	0.7	1.0	1.6	2.2	3.8	5.2	10.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
5	<0.5 <sup>1)</sup>	0.6	0.9	1.4	1.9	3.2	4.1	7.1	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
6	<0.5 <sup>1)</sup>	0.5	0.8	1.2	1.6	2.6	3.3	5.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	
8		0.5	0.8	1.1	1.5	2.2	2.7	4.1	8.7	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>		
10		0.5	0.7	1.0	1.3	1.9	2.5	3.6	7.2	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>		
13		1.0	1.3	1.9	2.3	3.4	6.5	9.5	10.0 <sup>2)</sup>				
16		1.1	1.6	2.0	3.0	5.5	8.0	10.0 <sup>2)</sup>					
20		1.4	1.8	2.8	5.0	7.5	10.0 <sup>2)</sup>						
25		1.8	2.7	4.8	7.0	10.0 <sup>2)</sup>							
32		2.4	4.1	6.2	9.3								
40		4.0	6.0	9.0									

<sup>1)</sup> Selectivity limiting current  $I_s$  under 0.5 kA

<sup>2)</sup> Selectivity limiting current  $I_s$  = rated breaking capacity  $I_{cn}$  of the MCB

Shaded fields: no selectivity

**FAZ towards D01-D03 Fuses**

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03\***)

FAZ	D01-D03 gL/gG								
	10	16	20	25	35</				

FAZ towards DII-DIV Fuses

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV\***)

FAZ	DII-DIV gL/gG								
I <sub>n</sub> [A]	10	16	20	25	35	50	63	80	100
1.0	<0.5 <sup>1)</sup>	1.2	10.0 <sup>2)</sup>						
1.5	<0.5 <sup>1)</sup>	1.0	10.0 <sup>2)</sup>						
2.0	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.8	1.6	10.0 <sup>2)</sup>				
2.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.8	1.5	10.0 <sup>2)</sup>				
3.0	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.8	1.4	10.0 <sup>2)</sup>				
3.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.7	1.3	10.0 <sup>2)</sup>				
4	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	1.0	3.6	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	2.0	3.5	8.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
6	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	1.8	3.2	7.4	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
8	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.5	0.8	1.6	2.6	5.2	8.3	10.0 <sup>2)</sup>
10			0.5	0.8	1.4	2.2	3.9	6.0	10.0 <sup>2)</sup>
13			0.5	0.7	1.3	2.0	3.6	5.4	10.0 <sup>2)</sup>
16			0.6	1.2	1.9	3.2	4.6	8.4	
20				1.2	1.8	3.1	4.4	7.8	
25				1.2	1.8	3.0	4.2	7.3	
32				1.7	2.8	3.9	6.8		
40					2.7	3.8	6.5		
50					2.5	3.5	5.7		
63						5.3			

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV\***)

FAZ	DII-DIV gL/gG								
I <sub>n</sub> [A]	10	16	20	25	35	50	63	80	100
0.75	1.0	1.0	10.0 <sup>2)</sup>						
1.0	<0.5 <sup>1)</sup>	1.2	10.0 <sup>2)</sup>						
1.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	1.0	2.2	10.0 <sup>2)</sup>				
2.0	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.8	1.6	10.0 <sup>2)</sup>				
2.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.8	1.4	10.0 <sup>2)</sup>				
3.0	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.7	1.3	10.0 <sup>2)</sup>				
3.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	10.0 <sup>2)</sup>				
4	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	0.9	2.2	4.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.8	0.8	1.8	3.6	9.7	10.0 <sup>2)</sup>
6	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.7	0.7	1.5	2.7	7.3	10.0 <sup>2)</sup>
8	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.5	0.6	0.6	1.4	2.4	5.5	10.0 <sup>2)</sup>
10			<0.5 <sup>1)</sup>	0.6	1.3	2.0	3.6	5.4	10.0 <sup>2)</sup>
13					1.3	1.9	3.3	5.0	9.4
16					1.2	1.8	3.2	4.4	8.0
20					1.2	1.8	3.1	4.1	7.0
25						1.7	2.8	3.8	6.5
32							2.7	3.7	6.2
40								3.5	5.9
50									5.5
63									

Short circuit selectivity **Characteristic D** towards fuse link **DII-DIV\***)

FAZ	DII-DIV gL/gG								
I <sub>n</sub> [A]	10	16	20	25	35	50	63	80	100
0.5	0.5	3.0	10.0 <sup>2)</sup>						
1.0	<0.5 <sup>1)</sup>	1.0	2.4	10.0 <sup>2)</sup>					
1.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.7	1.2	3.5	7.7	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
2.0	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	1.0	2.8	5.8	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
2.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	1.4	2.3	4.6	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
3.0	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	2.3	4.3	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
3.5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	2.1	4.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
4	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.9	2.0	3.8	9.5	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
5	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.5	0.7	1.7	3.1	7.0	10.0 <sup>2)</sup>	10.0 <sup>2)</sup>
6	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.5	0.7	1.5	2.6	5.3	9.1	10.0 <sup>2)</sup>
8			<0.5 <sup>1)</sup>	0.7	1.4	2.2	3.9	6.0	10.0 <sup>2)</sup>
10				0.7	1.2	1.9	3.4	5.0	9.5
13					1.2	1.8	3.2	4.6	8.6
16						1.6	2.7	4.0	7.4
20						1.5	2.5	3.5	6.7
25						2.4	3.4	6.2	
32						2.8	5.0		
40							4.8		

<sup>1)</sup> Selectivity limiting current I<sub>s</sub> under 0.5 kA

<sup>2)</sup> Selectivity limiting current I<sub>s</sub> = rated breaking capacity I<sub>cn</sub> of the MCB

Shaded fields: no selectivity

FAZ-B and NZM 1/2

Selectivity limiting current I<sub>s</sub> [kA] for selectivity between FAZ-B and NZM (overload and short-circuit release unit NZM at max. value).

FA

FAZ-D and NZM 1/2

FAZ-D	NZM...1-A...					
	$I_{cu} = 25 \text{ (50) kA}$					
	40	50	63	80	100	125
<b>0.5</b>	9	15	15	15	15	15
<b>1</b>	0.5	0.7	1.1	1.9	4.2	15
<b>1.5</b>	0.3	0.6	0.8	1.1	1.6	2.6
<b>2</b>	0.3	0.5	0.75	0.95	1.4	2.4
<b>2.5</b>	0.3	0.5	0.75	0.95	1.3	2.3
<b>3</b>	0.3	0.5	0.7	0.9	1.3	2.1
<b>3.5</b>	0.3	0.5	0.7	0.9	1.3	2
<b>4</b>	0.3	0.5	0.7	0.9	1.3	1.9
<b>5</b>	0.3	0.5	0.7	0.9	1.3	1.9
<b>6</b>	0.3	0.5	0.6	0.9	1.3	1.8
<b>8</b>	0.3	0.3	0.6	0.75	1	1.3
<b>10</b>	0.3	0.3	0.6	0.75	0.95	1.2
<b>13</b>	0.3	0.3	0.5	0.7	0.9	1.1
<b>16</b>	-	0.3	0.5	0.65	0.8	1.1
<b>20</b>	-	-	0.5	0.65	0.8	1.1
<b>25</b>	-	-	0.5	0.65	0.8	1.1
<b>32</b>	-	-	-	-	0.8	1.1
<b>40</b>	-	-	-	-	-	1

FAZ-D	NZM...2-A...								
	$I_{cu} = 25 \text{ (50)(100)(150) kA}$								
	40	50	63	80	100	125	160	200	250
<b>0.5</b>	9	15	15	15	15	15	15	15	15
<b>1</b>	0.5	0.7	1.1	1.9	4.2	15	15	15	15
<b>1.5</b>	0.3	0.6	0.8	1.1	1.6	2.6	5	15	15
<b>2</b>	0.3	0.5	0.75	0.95	1.4	2.4	4.5	10	15
<b>2.5</b>	0.3	0.5	0.75	0.95	1.3	2.3	4.2	9	15
<b>3</b>	0.3	0.5	0.7	0.9	1.3	2.1	3.6	7	15
<b>3.5</b>	0.3	0.5	0.7	0.9	1.3	2	3.3	5.6	10
<b>4</b>	0.3	0.5	0.7	0.9	1.3	1.9	3	4.7	8
<b>5</b>	0.3	0.5	0.7	0.9	1.3	1.9	3	4.4	7
<b>6</b>	0.3	0.5	0.6	0.9	1.3	1.8	2.8	4	6
<b>8</b>	0.3	0.3	0.6	0.75	1	1.3	1.8	2.7	4
<b>10</b>	0.3	0.3	0.6	0.75	0.95	1.2	1.7	2.4	3.6
<b>13</b>	0.3	0.3	0.5	0.7	0.9	1.1	1.6	2.2	3.2
<b>16</b>	-	0.3	0.5	0.65	0.8	1.1	1.5	2.1	3
<b>20</b>	-	-	0.5	0.65	0.8	1.1	1.4	2.1	3
<b>25</b>	-	-	0.5	0.65	0.8	1.1	1.4	1.9	2.7
<b>32</b>	-	-	-	-	0.8	1.1	1.4	1.9	2.7
<b>40</b>	-	-	-	-	-	1	1.4	1.8	2.6

**Back-up Protection FAZ**

The up-stream protective devices will protect the down-stream FAZ up to the short-circuit current specified.

**FAZ/C and AZ/C**

FAZ/C	AZ/C	I <sub>n</sub> [A]								
		20	25	32	40	50	63	80	100	125
<b>1</b>		25	25	25	25	25	25	20	20	15 kA
<b>2</b>		25	25	25	25	25	25	20	20	15 kA
<b>4</b>		25	25	25	25	25	25	20	20	15 kA
<b>6</b>		25	25	25	25	25	25	20	20	15 kA
<b>10</b>		25	25	25	25	25	25	20	20	15 kA
<b>13</b>		25	25	25	25	25	25	20	20	15 kA
<b>16</b>		25	25	25	25	25	25	20	20	15 kA
<b>20</b>	1)	25	25	25	25	25	25	20	20	15 kA
<b>25</b>	1)	25	25	25	25	25	25	20	20	15 kA
<b>32</b>	1)	1)	1)	25	25	25	20	20	-	
<b>40</b>	1)	1)	1)	1)	25	25	20	20	-	
<b>50</b>	1)	1)	1)	1)	1)	25	20	20	-	
<b>63</b>	1)	1)	1)	1)	1)	1)	-	-	-	

1) I<sub>n</sub> (AZ) ≤ I<sub>n</sub> (FAZ)

**FAZ and CL-PKZ0**

Back-up tests acc. to EN/IEC 60947-2, App. A: U = 1.05 U<sub>er</sub> (O - t - CO)

**FAZ B, C**    **CL-PKZ0**  
I<sub>n</sub> [A]    U<sub>e</sub> = 230/400 V

<b>0.16</b>	65 kA
<b>0.25</b>	65 kA
<b>0.5</b>	65 kA
<b>0.75</b>	65 kA
<b>1</b>	65 kA
<b>1.5</b>	65 kA
<b>2</b>	65 kA
<b>2.5</b>	65 kA
<b>3</b>	65 kA
<b>3.5</b>	65 kA
<b>4</b>	65 kA
<b>5</b>	45 kA
<b>6</b>	45 kA
<b>8</b>	45 kA
<b>10</b>	45 kA
<b>12</b>	45 kA
<b>13</b>	45 kA
<b>15</b>	45 kA
<b>16</b>	45 kA
<b>20</b>	45 kA
<b>25</b>	45 kA
<b>32</b>	45 kA
<b>40</b>	45 kA
<b>50</b>	45 kA
<b>63</b>	45 kA

**FAZ and NZM7**

**FAZ B, C**    **NZM7-40(...100)**  
I<sub>n</sub> [A]    U<sub>e</sub> = 230/400 V

<b>0.16</b>	25 kA
<b>0.25</b>	25 kA
<b>0.5</b>	25 kA
<b>0.75</b>	25 kA
<b>1</b>	25 kA
<b>1.5</b>	25 kA
<b>2</b>	25 kA
<b>2.5</b>	25 kA
<b>3</b>	25 kA
<b>3.5</b>	25 kA
<b>4</b>	25 kA
<b>5</b>	20 kA
<b>6</b>	20 kA
<b>8</b>	20 kA
<b>10</b>	20 kA
<b>12</b>	20 kA
<b>13</b>	20 kA
<b>15</b>	20 kA

**FAZ and NZMB1**

$U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 15 \text{ kA}$   
 $U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{NZMB1}) = 25 \text{ kA}$   
 Back-up test acc. to EN/IEC 60947-2, app. A:  $U = 1.05U_{er}$  ( $O - t - W$ )  
 (Settings NZMB1:  $I_r$ ,  $I_{rm}$  at max. volumes)

<b>FAZ B, C</b>	<b>NZMB1</b>
$I_n [\text{A}]$	$U_e = 230/400 \text{ V}$
<b>0.16</b>	25 kA
<b>0.25</b>	25 kA
<b>0.5</b>	25 kA
<b>0.75</b>	25 kA
<b>1</b>	25 kA
<b>1.5</b>	25 kA
<b>2</b>	25 kA
<b>2.5</b>	25 kA
<b>3</b>	25 kA
<b>3.5</b>	25 kA
<b>4</b>	25 kA
<b>5</b>	25 kA
<b>6</b>	25 kA
<b>8</b>	25 kA
<b>10</b>	25 kA
<b>12</b>	25 kA
<b>13</b>	25 kA
<b>15</b>	25 kA
<b>16</b>	25 kA
<b>20</b>	20 kA
<b>25</b>	20 kA
<b>32</b>	20 kA
<b>40</b>	20 kA
<b>50</b>	15 kA
<b>63</b>	15 kA

**FAZ and NZMN1**

$U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 15 \text{ kA}$   
 $U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{NZMN1}) = 25 \text{ kA}$   
 Back-up test acc. to EN/IEC 60947-2, app. A:  $U = 1.05U_{er}$  ( $O - t - W$ )  
 (Settings NZM at max. volumes)

<b>FAZ B, C</b>	<b>NZMN1</b>
$I_n [\text{A}]$	$U_e = 230/400 \text{ V}$
<b>0.16</b>	25 kA
<b>0.25</b>	25 kA
<b>0.5</b>	25 kA
<b>0.75</b>	25 kA
<b>1</b>	25 kA
<b>1.5</b>	25 kA
<b>2</b>	25 kA
<b>2.5</b>	25 kA
<b>3</b>	25 kA
<b>3.5</b>	25 kA
<b>4</b>	25 kA
<b>5</b>	25 kA
<b>6</b>	25 kA
<b>8</b>	25 kA
<b>10</b>	25 kA
<b>12</b>	25 kA
<b>13</b>	25 kA
<b>15</b>	25 kA
<b>16</b>	25 kA
<b>20</b>	20 kA
<b>25</b>	20 kA
<b>32</b>	20 kA
<b>40</b>	20 kA
<b>50</b>	15 kA
<b>63</b>	15 kA

**FAZ and NZMB2**

$U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 15 \text{ kA}$   
 $U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{NZMB2}) = 25 \text{ kA}$   
 $U_e = 133/230 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 20 \text{ kA}$   
 $U_e = 133/230 \text{ V}$ :  $I_{cu} (\text{NZMB2}) = 30 \text{ kA}$   
 Back-up test acc. to EN/IEC 60947-2, app. A:  $U = 1.05U_{er}$  ( $O - t - W$ )  
 (Settings NZM at max. volumes)

<b>FAZ B, C</b>	<b>NZMB2</b>
$I_n [\text{A}]$	$U_e = 230/400 \text{ V}$
<b>0.16</b>	25 kA
<b>0.25</b>	30 kA
<b>0.5</b>	30 kA
<b>0.75</b>	30 kA
<b>1</b>	30 kA
<b>1.5</b>	30 kA
<b>2</b>	30 kA
<b>2.5</b>	30 kA
<b>3</b>	30 kA
<b>3.5</b>	30 kA
<b>4</b>	30 kA
<b>5</b>	25 kA
<b>6</b>	25 kA
<b>8</b>	25 kA
<b>10</b>	25 kA
<b>12</b>	25 kA
<b>13</b>	25 kA
<b>15</b>	25 kA
<b>16</b>	25 kA
<b>20</b>	25 kA
<b>25</b>	25 kA
<b>32</b>	25 kA
<b>40</b>	20 kA
<b>50</b>	20 kA
<b>63</b>	15 kA

**FAZ and NZMH2**

$U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 15 \text{ kA}$   
 $U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{NZMH2}) = 150 \text{ kA}$   
 $U_e = 133/230 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 20 \text{ kA}$   
 $U_e = 133/230 \text{ V}$ :  $I_{cu} (\text{NZMH2}) = 150 \text{ kA}$   
 Back-up test acc. to EN/IEC 60947-2, app. A:  $U = 1.05U_e$ , (O - t - W)  
 (Settings NZM at max. volumes)

<b>FAZ B, C</b> <b>NZMH2</b>		
$I_n [\text{A}]$	$U_e = 230/400 \text{ V}$	$U_e = 133/230 \text{ V}$
<b>0.16</b>	50 kA	85 kA
<b>0.25</b>	50 kA	85 kA
<b>0.5</b>	50 kA	85 kA
<b>0.75</b>	50 kA	85 kA
<b>1</b>	50 kA	85 kA
<b>1.5</b>	50 kA	85 kA
<b>2</b>	50 kA	85 kA
<b>2.5</b>	50 kA	85 kA
<b>3</b>	50 kA	85 kA
<b>3.5</b>	50 kA	85 kA
<b>4</b>	50 kA	85 kA
<b>5</b>	50 kA	80 kA
<b>6</b>	50 kA	80 kA
<b>8</b>	50 kA	80 kA
<b>10</b>	50 kA	80 kA
<b>12</b>	30 kA	60 kA
<b>13</b>	30 kA	60 kA
<b>15</b>	30 kA	60 kA
<b>16</b>	30 kA	60 kA
<b>20</b>	30 kA	60 kA
<b>25</b>	30 kA	60 kA
<b>32</b>	30 kA	60 kA
<b>40</b>	20 kA	40 kA
<b>50</b>	20 kA	40 kA
<b>63</b>	20 kA	40 kA

**FAZ and NZML2**

$U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 15 \text{ kA}$   
 $U_e = 230/400 \text{ V}$ :  $I_{cu} (\text{NZML2}) = 150 \text{ kA}$   
 $U_e = 133/230 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 20 \text{ kA}$   
 $U_e = 133/230 \text{ V}$ :  $I_{cu} (\text{NZML2}) = 150 \text{ kA}$   
 Back-up test acc. to EN/IEC 60947-2, app. A:  $U = 1.05U_e$ , (O - t - W)  
 (Settings NZM at max. volumes)

<b>FAZ B, C</b> <b>NZML2</b>		
$I_n [\text{A}]$	$U_e = 230/400 \text{ V}$	$U_e = 133/230 \text{ V}$
<b>0.16</b>	50 kA	85 kA
<b>0.25</b>	50 kA	85 kA
<b>0.5</b>	50 kA	85 kA
<b>0.75</b>	50 kA	85 kA
<b>1</b>	50 kA	85 kA
<b>1.5</b>	50 kA	85 kA
<b>2</b>	50 kA	85 kA
<b>2.5</b>	50 kA	85 kA
<b>3</b>	50 kA	85 kA
<b>3.5</b>	50 kA	85 kA
<b>4</b>	50 kA	85 kA
<b>5</b>	50 kA	80 kA
<b>6</b>	50 kA	80 kA
<b>8</b>	50 kA	80 kA
<b>10</b>	50 kA	80 kA
<b>12</b>	30 kA	60 kA
<b>13</b>	30 kA	60 kA
<b>15</b>	30 kA	60 kA
<b>16</b>	30 kA	60 kA
<b>20</b>	30 kA	60 kA
<b>25</b>	30 kA	60 kA
<b>32</b>	30 kA	60 kA
<b>40</b>	20 kA	40 kA
<b>50</b>	20 kA	40 kA
<b>63</b>	20 kA	40 kA

**FAZ and NH**


$U_e = 230 \text{ V}$ :  $I_{cu} (\text{FAZ}) = 15 (10) \text{ kA}$  (acc. to IEC/EN 60947)  
 $U_e = 500 \text{ V}$ :  $I_{cu} (\text{NH00 125 A gL / gG}) = 120 \text{kA}$

**FAZ B, C, D** **NH00 125 A gL/gG**

$I_n [\text{A}]$	IT-system $U = 230 \text{ V}$
<b>0.5</b>	50 kA
<b>1</b>	50 kA
<b>2</b>	50 kA
<b>3</b>	50 kA
<b>4</b>	50 kA
<b>6</b>	50 kA
<b>10</b>	50 kA
<b>13</b>	50 kA
<b>16</b>	50 kA
<b>20</b>	50 kA
<b>25</b>	50 kA
<b>32</b>	50 kA
<b>40</b>	50 kA
<b>50</b>	50 kA
<b>63</b>	50 kA

## Overload Selectivity FAZ

FAZ-B(C)(D) to FAZ-B



## **Upstream side FAZ, Characteristic B**

## **Downstream side FAZ, Characteristic B, C, D**

x ... Selectivity range (i.e. only the downstream switch drops in case  $I < I_s$ )


← Downstream side  
**FAZ** Characteristic B

← Downstream side  
FAZ Characteristic C

<— Downstream side  
FAZ Characteristic D

---

FAZ-B(C)(D) to FAZ-



**Upstream side FAZ, Characteristic C**  
**Downstream side FAZ, Characteristic B, C, D**

x ... Selectivity range (i.e. only the downstream switch drops in case  $I < I_s$ )

Upstream side —> FAZ Characteristic C																	
Type B	Rated current $I_n$ [A]	0.5	1	2	3	4	6	8	10	13	16	20	25	32	40	50	63
Selectivity limiting current $I_s$ [A]		2.85	5.7	11.4	17.1	22.8	34.2	45.6	57	74.1	91.2	114	142.5	182.4	228	285	359.1
2		x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
3			x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
4				x	x	x	x	x	x	x	x	x	x	x	x	x	x
6					x	x	x	x	x	x	x	x	x	x	x	x	x
10						x	x	x	x	x	x	x	x	x	x	x	x
13							x	x	x	x	x	x	x	x	x	x	x
16								x	x	x	x	x	x	x	x	x	x
20									x	x	x	x	x	x	x	x	x
25										x	x	x	x	x	x	x	x
32										x	x	x	x	x	x	x	x
40											x	x	x	x	x	x	x
50											x	x	x	x	x	x	x
63												x	x	x	x	x	x

<— Downstream side

<----- Downstream side

Upstream side —> FAZ Characteristic C																
Type B	Rated current $I_n$ [A]															
Selectivity limiting current $I_s$ [A]	0.5	1	2	3	4	6	8	10	13	16	20	25	32	40	50	63
2.85	5.7	11.4	17.1	22.8	34.2	45.6	57	74.1	91.2	114	142.5	182.4	228	285	359.1	
2			x	x	x	x	x	x	x	x	x	x	x	x	x	x
4				x	x	x	x	x	x	x	x	x	x	x	x	x
6					x	x	x	x	x	x	x	x	x	x	x	x
10						x	x	x	x	x	x	x	x	x	x	x
13							x	x	x	x	x	x	x	x	x	x
16								x	x	x	x	x	x	x	x	x
20									x	x	x	x	x	x	x	x
25										x	x	x	x	x	x	x
32											x	x	x	x	x	x
40												x	x	x	x	x

<— Downstream side

FAZ-B(C)(D) to FAZ-D



Upstream side FAZ, Characteristic D  
Downstream side FAZ, Characteristic B, C, D

x ... Selectivity range (i.e. only the downstream switch drops in case  $I < I_s$ )

Upstream side → FAZ Characteristic D									
Type B	Rated current $I_n$ [A]	2	4	6	10	13	16	20	25
Selectivity limiting current $I_s$ [A]	21	42	63	105	136.5	168	210	262.5	336
2	x	x	x	x	x	x	x	x	x
3	x	x	x	x	x	x	x	x	x
4		x	x	x	x	x	x	x	x
6		x	x	x	x	x	x	x	x
10			x	x	x	x	x	x	x
13				x	x	x	x	x	x
16					x	x	x	x	x
20						x	x	x	x
25							x	x	x
32								x	x
40									x
50									x
63									x

Downstream side FAZ Characteristic B


Upstream side → FAZ Characteristic D									
Type B	Rated current $I_n$ [A]	2	4	6	10	13	16	20	25
Selectivity limiting current $I_s$ [A]	21	42	63	105	136.5	168	210	262.5	336
0.5	x	x	x	x	x	x	x	x	x
1	x	x	x	x	x	x	x	x	x
2		x	x	x	x	x	x	x	x
3	x	x	x	x	x	x	x	x	x
4		x	x	x	x	x	x	x	x
6		x	x	x	x	x	x	x	x
8		x	x	x	x	x	x	x	x
10			x	x	x	x	x	x	x
13				x	x	x	x	x	x
16					x	x	x	x	x
20						x	x	x	x
25							x	x	x
32								x	x
40									x
50									x
63									x

Downstream side FAZ Characteristic C

Upstream side → FAZ Characteristic D									
Type B	Rated current $I_n$ [A]	2	4	6	10	13	16	20	25
Selectivity limiting current $I_s$ [A]	21	42	63	105	136.5	168	210	262.5	336
2	x	x	x	x	x	x	x	x	x
4		x	x	x	x	x	x	x	x
6			x	x	x	x	x	x	x
10			x	x	x	x	x	x	x
13				x	x	x	x	x	x
16					x	x	x	x	x
20						x	x	x	x
25							x	x	x
32								x	x
40									x

Downstream side FAZ Characteristic D

FAZ-B(C)(D) to AZ-C



Upstream side AZ, Characteristic C  
Downstream side FAZ, Characteristic B, C, D


x ... Selectivity range (i.e. only the downstream switch drops in case  $I < I_s$ )

Upstream side → AZ Characteristic C									
Type B	Rated current $I_n$ [A]	20	25	32	40	50	63	80	100
Selectivity limiting current $I_s$ [A]	130	163	208	260	325	410	520	650	813
2	x	x	x	x	x	x	x	x	x
3	x	x	x	x	x	x	x	x	x
4		x	x	x	x	x	x	x	x
6		x	x	x	x	x	x	x	x
10	x	x	x	x	x	x	x	x	x
13		x	x	x	x	x	x	x	x
16			x	x	x	x	x	x	x
20			x	x	x	x	x	x	x
25				x	x	x	x	x	x
32					x	x	x	x	x
40						x	x	x	x
50							x	x	x
63								x	x

Downstream side FAZ Characteristic B

Upstream side → AZ Characteristic C									
Type B	Rated current $I_n$ [A]	20	25	32	40	50	63	80	100
Selectivity limiting current $I_s$ [A]	130	163	208	260	325	410	520	650	813
0.5	x	x	x	x	x	x	x	x	x
1	x	x	x	x	x	x	x	x	x
2		x	x	x	x	x	x	x	x
3	x	x	x	x	x	x	x	x	x
4		x	x	x	x	x	x	x	x
6		x	x	x	x	x	x	x	x
8		x	x	x	x	x	x	x	x
10		x	x	x	x	x	x	x	x
13			x	x	x	x	x	x	x
16				x	x	x	x	x	x
20				x	x	x	x	x	x
25					x	x	x</		

FAZ-B(C)(D) to AZ-D



**Upstream side AZ, Characteristic D**  
**Downstream side FAZ, Characteristic B, C, D**

x ... Selectivity range (i.e. only the downstream switch drops in case  $I < I_s$ )

**Upstream side —> AZ Characteristic D**

Type B	Rated current $I_n$ [A]	20	25	32	40	50	63	80	100
	Selectivity limiting current $I_s$ [A]	230	285	365	450	550	680	850	1020
	2	x	x	x	x	x	x	x	x
	3	x	x	x	x	x	x	x	x
	4	x	x	x	x	x	x	x	x
	6	x	x	x	x	x	x	x	x
	10	x	x	x	x	x	x	x	x
	13	x	x	x	x	x	x	x	x
	16	x	x	x	x	x	x	x	x
	20	x	x	x	x	x	x	x	x
	25		x	x	x	x	x	x	x
	32			x	x	x	x	x	x
	40				x	x	x	x	x
	50					x	x	x	x
	63						x	x	

Downstream side  
FAZ Characteristic B

**Upstream side —> AZ Characteristic D**

Type B	Rated current $I_n$ [A]	20	25	32	40	50	63	80	100
	Selectivity limiting current $I_s$ [A]	230	285	365	450	550	680	850	1020
	0.5	x	x	x	x	x	x	x	x
	1	x	x	x	x	x	x	x	x
	2	x	x	x	x	x	x	x	x
	3	x	x	x	x	x	x	x	x
	4	x	x	x	x	x	x	x	x
	6	x	x	x	x	x	x	x	x
	8	x	x	x	x	x	x	x	x
	10	x	x	x	x	x	x	x	x
	13	x	x	x	x	x	x	x	x
	16	x	x	x	x	x	x	x	x
	20	x	x	x	x	x	x	x	x
	25		x	x	x	x	x	x	x
	32			x	x	x	x	x	x
	40				x	x	x	x	x
	50					x	x	x	x
	63						x	x	

Downstream side  
FAZ Characteristic C

**Upstream side —> AZ Characteristic D**

Type B	Rated current $I_n$ [A]	20	25	32	40	50	63	80	100
	Selectivity limiting current $I_s$ [A]	230	285	365	450	550	680	850	1020
	2	x	x	x	x	x	x	x	x
	4	x	x	x	x	x	x	x	x
	6	x	x	x	x	x	x	x	x
	10	x	x	x	x	x	x	x	x
	13	x	x	x	x	x	x	x	x
	16	x	x	x	x	x	x	x	x
	20	x	x	x	x	x	x	x	x
	25		x	x	x	x	x	x	x
	32			x	x	x	x	x	x
	40				x	x	x	x	x
	50					x	x	x	x
	63						x	x	

Downstream side  
FAZ Characteristic D

**Influence of the Line Frequency FAZ**

On the Instantaneous Tripping Current  $I_{MA}$

	Line Frequency f [Hz]	16 $\frac{2}{3}$	50	60	100	200	300	400
$I_{MA}(f)/I_{MA}(50 \text{ Hz}) [\%]$		91	100	101	106	115	134	141

The use of the products in networks with other frequencies than 50/60 Hz are in the customer's responsibility.

# 2.232 Miniature Circuit Breakers

Miniature Circuit Breakers FAZ-T



## Description

FAZ-T

- High-quality miniature circuit breakers for industrial and commercial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 40 A
- Tripping characteristics B, C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2
- Classified for the use in rail rolling stock

## xEffect

## xEffect

# Miniature Circuit Breakers

FAZ-T Miniature Circuit Breakers

# 2.233

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60898-1 (V)	Breaking capacity acc. to IEC/EN 60898-1 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package
----------------------------------	--	---	--	---	--	---	------------------	-------------	-------------------

## Characteristic B

### 1-pole

1	240	15	240	25	254	15	FAZT-B1/1	240770	12/120
2	240	15	240	25	254	15	FAZT-B2/1	240771	12/120
3	240	15	240	25	254	15	FAZT-B3/1	240772	12/120
4	240	15	240	25	254	15	FAZT-B4/1	240777	12/120
6	240	15	240	25	254	15	FAZT-B6/1	240782	12/120
10	240	15	240	25	254	15	FAZT-B10/1	240787	12/120
12	240	15	240	25	254	15	FAZT-B12/1	240792	12/120
13	240	15	240	25	254	15	FAZT-B13/1	240793	12/120
15	240	15	240	25	254	15	FAZT-B15/1	240794	12/120
16	240	15	240	25	254	15	FAZT-B16/1	240795	12/120
20	240	15	240	25	254	15	FAZT-B20/1	240796	12/120
25	240	15	240	25	254	15	FAZT-B25/1	240797	12/120
32	240	10	240	20	254	15	FAZT-B32/1	141907	12/120
40	240	10	240	20	254	15	FAZT-B40/1	141908	12/120



### 1+N-poles

1	240	15	240	25	254	15	FAZT-B1/1N	240994	1/60
2	240	15	240	25	254	15	FAZT-B2/1N	240995	1/60
3	240	15	240	25	254	15	FAZT-B3/1N	240996	1/60
4	240	15	240	25	254	15	FAZT-B4/1N	240997	1/60
6	240	15	240	25	254	15	FAZT-B6/1N	240998	1/60
10	240	15	240	25	254	15	FAZT-B10/1N	240999	1/60
12	240	15	240	25	254	15	FAZT-B12/1N	241000	1/60
13	240	15	240	25	254	15	FAZT-B13/1N	241001	1/60
15	240	15	240	25	254	15	FAZT-B15/1N	241005	1/60
16	240	15	240	25	254	15	FAZT-B16/1N	241009	1/60
20	240	15	240	25	254	15	FAZT-B20/1N	241015	1/60
25	240	15	240	25	254	15	FAZT-B25/1N	241019	1/60
32	240	10	240	20	254	15	FAZT-B32/1N	142509	1/60
40	240	10	240	20	254	15	FAZT-B40/1N	142510	1/60



### 2-poles

1	415	15	240/415	25	254/440	15	FAZT-B1/2	240820	1/60
2	415	15	240/415	25	254/440	15	FAZT-B2/2	240821	1/60
3	415	15	240/415	25	254/440	15	FAZT-B3/2	240822	1/60
4	415	15	240/415	25	254/440	15	FAZT-B4/2	240823	1/60
6	415	15	240/415	25	254/440	15	FAZT-B6/2	240824	1/60
10	415	15	240/415	25	254/440	15	FAZT-B10/2	240825	1/60
12	415	15	240/415	25	254/440	15	FAZT-B12/2	240826	1/60
13	415	15	240/415	25	254/440	15	FAZT-B13/2	240827	1/60
15	415	15	240/415	25	254/440	15	FAZT-B15/2	240828	1/60
16	415	15	240/415	25	254/440	15	FAZT-B16/2	240829	1/60
20	415	15	240/415	25	254/440	15	FAZT-B20/2	240830	1/60
25	415	15	240/415	25	254/440	15	FAZT-B25/2	240831	1/60
32	415	10	240/415	20	254/440	15	FAZT-B32/2	142485	1/60
40	415	10	240/415	20	254/440	15	FAZT-B40/2	142486	1/60

# 2.234 Miniature Circuit Breakers

FAZ-T Miniature Circuit Breakers

## xEffect

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60898-1 (V)	Breaking capacity acc. to IEC/EN 60898-1 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package



### 3-poles

1	415	15	240/415 25	254/440 15	FAZT-B1/3	240874	1/40
2	415	15	240/415 25	254/440 15	FAZT-B2/3	240875	1/40
3	415	15	240/415 25	254/440 15	FAZT-B3/3	240876	1/40
4	415	15	240/415 25	254/440 15	FAZT-B4/3	240877	1/40
6	415	15	240/415 25	254/440 15	FAZT-B6/3	240878	1/40
10	415	15	240/415 25	254/440 15	FAZT-B10/3	240879	1/40
12	415	15	240/415 25	254/440 15	FAZT-B12/3	240880	1/40
13	415	15	240/415 25	254/440 15	FAZT-B13/3	240881	1/40
15	415	15	240/415 25	254/440 15	FAZT-B15/3	240882	1/40
16	415	15	240/415 25	254/440 15	FAZT-B16/3	240883	1/40
20	415	15	240/415 25	254/440 15	FAZT-B20/3	240884	1/40
25	415	15	240/415 25	254/440 15	FAZT-B25/3	240885	1/40
32	415	10	240/415 20	254/440 15	FAZT-B32/3	142493	1/40
40	415	10	240/415 20	254/440 15	FAZT-B40/3	142494	1/40






### 3+N-poles

1	415	15	240/415 25	254/440 15	FAZT-B1/3N	241060	1/30
2	415	15	240/415 25	254/440 15	FAZT-B2/3N	241065	1/30
3	415	15	240/415 25	254/440 15	FAZT-B3/3N	241070	1/30
4	415	15	240/415 25	254/440 15	FAZT-B4/3N	241075	1/30
6	415	15	240/415 25	254/440 15	FAZT-B6/3N	241080	1/30
10	415	15	240/415 25	254/440 15	FAZT-B10/3N	241085	1/30
12	415	15	240/415 25	254/440 15	FAZT-B12/3N	241090	1/30
13	415	15	240/415 25	254/440 15	FAZT-B13/3N	241095	1/30
15	415	15	240/415 25	254/440 15	FAZT-B15/3N	241100	1/30
16	415	15	240/415 25	254/440 15	FAZT-B16/3N	241105	1/30
20	415	15	240/415 25	254/440 15	FAZT-B20/3N	241110	1/30
25	415	15	240/415 25	254/440 15	FAZT-B25/3N	241115	1/30
32	415	10	240/415 20	254/440 15	FAZT-B32/3N	142517	1/30
40	415	10	240/415 20	254/440 15	FAZT-B40/3N	142518	1/30



### 4-poles

1	415	15	240/415 25	254/440 15	FAZT-B1/4	240922	1/30
2	415	15	240/415 25	254/440 15	FAZT-B2/4	240927	1/30
3	415	15	240/415 25	254/440 15	FAZT-B3/4	240930	1/30
4	415	15	240/415 25	254/440 15	FAZT-B4/4	240931	1/30
6	415	15	240/415 25	254/440 15	FAZT-B6/4	240932	1/30
10	415	15	240/415 25	254/440 15	FAZT-B10/4	240933	1/30
12	415	15	240/415 25	254/440 15	FAZT-B12/4	240934	1/30
13	415	15	240/415 25	254/440 15	FAZT-B13/4	240935	1/30
15	415	15	240/415 25	254/440 15	FAZT-B15/4	240936	1/30
16	415	15	240/415 25	254/440 15	FAZT-B16/4	240937	1/30
20	415	15	240/415 25	254/440 15	FAZT-B20/4	240938	1/30
25	415	15	240/415 25	254/440 15	FAZT-B25/4	240939	1/30
32	415	10	240/415 20	254/440 15	FAZT-B32/4	142501	1/30
40	415	10	240/415 20	254/440 15	FAZT-B40/4	142502	1/30

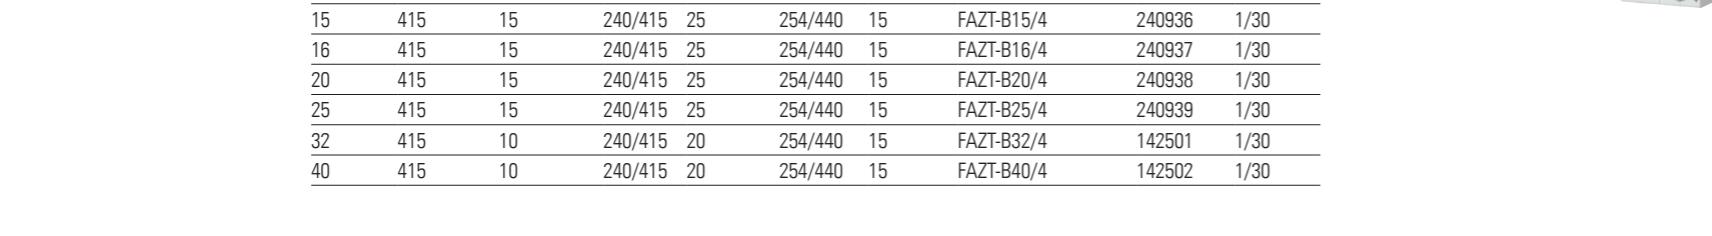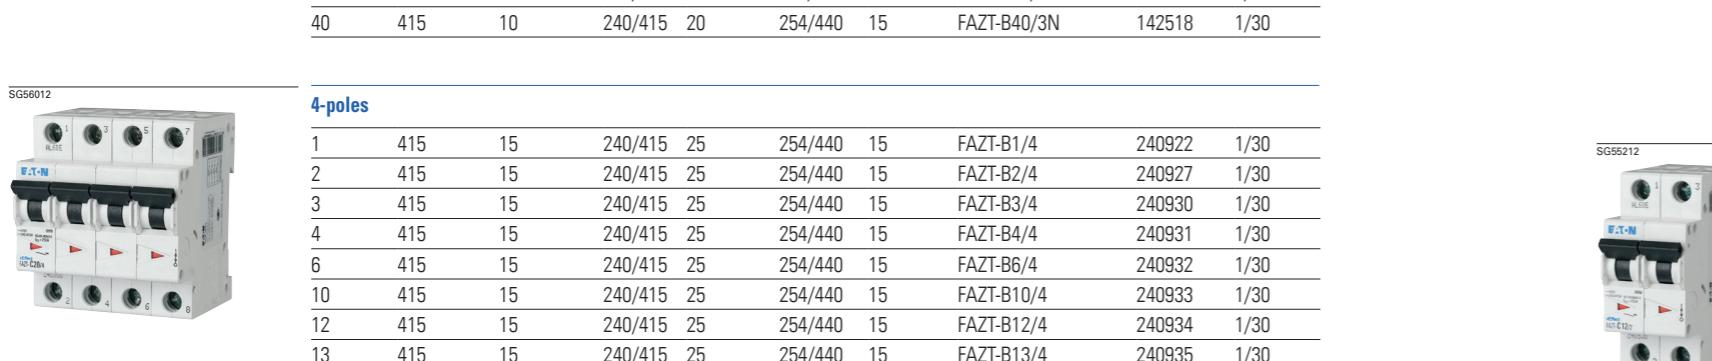

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60898-1 (V)	Breaking capacity acc. to IEC/EN 60898-1 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package

**3-poles**



1	415	15	240/415	25	254/440	15	FAZT-C1/3	240886	1/40
2	415	15	240/415	25	254/440	15	FAZT-C2/3	240887	1/40
3	415	15	240/415	25	254/440	15	FAZT-C3/3	240888	1/40
4	415	15	240/415	25	254/440	15	FAZT-C4/3	240889	1/40
6	415	15	240/415	25	254/440	15	FAZT-C6/3	240890	1/40
10	415	15	240/415	25	254/440	15	FAZT-C10/3	240891	1/40
12	415	15	240/415	25	254/440	15	FAZT-C12/3	240892	1/40
13	415	15	240/415	25	254/440	15	FAZT-C13/3	240893	1/40
15	415	15	240/415	25	254/440	15	FAZT-C15/3	240894	1/40
16	415	15	240/415	25	254/440	15	FAZT-C16/3	240895	1/40
20	415	15	240/415	25	254/440	15	FAZT-C20/3	240896	1/40
25	415	15	240/415	25	254/440	15	FAZT-C25/3	240897	1/40
32	415	10	240/415	20	254/440	15	FAZT-C32/3	142495	1/40
40	415	10	240/415	20	254/440	15	FAZT-C40/3	142496	1/40

**3+N-poles**

1	415	15	240/415	25	254/440	15	FAZT-C1/3N	241120	1/30
2	415	15	240/415	25	254/440	15	FAZT-C2/3N	241125	1/30
3	415	15	240/415	25	254/440	15	FAZT-C3/3N	241130	1/30
4	415	15	240/415	25	254/440	15	FAZT-C4/3N	241135	1/30
6	415	15	240/415	25	254/440	15	FAZT-C6/3N	241140	1/30
10	415	15	240/415	25	254/440	15	FAZT-C10/3N	241145	1/30
12	415	15	240/415	25	254/440	15	FAZT-C12/3N	241150	1/30
13	415	15	240/415	25	254/440	15	FAZT-C13/3N	241155	1/30
15	415	15	240/415	25	254/440	15	FAZT-C15/3N	241160	1/30
16	415	15	240/415	25	254/440	15	FAZT-C16/3N	241165	1/30
20	415	15	240/415	25	254/440	15	FAZT-C20/3N	241170	1/30
25	415	15	240/415	25	254/440	15	FAZT-C25/3N	241175	1/30
32	415	10	240/415	20	254/440	15	FAZT-C32/3N	142519	1/30
40	415	10	240/415	20	254/440	15	FAZT-C40/3N	142520	1/30

**4-poles**

1	415	15	240/415	25	254/440	15	FAZT-C1/4	240940	1/30
2	415	15	240/415	25	254/440	15	FAZT-C2/4	240941	1/30
3	415	15	240/415	25	254/440	15	FAZT-C3/4	240945	1/30
4	415	15	240/415	25	254/440	15	FAZT-C4/4	240949	1/30
6	415	15	240/415	25	254/440	15	FAZT-C6/4	240955	1/30
10	415	15	240/415	25	254/440	15	FAZT-C10/4	240959	1/30
12	415	15	240/415	25	254/440	15	FAZT-C12/4	240962	1/30
13	415	15	240/415	25	254/440	15	FAZT-C13/4	240963	1/30
15	415	15	240/415	25	254/440	15	FAZT-C15/4	240964	1/30
16	415	15	240/415	25	254/440	15	FAZT-C16/4	240965	1/30
20	415	15	240/415	25	254/440	15	FAZT-C20/4	240966	1/30
25	415	15	240/415	25	254/440	15	FAZT-C25/4	240967	1/30
32	415	10	240/415	20	254/440	15	FAZT-C32/4	142503	1/30
40	415	10	240/415	20	254/440	15	FAZT-C40/4	142504	1/30

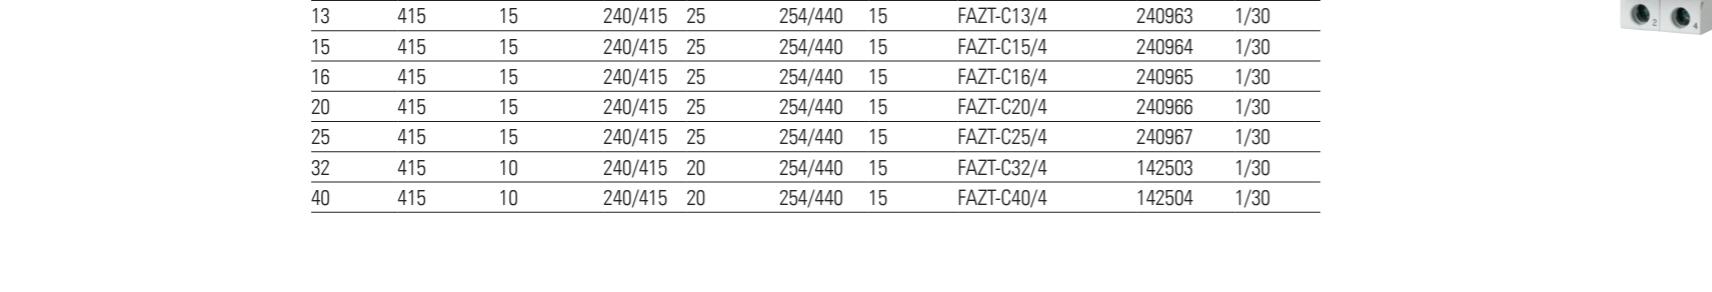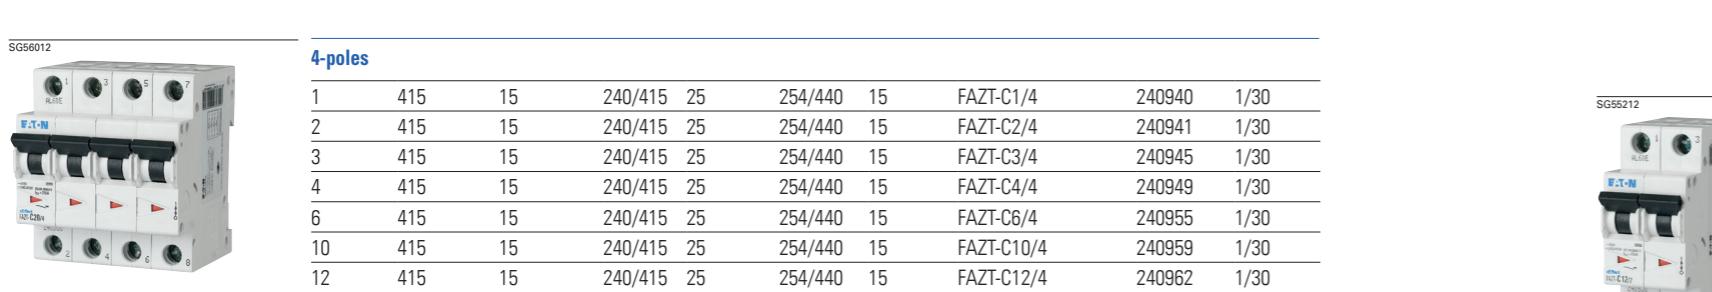**Characteristic D****1-pole**

1	240	15	240	25	FAZT-D1/1	240810	12/120
2	240	15	240	25	FAZT-D2/1	240811	12/120
3	240	15	240	25	FAZT-D3/1	240812	12/120
4	240	15	240	25	FAZT-D4/1	240813	12/120
6	240	15	240	25	FAZT-D6/1	240814	12/120
10	240	15	240	25	FAZT-D10/1	240815	12/120
12	240	15	240	25	FAZT-D12/1	240816	12/120
13	240	15	240	25	FAZT-D13/1	240817	12/120
15	240	15	240	20	FAZT-D15/1	240818	12/120
16	240	15	240	20	FAZT-D16/1	240819	12/120
20	240	10	240	20	FAZT-D20/1	142481	12/120
25	240	10	240	15	FAZT-D25/1	142482	12/120
32	240	10	240	15	FAZT-D32/1		



Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60898-1 (V)	Breaking capacity acc. to IEC/EN 60898-1 (kA)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package

**3-poles**

1	415	15	240/415	25	FAZT-D1/3	240898	1/40
2	415	15	240/415	25	FAZT-D2/3	240899	1/40
3	415	15	240/415	25	FAZT-D3/3	240900	1/40
4	415	15	240/415	25	FAZT-D4/3	240901	1/40
6	415	15	240/415	25	FAZT-D6/3	240902	1/40
10	415	15	240/415	25	FAZT-D10/3	240903	1/40
12	415	15	240/415	25	FAZT-D12/3	240904	1/40
13	415	15	240/415	25	FAZT-D13/3	240905	1/40
15	415	15	240/415	25	FAZT-D15/3	240910	1/40
16	415	15	240/415	25	FAZT-D16/3	240915	1/40
20	415	10	240/415	20	FAZT-D20/3	142497	1/40
25	415	10	240/415	15	FAZT-D25/3	142498	1/40
32	415	10	240/415	15	FAZT-D32/3	142499	1/40
40	415	10	240/415	15	FAZT-D40/3	142500	1/40

**3+N-poles**

1	415	15	240/415	25	FAZT-D1/3N	241180	1/30
2	415	15	240/415	25	FAZT-D2/3N	241181	1/30
3	415	15	240/415	25	FAZT-D3/3N	241182	1/30
4	415	15	240/415	25	FAZT-D4/3N	241183	1/30
6	415	15	240/415	25	FAZT-D6/3N	241184	1/30
10	415	15	240/415	25	FAZT-D10/3N	241185	1/30
12	415	15	240/415	25	FAZT-D12/3N	241186	1/30
13	415	15	240/415	25	FAZT-D13/3N	241187	1/30
15	415	15	240/415	25	FAZT-D15/3N	241188	1/30
16	415	15	240/415	25	FAZT-D16/3N	241189	1/30
20	415	10	240/415	20	FAZT-D20/3N	142521	1/30
25	415	10	240/415	15	FAZT-D25/3N	142522	1/30
32	415	10	240/415	15	FAZT-D32/3N	142523	1/30
40	415	10	240/415	15	FAZT-D40/3N	142524	1/30

**4-poles**

1	415	15	240/415	25	FAZT-D1/4	240968	1/30
2	415	15	240/415	25	FAZT-D2/4	240969	1/30
3	415	15	240/415	25	FAZT-D3/4	240970	1/30
4	415	15	240/415	25	FAZT-D4/4	240971	1/30
6	415	15	240/415	25	FAZT-D6/4	240975	1/30
10	415	15	240/415	25	FAZT-D10/4	240979	1/30
12	415	15	240/415	25	FAZT-D12/4	240985	1/30
13	415	15	240/415	25	FAZT-D13/4	240989	1/30
15	415	15	240/415	25	FAZT-D15/4	240992	1/30
16	415	15	240/415	25	FAZT-D16/4	240993	1/30
20	415	10	240/415	20	FAZT-D20/4	142505	1/30
25	415	10	240/415	15	FAZT-D25/4	142506	1/30
32	415	10	240/415	15	FAZT-D32/4	142507	1/30
40	415	10	240/415	15	FAZT-D40/4	142508	1/30

**xEffect**

**xEffect**

**xEffect**

**Miniature Circuit Breakers**

**2.239**

FAZ-T - Technical Data

**Technical Data**

**FAZ-T**

Product standard  
IEC/EN 60947-2, IEC/EN 60898-1  
Classified according to  
IEC 61373, EN 45545-2  
Current test marks as printed onto the device

Number of poles  
1, 1p+N, 2, 3, 3p+N, 4

**Mechanical**

Device width  
17.7 mm (1p), 27 mm (1p+N), 36 mm (2p), 54 mm (3p), 72 mm (3p+N), 72 mm (4p)  
Frame size  
45 mm  
Device height  
80 mm  
Device depth  
60 mm  
Terminals  
lift terminal  
Terminal capacity rigid solid/stranded wire  
1-25 mm<sup>2</sup>  
Terminal screw  
M5 (with slotted screw acc. to EN ISO 4757-Z2, PZ2)  
Fastening torque of terminal screws  
max. 2.4 Nm  
Snap on fixing  
tristable (on DIN rail acc. to EN 50022)  
Finger proof  
acc. to VBG4, ÖVE EN-6  
Degree of protection (DIN VDE 0470)  
Surface mounted  
IP20  
Built-in behind panel  
IP40  
Contact position indicator  
red / green

**Electrical**

Rated voltage  
U<sub>n</sub> 254/440 V AC (Characteristic B, C), 240/415 V AC (Characteristic D)  
60 V DC per pole (2-pole, 6A-32A = 125V DC)

Rated current  
I<sub>n</sub> Type B, C, D: 1, 2, 3, 4, 6, 10, 12, 13, 15, 16, 20, 25, 32, 40 A

Rated insulation voltage  
U<sub>i</sub> 440 V AC

Rated impulse withstand voltage  
U<sub>imp</sub> 4 kV (1.2/50)  $\mu$ sec

**Tripping characteristic**

Conventional non-tripping current  
I<sub>nt</sub> = 1,13 I<sub>n</sub>

Conventional tripping current  
I<sub>t</sub> = 1.45 I<sub>n</sub>

Reference temperature  
40 °C

Temperature factor  
0.4%/K

Instantaneous tripping current  
I<sub>mt</sub> Type B: 3 I<sub>n</sub> < I<sub>mt</sub> = 5 I<sub>n</sub> · t (I<sub>mt</sub>) < 0.1 sec

Type C: 5 I<sub>n</sub> < I<sub>mt</sub> = 10 I<sub>n</sub> · t (I<sub>mt</sub>) < 0.1 sec

Type D: 10 I<sub>n</sub> < I<sub>mt</sub> = 20 I<sub>n</sub> · t (I<sub>mt</sub>) < 0.1 sec

Rated ultimate short-circuit breaking capacity I<sub>cu</sub> (IEC/EN 60947-2)

Type B: 1-25 A: 25 kA, 32-40 A: 20 kA

Type C: 1-25 A: 25 kA, 32-40 A: 20 kA

Type D: 1p/1p+N/2p - 1-13 A: 25 kA, 15-20 A: 20 kA, 25-40 A: 15 kA

3p/3p+N/4p - 1-16 A: 25 kA, 20 A: 20 kA, 25-40 A: 15 kA

DC (type B, C, D) 2pole 6A-32A: 25kA at 125V DC

Rated service short-circuit breaking capacity I<sub>cs</sub> (IEC/EN 60947-2)

for I<sub>cu</sub> = 25 kA --> I<sub>cs</sub> = 12.5 kA: 240/415 V AC; I<sub>cu</sub> = 15 kA: 255/440 V AC

for I<sub>cu</sub> = 20 kA --> I<sub>cs</sub> = 10 kA: 240/415 V AC; I<sub>cu</sub> = 15 kA: 255/440 V AC

for I<sub>cu</sub> = 15 kA --> I<sub>cs</sub> = 7.5 kA

for DC I<sub>cu</sub> = 25kA --> I<sub>cs</sub> = 12.5 kA at 125V DC


Rated short-circuit breaking capacity I<sub>cn</sub> (IEC/EN 60898-1)

Type B: 1-25 A: 15 kA, 32-40 A: 10 kA

Type C: 1-25 A: 15 kA, 32-40 A: 10 kA


Type D: 1-16 A: 15 kA, 20-40 A: 10 kA

### Dimensions (mm) FAZ-T

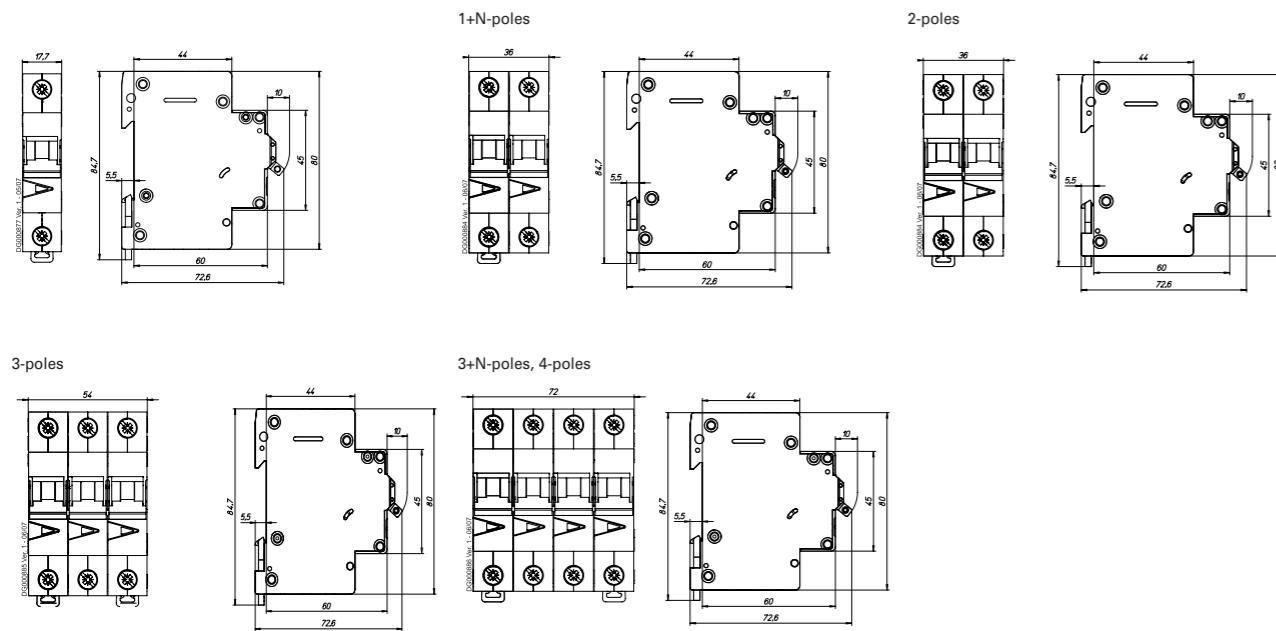

### Tripping Characteristics FAZ-T

Characteristics B, C and D - EN60898

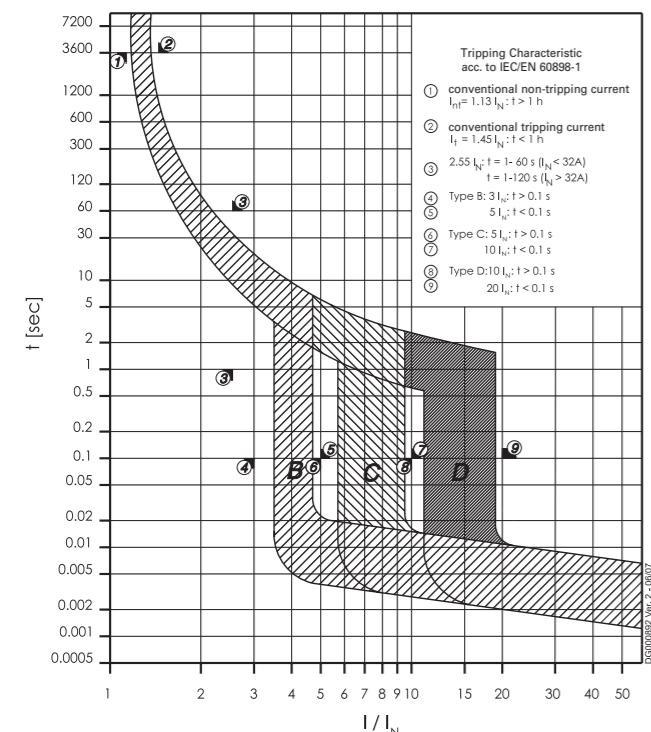

### Power Loss at $I_n$ FAZ-T (50/60 Hz)

#### Type B

$I_n$ [A]	1p P [W]	1pN P [W]	2p P [W]	3p P [W]	3pN* P [W]	4p P [W]
1	1.6	1.7	3.1	4.7	4.8	6.3
2	1.4	1.5	2.8	4.1	4.3	5.5
3	2.5	2.7	5.0	7.6	7.8	10.1
4	1.4	1.6	2.9	4.4	4.5	5.8
6	1.8	2.0	3.6	5.5	5.6	7.3
10	1.9	2.1	3.9	5.9	6.1	7.8
12	2.8	3.2	5.9	8.7	9.0	11.5
13	2.5	2.9	5.3	7.8	8.1	10.3
15	2.1	2.4	4.4	6.5	6.7	8.6
16	2.2	2.6	4.7	6.9	7.2	9.1
20	3.2	3.6	6.6	9.8	10.1	13.0
25	3.0	3.5	6.4	9.4	9.7	12.4
32	3.7	4.4	8.1	12.1	12.5	15.8
40	3.4	4.1	7.5	11.2	11.5	14.6

\* symmetrical load

#### Type C

$I_n$ [A]	1p P [W]	1pN P [W]	2p P [W]	3p P [W]	3pN* P [W]	4p P [W]
1	1.6	1.7	3.1	4.7	4.8	6.3
2	1.4	1.5	2.8	4.1	4.3	5.5
3	1.2	1.3	2.4	3.6	3.7	4.8
4	1.4	1.6	2.9	4.4	4.5	5.8
6	1.5	1.6	2.9	4.4	4.6	5.9
10	1.5	1.7	3.0	4.6	4.7	6.1
12	2.1	2.4	4.4	6.5	6.8	8.6
13	2.5	2.9	5.3	7.8	8.1	10.3
15	2.1	2.4	4.4	6.5	6.7	8.6
16	2.2	2.6	4.7	6.9	7.2	9.1
20	3.2	3.6	6.6	9.8	10.1	13.0
25	3.0	3.5	6.4	9.4	9.7	12.4
32	3.7	4.4	8.1	12.1	12.5	15.8
40	3.4	4.1	7.5	11.2	11.5	14.6

\* symmetrical load

#### Type D

$I_n$ [A]	1p P [W]	1pN P [W]	2p P [W]	3p P [W]	3pN* P [W]	4p P [W]
1	0.8	0.9	1.6	2.4	2.5	3.2
2	1.0	1.1	2.0	3.0	3.1	4.0
3	1.2	1.3	2.4	3.6	3.7	4.8
4	1.4	1.6	2.9	4.4	4.5	5.8
6	1.5	1.6	2.9	4.4	4.6	5.9
10	1.5	1.7	3.0	4.6	4.7	6.1
12	1.7	2.0	3.6	5.3	5.4	7.0
13	1.9	2.2	4.0	5.9	6.1	7.8
15	2.1	2.4	4.4	6.5	6.7	8.6
16	2.2	2.6	4.7	6.9	7.2	9.1
20	2.0	2.2	4.1	6.1	6.2	8.1
25	2.5	2.9	5.2	7.7	7.9	10.2
32	3.4	4.0	7.4	11.1	11.4	14.5
40	3.2	3.8	7.0	10.4	10.7	13.6

\* symmetrical load


### Influence of Ambient Temperature FAZ-T

On Load Carrying Capacity (temperature derating)


$I_n$ [A]	Ambient temperature T [°C]												
	-40	-30	-20	-10	0	10	20	30	35	40	45	50	55
1	1.3	1.2	1.2	1.2	1.1	1.1	1	1	0.99	0.97	0.95	0.93	0.9
2	2.6	2.5	2.4	2.3	2.2	2.2	2.1	2	2	1.9	1.9	1.9	1.8
3	3.8	3.7	3.6	3.5	3.4	3.3	3.1	3	3	2.9	2.8	2.8	2.7
4	5.1	5	4.8	4.7	4.5	4.3	4.2	4	3.9	3.9	3.8	3.7	3.6
6	7.7	7.5	7.2	7	6.7	6.5	6.3	6	5.9	5.8	5.7	5.6	5.4
10	13	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9
12	15	15	14	14	13	13	12	12	12	12	11	11	10
13	17	16	16	15	15	14	14	13	13	13	12	12	11
15	19	19	18	17	17	16	16	15	15	15	14	14	13
16	20	20	19	19	18	17	17	16	16	15	15	15	14
20	26	25	24	23	22	22	21	20	20	19	19	19	18
25	32	31	30	29	28	27	26	25	25	24	24	23	22
32	41	40	38	37	36	35	33	32	32	31	30	30	29
40	51	50	48	47	45	43	42	40	39	39	38	37	36

**Maximum Let-Through Energy FAZ-T**

Type B

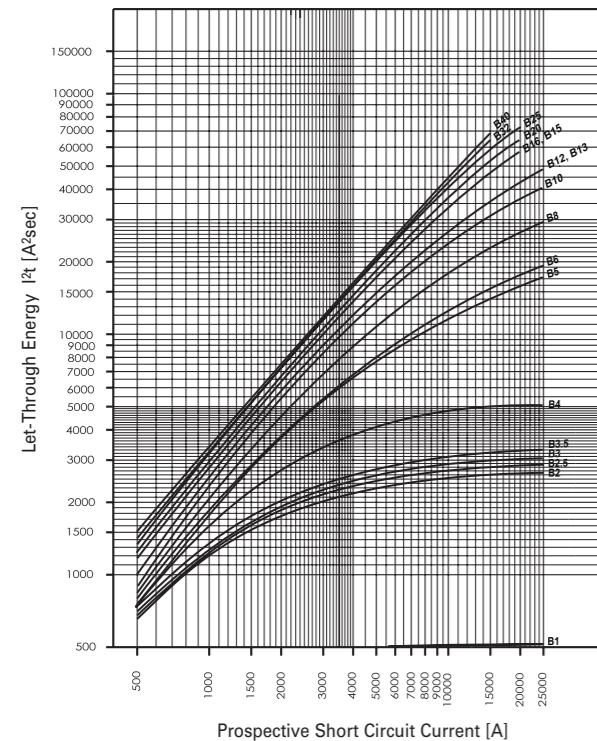

Type C

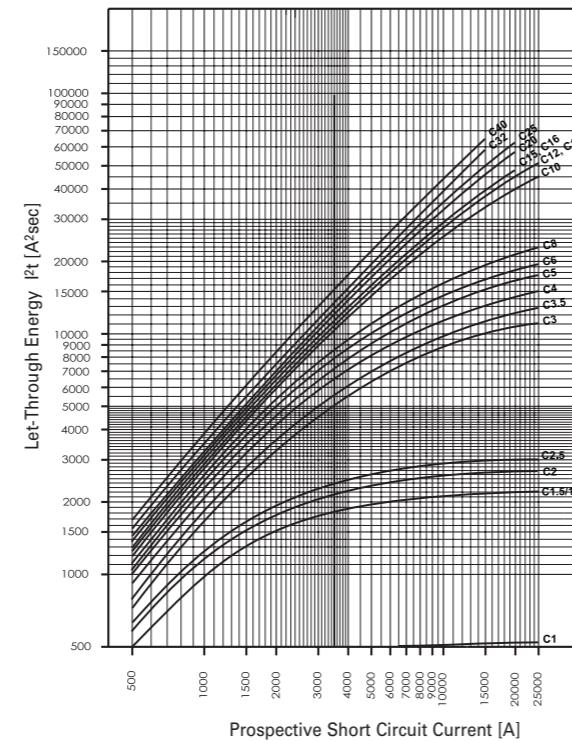

**xEffect**


**xEffect**

Miniature Circuit Breakers


FAZ-T - Technical Data

**Maximum Let-Through Current FAZ-T**


Type B

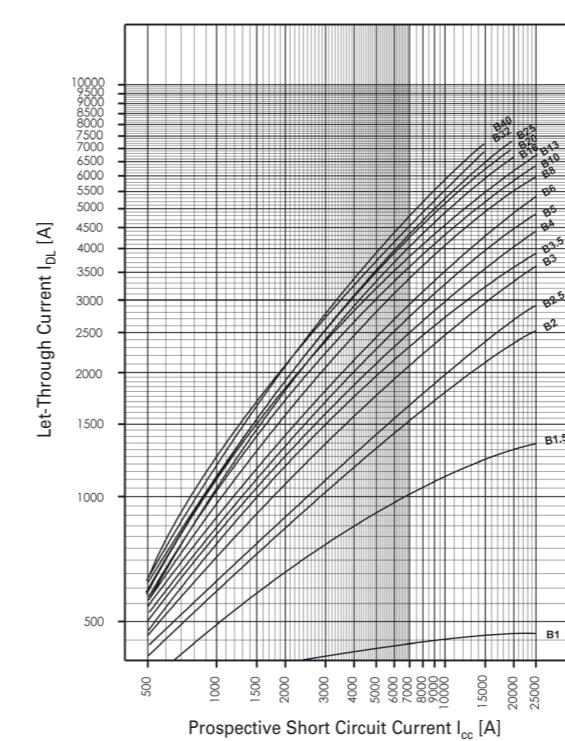


Type C

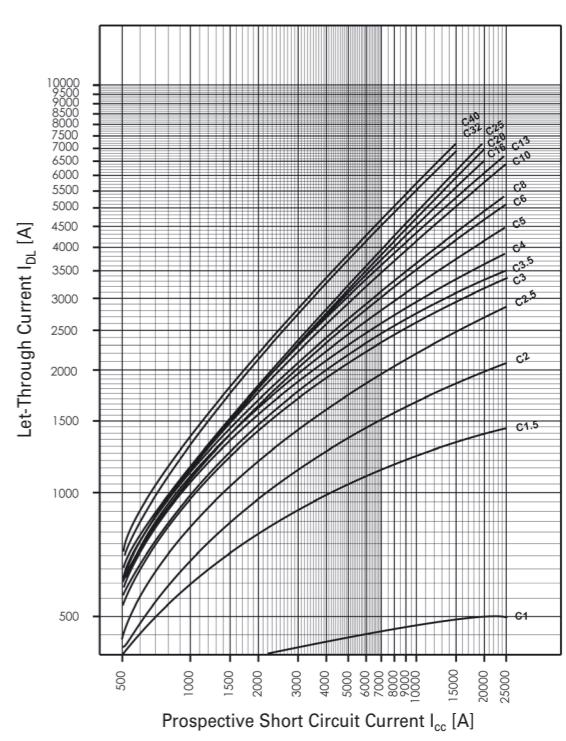

Type D

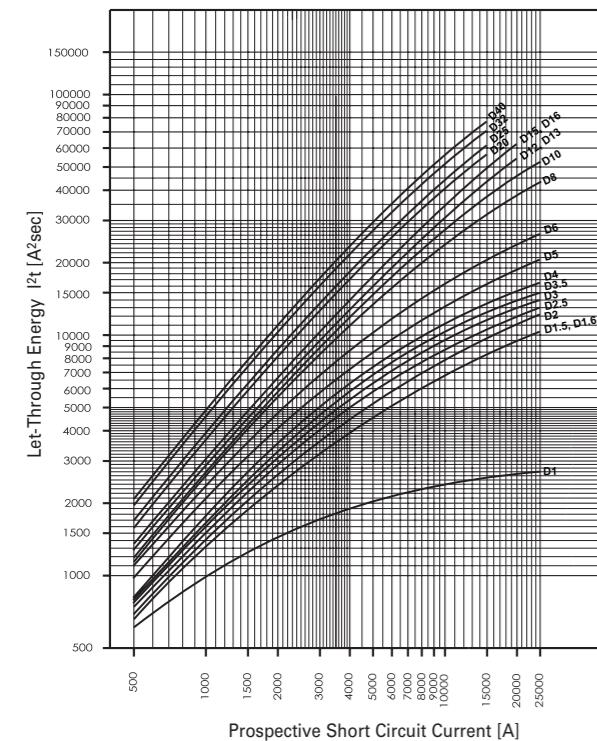

Type D

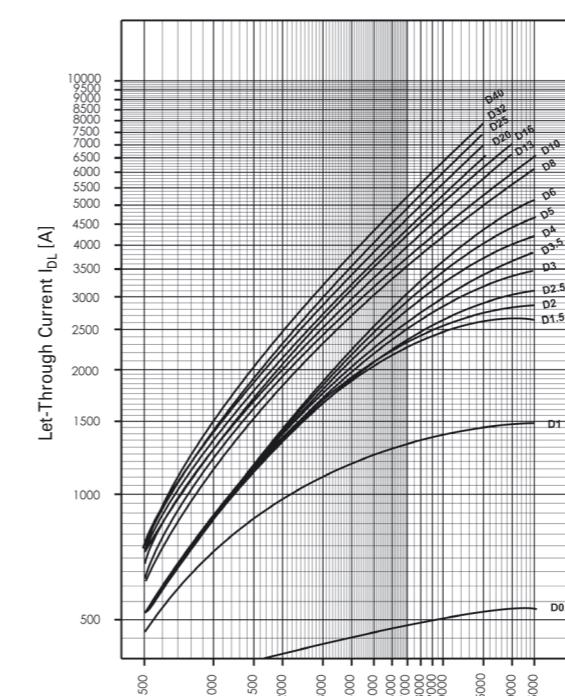


### Influence of the Line Frequency FAZ-T

On the Instantaneous Tripping Current  $I_{MA}$

Line Frequency f [Hz]							
16 $\frac{2}{3}$	50	60	100	200	300	400	
I <sub>MA(f)</sub> /I <sub>MA(50 Hz)</sub> [%]	91	100	101	106	115	134	141

The use of the products in networks with other frequencies than 50/60 Hz are in the customer's responsibility.

### Load rating in case of circuit breakers arranged one next to the other FAZ-T

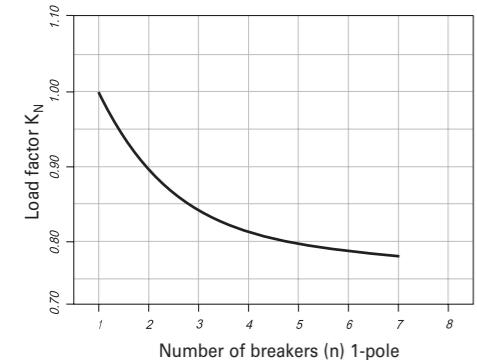

### Derating table for FAZ/FAZ-T above 2000m sea level

		60898		60947				
		U <sub>n</sub> 230/400V		U <sub>n</sub> 230/400V				
Above sea level (m)	Overvoltage category	Disconnect function	I/I <sub>n</sub>	I <sub>cn</sub>	I <sub>cs</sub>	I <sub>cu</sub>	I <sub>cs</sub>	
m	x	x	x	kA	kA	kA	kA	
<=2000	III	yes	1	10	7.5	15	10	7.5
>2000-2500	II	no	0.93	6	6	10	6	6
>2500-3000	II	no	0.88	6	6	10	6	6
>3000-3500	II	no	0.83	6	6	10	6	6
>3500-4000	II	no	0.78	6	6	10	6	6

### Additional I<sub>cu</sub> values for 2A and 4A FAZ-T type B and C (IEC/EN 60947-2)

	100-133 V	220-240 V	380-415 V
1-pole	2A	100	100
	4A	70	70
2-pole	2A	100	100
	4A	100	100
3-pole	2A	100	70
	4A	70	70
4-pole	2A	100	100
	4A	70	70

WA\_SG40320



### Description

#### FAZ-DC

- High-quality miniature circuit breakers for DC-applications
- Contact position indicator red - green
- Guide for secure terminal connection (not for FAZ-NA)
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 50 A
- Tripping characteristic B, C, K, Z
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 250 V DC per pole
- Classified for the use in rail rolling stock

# 2.246 Miniature Circuit Breakers

FAZ-...-DC Miniature Circuit Breakers

## xEffect

SG54512



Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package
2	220	10	FAZ-B2/1-DC	176063	12/120
3	250	10	FAZ-B3/1-DC	176064	12/120
4	250	10	FAZ-B4/1-DC	176065	12/120
6	250	10	FAZ-B6/1-DC	176066	12/120
8	250	10	FAZ-B8/1-DC	305864	12/120
10	250	10	FAZ-B10/1-DC	176067	12/120
13	250	10	FAZ-B13/1-DC	176068	12/120
16	250	10	FAZ-B16/1-DC	176069	12/120
20	250	10	FAZ-B20/1-DC	176070	12/120
25	250	10	FAZ-B25/1-DC	176071	12/120
32	250	10	FAZ-B32/1-DC	176072	12/120
40	250	10	FAZ-B40/1-DC	176073	12/120
50	250	10	FAZ-B50/1-DC	176074	12/120

### Characteristic B

#### 1-pole

2	220	10	FAZ-B2/1-DC	176063	12/120
3	250	10	FAZ-B3/1-DC	176064	12/120
4	250	10	FAZ-B4/1-DC	176065	12/120
6	250	10	FAZ-B6/1-DC	176066	12/120
8	250	10	FAZ-B8/1-DC	305864	12/120
10	250	10	FAZ-B10/1-DC	176067	12/120
13	250	10	FAZ-B13/1-DC	176068	12/120
16	250	10	FAZ-B16/1-DC	176069	12/120
20	250	10	FAZ-B20/1-DC	176070	12/120
25	250	10	FAZ-B25/1-DC	176071	12/120
32	250	10	FAZ-B32/1-DC	176072	12/120
40	250	10	FAZ-B40/1-DC	176073	12/120
50	250	10	FAZ-B50/1-DC	176074	12/120

#### 2-poles

2	440	10	FAZ-B2/2-DC	176075	1/60
3	500	10	FAZ-B3/2-DC	176076	1/60
4	500	10	FAZ-B4/2-DC	176077	1/60
6	500	10	FAZ-B6/2-DC	176078	1/60
8	500	10	FAZ-B8/2-DC	305867	1/60
10	500	10	FAZ-B10/2-DC	176079	1/60
13	500	10	FAZ-B13/2-DC	176080	1/60
16	500	10	FAZ-B16/2-DC	176081	1/60
20	500	10	FAZ-B20/2-DC	176082	1/60
25	500	10	FAZ-B25/2-DC	176083	1/60
32	500	10	FAZ-B32/2-DC	176084	1/60
40	500	10	FAZ-B40/2-DC	176085	1/60
50	500	10	FAZ-B50/2-DC	176086	1/60

## xEffect

SG54512



Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package
2	220	10	FAZ-C2/1-DC	279122	12/120
3	250	10	FAZ-C3/1-DC	279123	12/120
4	250	10	FAZ-C4/1-DC	279124	12/120
6	250	10	FAZ-C6/1-DC	279125	12/120
8	250	10	FAZ-C8/1-DC	305865	12/120
10	250	10	FAZ-C10/1-DC	279126	12/120
13	250	10	FAZ-C13/1-DC	279127	12/120
16	250	10	FAZ-C16/1-DC	279128	12/120
20	250	10	FAZ-C20/1-DC	279129	12/120
25	250	10	FAZ-C25/1-DC	279130	12/120
32	250	10	FAZ-C32/1-DC	279131	12/120
40	250	10	FAZ-C40/1-DC	279132	12/120
50	250	10	FAZ-C50/1-DC	279133	12/120

### Characteristic C

#### 1-pole

2	220	10	FAZ-C2/1-DC	279122	12/120
3	250	10	FAZ-C3/1-DC	279123	12/120
4	250	10	FAZ-C4/1-DC	279124	12/120
6	250	10	FAZ-C6/1-DC	279125	12/120
8	250	10	FAZ-C8/1-DC	305865	12/120
10	250	10	FAZ-C10/1-DC	279126	12/120
13	250	10	FAZ-C13/1-DC	279127	12/120
16	250	10	FAZ-C16/1-DC	279128	12/120
20	250	10	FAZ-C20/1-DC	279129	12/120
25	250	10	FAZ-C25/1-DC	279130	12/120
32	250	10	FAZ-C32/1-DC	279131	12/120
40	250	10	FAZ-C40/1-DC	279132	12/120
50	250	10	FAZ-C50/1-DC	279133	12/120

#### 2-poles

2	440	10	FAZ-C2/2-DC	279134	1/60
3	500	10	FAZ-C3/2-DC	279135	1/60
4	500	10	FAZ-C4/2-DC	279136	1/60
6	500	10	FAZ-C6/2-DC	279137	1/60
8	500	10	FAZ-C8/2-DC	305868	1/60
10	500	10	FAZ-C10/2-DC	279138	1/60
13	500	10	FAZ-C13/2-DC	279139	1/60
16	500	10	FAZ-C16/2-DC	279140	1/60
20	500	10	FAZ-C20/2-DC	279141	1/60
25	500	10	FAZ-C25/2-DC	279142	1/60
32	500	10	FAZ-C32/2-DC	279143	1/60
40	500	10	FAZ-C40/2-DC	279144	1/60
50	500	10	FAZ-C50/2-DC	279145	1/60

## Miniature Circuit Breakers

FAZ-...-DC Miniature Circuit Breakers

# 2.247

# 2.248 Miniature Circuit Breakers

FAZ-...-DC Miniature Circuit Breakers



## Characteristic K

### 1-pole

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package
4	250	10	FAZ-K4/1-DC	EP-505580	12/120	
6	250	10	FAZ-K6/1-DC	EP-505581	12/120	
8	250	10	FAZ-K8/1-DC	EP-505582	12/120	
10	250	10	FAZ-K10/1-DC	EP-505583	12/120	
13	250	10	FAZ-K13/1-DC	EP-505584	12/120	
16	250	10	FAZ-K16/1-DC	EP-505585	12/120	
20	250	10	FAZ-K20/1-DC	EP-505586	12/120	
25	250	10	FAZ-K25/1-DC	EP-505587	12/120	
32	250	10	FAZ-K32/1-DC	EP-505588	12/120	
40	250	10	FAZ-K40/1-DC	EP-505589	12/120	
50	250	10	FAZ-K50/1-DC	EP-505590	12/120	



### 2-poles

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Type Designation	Article No.	Units per package
4	500	10	FAZ-K4/2-DC	EP-505591	1/60
6	500	10	FAZ-K6/2-DC	EP-505592	1/60
8	500	10	FAZ-K8/2-DC	EP-505593	1/60
10	500	10	FAZ-K10/2-DC	EP-505594	1/60
13	500	10	FAZ-K13/2-DC	EP-505595	1/60
16	500	10	FAZ-K16/2-DC	EP-505596	1/60
20	500	10	FAZ-K20/2-DC	EP-505597	1/60
25	500	10	FAZ-K25/2-DC	EP-505598	1/60
32	500	10	FAZ-K32/2-DC	EP-505599	1/60
40	500	10	FAZ-K40/2-DC	EP-505600	1/60
50	500	10	FAZ-K50/2-DC	EP-505601	1/60

# xEffect

# xEffect

# Miniature Circuit Breakers

FAZ-...-DC Miniature Circuit Breakers

# 2.249

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Type Designation	Article No.	Units per package
4	250	10	FAZ-Z4/1-DC	EP-505602	12/120
6	250	10	FAZ-Z6/1-DC	EP-505603	12/120
8	250	10	FAZ-Z8/1-DC	EP-505604	12/120
10	250	10	FAZ-Z10/1-DC	EP-505605	12/120
13	250	10	FAZ-Z13/1-DC	EP-505606	12/120
16	250	10	FAZ-Z16/1-DC	EP-505607	12/120
20	250	10	FAZ-Z20/1-DC	EP-505608	12/120
25	250	10	FAZ-Z25/1-DC	EP-505609	12/120
32	250	10	FAZ-Z32/1-DC	EP-505610	12/120
40	250	10	FAZ-Z40/1-DC	EP-505611	12/120
50	250	10	FAZ-Z50/1-DC	EP-505612	12/120



## Characteristic Z

### 1-pole

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Type Designation	Article No.	Units per package
4	250	10	FAZ-Z4/2-DC	EP-505613	1/60
6	250	10	FAZ-Z6/2-DC	EP-505614	1/60
8	250	10	FAZ-Z8/2-DC	EP-505615	1/60
10	250	10	FAZ-Z10/2-DC	EP-505616	1/60
13	250	10	FAZ-Z13/2-DC	EP-505617	1/60
16	250	10	FAZ-Z16/2-DC	EP-505618	1/60
20	250	10	FAZ-Z20/2-DC	EP-505619	1/60
25	250	10	FAZ-Z25/2-DC	EP-505620	1/60
32	250	10	FAZ-Z32/2-DC	EP-505621	1/60
40	250	10	FAZ-Z40/2-DC	EP-505622	1/60
50	250	10	FAZ-Z50/2-DC	EP-505623	1/60





### 2-poles

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V DC)	Type Designation	Article No.	Units per package
4	500	10	FAZ-Z4/2-DC	EP-505613	1/60
6	500	10	FAZ-Z6/2-DC	EP-505614	1/60
8	500	10	FAZ-Z8/2-DC	EP-505615	1/60
10	500	10	FAZ-Z10/2-DC	EP-505616	1/60
13	500	10	FAZ-Z13/2-DC	EP-505617	1/60
16	500	10	FAZ-Z16/2-DC	EP-505618	1/60
20	500	10	FAZ-Z20/2-DC	EP-505619	1/60
25	500	10	FAZ-Z25/2-DC	EP-505620	1/60
32	500	10	FAZ-Z32/2-DC	EP-505621	1/60
40	500	10	FAZ-Z40/2-DC	EP-505622	1/60
50	500	10	FAZ-Z50/2-DC	EP-505623	1/60

**Technical Data**
**FAZ-DC \*)**

Productstandard	IEC/EN 60947-2
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Number of poles	1, 2
Characteristics	B, C, K, Z
<b>Mechanical</b>	
Device width	17.7 mm (1p), 36 mm (2p)
Frame size	45 mm
Device height	80 mm
Device depth	60 mm
Terminals	lift terminal
Terminal capacity rigid solid/stranded wire	1-25 mm <sup>2</sup>
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, PZ2) max. 2.4 Nm
Fastening torque of terminal screws	
Snap on fixing	tristable (on DIN rail acc. to EN 50022)
Finger proof	acc. to VBG4, ÖVE EN-6
Degree of protection (DIN VDE 0470)	
Surface mounted	IP20
Built-in behind panel	IP40
Contact position indicator	red / green
<b>Electrical</b>	
Rated voltage DC	$U_n$ 2 A Type: 220V (per pole) 3-50 A Typen: 250V (per pole)
Rated current	$I_n$ Type B and C: 2, 3, 4, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50 A Type K and Z: 4, 6, 8, 10, 13, 16, 20, 25, 32, 40, 50 A
Rated insulation voltage	$U_i$ 440 V AC
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50) $\mu$ sec
<b>Tripping characteristic</b>	
Conventional non-tripping current	$I_{nt} = 1,13 I_n$
Conventional tripping current	$I_t = 1,45 I_n$
Reference temperature	40 °C
Temperature factor	0.4%/K
Instantaneous tripping current	$I_{mt}$ Type B: 4 $I_n < I_{mt} = 7 I_n$ ; $t(I_{mt}) < 0.1$ sec Type C: 7 $I_n < I_{mt} = 15 I_n$ ; $t(I_{mt}) < 0.1$ sec
Rated short-circuit breaking capacity	$I_{cu}$ 10 kA at rated voltage (All current ratings) 25 kA at 125V DC (6A-32A)
Selectivity class	3
Number of electrical operations	> 4.000
Number of mechanical operations	> 20.000
Climatic conditions	acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)
Operating temperature range	-40°C up to +75°C
Storage- and transport temperature	-40°C up to +75°C

\*) not for PV string protection!

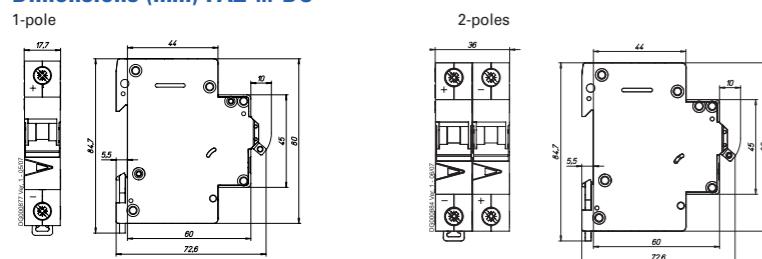**Connection diagram**

**Dimensions (mm) FAZ-...-DC**


# 2.252 Miniature Circuit Breakers

Miniature Circuit Breakers FAZ-NA, FAZ-RT



## Description

FAZ-NA, FAZ-RT

- According to UL 489, CSA C22.2 No. 5 and also IEC 60947-2 standard
- For Applications, which are permitted for UL 1077 or CSA C22.2 No. 235
- Auxiliary switch and voltage trips suitable for subsequent installation
- Series with removable terminal screws

(Type FAZ-..-RT), for use with ring cable lug

- Contact position indicator red - green
- Easy mounting at DIN-rail
- Classified for the use in rail rolling stock

## xEffect

## xEffect

# Miniature Circuit Breakers

FAZ-...-NA Miniature Circuit Breakers

# 2.253

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

## Characteristic B

### 1-pole

1	254	15	277	10	SWD	AWG 18	FAZ-B1/1-NA	132414	2/80
1.5	254	15	277	10	SWD	AWG 18	FAZ-B1,5/1-NA	132415	2/80
2	254	15	277	10	SWD	AWG 18	FAZ-B2/1-NA	132416	2/80
3	254	15	277	10	SWD	AWG 18	FAZ-B3/1-NA	132417	2/80
4	254	15	277	10	SWD	AWG 18	FAZ-B4/1-NA	132418	2/80
5	254	15	277	10	SWD	AWG 18	FAZ-B5/1-NA	132419	2/80
6	254	15	277	10	SWD	AWG 18	FAZ-B6/1-NA	132680	2/80
7	254	15	277	10	SWD	AWG 18	FAZ-B7/1-NA	132681	2/80
8	254	15	277	10	SWD	AWG 16	FAZ-B8/1-NA	132682	2/80
10	254	15	277	10	SWD	AWG 16	FAZ-B10/1-NA	132683	2/80
13	254	15	277	10	SWD		FAZ-B13/1-NA	132684	2/80
15	254	15	277	14	SWD		FAZ-B15/1-NA	132685	2/80
16	254	15	277	14	SWD		FAZ-B16/1-NA	132686	2/80
20	254	15	277	14	SWD		FAZ-B20/1-NA	132687	2/80
25	254	15	277	14			FAZ-B25/1-NA	132688	2/80
30	254	15	277	10			FAZ-B30/1-NA	132689	2/80
32	254	15	277	10			FAZ-B32/1-NA	132690	2/80
35	254	15	240	10			FAZ-B35/1-NA	132691	2/80
40	254	15	240	10			FAZ-B40/1-NA	132692	2/80
50	240	15	240	10			FAZ-B50/1-NA	190779	2/80
63	240	15	240	10			FAZ-B63/1-NA	190780	2/80

### 2-poles

1	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1/2-NA	132693	1/40
1.5	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1,5/2-NA	132694	1/40
2	440	15	480Y/277 10	SWD	AWG 18	FAZ-B2/2-NA	132695	1/40
3	440	15	480Y/277 10	SWD	AWG 18	FAZ-B3/2-NA	132696	1/40
4	440	15	480Y/277 10	SWD	AWG 18	FAZ-B4/2-NA	132697	1/40
5	440	15	480Y/277 10	SWD	AWG 18	FAZ-B5/2-NA	132698	1/40
6	440	15	480Y/277 10	SWD	AWG 18	FAZ-B6/2-NA	132699	1/40
7	440	15	480Y/277 10	SWD	AWG 18	FAZ-B7/2-NA	132700	1/40
8	440	15	480Y/277 10	SWD	AWG 16	FAZ-B8/2-NA	132701	1/40
10	440	15	480Y/277 10	SWD	AWG 16	FAZ-B10/2-NA	132702	1/40
13	440	15	480Y/277 10	SWD		FAZ-B13/2-NA	132703	1/40
15	440	15	480Y/277 14	SWD		FAZ-B15/2-NA	132704	1/40
16	440	15	480Y/277 14	SWD		FAZ-B16/2-NA	132705	1/40
20	440	15	480Y/277 14	SWD		FAZ-B20/2-NA	132706	1/40
25	440	15	480Y/277 14			FAZ-B25/2-NA	132707	1/40
30	440	15	480Y/277 10			FAZ-B30/2-NA	132708	1/40
32	440	15	480Y/277 10			FAZ-B32/2-NA	132709	1/40
35	440	15	240 10			FAZ-B35/2-NA	132710	1/40
40	440	15	240 10			FAZ-B40/2-NA	132711	1/40
50	415	15	240 10			FAZ-B50/2-NA	190783	1/40
63	415	15	240 10			FAZ-B63/2-NA	190784	1/40

# 2.254 Miniature Circuit Breakers

FAZ-...-NA Miniature Circuit Breakers



## 3-poles

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
1	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1/3-NA	132712	1/28		
1.5	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1,5/3-NA	132713	1/28		
2	440	15	480Y/277 10	SWD	AWG 18	FAZ-B2/3-NA	132714	1/28		
3	440	15	480Y/277 10	SWD	AWG 18	FAZ-B3/3-NA	132715	1/28		
4	440	15	480Y/277 10	SWD	AWG 18	FAZ-B4/3-NA	132716	1/28		
5	440	15	480Y/277 10	SWD	AWG 18	FAZ-B5/3-NA	132717	1/28		
6	440	15	480Y/277 10	SWD	AWG 18	FAZ-B6/3-NA	132718	1/28		
7	440	15	480Y/277 10	SWD	AWG 18	FAZ-B7/3-NA	132719	1/28		
8	440	15	480Y/277 10	SWD	AWG 16	FAZ-B8/3-NA	132720	1/28		
10	440	15	480Y/277 10	SWD	AWG 16	FAZ-B10/3-NA	132721	1/28		
13	440	15	480Y/277 10	SWD		FAZ-B13/3-NA	132722	1/28		
15	440	15	480Y/277 14	SWD		FAZ-B15/3-NA	132723	1/28		
16	440	15	480Y/277 14	SWD		FAZ-B16/3-NA	132724	1/28		
20	440	15	480Y/277 14	SWD		FAZ-B20/3-NA	132725	1/28		
25	440	15	480Y/277 14			FAZ-B25/3-NA	132726	1/28		
30	440	15	480Y/277 10			FAZ-B30/3-NA	132727	1/28		
32	440	15	480Y/277 10			FAZ-B32/3-NA	132728	1/28		
35	440	15	240 10			FAZ-B35/3-NA	132729	1/28		
40	440	15	240 10			FAZ-B40/3-NA	132730	1/28		
50	415	15	240 10			FAZ-B50/3-NA	190787	1/28		
63	415	15	240 10			FAZ-B63/3-NA	190788	1/28		



## 4-poles

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
1	440	15	480Y/277 10	AWG18	FAZ-B1/4-NA	190899	1/20			
1.5	440	15	480Y/277 10	AWG18	FAZ-B1,5/4-NA	190900	1/20			
2	440	15	480Y/277 10	AWG18	FAZ-B2/4-NA	190901	1/20			
3	440	15	480Y/277 10	AWG18	FAZ-B3/4-NA	190902	1/20			
4	440	15	480Y/277 10	AWG18	FAZ-B4/4-NA	190903	1/20			
5	440	15	480Y/277 10	AWG18	FAZ-B5/4-NA	190904	1/20			
6	440	15	480Y/277 10	AWG18	FAZ-B6/4-NA	190905	1/20			
7	440	15	480Y/277 10	AWG18	FAZ-B7/4-NA	190906	1/20			
8	440	15	480Y/277 10	AWG16	FAZ-B8/4-NA	190927	1/20			
10	440	15	480Y/277 10	AWG16	FAZ-B10/4-NA	190928	1/20			
13	440	15	480Y/277 10		FAZ-B13/4-NA	190907	1/20			
15	440	15	480Y/277 14		FAZ-B15/4-NA	190908	1/20			
16	440	15	480Y/277 14		FAZ-B16/4-NA	190909	1/20			
20	440	15	480Y/277 14		FAZ-B20/4-NA	190910	1/20			
25	440	15	480Y/277 14		FAZ-B25/4-NA	190911	1/20			
30	440	15	480Y/277 10		FAZ-B30/4-NA	190912	1/20			
32	440	15	480Y/277 10		FAZ-B32/4-NA	190913	1/20			
35	440	15	240 10		FAZ-B35/4-NA	190914	1/20			
40	440	15	240 10		FAZ-B40/4-NA	190915	1/20			
50	415	15	240 10		FAZ-B50/4-NA	190789	1/20			
63	415	15	240 10		FAZ-B63/4-NA	190790	1/20			

## xEffect

## xEffect

## Miniature Circuit Breakers

# 2.255

FAZ-...-NA Miniature Circuit Breakers

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
0.5	254	15	277	10	SWD	AWG 18	FAZ-C0,5/1-NA	102077	2/80

## Characteristic C

### 1-pole

0.5	254	15	277	10	SWD	AWG 18	FAZ-C0,5/1-NA	102077	2/80
1	254	15	277	10	SWD	AWG 18	FAZ-C1/1-NA	102078	2/80
1.5	254	15	277	10	SWD	AWG 18	FAZ-C1,5/1-NA	102079	2/80
2	254	15	277	10	SWD	AWG 18	FAZ-C2/1-NA	102080	2/80
3	254	15	277	10	SWD	AWG 18	FAZ-C3/1-NA	102081	2/80
4	254	15	277	10	SWD	AWG 18	FAZ-C4/1-NA	102082	2/80
5	254	15	277	10	SWD	AWG 18	FAZ-C5/1-NA	102083	2/80
6	254	15	277	10	SWD	AWG 18	FAZ-C6/1-NA	102084	2/80
7	254	15	277	10	SWD	AWG 18	FAZ-C7/1-NA	102085	2/80
8	254	15	277	10	SWD	AWG 16	FAZ-C8/1-NA	102086	2/80
10	254	15	277	10	SWD	AWG 16	FAZ-C10/1-NA	102087	2/80
13	254	15	277	10	SWD		FAZ-C13/1-NA	102088	2/80
15	254	15	277	14	SWD		FAZ-C15/1-NA	102089	2/80
16	254	15	277	14	SWD		FAZ-C16/1-NA	102090	2/80
20	254	15	277	14	SWD		FAZ-C20/1-NA	102091	2/80
25	254	15	277	14	SWD		FAZ-C25/1		

**3-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
0.5	440	15	480Y/277 10	SWD	AWG 18	FAZ-C0,5/3-NA	102237	1/28	
1	440	15	480Y/277 10	SWD	AWG 18	FAZ-C1/3-NA	102238	1/28	
1.5	440	15	480Y/277 10	SWD	AWG 18	FAZ-C1,5/3-NA	102239	1/28	
2	440	15	480Y/277 10	SWD	AWG 18	FAZ-C2/3-NA	102240	1/28	
3	440	15	480Y/277 10	SWD	AWG 18	FAZ-C3/3-NA	102241	1/28	
4	440	15	480Y/277 10	SWD	AWG 18	FAZ-C4/3-NA	102242	1/28	
5	440	15	480Y/277 10	SWD	AWG 18	FAZ-C5/3-NA	102243	1/28	
6	440	15	480Y/277 10	SWD	AWG 18	FAZ-C6/3-NA	102244	1/28	
7	440	15	480Y/277 10	SWD	AWG 18	FAZ-C7/3-NA	102245	1/28	
8	440	15	480Y/277 10	SWD	AWG 16	FAZ-C8/3-NA	102246	1/28	
10	440	15	480Y/277 10	SWD	AWG 16	FAZ-C10/3-NA	102247	1/28	
13	440	15	480Y/277 10	SWD		FAZ-C13/3-NA	102248	1/28	
15	440	15	480Y/277 14	SWD		FAZ-C15/3-NA	102249	1/28	
16	440	15	480Y/277 14	SWD		FAZ-C16/3-NA	102250	1/28	
20	440	15	480Y/277 14	SWD		FAZ-C20/3-NA	102251	1/28	
25	440	15	480Y/277 14			FAZ-C25/3-NA	102252	1/28	
30	440	15	480Y/277 10			FAZ-C30/3-NA	102253	1/28	
32	440	15	480Y/277 10			FAZ-C32/3-NA	102254	1/28	
35	440	15	240 10			FAZ-C35/3-NA	102255	1/28	
40	440	15	240 10			FAZ-C40/3-NA	102256	1/28	
50	415	15	240 10			FAZ-C50/3-NA	190791	1/28	
63	415	15	240 10			FAZ-C63/3-NA	190792	1/28	

**4-poles**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
0.5	440	15	480Y/277 10	AWG18	FAZ-C0,5/4-NA	190916	1/20		
1	440	15	480Y/277 10	AWG18	FAZ-C1/4-NA	190917	1/20		
1.5	440	15	480Y/277 10	AWG18	FAZ-C1,5/4-NA	190918	1/20		
2	440	15	480Y/277 10	AWG18	FAZ-C2/4-NA	190919	1/20		
3	440	15	480Y/277 10	AWG18	FAZ-C3/4-NA	190920	1/20		
4	440	15	480Y/277 10	AWG18	FAZ-C4/4-NA	190921	1/20		
5	440	15	480Y/277 10	AWG18	FAZ-C5/4-NA	190922	1/20		
6	440	15	480Y/277 10	AWG18	FAZ-C6/4-NA	190923	1/20		
7	440	15	480Y/277 10	AWG18	FAZ-C7/4-NA	190924	1/20		
8	440	15	480Y/277 10	AWG16	FAZ-C8/4-NA	190925	1/20		
10	440	15	480Y/277 10	AWG16	FAZ-C10/4-NA	190926	1/20		
13	440	15	480Y/277 10		FAZ-C13/4-NA	190815	1/20		
15	440	15	480Y/277 14		FAZ-C15/4-NA	190816	1/20		
16	440	15	480Y/277 14		FAZ-C16/4-NA	190817	1/20		
20	440	15	480Y/277 14		FAZ-C20/4-NA	190818	1/20		
25	440	15	480Y/277 14		FAZ-C25/4-NA	190819	1/20		
30	440	15	480Y/277 10		FAZ-C30/4-NA	190820	1/20		
32	440	15	480Y/277 10		FAZ-C32/4-NA	190821	1/20		
35	440	15	240 10		FAZ-C35/4-NA	190822	1/20		
40	440	15	240 10		FAZ-C40/4-NA	190823	1/20		
50	415	15	240 10		FAZ-C50/4-NA	190793	1/20		
63	415	15	240 10		FAZ-C63/4-NA	190794	1/20		

**Characteristic D****1-pole**

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
0.5	240	15	277 10	SWD	AWG 18	FAZ-D0,5/1-NA	102097	2/80	
1	240	15	277 10	SWD	AWG 18	FAZ-D1/1-NA	102098	2/80	
1.5	240	15	277 10	SWD	AWG 18	FAZ-D1,5/1-NA	102099	2/80	
2	240	15	277 10	SWD	AWG 18	FAZ-D2/1-NA	102100	2/80	
3	240	15	277 10	SWD	AWG 18	FAZ-D3/1-NA	102101	2/80	
4	240	15	277 10	SWD	AWG 18	FAZ-D4/1-NA	102102	2/80	
5	240	15	277 10	SWD	AWG 18	FAZ-D5/1-NA	102103	2/80	
6	240	15	277 10	SWD	AWG 18	FAZ-D6/1-NA	102104	2/80	
7	240	15	277 10	SWD	AWG 18	FAZ-D7/1-NA	102105	2/80	
8	240	15	277 10	SWD	AWG 16	FAZ-D8/1-NA	102106	2/80	
10	240	15	277 10	SWD	AWG 16	FAZ-D10/1-NA	102107	2/80	
13	240	15	277 14	SWD		FAZ-D13/1-NA	102108	2/80	
15	240	15	277 14	SWD		FAZ-D15/1-NA	102109	2/80	
16	240	15	277 14	SWD		FAZ-D16/1-NA	102110	2/80	
20	240	15	277 14	SWD		FAZ-D20/1-NA	102111	2/80	
25	240	15	277 10			FAZ-D25/1-NA	102112	2/80	
30	240	15	277 10			FAZ-D30/1-NA	102113	2/80	
32	240	15	277 10			FAZ-D32/1-NA	102114	2/80	
35	240	15	240 10			FAZ-D35/1-NA	102115	2/80	
40	240	15	240 10			FAZ-D40/1-NA	102116	2/80	

**2-poles**

Rated current I<sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package

<tbl\_r cells="

# 2.258 Miniature Circuit Breakers

FAZ-...-NA Miniature Circuit Breakers

## xEffect



Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

### 3-poles

0.5	415	15	480Y/277 10	SWD	AWG 18	FAZ-D0,5/3-NA	102257	1/28
1	415	15	480Y/277 10	SWD	AWG 18	FAZ-D1/3-NA	102258	1/28
1.5	415	15	480Y/277 10	SWD	AWG 18	FAZ-D1,5/3-NA	102259	1/28
2	415	15	480Y/277 10	SWD	AWG 18	FAZ-D2/3-NA	102260	1/28
3	415	15	480Y/277 10	SWD	AWG 18	FAZ-D3/3-NA	102261	1/28
4	415	15	480Y/277 10	SWD	AWG 18	FAZ-D4/3-NA	102262	1/28
5	415	15	480Y/277 10	SWD	AWG 18	FAZ-D5/3-NA	102263	1/28
6	415	15	480Y/277 10	SWD	AWG 18	FAZ-D6/3-NA	102264	1/28
7	415	15	480Y/277 10	SWD	AWG 18	FAZ-D7/3-NA	102265	1/28
8	415	15	480Y/277 10	SWD	AWG 16	FAZ-D8/3-NA	102266	1/28
10	415	15	480Y/277 10	SWD	AWG 16	FAZ-D10/3-NA	102267	1/28
13	415	15	480Y/277 14	SWD		FAZ-D13/3-NA	102268	1/28
15	415	15	480Y/277 14	SWD		FAZ-D15/3-NA	102269	1/28
16	415	15	480Y/277 14	SWD		FAZ-D16/3-NA	102270	1/28
20	415	15	480Y/277 14	SWD		FAZ-D20/3-NA	102271	1/28
25	415	15	480Y/277 10			FAZ-D25/3-NA	102272	1/28
30	415	15	480Y/277 10			FAZ-D30/3-NA	102273	1/28
32	415	15	480Y/277 10			FAZ-D32/3-NA	102274	1/28
35	415	15	240 10			FAZ-D35/3-NA	102275	1/28
40	415	15	240 10			FAZ-D40/3-NA	102276	1/28

wa\_sg01017



0.5	415	15	480Y/277 10	AWG18	FAZ-D0,5/4-NA	190824	1/20
1	415	15	480Y/277 10	AWG18	FAZ-D1/4-NA	190825	1/20
1.5	415	15	480Y/277 10	AWG18	FAZ-D1,5/4-NA	190826	1/20
2	415	15	480Y/277 10	AWG18	FAZ-D2/4-NA	190827	1/20
3	415	15	480Y/277 10	AWG18	FAZ-D3/4-NA	190828	1/20
4	415	15	480Y/277 10	AWG18	FAZ-D4/4-NA	190829	1/20
5	415	15	480Y/277 10	AWG18	FAZ-D5/4-NA	190830	1/20
6	415	15	480Y/277 10	AWG18	FAZ-D6/4-NA	190831	1/20
7	415	15	480Y/277 10	AWG18	FAZ-D7/4-NA	190832	1/20
8	415	15	480Y/277 10	AWG16	FAZ-D8/4-NA	190833	1/20
10	415	15	480Y/277 10	AWG16	FAZ-D10/4-NA	190834	1/20
13	415	15	480Y/277 10		FAZ-D13/4-NA	190835	1/20
15	415	15	480Y/277 14		FAZ-D15/4-NA	190836	1/20
16	415	15	480Y/277 14		FAZ-D16/4-NA	190837	1/20
20	415	15	480Y/277 14		FAZ-D20/4-NA	190838	1/20
25	415	15	480Y/277 14		FAZ-D25/4-NA	190839	1/20
30	415	15	480Y/277 10		FAZ-D30/4-NA	190840	1/20
32	415	15	480Y/277 10		FAZ-D32/4-NA	190841	1/20
35	415	15	240 10		FAZ-D35/4-NA	190842	1/20
40	415	15	240 10		FAZ-D40/4-NA	190843	1/20

## xEffect



Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

### Characteristic B

#### 1-pole

1	254	15	277 10	SWD	AWG 18	FAZ-B1/1-RT	132731	2/80
1,5	254	15	277 10	SWD	AWG 18	FAZ-B1,5/1-RT	132732	2/80
2	254	15	277 10	SWD	AWG 18	FAZ-B2/1-RT	132733	2/80
3	254	15	277 10	SWD	AWG 18	FAZ-B3/1-RT	132734	2/80
4	254	15	277 10	SWD	AWG 18	FAZ-B4/1-RT	132735	2/80
5	254	15	277 10	SWD	AWG 18	FAZ-B5/1-RT	132736	2/80
6	254	15	277 10	SWD	AWG 18	FAZ-B6/1-RT	132737	2/80
7	254	15	277 10	SWD	AWG 18	FAZ-B7/1-RT	132738	2/80
8	254	15	277 10	SWD	AWG 16	FAZ-B8/1-RT	132739	2/80
10	254	15	277 10	SWD	AWG 16	FAZ-B10/1-RT	132740	2/80
13	254	15	277 10	SWD		FAZ-B13/1-RT	132741	2/80
15	254	15	277 14	SWD		FAZ-B15/1-RT	132742	2/80
16	254	15	277 14	SWD		FAZ-B16/1-RT	132743	2/80
20	254	15	277 14	SWD		FAZ-B20/1-RT	132744	2/80
25	254	15	277 14	SWD		FAZ-B25/1-RT	132745	2/80
30	254	15	277 10			FAZ-B30/1-RT	132746	2/80
32	254	15	277 10			FAZ-B32/1-RT	132747	2/80
35	254	15	240 10			FAZ-B35/1-RT	132748	2/80
40	254	15	240 10			FAZ-B40/1-RT	132749	2/80
50	240	15	240 10			FAZ-B50/1-RT	190795	2/80
63	240	15	240 10			FAZ-B63/1-RT	190796	2/80



1	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1/2-RT	132750	1/40
1,5	440	15</						



wa\_sg01017



Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

**3-poles**

1	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1/3-RT	132769	1/28
1,5	440	15	480Y/277 10	SWD	AWG 18	FAZ-B1,5/3-RT	132770	1/28
2	440	15	480Y/277 10	SWD	AWG 18	FAZ-B2/3-RT	132771	1/28
3	440	15	480Y/277 10	SWD	AWG 18	FAZ-B3/3-RT	132772	1/28
4	440	15	480Y/277 10	SWD	AWG 18	FAZ-B4/3-RT	132773	1/28
5	440	15	480Y/277 10	SWD	AWG 18	FAZ-B5/3-RT	132774	1/28
6	440	15	480Y/277 10	SWD	AWG 18	FAZ-B6/3-RT	132775	1/28
7	440	15	480Y/277 10	SWD	AWG 18	FAZ-B7/3-RT	132776	1/28
8	440	15	480Y/277 10	SWD	AWG 16	FAZ-B8/3-RT	132777	1/28
10	440	15	480Y/277 10	SWD	AWG 16	FAZ-B10/3-RT	132778	1/28
13	440	15	480Y/277 10	SWD		FAZ-B13/3-RT	132779	1/28
15	440	15	480Y/277 14	SWD		FAZ-B15/3-RT	132780	1/28
16	440	15	480Y/277 14	SWD		FAZ-B16/3-RT	132781	1/28
20	440	15	480Y/277 14	SWD		FAZ-B20/3-RT	132782	1/28
25	440	15	480Y/277 14			FAZ-B25/3-RT	132783	1/28
30	440	15	480Y/277 10			FAZ-B30/3-RT	132784	1/28
32	440	15	480Y/277 10			FAZ-B32/3-RT	132785	1/28
35	440	15	240 10			FAZ-B35/3-RT	132786	1/28
40	440	15	240 10			FAZ-B40/3-RT	132787	1/28
50	415	15	240 10			FAZ-B50/3-RT	190803	1/28
63	415	15	240 10			FAZ-B63/3-RT	190804	1/28

**4-poles**

1	440	15	480Y/277 10	AWG18	FAZ-B1/4-RT	190844	1/20
1,5	440	15	480Y/277 10	AWG18	FAZ-B1,5/4-RT	190845	1/20
2	440	15	480Y/277 10	AWG18	FAZ-B2/4-RT	190846	1/20
3	440	15	480Y/277 10	AWG18	FAZ-B3/4-RT	190847	1/20
4	440	15	480Y/277 10	AWG18	FAZ-B4/4-RT	190848	1/20
5	440	15	480Y/277 10	AWG18	FAZ-B5/4-RT	190849	1/20
6	440	15	480Y/277 10	AWG18	FAZ-B6/4-RT	190850	1/20
7	440	15	480Y/277 10	AWG18	FAZ-B7/4-RT	190851	1/20
8	440	15	480Y/277 10	AWG16	FAZ-B8/4-RT	190852	1/20
10	440	15	480Y/277 10	AWG16	FAZ-B10/4-RT	190853	1/20
13	440	15	480Y/277 10		FAZ-B13/4-RT	190854	1/20
15	440	15	480Y/277 14		FAZ-B15/4-RT	190855	1/20
16	440	15	480Y/277 14		FAZ-B16/4-RT	190856	1/20
20	440	15	480Y/277 14		FAZ-B20/4-RT	190857	1/20
25	440	15	480Y/277 14		FAZ-B25/4-RT	190858	1/20
30	440	15	480Y/277 10		FAZ-B30/4-RT	190859	1/20
32	440	15	480Y/277 10		FAZ-B32/4-RT	190860	1/20
35	440	15	240 10		FAZ-B35/4-RT	190861	1/20
40	440	15	240 10		FAZ-B40/4-RT	190862	1/20
50	415	15	240 10		FAZ-B50/4-RT	190805	1/20
63	415	15	240 10		FAZ-B63/4-RT	190806	1/20

**xEffect****xEffect****Miniature Circuit Breakers****2.261**

## FAZ-...-RT Miniature Circuit Breakers

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

**Characteristic C****1-pole**

0.5	254	15	277 10	SWD	AWG 18	FAZ-C0,5/1-RT	102117	2/80
1	254	15	277 10	SWD	AWG 18	FAZ-C1/1-RT	102118	2/80
1,5	254	15	277 10	SWD	AWG 18	FAZ-C1,5/1-RT	102119	2/80
2	254	15	277 10	SWD	AWG 18	FAZ-C2/1-RT	102120	2/80
3	254	15	277 10	SWD	AWG 18	FAZ-C3/1-RT	102121	2/80
4	254	15	277 10	SWD	AWG 18	FAZ-C4/1-RT	102122	2/80
5	254	15	277 10	SWD	AWG 18	FAZ-C5/1-RT	102123	2/80
6	254	15	277 10	SWD	AWG 18	FAZ-C6/1-RT	102124	2/80
7	254	15	277 10	SWD	AWG 18	FAZ-C7/1-RT	102125	2/80
8	254	15	277 10	SWD	AWG 16	FAZ-C8/1-RT	102126	2/80
10	254	15	277 10	SWD	AWG 16	FAZ-C10/1-RT	102127	2/80
13	254	15	277 10	SWD		FAZ-C13/1-RT	102128	2/80
15	254	15	277 14	SWD		FAZ-C15/1-RT	102129	2/80
16	254	15	277 14	SWD		FAZ-C16/1-RT	102130	2/80
20	254	15	277 14	SWD		FAZ-C20/1-RT	102131	2/80
25	254	15	277 14			FAZ-C25/1-RT	102132	2/80
30	254	15	277 10			FAZ-C30/1-RT	102133	2/80
32	254	15	277 10			FAZ-C32/1-RT	102134	2/80
35	254	15	240 10			FAZ-C35/1-RT	102135	2/80
40	254	15	240 10			FAZ-C40/1-RT	102136	2/80
50	240	15	240 10			FAZ-C50/1-RT	190797	2/80
63	240	15	240 10			FAZ-C63/1-RT	190798	2/80

**2-poles**

0.5	440	15	480Y/277 10	SWD	AWG 18	FAZ-C0,5/2-RT	102197

xEffect



3-poles

0.5	440	15	480Y/277	10	SWD	AWG 18	FAZ-C0,5/3-RT	102277	1/28
1	440	15	480Y/277	10	SWD	AWG 18	FAZ-C1/3-RT	102278	1/28
1,5	440	15	480Y/277	10	SWD	AWG 18	FAZ-C1,5/3-RT	102279	1/28
2	440	15	480Y/277	10	SWD	AWG 18	FAZ-C2/3-RT	102280	1/28
3	440	15	480Y/277	10	SWD	AWG 18	FAZ-C3/3-RT	102281	1/28
4	440	15	480Y/277	10	SWD	AWG 18	FAZ-C4/3-RT	102282	1/28
5	440	15	480Y/277	10	SWD	AWG 18	FAZ-C5/3-RT	102283	1/28
6	440	15	480Y/277	10	SWD	AWG 18	FAZ-C6/3-RT	102284	1/28
7	440	15	480Y/277	10	SWD	AWG 18	FAZ-C7/3-RT	102285	1/28
8	440	15	480Y/277	10	SWD	AWG 16	FAZ-C8/3-RT	102286	1/28
10	440	15	480Y/277	10	SWD	AWG 16	FAZ-C10/3-RT	102287	1/28
13	440	15	480Y/277	10	SWD		FAZ-C13/3-RT	102288	1/28
15	440	15	480Y/277	14	SWD		FAZ-C15/3-RT	102289	1/28
16	440	15	480Y/277	14	SWD		FAZ-C16/3-RT	102290	1/28
20	440	15	480Y/277	14	SWD		FAZ-C20/3-RT	102291	1/28
25	440	15	480Y/277	14			FAZ-C25/3-RT	102292	1/28
30	440	15	480Y/277	10			FAZ-C30/3-RT	102293	1/28
32	440	15	480Y/277	10			FAZ-C32/3-RT	102294	1/28
35	440	15	240	10			FAZ-C35/3-RT	102295	1/28
40	440	15	240	10			FAZ-C40/3-RT	102296	1/28
50	415	15	240	10			FAZ-C50/3-RT	190807	1/28
63	415	15	240	10			FAZ-C63/3-RT	190808	1/28



4-poles

0,5	440	15	480Y/277	10	AWG18	FAZ-C0,5/4-RT	190863	1/20
1	440	15	480Y/277	10	AWG18	FAZ-C1/4-RT	190864	1/20
1,5	440	15	480Y/277	10	AWG18	FAZ-C1,5/4-RT	190865	1/20
2	440	15	480Y/277	10	AWG18	FAZ-C2/4-RT	190866	1/20
3	440	15	480Y/277	10	AWG18	FAZ-C3/4-RT	190867	1/20
4	440	15	480Y/277	10	AWG18	FAZ-C4/4-RT	190868	1/20
5	440	15	480Y/277	10	AWG18	FAZ-C5/4-RT	190869	1/20
6	440	15	480Y/277	10	AWG18	FAZ-C6/4-RT	190870	1/20
7	440	15	480Y/277	10	AWG18	FAZ-C7/4-RT	190871	1/20
8	440	15	480Y/277	10	AWG16	FAZ-C8/4-RT	190872	1/20
10	440	15	480Y/277	10	AWG16	FAZ-C10/4-RT	190873	1/20
13	440	15	480Y/277	10		FAZ-C13/4-RT	190874	1/20
15	440	15	480Y/277	14		FAZ-C15/4-RT	190875	1/20
16	440	15	480Y/277	14		FAZ-C16/4-RT	190876	1/20
20	440	15	480Y/277	14		FAZ-C20/4-RT	190877	1/20
25	440	15	480Y/277	14		FAZ-C25/4-RT	190878	1/20
30	440	15	480Y/277	10		FAZ-C30/4-RT	190879	1/20
32	440	15	480Y/277	10		FAZ-C32/4-RT	190880	1/20
35	440	15	240	10		FAZ-C35/4-RT	190881	1/20
40	440	15	240	10		FAZ-C40/4-RT	190882	1/20
50	415	15	240	10		FAZ-C50/4-RT	190809	1/20
63	415	15	240	10		FAZ-C63/4-RT	190810	1/20

xEffect

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------



## Characteristic

---

1-pg

0,5	240	15	277	10	SWD	AWG 18	FAZ-D0,5/1-RT	102137	2/80
1	240	15	277	10	SWD	AWG 18	FAZ-D1/1-RT	102138	2/80
1,5	240	15	277	10	SWD	AWG 18	FAZ-D1,5/1-RT	102139	2/80
2	240	15	277	10	SWD	AWG 18	FAZ-D2/1-RT	102140	2/80
3	240	15	277	10	SWD	AWG 18	FAZ-D3/1-RT	102141	2/80
4	240	15	277	10	SWD	AWG 18	FAZ-D4/1-RT	102142	2/80
5	240	15	277	10	SWD	AWG 18	FAZ-D5/1-RT	102143	2/80
6	240	15	277	10	SWD	AWG 18	FAZ-D6/1-RT	102144	2/80
7	240	15	277	10	SWD	AWG 18	FAZ-D7/1-RT	102145	2/80
8	240	15	277	10	SWD	AWG 16	FAZ-D8/1-RT	102146	2/80
10	240	15	277	10	SWD	AWG 16	FAZ-D10/1-RT	102147	2/80
13	240	15	277	14	SWD		FAZ-D13/1-RT	102148	2/80
15	240	15	277	14	SWD		FAZ-D15/1-RT	102149	2/80
16	240	15	277	14	SWD		FAZ-D16/1-RT	102150	2/80
20	240	15	277	14	SWD		FAZ-D20/1-RT	102151	2/80
25	240	15	277	10			FAZ-D25/1-RT	102152	2/80
30	240	15	277	10			FAZ-D30/1-RT	102153	2/80
32	240	15	277	10			FAZ-D32/1-RT	102154	2/80
35	240	15	240	10			FAZ-D35/1-RT	102155	2/80
40	240	15	240	10			FAZ-D40/1-RT	102156	2/80



2-po

0,5	415	15	480Y/277	10	SWD	AWG 18	FAZ-D0,5/2-RT	102217	1/40
1	415	15	480Y/277	10	SWD	AWG 18	FAZ-D1/2-RT	102218	1/40
1,5	415	15	480Y/277	10	SWD	AWG 18	FAZ-D1,5/2-RT	102219	1/40
2	415	15	480Y/277	10	SWD	AWG 18	FAZ-D2/2-RT	102220	1/40
3	415	15	480Y/277	10	SWD	AWG 18	FAZ-D3/2-RT	102221	1/40
4	415	15	480Y/277	10	SWD	AWG 18	FAZ-D4/2-RT	102222	1/40
5	415	15	480Y/277	10	SWD	AWG 18	FAZ-D5/2-RT	102223	1/40
6	415	15	480Y/277	10	SWD	AWG 18	FAZ-D6/2-RT	102224	1/40
7	415	15	480Y/277	10	SWD	AWG 18	FAZ-D7/2-RT	102225	1/40
8	415	15	480Y/277	10	SWD	AWG 16	FAZ-D8/2-RT	102226	1/40
10	415	15	480Y/277	10	SWD	AWG 16	FAZ-D10/2-RT	102227	1/40
13	415	15	480Y/277	14	SWD		FAZ-D13/2-RT	102228	1/40
15	415	15	480Y/277	14	SWD		FAZ-D15/2-RT	102229	1/40
16	415	15	480Y/277	14	SWD		FAZ-D16/2-RT	102230	1/40
20	415	15	480Y/277	14	SWD		FAZ-D20/2-RT	102231	1/40
25	415	15	480Y/277	10			FAZ-D25/2-RT	102232	1/40
30	415	15	480Y/277	10			FAZ-D30/2-RT	102233	1/40
32	415	15	480Y/277	10			FAZ-D32/2-RT	102234	1/40
35	415	15	240	10			FAZ-D35/2-RT	102235	1/40
40	415	15	240	10			FAZ-D40/2-RT	102236	1/40



## xEffect

Rated current $I_n$ (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------	--	---	--	---	-----	---------	------------------	-------------	-------------------

3-poles									
0.5	415	15	480Y/277 10	SWD	AWG 18	FAZ-D0,5/3-RT	102297	1/28	
1	415	15	480Y/277 10	SWD	AWG 18	FAZ-D1/3-RT	102298	1/28	
1.5	415	15	480Y/277 10	SWD	AWG 18	FAZ-D1,5/3-RT	102299	1/28	
2	415	15	480Y/277 10	SWD	AWG 18	FAZ-D2/3-RT	102300	1/28	
3	415	15	480Y/277 10	SWD	AWG 18	FAZ-D3/3-RT	102301	1/28	
4	415	15	480Y/277 10	SWD	AWG 18	FAZ-D4/3-RT	102302	1/28	
5	415	15	480Y/277 10	SWD	AWG 18	FAZ-D5/3-RT	102303	1/28	
6	415	15	480Y/277 10	SWD	AWG 18	FAZ-D6/3-RT	102304	1/28	
7	415	15	480Y/277 10	SWD	AWG 18	FAZ-D7/3-RT	102305	1/28	
8	415	15	480Y/277 10	SWD	AWG 16	FAZ-D8/3-RT	102306	1/28	
10	415	15	480Y/277 10	SWD	AWG 16	FAZ-D10/3-RT	102307	1/28	
13	415	15	480Y/277 14	SWD		FAZ-D13/3-RT	102308	1/28	
15	415	15	480Y/277 14	SWD		FAZ-D15/3-RT	102309	1/28	
16	415	15	480Y/277 14	SWD		FAZ-D16/3-RT	102310	1/28	
20	415	15	480Y/277 14	SWD		FAZ-D20/3-RT	102311	1/28	
25	415	15	480Y/277 10			FAZ-D25/3-RT	102312	1/28	
30	415	15	480Y/277 10			FAZ-D30/3-RT	102313	1/28	
32	415	15	480Y/277 10			FAZ-D32/3-RT	102314	1/28	
35	415	15	240 10			FAZ-D35/3-RT	102315	1/28	
40	415	15	240 10			FAZ-D40/3-RT	102316	1/28	

4-poles									
0.5	415	15	480Y/277 10	AWG18	FAZ-D0,5/4-RT	190883	1/20		
1	415	15	480Y/277 10	AWG18	FAZ-D1/4-RT	190884	1/20		
1.5	415	15	480Y/277 10	AWG18	FAZ-D1,5/4-RT	190885	1/20		
2	415	15	480Y/277 10	AWG18	FAZ-D2/4-RT	190886	1/20		
3	415	15	480Y/277 10	AWG18	FAZ-D3/4-RT	190887	1/20		
4	415	15	480Y/277 10	AWG18	FAZ-D4/4-RT	190888	1/20		
5	415	15	480Y/277 10	AWG18	FAZ-D5/4-RT	190889	1/20		
6	415	15	480Y/277 10	AWG18	FAZ-D6/4-RT	190890	1/20		
7	415	15	480Y/277 10	AWG18	FAZ-D7/4-RT	190891	1/20		
8	415	15	480Y/277 10	AWG16	FAZ-D8/4-RT	190892	1/20		
10	415	15	480Y/277 10	AWG16	FAZ-D10/4-RT	190893	1/20		
13	415	15	480Y/277 10		FAZ-D13/4-RT	190894	1/20		
15	415	15	480Y/277 14		FAZ-D15/4-RT	190895	1/20		
16	415	15	480Y/277 14		FAZ-D16/4-RT	190896	1/20		
20	415	15	480Y/277 14		FAZ-D20/4-RT	190897	1/20		
25	415	15	480Y/277 14		FAZ-D25/4-RT	190898	1/20		
30	415	15	480Y/277 10		FAZ-D30/4-RT	190811	1/20		
32	415	15	480Y/277 10		FAZ-D32/4-RT	190812	1/20		
35	415	15	240 10		FAZ-D35/4-RT	190813	1/20		
40	415	15	240 10		FAZ-D40/4-RT	190814	1/20		

## xEffect

### Miniature Circuit Breakers FAZ-...-NA, -RT


#### Accessories:

Auxiliary switch for subsequent installation	Z-IHK-NA	113895
Tripping signal contact for subsequent installation	Z-NHK	248434
Shunt trip release	FAZ-XAA-NA12-110V AC	102037
	FAZ-XAA-NA10-415V AC	102036
Switching interlock	Z-IS/SPE-1TE	274418

#### Technical Data IEC/EN

FAZ-...-NA, -RT	
Productstandard	IEC/EN 60947-2
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Number of poles	1, 2, 3, 4
Mechanical	
Device width	17.7 mm (1-pole), 35.4 mm (2-poles), 53.1 mm (3-poles), 70.8 mm (4-poles)
Frame size	45 mm
Device height	105 mm
Device depth	60 mm
Terminals	lift terminal / ring-tongue
Terminal capacity rigid solid/stranded wire	1-25 mm <sup>2</sup>
Terminal screw	M5 (with slotted screw Pozidriv PZ2)
Fastening torque of terminal screws	max. 2.4 Nm
Degree of protection (DIN VDE 0470)	
Surface mounted	IP20
Built-in behind panel	IP40
Contact position indicator	red / green
Electrical	
Rated voltage	$U_n$ Only characteristic B, C (up to 40 A): 254/440 V AC For characteristic B, C (50 and 63 A) and characteristic D: 240/415 V AC
Rated current	$I_n$ 0.5, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40, 50, 63 A
Rated insulation voltage	$U_i$ 440 V AC
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50) $\mu$ sec
Tripping characteristic	
Conventional non-tripping current	$I_{nt} = 1.05 I_n$
Conventional tripping current	$I_t = 1.30 I_n$
Reference temperature	30 °C
Temperature factor	0.5%/K
Instantaneous tripping current	$I_{mt}$ Type B: 3 $I_n < I_{mt} = 5 I_n \cdot t$ ( $I_{mt}$ ) < 0.1 sec Type C: 5 $I_n < I_{mt} = 10 I_n \cdot t$ ( $I_{mt}$ ) < 0.1 sec Type D: 10 $I_n < I_{mt} = 20 I_n \cdot t$ ( $I_{mt}$ ) < 0.1 sec
Rated short-circuit breaking capacity	$I_{cu}$ 15 kA
Service short circuit capacity	$I_{cs}$ 7.5 kA
Selectivity class	3 (acc. to EN 60898)
Number of electrical operations	> 1,500
Number of mechanical operations	> 10,000
Climatic conditions	acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)
Operating temperature range	-40°C up to +75°C
Storage- and transport temperature	-40°C up to +75°C
Operating utility frequency	50/60 Hz

#### Connection diagram

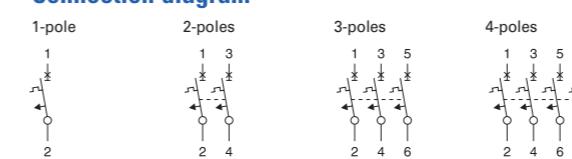






## Miniature Circuit Breakers

### FAZ-...-NA, -RT - Technical Data

# 2.265

**Technical Data UL****FAZ-...-NA, -RT**

Product standard	UL 489, CSA C22.2 No. 5-02
Number of poles	1, 2, 3, 4
<b>Mechanical</b>	
Device width	0.697 in. (1-pole), 1.394 in. (2-poles), 2.090 in. (3-poles), 2.788 in. (4-poles)
Frame size	1.772 in.
Device height	4.134 in.
Device depth	2.362 in.
Terminals	lift terminal / ring-tongue
Terminal capacity rigid solid/stranded wire	1 Wire: #18-6 AWG (Cu only) 2 Wires: #18-10 AWG (Cu only)
Terminal screw	M5 (with slotted screw Pozidriv PZ2)
Fastening torque of terminal screws	#18-12 AWG: 2.4 Nm (21 lb-in) #10-8 AWG: 2.8 Nm (25 lb-in) #6 AWG: 4 Nm (36 lb-in)
Contact position indicator	red / green
<b>Electrical</b>	
Rated voltage	$U_n$ 0.5-32 A: 480Y/277 V AC, 35-63 A: 240 V AC
Rated current	$I_n$ 0.5, 1, 1.5, 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40, 50 (not D), 63 (not D) A
<b>Tripping characteristic</b>	
Conventional non-tripping current	$I_{nt} = 1.00 I_n$
Conventional tripping current	$I_t = 1.35 I_n$
Reference temperature	25 °C
Temperature factor	0.5%/K
Instantaneous tripping current	$I_{mt}$ Type B: $3 I_n < I_{mt} = 5 I_n \cdot t (I_{mt}) < 0.1$ sec Type C: $5 I_n < I_{mt} = 10 I_n \cdot t (I_{mt}) < 0.1$ sec Type D: $10 I_n < I_{mt} = 20 I_n \cdot t (I_{mt}) < 0.1$ sec
Current interrupting rating	10 kA 14 kA
B0.5-13A, B30-63A, C0.5-13A, C30-63A, D0.5-10A, D25-40A	B15-25A, C15-25A, D13-20A
Current-Limiting	
High interrupt current at 240 V / 10 kA	$I^2t = 42 \text{ kA}^2\text{s}$ and $I_{peak} = 6.2 \text{ kA}$
Intermediate interrupt current at 240 V / 5 kA	$I^2t = 24 \text{ kA}^2\text{s}$ and $I_{peak} = 4.2 \text{ kA}$
Threshold current at 240 V / 2.6 kA	$I^2t = 18 \text{ kA}^2\text{s}$ and $I_{peak} = 2.9 \text{ kA}$
High interrupt current at 480Y/277V / 10 kA	$I^2t = 60 \text{ kA}^2\text{s}$ and $I_{peak} = 6.2 \text{ kA}$
High interrupt current at 480Y/277V / 14 kA	$I^2t = 65 \text{ kA}^2\text{s}$ and $I_{peak} = 7.5 \text{ kA}$
Intermediate interrupt current at 480Y/277V / 5 kA	$I^2t = 36 \text{ kA}^2\text{s}$ and $I_{peak} = 4.6 \text{ kA}$
Threshold current at 480Y/277V / 2.08 kA	$I^2t = 15 \text{ kA}^2\text{s}$ and $I_{peak} = 2.2 \text{ kA}$
Selectivity class	3 (acc. to EN 60898)
Number of electrical operations	6,000
Number of mechanical operations	10,000
Climatic conditions	acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)
Operating temperature range	-5°C up to +40 °C
Storage- and transport temperature	-40°C up to +75°C
Operating utility frequency	50/60 Hz (B, C, D up to 40 A) 60 Hz (50, 63 A)

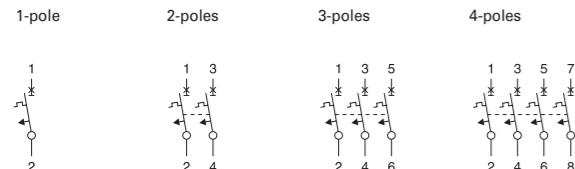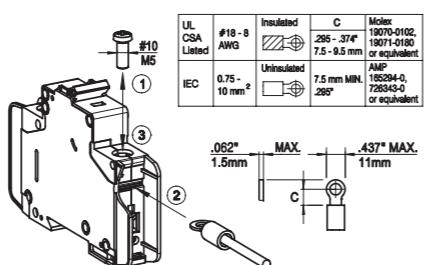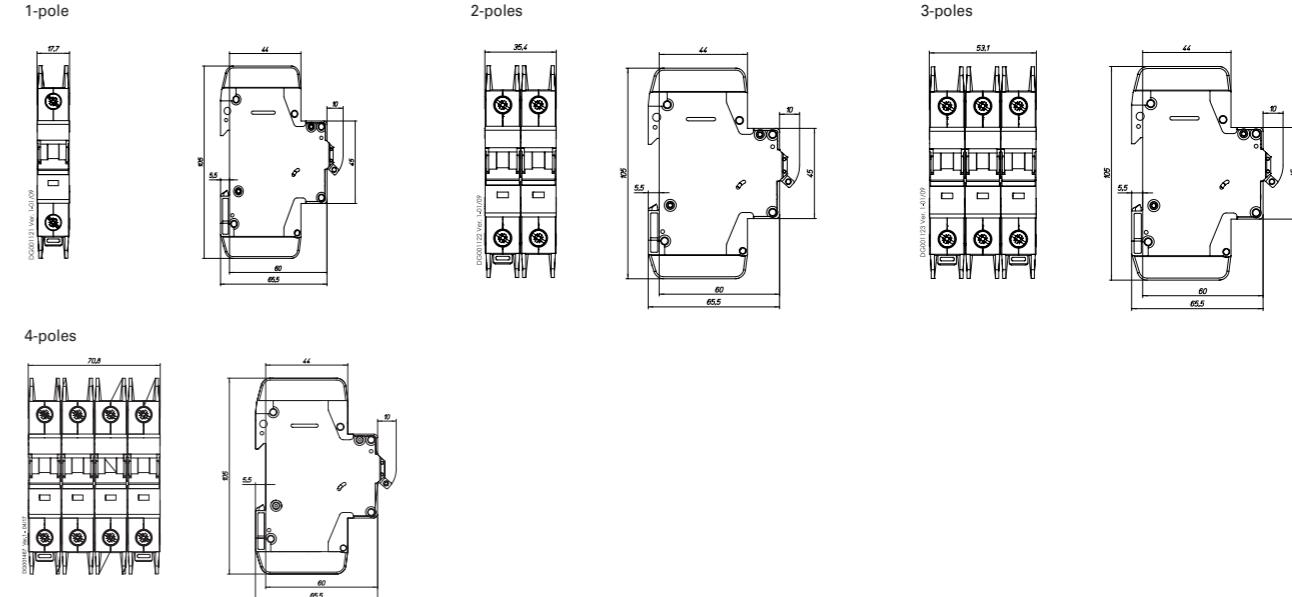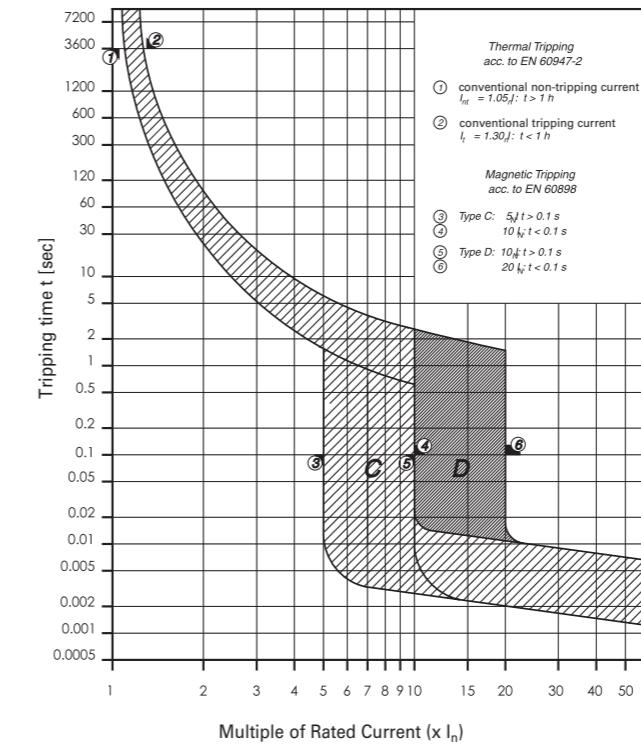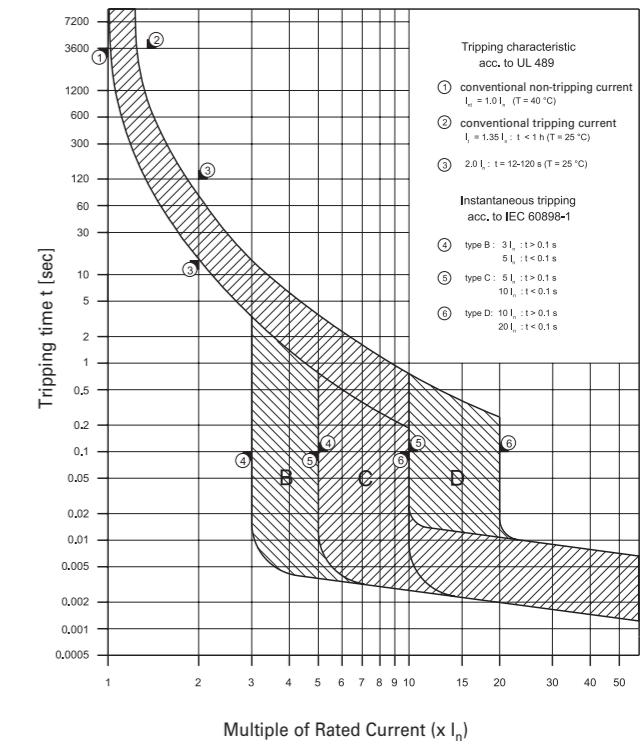**Connection diagram****Connection of ring cable lugs (only FAZ...RT)****Dimensions (mm) FAZ-...-NA, -RT****Tripping Characteristics FAZ-...-NA, -RT****Characteristics C and D - EN/IEC 60947-2****Characteristics B, C and D - UL 489**

## Internal Resistance FAZ-...-NA, -RT (50/60Hz)

Type B	
At room temperature (single pole)	
$I_n$ [A]	$R^*$ [mΩ]
1	1100
1.5	900
2	350
3	220
4	87
5	72
6	47
7	38
8	30
10	17
13	13
15	8.0
16	8.0
20	6.9
25	3.9
30	2.8
32	3.0
35	2.9
40	1.9
50	1.6
63	1.2
* 50 Hz	

Type C	
At room temperature (single pole)	
$I_n$ [A]	$R^*$ [mΩ]
1	1100
1.5	580
2	350
3	130
4	87
5	60
6	32
7	28
8	19
10	14
13	13
15	8.0
16	8.0
20	6.9
25	3.9
30	2.8
32	3.0
35	2.5
40	1.9
50	1.6
63	1.2
* 50 Hz	

Type D	
At room temperature (single pole)	
$I_n$ [A]	$R^*$ [mΩ]
1	800
1.5	490
2	260
3	130
4	87
5	58
6	32
7	28
8	19
10	14
13	11
15	8.0
16	8.0
20	4.9
25	3.5
30	2.5
32	2.6
35	2.5
40	1.8
50	1.7
63	1.2
* 50 Hz	

## Power Loss at In FAZ-...-NA, -RT


Type B				
$I_n$ [A]	1p P [W]	2p P [W]	3p P [W]	4p P [W]
1	1.2	2.2	3.6	4.8
1.5	2.2	4.4	6.6	8.8
2	1.4	2.8	4.2	5.6
3	2.2	4.4	6.6	8.8
4	1.4	2.8	4.2	5.6
5	1.9	3.8	5.7	7.6
6	1.8	3.6	5.4	7.2
7	2	4	6	8
8	2.1	4.2	6.3	8.4
10	1.8	3.6	5.4	7.2
13	2.5	5	7.5	10
15	2	4	6	8
16	2.3	4.6	6.9	9.2
20	3.3	6.6	9.9	13.2
25	2.8	5.6	8.4	11.2
30	3	6	9	12
32	3.5	7	10.5	14
35	4	8	12	16
40	3.4	6.8	10.2	13.6
50	4.4	8.8	13.2	17.6
63	5.5	11	16.5	22
* 50/60 Hz				

Type C				
$I_n$ [A]	1p P [W]	2p P [W]	3p P [W]	4p P [W]
1	1.2	2.4	3.6	4.8
1.5	1.3	2.6	3.9	5.2
2	1.4	2.8	4.2	5.6
3	1.2	2.4	3.6	4.8
4	1.5	3	4.5	6
5	1.6	3.2	4.8	6.4
6	1.2	2.4	3.6	4.8
7	1.4	2.8	4.2	5.6
8	1.3	2.6	3.9	5.2
10	1.5	3	4.5	6
13	2.5	5	7.5	10
15	2	4	6	8
16	2.3	4.6	6.9	9.2
20	3.3	6.6	9.9	13.2
25	2.8	5.6	8.4	11.2
30	3	6	9	12
32	3.5	7	10.5	14
35	3.7	7.4	11.1	14.8
40	3.4	6.8	10.2	13.6
50	4.4	8.8	13.2	17.6
63	5.5	11	16.5	22
* 50/60 Hz				


Type D				
$I_n$ [A]	1p P [W]	2p P [W]	3p P [W]	4p P [W]
1	0.8	1.6	2.4	3.2
1.5	1.1	2.2	3.3	4.4
2	1.1	2.2	3.3	4.8
3	1.2	2.4	3.6	4.8
4	1.5	3	4.5	6
5	1.5	3	5.5	6
6	1.2	2.4	3.6	4.8
7	1.4	2.8	4.2	5.6
8	1.3	2.6	3.9	5.2
10	1.5	3	4.5	6
13	2	4	6	8
15	2	4	6	8
16	2.3	4.6	6.9	9.2
20	2.2	4.4	6.6	8.8
25	2.5	5	7.5	10
30	2.7	5.4	8.1	10.8
32	3	6	9	12
35	3.8	7.6	11.4	15.2
40	3.1	6.2	9.3	12.4
50	4.9	9.8	14.7	19.6
63	5.5	11	16.5	22
* 50/60 Hz				

## Maximum Let-Through Energy FAZ-...-NA, -RT


Type C (0.5 - 32 A), 277 V

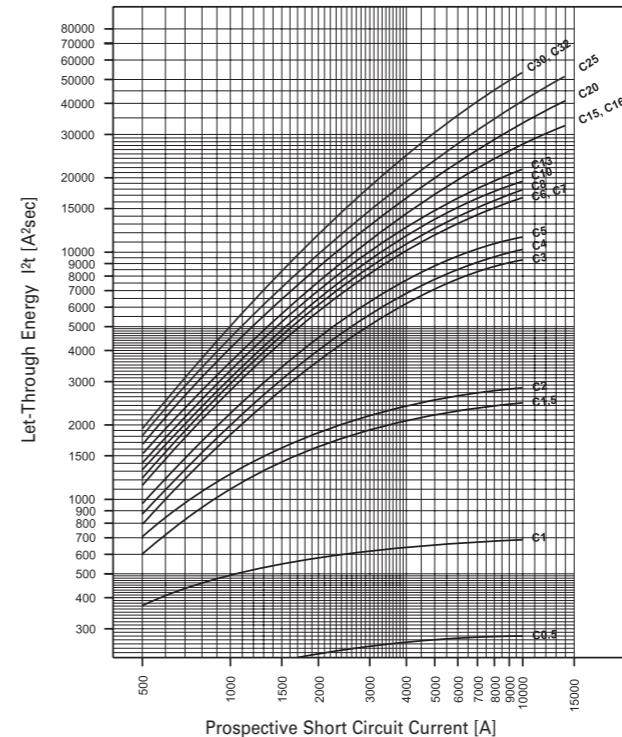


Type C (35 - 40 A), 240 V

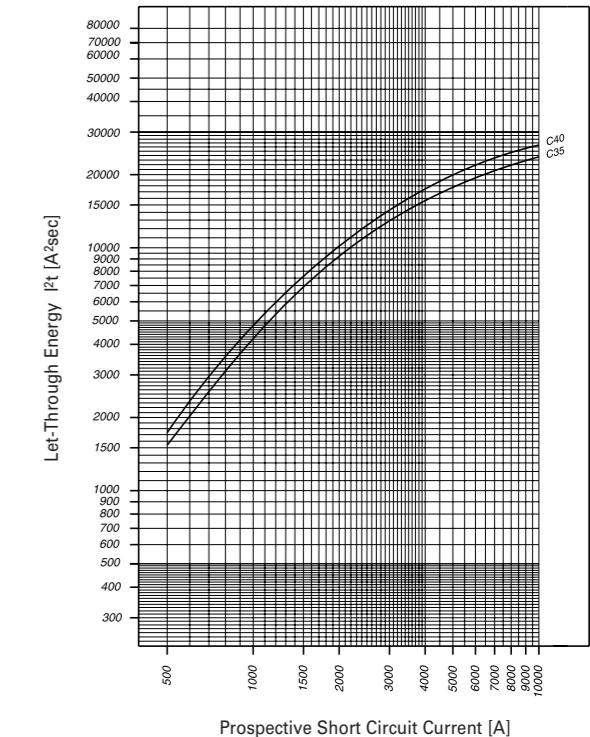

Type D (0.5 - 32 A), 277 V

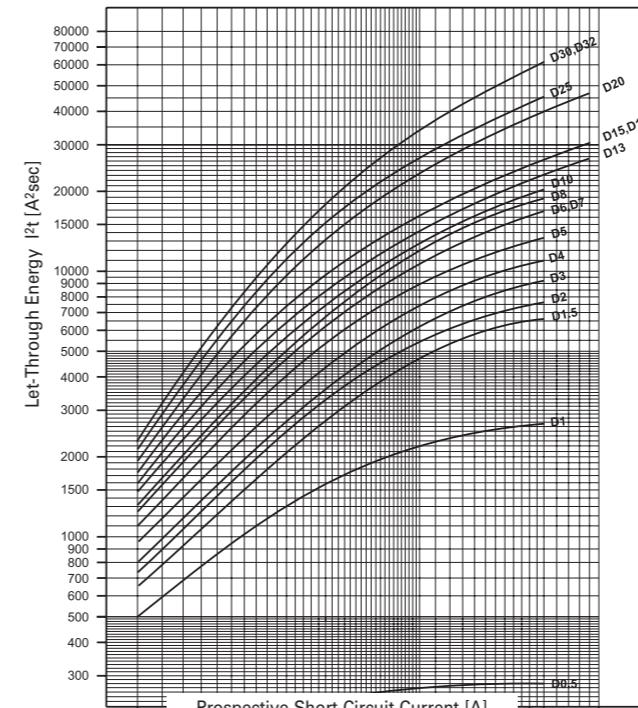


Type D (35 - 40 A), 240 V

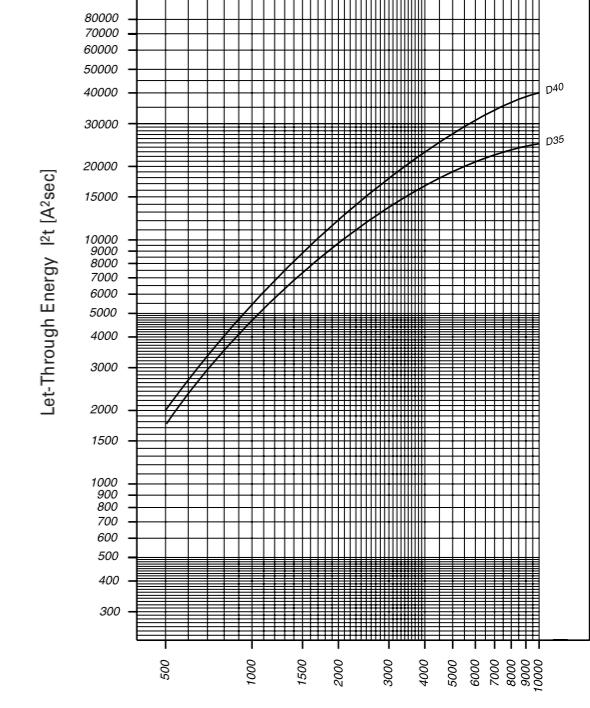


### Maximum Let-Through Current FAZ-...-NA, -RT


Type C (0.5 - 32 A), 277 V

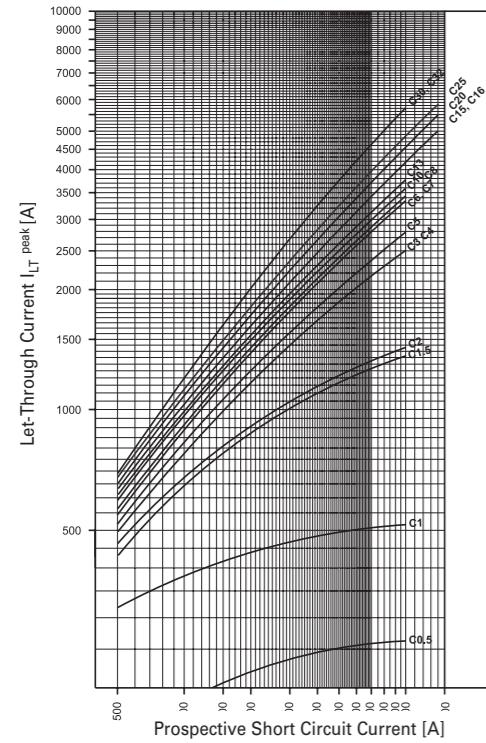


Type C (35 - 40 A), 240 V

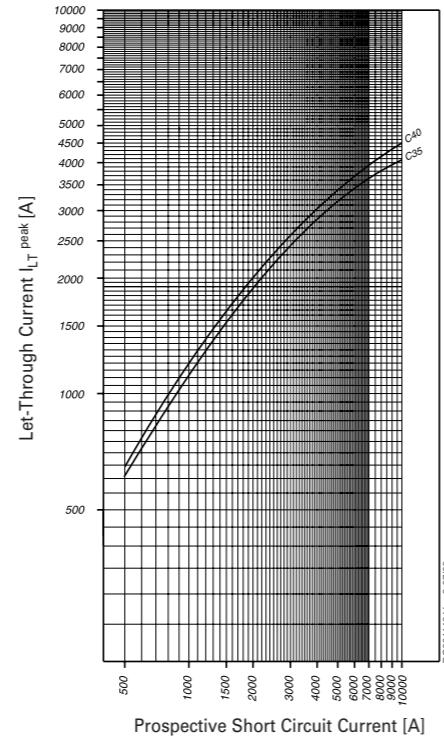

Type D (0.5 - 32 A), 277 V

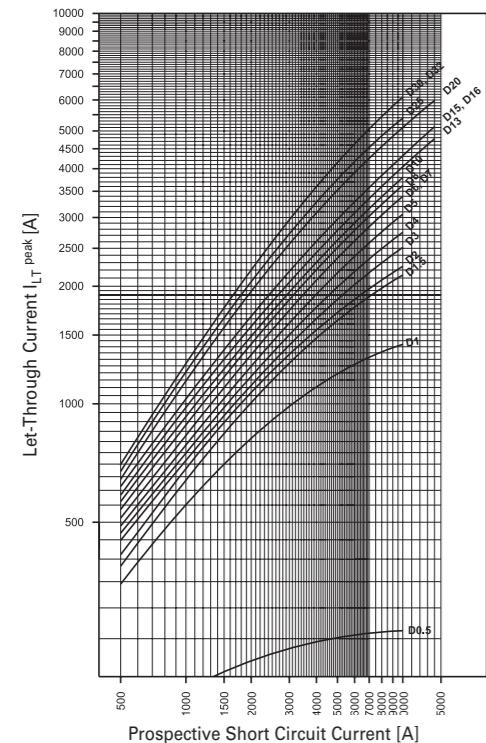

Type D (35 - 40 A), 240 V

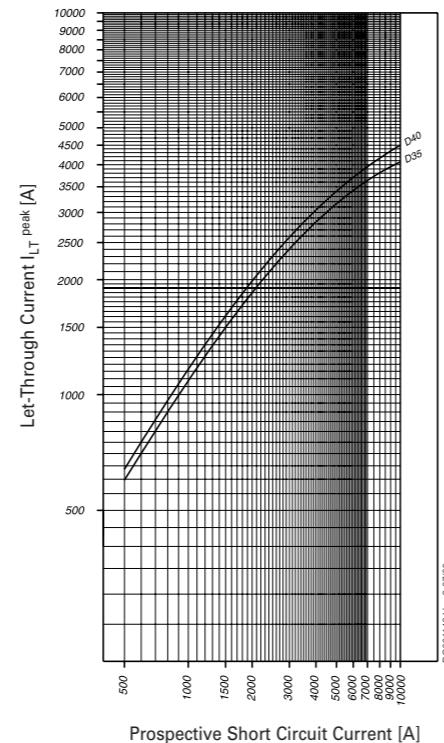

### Influence of Ambient Temperature on Load Carrying Capacity (temperature derating)

Values in the table display the nominal current  $I_n$  in ampere depending on the ambient temperature

$I_n$ [A]	Ambient Temperature T [°C]										
	-25	-10	5	15	20	25	30	40*	50	55	60
0.5	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
1	1.3	1.2	1.1	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9
1.5	1.9	1.8	1.7	1.7	1.6	1.6	1.6	1.5	1.4	1.4	1.4
2	2.5	2.4	2.3	2.2	2.2	2.1	2.1	2.0	1.9	1.9	1.8
3	3.8	3.6	3.4	3.3	3.2	3.2	3.1	3.0	2.9	2.8	2.8
4	5.0	4.8	4.6	4.4	4.3	4.2	4.2	4.0	3.8	3.8	3.7
5	6.3	6.0	5.7	5.5	5.4	5.3	5.2	5.0	4.8	4.7	4.6
6	7.6	7.2	6.8	6.6	6.5	6.4	6.2	6.0	5.8	5.6	5.5
7	8.5	8.0	7.7	7.6	7.4	7.3	7.0	6.7	6.6	6.4	6.4
8	10.1	9.6	9.1	8.8	8.6	8.5	8.3	8.0	7.7	7.5	7.4
10	12.6	12.0	11.4	11.0	10.8	10.6	10.4	10.0	9.6	9.4	9.2
13	16.4	15.6	14.8	14.3	14.0	13.8	13.5	13.0	12.5	12.2	12.0
15	18.9	18.0	17.1	16.5	16.2	15.9	15.6	15.0	14.4	14.1	13.8
16	20.2	19.2	18.2	17.6	17.3	17.0	16.6	16.0	15.4	15.0	14.7
20	25.2	24.0	22.8	22.0	21.6	21.2	20.8	20.0	19.2	18.8	18.4
25	31.5	30.0	28.5	27.5	27.0	26.5	26.0	25.0	24.0	23.5	23.0
30	37.8	36.0	34.2	33.1	32.4	31.8	31.2	30.0	28.8	28.2	27.6
32	40.3	38.4	36.5	35.2	34.6	33.9	33.3	32.0	30.7	30.1	29.4
35	44.1	42.0	39.9	38.5	37.8	37.1	36.4	35.0	33.6	32.9	32.2
40	50.4	48.0	45.6	44.0	43.2	42.4	41.6	40.0	38.4	37.6	36.8
50	63.0	60.0	57.0	55.0	54.0	53.0	52.0	50.0	48.0	47.0	46.0
63	79.4	75.6	71.8	69.3	68.0	66.8	65.5	63.0	60.5	59.2	58.0

\*IEC 60947-2, nominal current at reference calibration temperature 40°C

# 2.272 Miniature Circuit Breakers

Miniature Circuit Breakers FAZ-NA-DC



## Description

FAZ-NA-DC

- High-quality miniature circuit breakers for DC-applications
- Contact position indicator red - green
- Guide for secure terminal connection (not for FAZ-NA)

- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 40 A
- Tripping characteristic C
- Rated breaking capacity 10 kA according to IEC/EN 60947-2
- Up to 125 V DC per pole
- Classified for the use in rail rolling stock

## xEffect

## xEffect

# Miniature Circuit Breakers

FAZ-...-NA-DC Miniature Circuit Breakers

# 2.273

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	---	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

## Characteristic C

### 1-pole

2	220	10	125	10			FAZ-C2/1-NA-DC	113752	12/120
3	250	10	125	10			FAZ-C3/1-NA-DC	113753	12/120
4	250	10	125	10			FAZ-C4/1-NA-DC	113754	12/120
5	250	10	125	10			FAZ-C5/1-NA-DC	113755	12/120
6	250	10	125	10			FAZ-C6/1-NA-DC	113756	12/120
7	250	10	125	10			FAZ-C7/1-NA-DC	113757	12/120
8	250	10	125	10			FAZ-C8/1-NA-DC	113758	12/120
10	250	10	125	10			FAZ-C10/1-NA-DC	113759	12/120
13	250	10	125	10			FAZ-C13/1-NA-DC	113760	12/120
15	250	10	125	10			FAZ-C15/1-NA-DC	113761	12/120
16	250	10	125	10			FAZ-C16/1-NA-DC	113762	12/120
20	250	10	125	10			FAZ-C20/1-NA-DC	113763	12/120
25	250	10	125	10			FAZ-C25/1-NA-DC	113764	12/120
30	250	10	125	10			FAZ-C30/1-NA-DC	113765	12/120
32	250	10	125	10			FAZ-C32/1-NA-DC	113766	12/120
35	250	10	125	10			FAZ-C35/1-NA-DC	113767	12/120
40	250	10	125	10			FAZ-C40/1-NA-DC	113768	12/120




### 2-poles

2	440	10	250	10			FAZ-C2/2-NA-DC	137239	1/60
3	500	10	250	10			FAZ-C3/2-NA-DC	137250	1/60
4	500	10	250	10			FAZ-C4/2-NA-DC	137251	1/60
5	500	10	250	10			FAZ-C5/2-NA-DC	137252	1/60
6	500	10	250	10			FAZ-C6/2-NA-DC	120638	1/60
7	500	10	250	10			FAZ-C7/2-NA-DC	120639	1/60
8	500	10	250	10			FAZ-C8/2-NA-DC	120640	1/60
10	500	10	250	10			FAZ-C10/2-NA-DC	120641	1/60
13	500	10	250	10			FAZ-C13/2-NA-DC	120642	1/60
15	500	10	250	10			FAZ-C15/2-NA-DC	120643	1/60
16	500	10	250	10			FAZ-C16/2-NA-DC	120644	1/60
20	500	10	250	10			FAZ-C20/2-NA-DC	120645	1/60
25	500	10	250	10			FAZ-C25/2-NA-DC	120646	1/60
30	500	10	250	10			FAZ-C30/2-NA-DC	120647	1/60
32	500	10	250	10			FAZ-C32/2-NA-DC	120648	1/60
35	500	10	250	10			FAZ-C35/2-NA-DC	120649	1/60
40	500	10	250	10			FAZ-C40/2-NA-DC	120650	1/60


**Technical Data**

<b>FAZ-...-NA-DC</b>	
Productstandard	UL 489, CSA C22.2 No. 5-02
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Number of poles	1, 2
<b>Mechanical</b>	
Device width	1 pole = 0.697 inch, 2 poles = 1.394 inch
Frame size	1.772 inch
Device height	4.134 inch
Device depth	2.362 inch
Terminals	lift terminal / ring-tongue
Terminal capacity rigid solid/stranded wire	1 Wire: #18-6 AWG (Cu only) 2 Wires: #18-10 AWG (Cu only)
Terminal screw	M5 (with slotted screw Pozidriv PZ2)
Fastening torque of terminal screws	#18-12 AWG: 2.4 Nm (21 lb-in) #10-8 AWG: 2.8 Nm (25 lb-in) #6 AWG: 4 Nm (36 lb-in)
Snap on fixing	tristable (on DIN Rail according to IEC/EN 60715)
Finger proof	acc. to VBG4, ÖVE EN-6
Contact position indicator	red / green
<b>Electrical</b>	
Rated voltage	$U_n$ 125 V DC (1p) 250 V DC (2p)
Rated current	$I_n$ 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A
Rated impulse withstand voltage	$U_{imp}$ 4 kV (1.2/50) $\mu$ sec
<b>Tripping characteristic</b>	
Conventional non-tripping current	$I_{nt} = 1.00 I_n$
Conventional tripping current	$I_t = 1.35 I_n$
Reference temperature	25 °C
Temperature factor	0.5%/K
Instantaneous tripping current	$I_{mt} = 7 I_n < I_{mt} = 15 I_n \cdot t$ ( $I_{mt}$ ) < 0.1 sec
Current interrupting rating	10 kA
Number of electrical operations	6,000
Number of mechanical operations	10,000
Climatic conditions	acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)
Operating temperature range	-25°C up to +55°C

**Connection diagram**

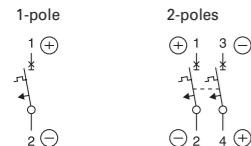


**Dimensions (mm) FAZ-...-NA-DC**

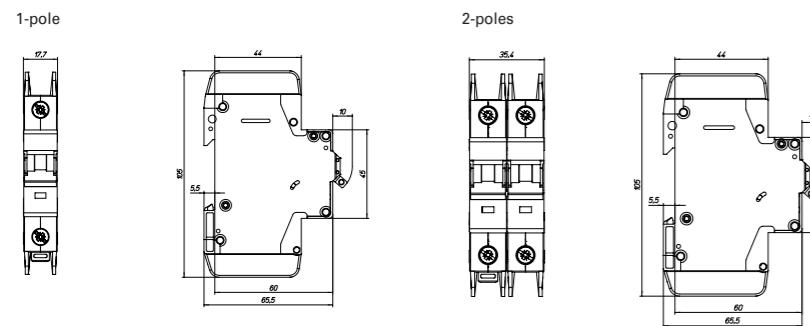

**Tripping Characteristics FAZ-...-NA-DC**

**Characteristics C - UL 489**

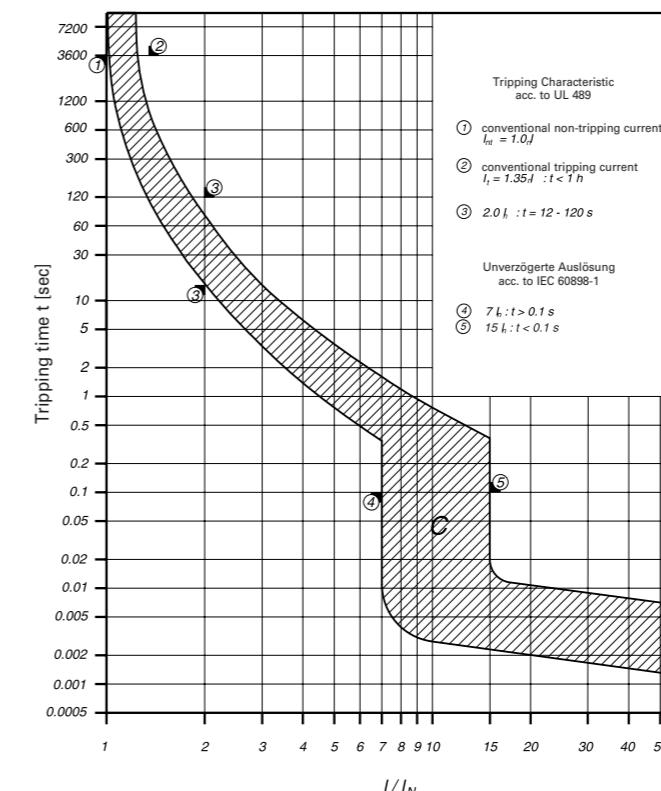

# 2.276 Miniature Circuit Breakers

FAZ-...-RT-DC Miniature Circuit Breakers



## Description

- FAZ-...-RT-DC
- According to IEC 60947-2 standard
- Auxiliary switch and voltage trips suitable for subsequent installation
- With removable terminal screws for use with ring cable lug
- Contact position indicator red - green
- Easy mounting at DIN-rail
- Classified for the use in rail rolling stock

## xEffect

## xEffect

## Miniature Circuit Breakers

FAZ-...-RT-DC Miniature Circuit Breakers

# 2.277

Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (V)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
----------------------------------	--	--	---------------------------------	--------------------------------------	-----	---------	------------------	-------------	-------------------

## Characteristic B

### 1-pole

2	220	10	-	-	-	-	FAZ-B2/1-RT-DC	305912	2/80
3	250	10	-	-	-	-	FAZ-B3/1-RT-DC	305913	2/80
4	250	10	-	-	-	-	FAZ-B4/1-RT-DC	305914	2/80
5	250	10	-	-	-	-	FAZ-B5/1-RT-DC	305915	2/80
6	250	10	-	-	-	-	FAZ-B6/1-RT-DC	305916	2/80
7	250	10	-	-	-	-	FAZ-B7/1-RT-DC	305917	2/80
8	250	10	-	-	-	-	FAZ-B8/1-RT-DC	305918	2/80
10	250	10	-	-	-	-	FAZ-B10/1-RT-DC	305919	2/80
13	250	10	-	-	-	-	FAZ-B13/1-RT-DC	305920	2/80
15	250	10	-	-	-	-	FAZ-B15/1-RT-DC	305921	2/80
16	250	10	-	-	-	-	FAZ-B16/1-RT-DC	305922	2/80
20	250	10	-	-	-	-	FAZ-B20/1-RT-DC	305923	2/80
25	250	10	-	-	-	-	FAZ-B25/1-RT-DC	305924	2/80
30	250	10	-	-	-	-	FAZ-B30/1-RT-DC	305925	2/80
32	250	10	-	-	-	-	FAZ-B32/1-RT-DC	305927	2/80
35	250	10	-	-	-	-	FAZ-B35/1-RT-DC	305928	2/80
40	250	10	-	-	-	-	FAZ-B40/1-RT-DC	305929	2/80
50	250	10	-	-	-	-	FAZ-B50/1-RT-DC	305930	2/80

### 2-poles

2	220	10	-	-	-	-	FAZ-B2/2-RT-DC	305931	1/40
3	250	10	-	-	-	-	FAZ-B3/2-RT-DC	305932	1/40
4	250	10	-	-	-	-	FAZ-B4/2-RT-DC	305933	1/40
5	250	10	-	-	-	-	FAZ-B5/2-RT-DC	305934	1/40
6	250	10	-	-	-	-	FAZ-B6/2-RT-DC	305935	1/40
7	250	10	-	-	-	-	FAZ-B7/2-RT-DC	305936	1/40
8	250	10	-	-	-	-	FAZ-B8/2-RT-DC	305938	1/40
10	250	10	-	-	-	-	FAZ-B10/2-RT-DC	305939	1/40
13	250	10	-	-	-	-	FAZ-B13/2-RT-DC	305940	1/40
15	250	10	-	-	-	-	FAZ-B15/2-RT-DC	305942	1/40
16	250	10	-	-	-	-	FAZ-B16/2-RT-DC	305943	1/40
20	250	10	-	-	-	-	FAZ-B20/2-RT-DC	305944	1/40
25	250	10	-	-	-	-	FAZ-B25/2-RT-DC	305945	1/40
30	250	10	-	-	-	-	FAZ-B30/2-RT-DC	305946	1/40
32	250	10	-	-	-	-	FAZ-B32/2-RT-DC	305947	1/40
35	250	10	-	-	-	-	FAZ-B35/2-RT-DC	305948	1/40
40	250	10	-	-	-	-	FAZ-B40/2-RT-DC	305949	1/40
50	250	10	-	-	-	-	FAZ-B50/2-RT-DC	305950	1/40

# 2.278 Miniature Circuit Breakers

FAZ-...-RT-DC Miniature Circuit Breakers

SG56412



## Characteristic C

### 1-pole

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
2	220	10	-	-	-	FAZ-C2/1-RT-DC	305869	2/80		
3	250	10	-	-	-	FAZ-C3/1-RT-DC	305870	2/80		
4	250	10	-	-	-	FAZ-C4/1-RT-DC	305871	2/80		
5	250	10	-	-	-	FAZ-C5/1-RT-DC	305872	2/80		
6	250	10	-	-	-	FAZ-C6/1-RT-DC	305873	2/80		
7	250	10	-	-	-	FAZ-C7/1-RT-DC	305874	2/80		
8	250	10	-	-	-	FAZ-C8/1-RT-DC	305875	2/80		
10	250	10	-	-	-	FAZ-C10/1-RT-DC	305876	2/80		
13	250	10	-	-	-	FAZ-C13/1-RT-DC	305877	2/80		
15	250	10	-	-	-	FAZ-C15/1-RT-DC	305878	2/80		
16	250	10	-	-	-	FAZ-C16/1-RT-DC	305879	2/80		
20	250	10	-	-	-	FAZ-C20/1-RT-DC	305880	2/80		
25	250	10	-	-	-	FAZ-C25/1-RT-DC	305881	2/80		
30	250	10	-	-	-	FAZ-C30/1-RT-DC	305882	2/80		
32	250	10	-	-	-	FAZ-C32/1-RT-DC	305883	2/80		
35	250	10	-	-	-	FAZ-C35/1-RT-DC	305884	2/80		
40	250	10	-	-	-	FAZ-C40/1-RT-DC	305885	2/80		
50	250	10	-	-	-	FAZ-C50/1-RT-DC	305886	2/80		

SG56712



### 2-poles

	Rated current I <sub>n</sub> (A)	Rated voltage acc. to IEC/EN 60947-2 (V)	Breaking capacity acc. to IEC/EN 60947-2 (kA)	Rated voltage acc. to UL489 (V)	Breaking capacity acc. to UL489 (kA)	SWD	NFPA 79	Type Designation	Article No.	Units per package
2	220	10	-	-	-	FAZ-C2/2-RT-DC	305891	1/40		
3	250	10	-	-	-	FAZ-C3/2-RT-DC	305892	1/40		
4	250	10	-	-	-	FAZ-C4/2-RT-DC	305894	1/40		
5	250	10	-	-	-	FAZ-C5/2-RT-DC	305895	1/40		
6	250	10	-	-	-	FAZ-C6/2-RT-DC	305896	1/40		
7	250	10	-	-	-	FAZ-C7/2-RT-DC	305897	1/40		
8	250	10	-	-	-	FAZ-C8/2-RT-DC	305900	1/40		
10	250	10	-	-	-	FAZ-C10/2-RT-DC	305901	1/40		
13	250	10	-	-	-	FAZ-C13/2-RT-DC	305902	1/40		
15	250	10	-	-	-	FAZ-C15/2-RT-DC	305903	1/40		
16	250	10	-	-	-	FAZ-C16/2-RT-DC	305904	1/40		
20	250	10	-	-	-	FAZ-C20/2-RT-DC	305905	1/40		
25	250	10	-	-	-	FAZ-C25/2-RT-DC	305906	1/40		
30	250	10	-	-	-	FAZ-C30/2-RT-DC	305907	1/40		
32	250	10	-	-	-	FAZ-C32/2-RT-DC	305908	1/40		
35	250	10	-	-	-	FAZ-C35/2-RT-DC	305909	1/40		
40	250	10	-	-	-	FAZ-C40/2-RT-DC	305910	1/40		
50	250	10	-	-	-	FAZ-C50/2-RT-DC	305911	1/40		

## xEffect

## xEffect

## Miniature Circuit Breakers

# 2.279

FAZ-...-RT-DC Miniature Circuit Breakers

### Technical Data

#### FAZ-...-RT-DC

Product standard  
Classified according to  
Current test marks as printed onto the device

1, 2

#### Mechanical

Device width 1 pole = 0.697 inch, 2 poles = 1.394 inch

Frame size 1.772 inch

Device height 4.134 inch

Device depth 2.362 inch

Terminals lift terminal / ring-tongue

Terminal capacity rigid solid/stranded wire 1-25 mm<sup>2</sup>

Terminal screw M5 (with slotted screw Pozidriv PZ2)

Fastening torque of terminal screws max. 2.4 Nm

Snap on fixing tristable (on DIN Rail according to IEC/EN 60715)

Finger proof acc. to VBG4, ÖVE EN-6

Contact position indicator red / green

#### Electrical

Rated voltage U<sub>n</sub> 2 A Type: 220 V (per poles)

3-50 A Types: 250 V (per poles)

Rated current I<sub>n</sub> 2, 3, 4, 5, 6, 7, 8, 10, 13, 15, 16, 20, 25, 30, 32, 35, 40 A

Rated impulse withstand voltage U<sub>imp</sub> 4 kV (1.2/50) µsec

#### Tripping characteristic

Conventional non-tripping current I<sub>nt</sub> = 1.13 I<sub>n</sub>

Conventional tripping current I<sub>t</sub> = 1.45 I<sub>n</sub>

Reference temperature 30 °C

Temperature factor 0.5%/K

Instantaneous tripping current I<sub>mt</sub> Type B: 4 I<sub>n</sub> < I<sub>mt</sub> = 7 I<sub>n</sub>; t (I<sub>mt</sub>) < 0.1 sec  
Type C: 7 I<sub>n</sub> < I<sub>mt</sub> = 15 I<sub>n</sub>; t (I<sub>mt</sub>) < 0.1 sec

Current interrupting rating 10 kA

Number of electrical operations > 4,000

Number of mechanical operations > 20,000


Climatic conditions acc. to IEC 60068-2-30 (25..55°C / 90..95% RH)

Operating temperature range -40°C up to +75°C

Storage- and transport temperature -40°C up to +75°C


\*) not for PV string protection!

### Connection diagram




### Dimensions (mm) FAZ-...-RT-DC


#### 1-pole

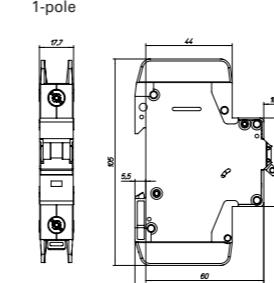

#### 2-poles

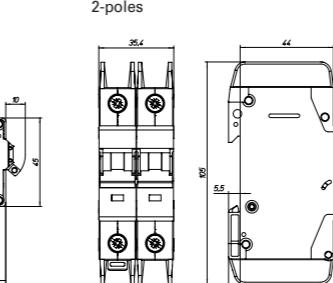


### Connection of ring cable lugs (only FAZ...-RT)

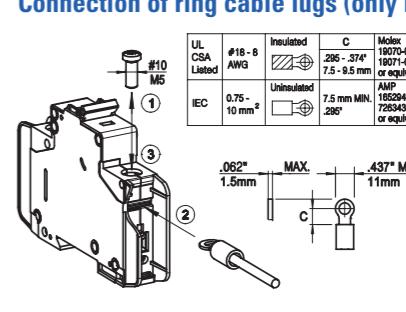


**Connection examples FAZ-...-RT-DC**

Connection example at 250V=, 1-pole

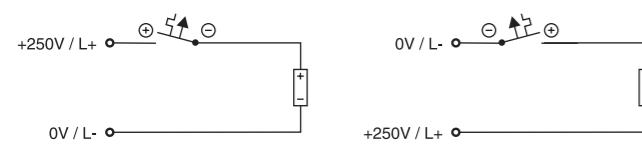


Connection example at 500V=, 2-poles

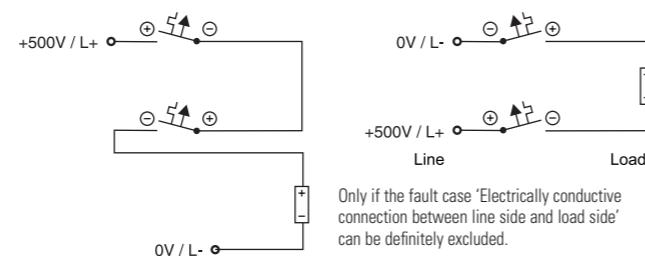


**Tripping Characteristics FAZ-...-RT-DC**

Characteristics C - IEC/EN 60947-2

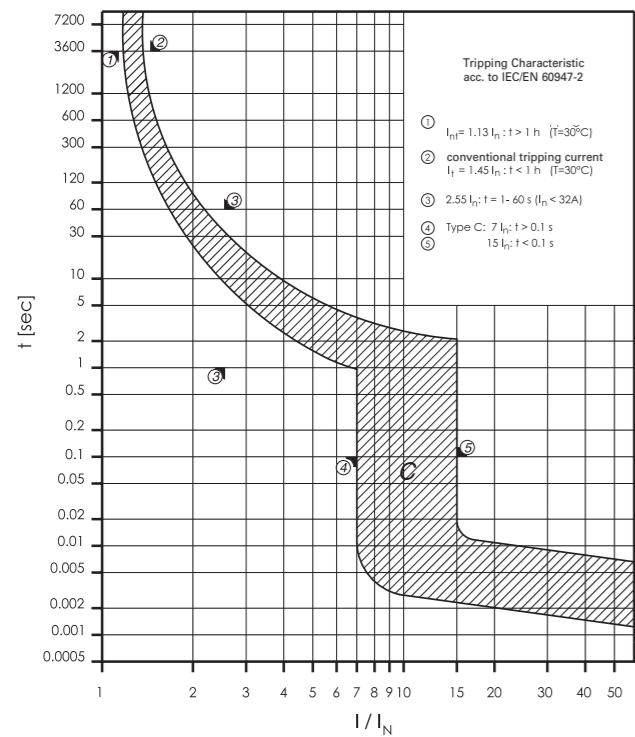

**Maximum Let-Through Energy FAZ-...-RT-DC**

Type C

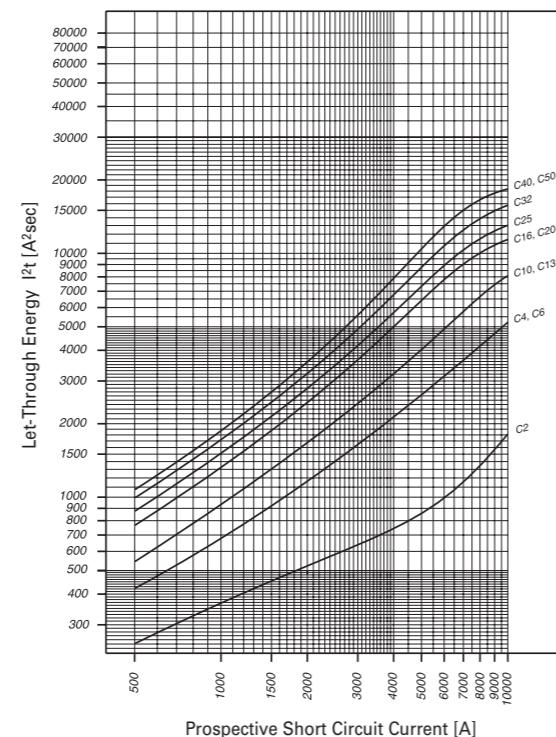

SG08911



**Description**

- High-quality miniature circuit breakers for industrial applications and residential applications
- Contact position indicator red - green
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C, D, K, Z

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**Characteristic B****1-pole**

1	FAZ6-B1/1	177373	12/120
1.5	FAZ6-B1,5/1	177374	12/120
1.6	FAZ6-B1,6/1	177375	12/120
2	FAZ6-B2/1	177376	12/120
2.5	FAZ6-B2,5/1	177377	12/120
3	FAZ6-B3/1	177378	12/120
3.5	FAZ6-B3,5/1	177379	12/120
4	FAZ6-B4/1	177380	12/120
5	FAZ6-B5/1	177381	12/120
6	FAZ6-B6/1	239001	12/120
8	FAZ6-B8/1	177382	12/120
10	FAZ6-B10/1	239006	12/120
12	FAZ6-B12/1	177395	12/120
13	FAZ6-B13/1	239011	12/120
15	FAZ6-B15/1	177396	12/120
16	FAZ6-B16/1	239016	12/120
20	FAZ6-B20/1	239023	12/120
25	FAZ6-B25/1	239024	12/120
32	FAZ6-B32/1	239025	12/120
40	FAZ6-B40/1	239026	12/120
50	FAZ6-B50/1	239027	12/120
63	FAZ6-B63/1	239028	12/120

**1+N-poles**

1	FAZ6-B1/1N	177494	1/60
1.5	FAZ6-B1,5/1N	177495	1/60
1.6	FAZ6-B1,6/1N	177496	1/60
2	FAZ6-B2/1N	177497	1/60
2.5	FAZ6-B2,5/1N	177498	1/60
3	FAZ6-B3/1N	177499	1/60
3.5	FAZ6-B3,5/1N	177500	1/60
4	FAZ6-B4/1N	177501	1/60
5	FAZ6-B5/1N	177502	1/60
6	FAZ6-B6/1N	239044	1/60
8	FAZ6-B8/1N	177503	1/60
10	FAZ6-B10/1N	239045	1/60
12	FAZ6-B12/1N	177504	1/60
13	FAZ6-B13/1N	239046	1/60
15	FAZ6-B15/1N	177505	1/60
16	FAZ6-B16/1N	239047	1/60
20	FAZ6-B20/1N	239048	1/60
25	FAZ6-B25/1N	239049	1/60
32	FAZ6-B32/1N	239050	1/60
40	FAZ6-B40/1N	239051	1/60
50	FAZ6-B50/1N	239052	1/60
63	FAZ6-B63/1N	239053	1/60

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**2-poles**

1	FAZ6-B1/2	177540	1/60
1.5	FAZ6-B1,5/2	177541	1/60
1.6	FAZ6-B1,6/2	177542	1/60
2	FAZ6-B2/2	177543	1/60
2.5	FAZ6-B2,5/2	177544	1/60
3	FAZ6-B3/2	177545	1/60
3.5	FAZ6-B3,5/2	177546	1/60
4	FAZ6-B4/2	177547	1/60
5	FAZ6-B5/2	177548	1/60
6	FAZ6-B6/2	239085	1/60
8	FAZ6-B8/2	177549	1/60
10	FAZ6-B10/2	239086	1/60
12	FAZ6-B12/2	177550	1/60
13	FAZ6-B13/2	239087	1/60
15	FAZ6-B15/2	177551	1/60
16	FAZ6-B16/2	239088	1/60
20	FAZ6-B20/2	239089	1/60
25	FAZ6-B25/2	239090	1/60
32	FAZ6-B32/2	239091	1/60
40	FAZ6-B40/2	239092	1/60
50	FAZ6-B50/2	239093	1/60
63	FAZ6-B63/2	239094	1/60

**3-poles**

1	FAZ6-B1/3	177577	1/40
1.5	FAZ6-B1,5/3	177578	1/40
1.6	FAZ6-B1,6/3	177579	1/40
2	FAZ6-B2/3	177580	1/40
2.5	FAZ6-B2,5/3	177581	1/40
3	FAZ6-B3/3	177582	1/40
3.5	FAZ6-B3,5/3	177583	1/40
4	FAZ6-B4/3	177584	1/40
5	FAZ6-B5/3	177585	1/40
6	FAZ6-B6/3	239110	1/40
8	FAZ6-B8/3	177586	1/40
10	FAZ6-B10/3	239111	1/40
12	FAZ6-B12/3	177587	1/40
13	FAZ6-B13/3	239112	1/40
15	FAZ6-B15/3	177588	1/40
16	FAZ6-B16/3	239113	1/40
20	FAZ6-B20/3	239114	1/40
25	FAZ6-B25/3	239115	1/40
32	FAZ6-B32/3	239116	1/40
40	FAZ6-B40/3	239117	1/40
50	FAZ6-B50/3	239118	1/40
63	FAZ6-B63/3	239119	1/40

# 2.284 Miniature Circuit Breakers

FAZ6 Miniature Circuit Breakers



**3+N-poles**

	Type Designation	Article No.	Units per package
1	FAZ6-B1/3N	177446	1/30
1.5	FAZ6-B1,5/3N	177447	1/30
1.6	FAZ6-B1,6/3N	177448	1/30
2	FAZ6-B2/3N	177449	1/30
2.5	FAZ6-B2,5/3N	177450	1/30
3	FAZ6-B3/3N	177451	1/30
3.5	FAZ6-B3,5/3N	177452	1/30
4	FAZ6-B4/3N	177453	1/30
5	FAZ6-B5/3N	177454	1/30
6	FAZ6-B6/3N	239155	1/30
8	FAZ6-B8/3N	177455	1/30
10	FAZ6-B10/3N	239156	1/30
12	FAZ6-B12/3N	177456	1/30
13	FAZ6-B13/3N	239157	1/30
15	FAZ6-B15/3N	177457	1/30
16	FAZ6-B16/3N	239158	1/30
20	FAZ6-B20/3N	239159	1/30
25	FAZ6-B25/3N	239160	1/30
32	FAZ6-B32/3N	239161	1/30
40	FAZ6-B40/3N	239162	1/30
50	FAZ6-B50/3N	239163	1/30
63	FAZ6-B63/3N	239164	1/30



**4-poles**

	Type Designation	Article No.	Units per package
1	FAZ6-B1/4	177420	1/30
1.5	FAZ6-B1,5/4	177421	1/30
1.6	FAZ6-B1,6/4	177422	1/30
2	FAZ6-B2/4	177423	1/30
2.5	FAZ6-B2,5/4	177424	1/30
3	FAZ6-B3/4	177425	1/30
3.5	FAZ6-B3,5/4	177426	1/30
4	FAZ6-B4/4	177427	1/30
5	FAZ6-B5/4	177428	1/30
6	FAZ6-B6/4	239180	1/30
8	FAZ6-B8/4	177429	1/30
10	FAZ6-B10/4	239181	1/30
12	FAZ6-B12/4	177430	1/30
13	FAZ6-B13/4	239182	1/30
15	FAZ6-B15/4	177431	1/30
16	FAZ6-B16/4	239183	1/30
20	FAZ6-B20/4	239184	1/30
25	FAZ6-B25/4	239185	1/30
32	FAZ6-B32/4	239186	1/30
40	FAZ6-B40/4	239187	1/30
50	FAZ6-B50/4	239188	1/30
63	FAZ6-B63/4	239189	1/30

## xEffect

## xEffect

# Miniature Circuit Breakers

# 2.285

FAZ6 Miniature Circuit Breakers

Rated current $I_n$ (A)
-------------------------------

## Characteristic C

### 1-pole

0.16	FAZ6-C0,16/1	177397	12/120
0.25	FAZ6-C0,25/1	177398	12/120
0.5	FAZ6-C0,5/1	239029	12/120
0.75	FAZ6-C0,75/1	177383	12/120
1	FAZ6-C1/1	239030	12/120
1.5	FAZ6-C1,5/1	177384	12/120
1.6	FAZ6-C1,6/1	177385	12/120
2	FAZ6-C2/1	239031	12/120
2.5	FAZ6-C2,5/1	177386	12/120
3	FAZ6-C3/1	239032	12/120
3.5	FAZ6-C3,5/1	177387	12/120
4	FAZ6-C4/1	239033	12/120
5	FAZ6-C5/1	177388	12/120
6	FAZ6-C6/1	239034	12/120
8	FAZ6-C8/1	177389	12/120
10	FAZ6-C10/1	239035	12/120
12	FAZ6-C12/1	177390	12/120
13	FAZ6-C13/1	239036	12/120
15	FAZ6-C15/1	177391	12/120
16	FAZ6-C16/1	239037	12/120
20	FAZ6-C20/1	239038	12/120
25	FAZ6-C25/1	239039	12/120
32	FAZ6-C32/1	239040	12/120
40	FAZ6-C40/1	239041	12/120
50	FAZ6-C50/1	239042	12/120
63	FAZ6-C63/1	239043	12/120

### 1+N-poles

Rated current $I_n$ (A)			
0.16	FAZ6-C0,16/1N	177506	1/60
0.25	FAZ6-C0,25/1N	177507	1/60
0.5	FAZ6-C0,5/1N	239054	1/60
0.75	FAZ6-C0,75/1N	177508	1/60
1	FAZ6-C1/1N	239055	1/60
1.5	FAZ6-C1,5/1N	177509	1/60
1.6	FAZ6-C1,6/1N	177510	1/60
2	FAZ6-C2/1N	239056	1/60
2.5	FAZ6-C2,5/1N	177511	1/60
3	FAZ6-C3/1N	239057	1/60
3.5	FAZ6-C3,5/1N	177512	1/60
4	FAZ6-C4/1N	239058	1/60
5	FAZ6-C5/1N	177513	1/60
6	FAZ6-C6/1N	239059	1/60
8	FAZ6-C8/1N	177514	1/60
10	FAZ6-C10/1N	239060	1/60
12	FAZ6-C12/1N	177515	1/60
13	FAZ6-C13/1N	239061	1/60
15	FAZ6-C15/1N	177516	1/60
16	FAZ6-C16/1N	239066	1/60
20	FAZ6-C20/1N	239071	1/60
25	FAZ6-C25/1N	239076	1/60
32	FAZ6-C32/1N	239081	1/60
40	FAZ6-C40/1N	239082	1/60
50	FAZ6-C50/1N	239083	1/60
63	FAZ6-C63/1N	239084	1/60

Rated current  
 $I_n$  (A)

Type  
Designation

Article No.  
Units per package

**2-poles**

0.16	FAZ6-C0,16/2	177552	1/60
0.25	FAZ6-C0,25/2	177553	1/60
0.5	FAZ6-C0,5/2	239095	1/60
0.75	FAZ6-C0,75/2	177554	1/60
1	FAZ6-C1/2	239096	1/60
1.5	FAZ6-C1,5/2	177555	1/60
1.6	FAZ6-C1,6/2	177556	1/60
2	FAZ6-C2/2	239097	1/60
2.5	FAZ6-C2,5/2	177557	1/60
3	FAZ6-C3/2	239098	1/60
3.5	FAZ6-C3,5/2	177558	1/60
4	FAZ6-C4/2	239099	1/60
5	FAZ6-C5/2	177559	1/60
6	FAZ6-C6/2	239100	1/60
8	FAZ6-C8/2	177560	1/60
10	FAZ6-C10/2	239101	1/60
12	FAZ6-C12/2	177561	1/60
13	FAZ6-C13/2	239102	1/60
15	FAZ6-C15/2	177562	1/60
16	FAZ6-C16/2	239103	1/60
20	FAZ6-C20/2	239104	1/60
25	FAZ6-C25/2	239105	1/60
32	FAZ6-C32/2	239106	1/60
40	FAZ6-C40/2	239107	1/60
50	FAZ6-C50/2	239108	1/60
63	FAZ6-C63/2	239109	1/60

**3-poles**

0.16	FAZ6-C0,16/3	177589	1/40
0.25	FAZ6-C0,25/3	177590	1/40
0.5	FAZ6-C0,5/3	239120	1/40
0.75	FAZ6-C0,75/3	177399	1/40
1	FAZ6-C1/3	239121	1/40
1.5	FAZ6-C1,5/3	177400	1/40
1.6	FAZ6-C1,6/3	177401	1/40
2	FAZ6-C2/3	239122	1/40
2.5	FAZ6-C2,5/3	177402	1/40
3	FAZ6-C3/3	239127	1/40
3.5	FAZ6-C3,5/3	177403	1/40
4	FAZ6-C4/3	239132	1/40
5	FAZ6-C5/3	177404	1/40
6	FAZ6-C6/3	239139	1/40
8	FAZ6-C8/3	177405	1/40
10	FAZ6-C10/3	239144	1/40
12	FAZ6-C12/3	177406	1/40
13	FAZ6-C13/3	239147	1/40
15	FAZ6-C15/3	177407	1/40
16	FAZ6-C16/3	239148	1/40
20	FAZ6-C20/3	239149	1/40
25	FAZ6-C25/3	239150	1/40
32	FAZ6-C32/3	239151	1/40
40	FAZ6-C40/3	239152	1/40
50	FAZ6-C50/3	239153	1/40
63	FAZ6-C63/3	239154	1/40

Rated current  
 $I_n$  (A)

Type  
Designation

Article No.  
Units per package

**3+N-poles**

0.16	FAZ6-C0,16/3N	177458	1/30
0.25	FAZ6-C0,25/3N	177459	1/30
0.5	FAZ6-C0,5/3N	239165	1/30
0.75	FAZ6-C0,75/3N	177460	1/30
1	FAZ6-C1/3N	239166	1/30
1.5	FAZ6-C1,5/3N	177461	1/30
1.6	FAZ6-C1,6/3N	177462	1/30
2	FAZ6-C2/3N	239167	1/30
2.5	FAZ6-C2,5/3N	177463	1/30
3	FAZ6-C3/3N	239168	1/30
3.5	FAZ6-C3,5/3N	177464	1/30
4	FAZ6-C4/3N	239169	1/30
5	FAZ6-C5/3N	177465	1/30
6	FAZ6-C6/3N	239170	1/30
8	FAZ6-C8/3N	177466	1/30
10	FAZ6-C10/3N	239171	1/30
12	FAZ6-C12/3N	177467	1/30
13	FAZ6-C13/3N	239172	1/30
15	FAZ6-C15/3N	177468	1/30
16	FAZ6-C16/3N	239173	1/30
20	FAZ6-C20/3N	239174	1/30
25	FAZ6-C25/3N	239175	1/30
32	FAZ6-C32/3N	239176	1/30
40	FAZ6-C40/3N	239177	1/30
50	FAZ6-C50/3N	239178	1/30
63	FAZ6-C63/3N	239179	1/30

**4-poles**

0.16	FAZ6-C0,16/4	177432	1/30
0.25	FAZ6-C0,25/4	177433	1/30
0.5	FAZ6-C0,5/4	239190	1/30
0.75	FAZ6-C0,75/4	177434	1/30
1	FAZ6-C1/4	239191	1/30
1.5	FAZ6-C1,5/4	177591	1/30
1.6	FAZ6-C1,6/4	177592	1/30
2	FAZ6-C2/4	239192	1/30
2.5	FAZ6-C2,5/4	177593	1/30
3	FAZ6-C3/4	239193	1/30
3.5	FAZ6-C3,5/4	177594	1/30
4	FAZ6-C4/4	239194	1/30
5	FAZ6-C5/4	177595	1/30
6	FAZ6-C6/4	239199	1/30
8	FAZ6-C8/4	177596	1/30
10	FAZ6-C10/4	239204	1/30
12	FAZ6-C12/4	177597	1/30
13	FAZ6-C13/4	239211	1/30
15	FAZ6-C15/4	177598	1/30
16	FAZ6-C16/4	239216	1/30
20	FAZ6-C20/4	239219	1/30
25	FAZ6-C25/4	239220	1/30
32	FAZ6-C32/4	239221	1/30
40	FAZ6-C40/4	239222	1/30
50	FAZ6-C50/4	239223	1/30
63	FAZ6-C63/4	239224	1/30

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**Characteristic D****1-pole**

0.5	FAZ6-D0,5/1	177392	1/120
1	FAZ6-D1/1	177393	1/120
1.5	FAZ6-D1,5/1	177394	1/120
1.6	FAZ6-D1,6/1	177483	1/120
2	FAZ6-D2/1	177484	1/120
2.5	FAZ6-D2,5/1	177485	1/120
3	FAZ6-D3/1	177486	1/120
3.5	FAZ6-D3,5/1	177487	1/120
4	FAZ6-D4/1	177488	1/120
5	FAZ6-D5/1	177489	1/120
6	FAZ6-D6/1	168061	1/120
8	FAZ6-D8/1	177490	1/120
10	FAZ6-D10/1	168062	1/120
12	FAZ6-D12/1	177491	1/120
13	FAZ6-D13/1	177492	1/120
15	FAZ6-D15/1	177493	1/120
16	FAZ6-D16/1	168063	1/120
20	FAZ6-D20/1	168064	1/120
25	FAZ6-D25/1	168065	1/120
32	FAZ6-D32/1	168066	1/120
40	FAZ6-D40/1	168067	1/120
50	FAZ6-D50/1	168068	1/120
63	FAZ6-D63/1	168069	1/120

**1+N Pole**

0.5	FAZ6-D0,5/1N	177517	1/60
1	FAZ6-D1/1N	177518	1/60
1.5	FAZ6-D1,5/1N	177519	1/60
1.6	FAZ6-D1,6/1N	177520	1/60
2	FAZ6-D2/1N	177521	1/60
2.5	FAZ6-D2,5/1N	177522	1/60
3	FAZ6-D3/1N	177523	1/60
3.5	FAZ6-D3,5/1N	177524	1/60
4	FAZ6-D4/1N	177525	1/60
5	FAZ6-D5/1N	177526	1/60
6	FAZ6-D6/1N	177527	1/60
8	FAZ6-D8/1N	177528	1/60
10	FAZ6-D10/1N	177529	1/60
12	FAZ6-D12/1N	177530	1/60
13	FAZ6-D13/1N	177531	1/60
15	FAZ6-D15/1N	177532	1/60
16	FAZ6-D16/1N	177533	1/60
20	FAZ6-D20/1N	177534	1/60
25	FAZ6-D25/1N	177535	1/60
32	FAZ6-D32/1N	177536	1/60
40	FAZ6-D40/1N	177537	1/60
50	FAZ6-D50/1N	177538	1/60
63	FAZ6-D63/1N	177539	1/60

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**2-poles**

0.5	FAZ6-D0,5/2	177563	1/60
1	FAZ6-D1/2	177564	1/60
1.5	FAZ6-D1,5/2	177565	1/60
1.6	FAZ6-D1,6/2	177566	1/60
2	FAZ6-D2/2	177567	1/60
2.5	FAZ6-D2,5/2	177568	1/60
3	FAZ6-D3/2	177569	1/60
3.5	FAZ6-D3,5/2	177570	1/60
4	FAZ6-D4/2	177571	1/60
5	FAZ6-D5/2	177572	1/60
6	FAZ6-D6/2	168070	1/60
8	FAZ6-D8/2	177573	1/60
10	FAZ6-D10/2	168071	1/60
12	FAZ6-D12/2	177574	1/60
13	FAZ6-D13/2	177575	1/60
15	FAZ6-D15/2	177576	1/60
16	FAZ6-D16/2	168072	1/60
20	FAZ6-D20/2	168073	1/60
25	FAZ6-D25/2	168074	1/60
32	FAZ6-D32/2	168075	1/60
40	FAZ6-D40/2	168076	1/60
50	FAZ6-D50/2	168077	1/60
63	FAZ6-D63/2	168078	1/60

**3-poles**

0.5	FAZ6-D0,5/3	177408	1/40
1	FAZ6-D1/3	177409	1/40
1.5	FAZ6-D1,5/3	177410	1/40
1.6	FAZ6-D1,6/3	177435	1/40
2	FAZ6-D2/3	177436	1/40
2.5	FAZ6-D2,5/3	177437	1/40
3	FAZ6-D3/3	177438	1/40
3.5	FAZ6-D3,5/3	177439	1/40
4	FAZ6-D4/3	177440	1/40
5	FAZ6-D5/3	177441	1/40
6	FAZ6-D6/3	168079	1/40
8	FAZ6-D8/3	177442	1/40
10	FAZ6-D10/3	168080	1/40
12	FAZ6-D12/3	177443	1/40
13	FAZ6-D13/3	177444	1/40
15	FAZ6-D15/3	177445	1/40
16	FAZ6-D16/3	168081	1/40
20	FAZ6-D20/3	168082	1/40
25	FAZ6-D25/3	168083	1/40
32	FAZ6-D32/3	168084	1/40
40	FAZ6-D40/3	168085	1/40
50	FAZ6-D50/3	168086	1/40
63	FAZ6-D63/3	168087	1/40

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**3+N Pole**

0.5	FAZ6-D0,5/3N	177469	1/30
1	FAZ6-D1/3N	177470	1/30
1.5	FAZ6-D1,5/3N	177471	1/30
1.6	FAZ6-D1,6/3N	177472	1/30
2	FAZ6-D2/3N	177473	1/30
2.5	FAZ6-D2,5/3N	177474	1/30
3	FAZ6-D3/3N	177475	1/30
3.5	FAZ6-D3,5/3N	177476	1/30
4	FAZ6-D4/3N	177477	1/30
5	FAZ6-D5/3N	177478	1/30
6	FAZ6-D6/3N	177479	1/30
8	FAZ6-D8/3N	177480	1/30
10	FAZ6-D10/3N	177481	1/30
12	FAZ6-D12/3N	177482	1/30
13	FAZ6-D13/3N	177411	1/30
15	FAZ6-D15/3N	177412	1/30
16	FAZ6-D16/3N	177413	1/30
20	FAZ6-D20/3N	177414	1/30
25	FAZ6-D25/3N	177415	1/30
32	FAZ6-D32/3N	177416	1/30
40	FAZ6-D40/3N	177417	1/30
50	FAZ6-D50/3N	177418	1/30
63	FAZ6-D63/3N	177419	1/30

**4-poles**

0.5	FAZ6-D0,5/4	177599	1/30
1	FAZ6-D1/4	177600	1/30
1.5	FAZ6-D1,5/4	177601	1/30
1.6	FAZ6-D1,6/4	177602	1/30
2	FAZ6-D2/4	177603	1/30
2.5	FAZ6-D2,5/4	177604	1/30
3	FAZ6-D3/4	177605	1/30
3.5	FAZ6-D3,5/4	177606	1/30
4	FAZ6-D4/4	177607	1/30
5	FAZ6-D5/4	177608	1/30
6	FAZ6-D6/4	168088	1/30
8	FAZ6-D8/4	177609	1/30
10	FAZ6-D10/4	168089	1/30
12	FAZ6-D12/4	177610	1/30
13	FAZ6-D13/4	177611	1/30
15	FAZ6-D15/4	177612	1/30
16	FAZ6-D16/4	168090	1/30
20	FAZ6-D20/4	168091	1/30
25	FAZ6-D25/4	168092	1/30
32	FAZ6-D32/4	168093	1/30
40	FAZ6-D40/4	168094	1/30
50	FAZ6-D50/4	168095	1/30
63	FAZ6-D63/4	168096	1/30

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**Characteristic K****1-Pole**

0.5	FAZ6-K0,5/1	EP-505624	12/120
1	FAZ6-K1/1	EP-505626	12/120
1.6	FAZ6-K1,6/1	EP-505628	12/120
2	FAZ6-K2/1	EP-505629	12/120
3	FAZ6-K3/1	EP-505631	12/120
4	FAZ6-K4/1	EP-505633	12/120
6	FAZ6-K6/1	EP-505635	12/120
8	FAZ6-K8/1	EP-505636	12/120
10	FAZ6-K10/1	EP-505637	12/120
13	FAZ6-K13/1	EP-505639	12/120
16	FAZ6-K16/1	EP-505640	12/120
20	FAZ6-K20/1	EP-505641	12/120
25	FAZ6-K25/1	EP-505642	12/120
32	FAZ6-K32/1	EP-505643	12/120
40	FAZ6-K40/1	EP-505644	12/120
50	FAZ6-K50/1	EP-505645	12/120
63	FAZ6-K63/1	EP-505646	12/120

**1+N-poles**

0.5	FAZ6-K0,5/1N	EP-505647	1/60
1	FAZ6-K1/1N	EP-505649	1/60
1.6	FAZ6-K1,6/1N	EP-505651	1/60
2	FAZ6-K2/1N	EP-505652	1/60
3	FAZ6-K3/1N	EP-505654	1/60
4	FAZ6-K4/1N	EP-505656	1/60
6	FAZ6-K6/1N	EP-505658	1/60
8	FAZ6-K8/1N	EP-505659	1/60
10	FAZ6-K10/1N	EP-505660	1/60
13	FAZ6-K13/1N	EP-505662	1/60
16	FAZ6-K16/1N	EP-505663	1/60
20	FAZ6-K20/1N	EP-505664	1/60
25	FAZ6-K25/1N	EP-505665	1/60
32	FAZ6-K32/1N	EP-505666	1/60
40	FAZ6-K40/1N	EP-505667	1/60
50	FAZ6-K50/1N	EP-505668	1/60
63	FAZ6-K63/1N	EP-505669	1/60

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package

**Characteristic K****2-poles**

0.5	FAZ6-K0,5/2	EP-505670	1/60
1	FAZ6-K1/2	EP-505672	1/60
1.6	FAZ6-K1,6/2	EP-505674	1/60
2	FAZ6-K2/2	EP-505675	1/60
3	FAZ6-K3/2	EP-505677	1/60
4	FAZ6-K4/2	EP-505679	1/60
6	FAZ6-K6/2	EP-505681	1/60
8	FAZ6-K8/2	EP-505682	1/60
10	FAZ6-K10/2	EP-505683	1/60
13	FAZ6-K13/2	EP-505685	1/60
16	FAZ6-K16/2	EP-505686	1/60
20	FAZ6-K20/2	EP-505687	1/60
25	FAZ6-K25/2	EP-505688	1/60
32	FAZ6-K32/2	EP-505689	1/60
40	FAZ6-K40/2	EP-505690	1/60
50	FAZ6-K50/2	EP-505691	1/60
63	FAZ6-K63/2	EP-505692	1/60

**3-poles**

0.5	FAZ6-K0,5/3	EP-505693	1/40
1	FAZ6-K1/3	EP-505695	1/40
1.6	FAZ6-K1,6/3	EP-505697	1/40
2	FAZ6-K2/3	EP-505698	1/40
3	FAZ6-K3/3	EP-505700	1/40
4	FAZ6-K4/3	EP-505702	1/40
6	FAZ6-K6/3	EP-505704	1/40
8	FAZ6-K8/3	EP-505705	1/40
10	FAZ6-K10/3	EP-505706	1/40
13	FAZ6-K13/3	EP-505708	1/40
16	FAZ6-K16/3	EP-505709	1/40
20	FAZ6-K20/3	EP-505710	1/40
25	FAZ6-K25/3	EP-505711	1/40
32	FAZ6-K32/3	EP-505712	1/40
40	FAZ6-K40/3	EP-505713	1/40
50	FAZ6-K50/3	EP-505714	1/40
63	FAZ6-K63/3	EP-505715	1/40

Rated current I<sub>n</sub> (A)**Characteristic K****3+N-Poles**

0.5	FAZ6-K0,5/3N	EP-505716	1/30
1	FAZ6-K1/3N	EP-505718	1/30
1.6	FAZ6-K1,6/3N	EP-505720	1/30
2	FAZ6-K2/3N	EP-505721	1/30
3	FAZ6-K3/3N	EP-505723	1/30
4	FAZ6-K4/3N	EP-505725	1/30
6	FAZ6-K6/3N	EP-505727	1/30
8	FAZ6-K8/3N	EP-505728	1/30
10	FAZ6-K10/3N	EP-505729	1/30
13	FAZ6-K13/3N	EP-505731	1/30
16	FAZ6-K16/3N	EP-505732	1/30
20	FAZ6-K20/3N	EP-505733	1/30
25	FAZ6-K25/3N	EP-505734	1/30
32	FAZ6-K32/3N	EP-505735	1/30
40	FAZ6-K40/3N	EP-505736	1/30
50	FAZ6-K50/3N	EP-505737	1/30
63	FAZ6-K63/3N	EP-505738	1/30

**4-poles**

0.5	FAZ6-K0,5/4	EP-505739	1/30
1	FAZ6-K1/4	EP-505741	1/30
1.6	FAZ6-K1,6/4	EP-505743	1/30
2	FAZ6-K2/4	EP-505744	1/30
3	FAZ6-K3/4	EP-505746	1/30
4	FAZ6-K4/4	EP-505748	1/30
6	FAZ6-K6/4	EP-505750	1/30
8	FAZ6-K8/4	EP-505751	1/30
10	FAZ6-K10/4	EP-505752	1/30
13	FAZ6-K13/4	EP-505754	1/30
16	FAZ6-K16/4	EP-505755	1/30
20	FAZ6-K20/4	EP-505756	1/30
25	FAZ6-K25/4	EP-505757	1/30
32	FAZ6-K32/4	EP-505758	1/30
40	FAZ6-K40/4	EP-505759	1/30
50	FAZ6-K50/4	EP-505760	1/30
63	FAZ6-K63/4	EP-505761	1/30

# 2.294 Miniature Circuit Breakers

FAZ6 Miniature Circuit Breakers

## xEffect



Rated current  
 $I_n$  (A)

Type  
Designation

Article No.  
Units per package

### Characteristic Z


#### 1-Pole

0.5	FAZ6-Z0,5/1	EP-505762	12/120
1	FAZ6-Z1/1	EP-505763	12/120
1.6	FAZ6-Z1,6/1	EP-505764	12/120
2	FAZ6-Z2/1	EP-505765	12/120
3	FAZ6-Z3/1	EP-505766	12/120
4	FAZ6-Z4/1	EP-505767	12/120
6	FAZ6-Z6/1	EP-505768	12/120
8	FAZ6-Z8/1	EP-505769	12/120
10	FAZ6-Z10/1	EP-505770	12/120
13	FAZ6-Z13/1	EP-505771	12/120
16	FAZ6-Z16/1	EP-505772	12/120
20	FAZ6-Z20/1	EP-505773	12/120
25	FAZ6-Z25/1	EP-505774	12/120
32	FAZ6-Z32/1	EP-505775	12/120
40	FAZ6-Z40/1	EP-505776	12/120
50	FAZ6-Z50/1	EP-505777	12/120
63	FAZ6-Z63/1	EP-505778	12/120



#### 2-Pole

0.5	FAZ6-Z0,5/2	EP-505796	1/60
1	FAZ6-Z1/2	EP-505797	1/60
1.6	FAZ6-Z1,6/2	EP-505798	1/60
2	FAZ6-Z2/2	EP-505799	1/60
3	FAZ6-Z3/2	EP-505800	1/60
4	FAZ6-Z4/2	EP-505801	1/60
6	FAZ6-Z6/2	EP-505802	1/60
8	FAZ6-Z8/2	EP-505803	1/60
10	FAZ6-Z10/2	EP-505804	1/60
13	FAZ6-Z13/2	EP-505805	1/60
16	FAZ6-Z16/2	EP-505806	1/60
20	FAZ6-Z20/2	EP-505807	1/60
25	FAZ6-Z25/2	EP-505808	1/60
32	FAZ6-Z32/2	EP-505809	1/60
40	FAZ6-Z40/2	EP-505810	1/60
50	FAZ6-Z50/2	EP-505811	1/60
63	FAZ6-Z63/2	EP-505812	1/60

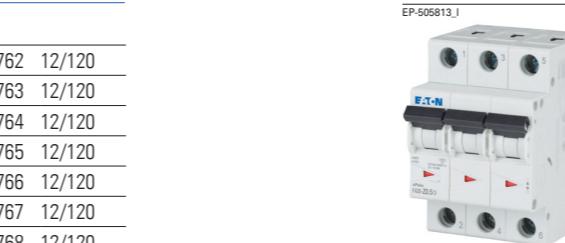

Rated current  
 $I_n$  (A)

## Miniature Circuit Breakers

FAZ6 Miniature Circuit Breakers

# 2.295

### Characteristic Z

#### 3-Pole

0.5	FAZ6-Z0,5/3	EP-505813	1/40
1	FAZ6-Z1/3	EP-505814	1/40
1.6	FAZ6-Z1,6/3	EP-505815	1/40
2	FAZ6-Z2/3	EP-505816	1/40
3	FAZ6-Z3/3	EP-505817	1/40
4	FAZ6-Z4/3	EP-505818	1/40
6	FAZ6-Z6/3	EP-505819	1/40
8	FAZ6-Z8/3	EP-505820	1/40
10	FAZ6-Z10/3	EP-505821	1/40
13	FAZ6-Z13/3	EP-505822	1/40
16	FAZ6-Z16/3	EP-505823	1/40
20	FAZ6-Z20/3	EP-505824	1/40
25	FAZ6-Z25/3	EP-505825	1/40
32	FAZ6-Z32/3	EP-505826	1/40
40	FAZ6-Z40/3	EP-505827	1/40
50	FAZ6-Z50/3	EP-505828	1/40
63	FAZ6-Z63/3	EP-505829	1/40



#### 4-Pole

0.5	FAZ6-Z0,5/4	EP-505847	1/30
1	FAZ6-Z1/4	EP-505848	1/30
1.6	FAZ6-Z1,6/4	EP-505849	1/30
2	FAZ6-Z2/4	EP-505850	1/30
3	FAZ6-Z3/4	EP-505851	1/30
4	FAZ6-Z4/4	EP-505852	1/30
6	FAZ6-Z6/4	EP-505853	1/30
8	FAZ6-Z8/4	EP-505854	1/30
10	FAZ6-Z10/4	EP-505855	1/30
13	FAZ6-Z13/4	EP-505856	1/30
16	FAZ6-Z16/4	EP-505857	1/30
20	FAZ6-Z20/4	EP-505858	1/30
25	FAZ6-Z25/4	EP-505859	1/30
32	FAZ6-Z32/4	EP-505860	1/30
40	FAZ6-Z40/4	EP-505861	1/30
50	FAZ6-Z50/4	EP-505862	1/30
63	FAZ6-Z63/4	EP-505863	1/30

**Miniature Circuit Breakers FAZ6**

**Accessories:**

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal contact for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA	258288, 248289, 248290
	Z-USD	248292, 248291

**Technical Data**

Electrical	B Characteristic	C Characteristic	D Characteristic
------------	------------------	------------------	------------------

Approvals	UL (UL 1077), CSA (CSA 22.2 No. 235), CE, ÖVE, EAC		
Standards	IEC/EN 60947-2, IEC/EN 60898-1		
Short-circuit trip response	3–5 $I_n$	5–10 $I_n$	10–20 $I_n$
<b>Supplementary Protectors-UL/CSA</b>			
Current range	1–63 A	0.16–63 A	0.5–40 A
Maximum voltage ratings - UL/CSA			
Single-pole, single-pole + neutral	277 V AC	277 V AC	277 V AC
48 V DC	48 V DC	48 V DC	48 V DC
Two-, three-, four-pole and three-pole + neutral	480Y/277 V AC	480Y/277 V AC	480Y/277 V AC
Two poles in series	96 V DC	96 V DC	96 V DC
Thermal tripping characteristics			
Single-pole	< 1 hour @ 1.35 x $I_n$ @ 40°C	< 1 hour @ 1.35 x $I_n$ @ 40°C	< 1 hour @ 1.35 x $I_n$ @ 40°C
Multi-pole	< 1 hour @ 1.45 x $I_n$ @ 40°C	< 1 hour @ 1.45 x $I_n$ @ 40°C	< 1 hour @ 1.45 x $I_n$ @ 40°C
Short-circuit ratings (at max. voltage)			
Single-pole	10 kA (5 kA for 40–63A device)	10 kA (5 kA for 40–63A device)	5 kA
Two-, three-pole	10 kA (5 kA for 40–63A device)	10 kA (5 kA for 40–63A device)	5 kA
Single-pole	10 kA @ 48 V DC	10 kA @ 48 V DC	10 kA @ 48 V DC
Two poles in series	10 kA @ 96 V DC	10 kA @ 96 V DC	10 kA @ 96 V DC

**Miniature Circuit Breaker - IEC**

Current range	1–63 A	0.16–63 A	0.5–63 A
<b>Maximum voltage ratings - IEC 60947-2</b>			
Single-pole, single-pole + neutral	230 V AC	230 V AC	230 V AC
60 V DC	60 V DC	60 V DC	60 V DC
<b>Two-, three-, four-pole and three-pole + neutral</b>			
400 V AC	400 V AC	400 V AC	400 V AC
<b>Maximum voltage ratings - IEC 60898</b>			
Single-pole, single-pole + neutral	240 V AC	240 V AC	240 V AC
Two-, three-, four-pole and three-pole + neutral	415 V AC	415 V AC	415 V AC

**Thermal tripping characteristics - IEC 60947-2**

> 1 hour @ 1.05 x $I_n$ @ 40°C	> 1 hour @ 1.05 x $I_n$ @ 40°C	> 1 hour @ 1.05 x $I_n$ @ 40°C	
< 1 hour @ 1.3 x $I_n$ @ 40°C	< 1 hour @ 1.3 x $I_n$ @ 40°C	< 1 hour @ 1.3 x $I_n$ @ 40°C	
<b>Interrupt ratings (at max. voltage)</b>			
$I_{cn}$ (IEC 60947-2)	10 kA	10 kA	10 kA (Type D50 and D63: 10 kA)
$I_{cu}$ (IEC 60898)	6 kA	6 kA	6 kA (Type D50 and D63: not tested)
Service short circuit breaking capacity- $I_{cs}$	7.5 kA	7.5 kA	7.5 kA (Type D50 und D63: 6 kA)
Max. back-up fuse [gL/gG]	100 A	100 A	100 A
Rated impulse withstand voltage - $U_{imp}$	4000 V AC	4000 V AC	4000 V AC
Rated insulation voltage - $U_i$	440 V AC	440 V AC	440 V AC

**Environmental / General**


Selectivity class	3	3	3
<b>Endurance (operations)</b>			
Shock (IEC 68-2-22)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)
Operating temperature range	-40°C up to +75°C	-40°C up to +75°C	-40°C up to +75°C
Storage- and transport temperature	-40°C up to +75°C	-40°C up to +75°C	-40°C up to +75°C

**Mechanical**


Device height	80 mm	80 mm	80 mm
Terminal protection	Finger and back-of-hand proof	Finger and back-of-hand proof	Finger and back-of-hand proof
Mounting width per pole	17.5 mm	17.5 mm	17.5 mm
Mounting	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail
Degree of protection	IP20	IP20	IP20
Terminals top and bottom	Twin-purpose terminals	Twin-purpose terminals	Twin-purpose terminals
Supply connection	Line or load side	Line or load side	Line or load side
Terminal capacity [mm <sup>2</sup> ]	1 x 25 / 2 x 10	1 x 25 / 2 x 10	1 x 25 / 2 x 10
Torque of terminals	2.4 Nm	2.4 Nm	2.4 Nm
Thickness of busbar material	0.8 - 2 mm	0.8 - 2 mm	0.8 - 2 mm
Mounting position	As required	As required	As required

**Technical Data**

Electrical	K Characteristic	Z Characteristic
Approvals	UL (UL 1077), CSA (CSA 22.2 No. 235), CE, ÖVE, EAC	
Standards	IEC/EN 60947-2	
Short-circuit trip response	8-14 $I_n$	2-3 $I_n$
<b>Supplementary Protectors-UL/CSA</b>		
Current range	0.5–63 A	0.5–63 A
Maximum voltage ratings - UL/CSA		
Single-pole, single-pole + neutral	277 V AC	277 V AC
60 V DC	60 V DC	60 V DC
Two-, three-, four-pole and three-pole + neutral	480Y/277 V AC	480Y/277 V AC
Two poles in series	>125 V DC	96 V DC
Thermal tripping characteristics		
Single-pole	< 1 hour @ 1.35 x $I_n$ @ 40°C	< 1 hour @ 1.35 x $I_n$ @ 40°C
Multi-pole	< 1 hour @ 1.45 x $I_n$ @ 40°C	< 1 hour @ 1.45 x $I_n$ @ 40°C
Short-circuit ratings (at max. voltage)		
Single-pole	5 kA @ 277 V AC	5 kA @ 277 V AC
Two-, three-, three+N, Four pole	5 kA @ 480Y/277 V AC	5 kA @ 480Y/277 V AC
<b>Miniature Circuit Breaker - IEC</b>		
Current range	0.5–63 A	0.5–63 A
Maximum voltage ratings - IEC 60947-2		
Single-pole, single-pole + neutral	240 V AC	240 V AC
60 V DC	60 V DC	60 V DC
Two-, three-, four-pole and three-pole + neutral	415 V AC	415 V AC
Thermal tripping characteristics - IEC 60947-2		
> 1 hour @ 1.05 x $I_n$ @ 40°C	> 1 hour @ 1.05 x $I_n$ @ 40°C	> 1 hour @ 1.05 x $I_n$ @ 40°C
< 1 hour @ 1.3 x $I_n$ @ 40°C	< 1 hour @ 1.3 x $I_n$ @ 40°C	< 1 hour @ 1.3 x $I_n$ @ 40°C
<b>Interrupt ratings (at max. voltage)</b>		
$I_{cn}$ (IEC 60947-2)	10 kA	10 kA
$I_{cu}$ (IEC 60898)	6 kA	6 kA
Service short circuit breaking capacity- $I_{cs}$	7.5 kA	7.5 kA
Max. back-up fuse [gL/gG]	100 A	100 A
Rated impulse withstand voltage - $U_{imp}$	4000 V AC	4000 V AC
Rated insulation voltage - $U_i$	440 V AC	440 V AC
<b>Environmental / General</b>		
Selectivity class	3	3
Endurance (operations)	>10000 (1 operation = ON/OFF)	>10000 (1 operation = ON/OFF)
Shock (IEC 68-2-22)	15 g / 20 ms	15 g / 20 ms
Operating temperature range	-40°C up to +75°C	-40°C up to +75°C
Storage- and transport temperature	-40°C up to +75°C	-40°C up to +75°C
<b>Mechanical</b>		
Device height	80 mm	80 mm
Terminal protection	Finger and back-of-hand proof	Finger and back-of-hand proof
Mounting width per pole	17.5 mm	17.5 mm
Mounting	IEC/EN 60715 top-hat rail	IEC/EN 60715 top-hat rail
Degree of protection	IP20	IP20
Terminals top and bottom	Twin-purpose terminals	Twin-purpose terminals
Supply connection	Line or load side	Line or load side
Terminal capacity [mm <sup>2</sup> ]	1 x 25 / 2 x 10	1 x 25 / 2 x 10
Torque of terminals	2.4 Nm	2.4 Nm
Thickness of busbar material	0.8 - 2 mm	0.8 - 2 mm
Mounting position		

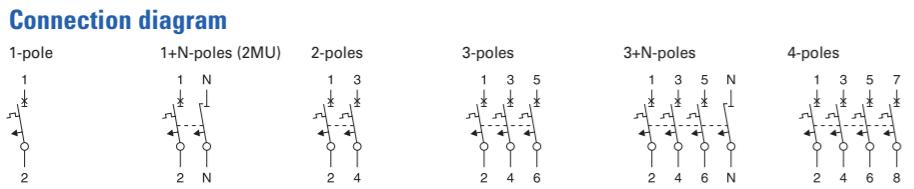

**Dimensions (mm) FAZ6**

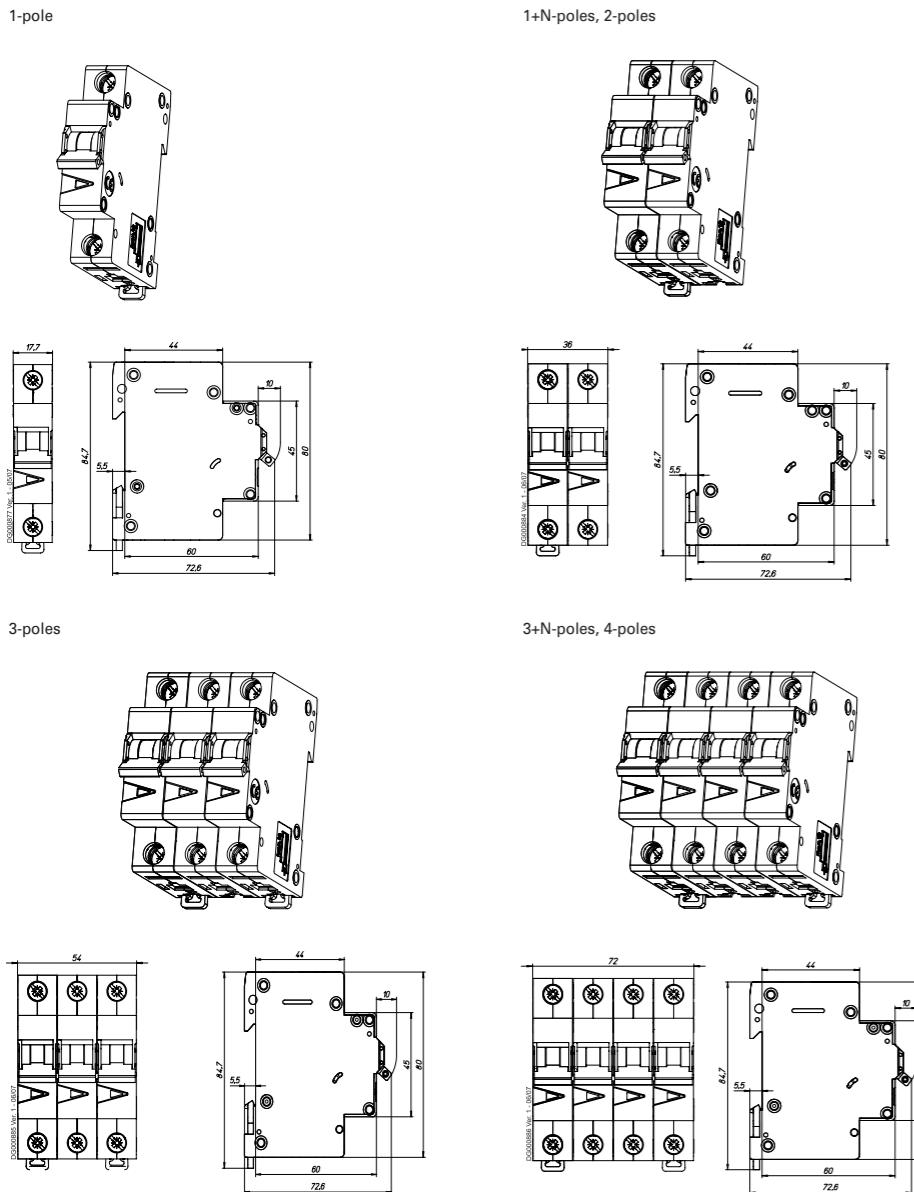


**xEffect**

**xEffect**


**Miniature Circuit Breakers**

**Tripping Characteristics FAZ6**

**Characteristics B, C and D - IEC 898, EN 60898**

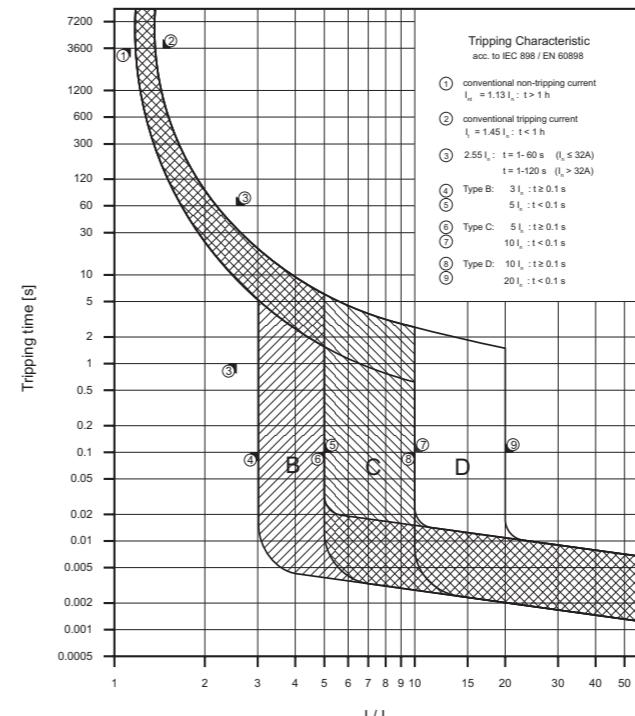

**Characteristics B, C and D - IEC 947, EN 60947**

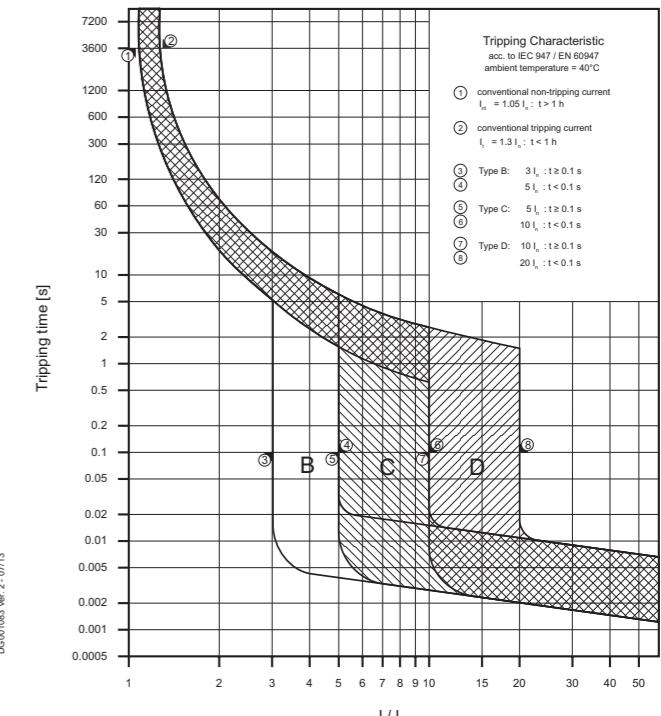

**Internal Resistance FAZ6**

<b>Type B</b>	
At room temperature (single pole)	
I <sub>n</sub> [A]	R* [mΩ]
6	46.8
10	17.5
13	13.4
16	8.0
20	7.2
25	5.0
32	3.7
40	2.6
50	2.1
63	2.0
* 50 Hz	

<b>Type C</b>	
At room temperature (single pole)	
0.5	4680
1	1120
2	335
3	131
4	87.7
6	39.3
10	14.1
13	13.4
16	8.0
20	7.2
25	5.0
32	3.7
40	2.6
50	2.1
63	2.0
* 50 Hz	

<b>Type B</b>	
At room temperature (single pole)	
I <sub>n</sub> [A]	R* [mΩ]
6	39.3
10	14.1
16	8.0
20	4.9
25	3.9
32	3.5
40	2.7
50	1.9
63	1.5
* 50 Hz	

**Power Loss at I<sub>n</sub> FAZ6**

<b>Type B</b>					
I <sub>n</sub> [A]	1p P* [W]	1pN P* [W]	2p P* [W]	3p P* [W]	3pN P* [W]
6	1.8	2	3.6	5.5	5.6
10	1.9	2.1	3.9	5.9	6.1
13	2.5	2.9	5.3	7.8	8.1
16	2.2	2.6	4.7	6.9	7.2
20	3.2	3.6	6.6	9.8	10.1
25	3	3.5	6.4	9.4	9.7
32	3.7	4.4	8.1	12.1	12.5
40	34	4.1	7.5	11.2	11.5
50	4.5	5.4	9.9	14.9	15.3
63	5.2	6.3	11.5	17.2	17.7

\* 50/60 Hz

<b>Type C</b>					
I <sub>n</sub> [A]	1p P* [W]	1pN P* [W]	2p P* [W]	3p P* [W]	3pN P* [W]
0.5	1.2	1.3	2.4	3.5	3.7
1	1.6	1.7	3.1	4.7	4.8
2	1.4	1.5	2.8	4.1	4.3
3	1.2	1.3	2.4	3.6	3.7
4	1.4	1.6	2.9	4.4	4.5
6	1.5	1.6	2.9	4.4	4.6
10	1.5	1.7	3	4.6	4.7
13	2.5	2.9	5.3	7.8	8.1
16	2.2	2.6	4.7	6.9	7.2
20	3.2	3.6	6.6	9.8	10.1
25	3.7	4.4	8.1	12.1	12.5
32	4.4	5.4	9.9	14.9	15.3
40	5.2	6.3	11.5	17.2	17.7

\* 50/60 Hz

**Type D**

<b>Type D</b>					
I <sub>n</sub> [A]	1p P* [W]	1pN P* [W]	2p P* [W]	3p P* [W]	3pN P* [W]
6	1.5	1.6	2.9	4.4	4.6
10	1.5	1.7	3	4.6	4.7
16	2.2	2.6	4.7	6.9	7.2
20	2	2.2	4.1	6.8	6.2
25	2.5	2.9	5.2	7.7	7.9
32	3.4	4	7.4	11.1	11.4
40	3.2	3.8	7	10.4	10.7
50	4.9	7.5	9.8	14.6	17.3
63	6.8	11.9	13.6	20.4	25.5

\* 50/60 Hz

**Influence of Ambient Temperature on Load Carrying Capacity (temperature derating) at  $I_n$  IEC 898, FAZ6**

Values in the table display the nominal current  $I_n$  in ampere depending on the ambient temperature

Ambient Temperature T [°C]																		
$I_n$ [A]	-40	-30	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75	
0.5	0.64	0.62	0.6	0.58	0.56	0.54	0.52	0.5	0.49	0.48	0.47	0.46	0.45	0.44	0.43	0.42	0.41	
1	1.3	1.2	1.2	1.2	1.1	1.1	1	1	0.99	0.97	0.95	0.93	0.9	0.89	0.87	0.85	0.83	
2	2.6	2.5	2.4	2.3	2.2	2.2	2.1	2	2	1.9	1.9	1.9	1.8	1.8	1.7	1.7	1.7	
3	3.8	3.7	3.6	3.5	3.4	3.3	3.1	3	3	2.9	2.8	2.8	2.7	2.7	2.6	2.5	2.5	
4	5.1	5	4.8	4.7	4.5	4.3	4.2	4	3.9	3.9	3.8	3.7	3.6	3.5	3.5	3.4	3.3	
6	7.7	7.5	7.2	7	6.7	6.5	6.3	6	5.9	5.8	5.7	5.6	5.4	5.3	5.2	5.1	5	
10	10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9	8.9	8.7	8.5	8.3	
13	17	16	16	15	15	14	14	13	13	13	12	12	12	12	11	11	11	
16	20	20	19	19	18	17	17	16	16	15	15	15	14	14	14	14	13	
20	26	25	24	23	22	22	21	20	20	19	19	19	18	18	17	17	17	
25	32	31	30	29	28	27	26	25	25	24	24	23	23	22	22	21	21	
32	41	40	38	37	36	35	33	32	32	31	30	30	29	28	28	27	26	
40	51	50	48	47	45	43	42	40	39	39	38	37	36	35	35	34	33	
50	64	62	60	58	56	54	52	50	49	48	47	46	45	44	43	42	41	
63	81	78	76	73	71	68	66	63	62	61	60	58	57	56	55	53	52	

**Influence of Ambient Temperature on Load Carrying Capacity (temperature derating) at  $I_n$  IEC 947, FAZ6**


Values in the table display the nominal current  $I_n$  in ampere depending on the ambient temperature

Ambient Temperature T [°C]																		
$I_n$ [A]	-40	-30	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75	
0.5	0.68	0.66	0.64	0.62	0.6	0.58	0.56	0.54	0.52	0.5	0.49	0.48	0.47	0.46	0.45	0.44	0.43	
1	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1	1	0.99	0.97	0.95	0.93	0.9	0.89	0.87		
2	2.8	2.7	2.6	2.5	2.4	2.3	2.2	2.2	2.1	2	2	1.9	1.9	1.9	1.8	1.8	1.7	
3	4	3.9	3.8	3.7	3.6	3.5	3.4	3.3	3.1	3	3	2.9	2.8	2.8	2.7	2.7	2.6	
4	5.4	5.3	5.1	5	4.8	4.7	4.5	4.3	4.2	4	3.9	3.9	3.8	3.7	3.6	3.5	3.5	
6	8.2	8	7.7	7.5	7.2	7	6.7	6.5	6.3	6	5.9	5.8	5.7	5.6	5.4	5.3	5.2	
10	12	11	10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9	8.9	8.7	
13	18	17	17	16	16	15	15	14	14	13	13	13	12	12	12	11		
16	21	21	20	20	19	19	18	17	17	16	16	15	15	15	14	14	14	
20	28	27	26	25	24	23	22	22	21	20	20	19	19	19	18	18	17	
25	34	33	32	31	30	29	28	27	26	25	25	24	24	23	23	22	22	
32	44	42	41	40	38	37	36	35	33	32	32	31	30	30	29	28	28	
40	54	53	51	50	48	47	45	43	42	40	39	39	38	37	36	35	35	
50	68	66	64	62	60	58	56	54	52	50	49	48	47	46	45	44	43	
63	86	83	81	78	76	73	71	68	66	63	62	61	60	58	57	56	55	

**Maximum Let-Through Energy IEC 947, FAZ6**


Let-through energy FAZ6, Characteristic B, 1-pole

230 V / 400 V

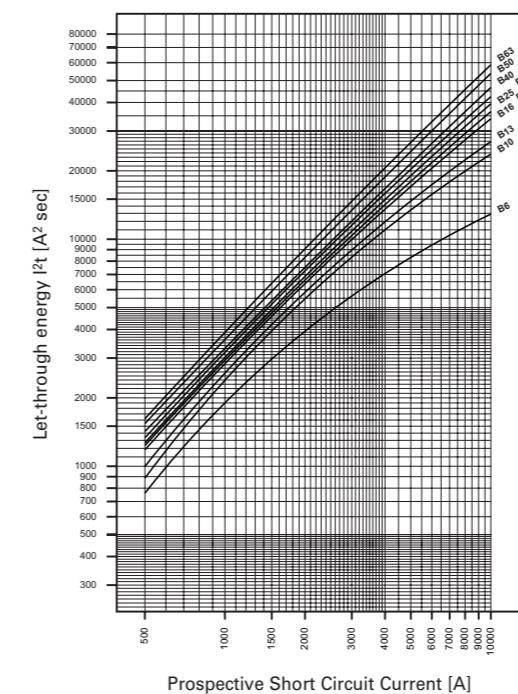


**Maximum Let-Through Current IEC 947, FAZ6**


Let-through current FAZ6, Characteristic B, 1-pole

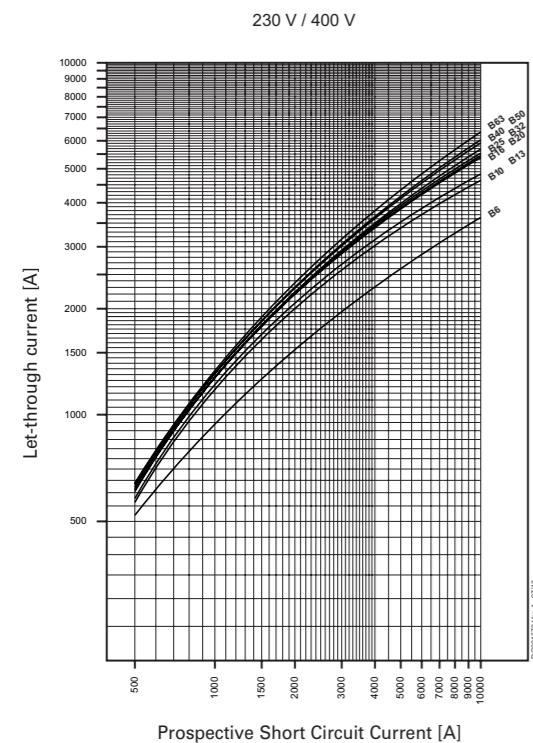

Let-through current FAZ6, Characteristic C, 1-pole

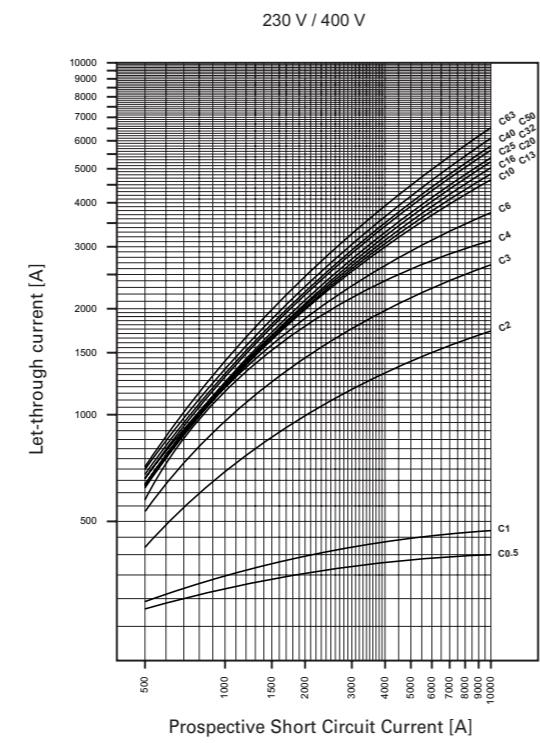

Let-through current FAZ6, Characteristic D, 1-pole

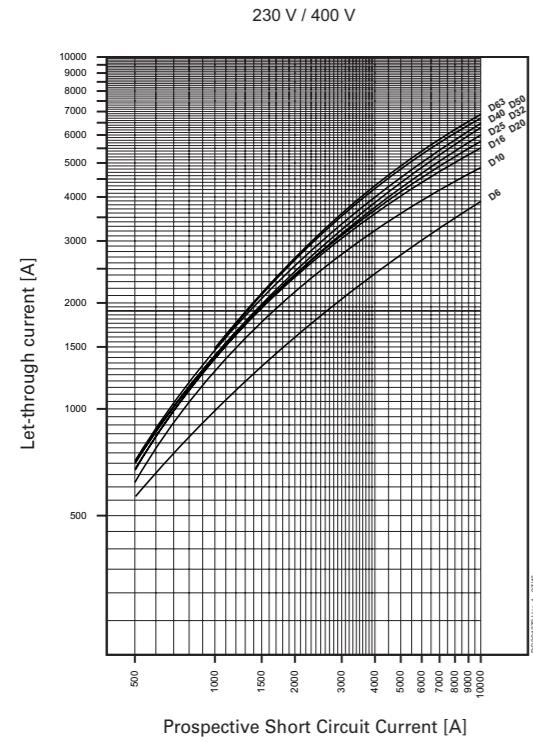


**Influence of the Line Frequency FAZ**

On the Instantaneous Tripping Current  $I_{MA}$

Line Frequency $f$ [Hz]	16 $\frac{2}{3}$	50	60	100	200	300	400
$I_{MA}(f)/I_{MA}(50 \text{ Hz}) [\%]$	91	100	101	106	115	134	141

The use of the products in networks with other frequencies than 50/60 Hz are in the customer's responsibility.

**Load Capacity of Series Connected Miniature Circuit Breakers**

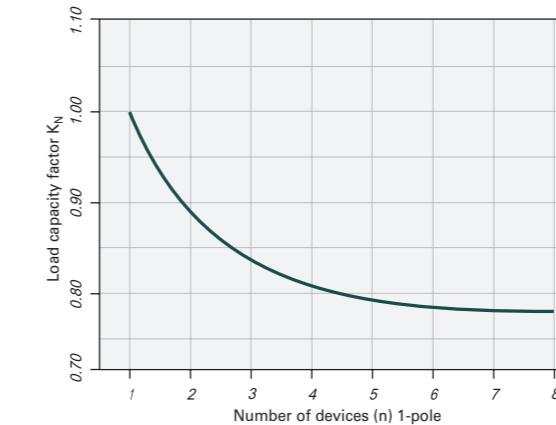

# 2.306 Miniature Circuit Breakers

Miniature Circuit Breakers AZ



## Description

- High-quality miniature circuit breakers for industrial and commercial applications
- Contact position indicator red - green
- Accessories suitable for subsequent installation
- Rated currents up to 125 A
- Tripping characteristics B, C, D
- Rated breaking capacity up to 25 kA according to EN 60947-2
- Classified for the use in rail rolling stock
- Independent switching contacts
- With isolator function, meets the requirements of insulation co-ordination, distance between contacts  $\geq 4 \text{ mm}$ , for secure isolation

## xEffect

## xEffect

## Miniature Circuit Breakers

AZ Miniature Circuit Breakers

# 2.307

Rated current  
 $I_n$  (A)

Type  
Designation

Article No.  
Units per package

## Characteristic B

### 1-pole

20	AZ-B20	174480	12
25	AZ-B25	174481	12
32	AZ-B32	174482	12
40	AZ-B40	174483	12
50	AZ-B50	174484	12
63	AZ-B63	174485	12
80	AZ-B80	174486	12
100	AZ-B100	174487	12
125	AZ-B125	174488	12



### 2-poles

20	AZ-2-B20	174493	6
25	AZ-2-B25	174494	6
32	AZ-2-B32	174495	6
40	AZ-2-B40	174496	6
50	AZ-2-B50	174497	6
63	AZ-2-B63	174498	6
80	AZ-2-B80	174499	6
100	AZ-2-B100	174500	6
125	AZ-2-B125	174501	6



### 3-poles

20	AZ-3-B20	174506	4
25	AZ-3-B25	174507	4
32	AZ-3-B32	174508	4
40	AZ-3-B40	174509	4
50	AZ-3-B50	174510	4
63	AZ-3-B63	174511	4
80	AZ-3-B80	174512	4
100	AZ-3-B100	174513	4
125	AZ-3-B125	174514	4



### 3+N-poles

20	AZ-3N-B20	174519	3
25	AZ-3N-B25	174520	3
32	AZ-3N-B32	174521	3
40	AZ-3N-B40	174522	3
50	AZ-3N-B50	174523	3
63	AZ-3N-B63	174524	3
80	AZ-3N-B80	174525	3
100	AZ-3N-B100	174526	3
125	AZ-3N-B125	174527	3



### 4-poles

20	AZ-4-B20	174532	3
25	AZ-4-B25	174533	3
32	AZ-4-B32	174534	3
40	AZ-4-B40	174535	3
50	AZ-4-B50	174536	3
63	AZ-4-B63	174537	3
80	AZ-4-B80	174538	3
100	AZ-4-B100	174539	3
125	AZ-4-B125	174540	3



# 2.308 Miniature Circuit Breakers

AZ Miniature Circuit Breakers

xEffect

Rated current I<sub>n</sub> (A)

Type Designation

Article No. Units per package



## Characteristic C

### 1-pole

20	AZ-C20	211769	12
25	AZ-C25	211774	12
32	AZ-C32	211779	12
40	AZ-C40	211784	12
50	AZ-C50	211789	12
63	AZ-C63	211794	12
80	AZ-C80	211799	12
100	AZ-C100	211804	12
125	AZ-C125	211809	12



### 2-poles

20	AZ-2-C20	211770	6
25	AZ-2-C25	211775	6
32	AZ-2-C32	211780	6
40	AZ-2-C40	211785	6
50	AZ-2-C50	211790	6
63	AZ-2-C63	211795	6
80	AZ-2-C80	211800	6
100	AZ-2-C100	211805	6
125	AZ-2-C125	211810	6



### 3-poles

20	AZ-3-C20	211771	4
25	AZ-3-C25	211776	4
32	AZ-3-C32	211781	4
40	AZ-3-C40	211786	4
50	AZ-3-C50	211791	4
63	AZ-3-C63	211796	4
80	AZ-3-C80	211801	4
100	AZ-3-C100	211806	4
125	AZ-3-C125	211811	4



### 3+N-poles

20	AZ-3N-C20	211773	3
25	AZ-3N-C25	211778	3
32	AZ-3N-C32	211783	3
40	AZ-3N-C40	211788	3
50	AZ-3N-C50	211793	3
63	AZ-3N-C63	211798	3
80	AZ-3N-C80	211803	3
100	AZ-3N-C100	211808	3
125	AZ-3N-C125	211813	3



### 4-poles

20	AZ-4-C20	211772	3
25	AZ-4-C25	211777	3
32	AZ-4-C32	211782	3
40	AZ-4-C40	211787	3
50	AZ-4-C50	211792	3
63	AZ-4-C63	211797	3
80	AZ-4-C80	211802	3
100	AZ-4-C100	211807	3
125	AZ-4-C125	211812	3

xEffect

Rated current I<sub>n</sub> (A)



## Characteristic D

### 1-pole

20	AZ-D20	174489	12
25	AZ-D25	174490	12
32	AZ-D32	174491	12
40	AZ-D40	174492	12
50	AZ-D50	211814	12
63	AZ-D63	211818	12
80	AZ-D80	211822	12
100	AZ-D100	211826	12



### 2-poles

20	AZ-2-D20	174502	6
25	AZ-2-D25	174503	6
32	AZ-2-D32	174504	6
40	AZ-2-D40	174505	6
50	AZ-2-D50	211815	6
63	AZ-2-D63	211819	6
80	AZ-2-D80	211823	6
100	AZ-2-D100	211827	6



### 3-poles

20	AZ-3-D20	174515	4
25	AZ-3-D25	174516	4
32	AZ-3-D32	174517	4
40	AZ-3-D40	174518	4
50	AZ-3-D50	211816	4
63	AZ-3-D63	211820	4
80	AZ-3-D80	211824	4
100	AZ-3-D100	211828	4



### 3+N-poles

20	AZ-3N-D20	174528	3
25	AZ-3N-D25	174529	3
32	AZ-3N-D32	174530	3
40	AZ-3N-D40	174531	3
50	AZ-3N-D50	211817	3
63	AZ-3N-D63	211821	3
80	AZ-3N-D80	211825	3
100	AZ-3N-D100	211829	3



### 4-poles

20	AZ-4-D20	174541	3
25	AZ-4-D25	174542	3
32	AZ-4-D32	174543	3
40	AZ-4-D40	174544	3
50	AZ-4-D50	174545	3
63	AZ-4-D63	174546	3
80	AZ-4-D80	174547	3
100	AZ-4-D100	174548	3

Miniature Circuit Breakers

AZ Miniature Circuit Breakers

2.309

## Accessories for Miniature Circuit Breakers AZ

Operational voltage range V~	Type Designation	Article No.	Units per package
<b>Shunt trip release, Shunt trip release-Kit</b>			
110-415/Shunt trip release	Z-LHASA/230	248442	8
12-60/Shunt trip release	Z-LHASA/24	248441	8
110-415/Shunt trip release-Kit	Z-BHASA/230	248445	8
12-60/Shunt trip release-Kit	Z-BHASA/24	248444	8
Function	Type Designation	Article No.	Units per package
<b>Auxiliary switch</b>			
1NO+1NC	Z-LHK	248440	10/100
Benennung	Type Designation	Article No.	Units per package
<b>Switching interlock</b>			
Switching interlock	LH-SPL	285752	1
Switching interlock	LHSP-E	215999	1
Switching interlock	LHSP-A	216000	1


## Technical Data

### AZ


#### Electrical

Standards	IEC/EN 60947-2
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Rated operating voltage	230/400 V AC 60 V DC (per pole)
Limiting breaking capacity according to IEC/EN 60947-2	
Characteristic B	$I_n = 20-63 A: 25 \text{ kA}$ $I_n = 80-100 A: 20 \text{ kA}$ $I_n = 125 A: 15 \text{ kA}$
Characteristic C	$I_n = 20-63 A: 25 \text{ kA}$ $I_n = 80-100 A: 20 \text{ kA}$ $I_n = 125 A: 15 \text{ kA}$
Characteristic D	$I_n = 20-63 A: 25 \text{ kA}$ $I_n = 80 A: 20 \text{ kA}$ $I_n = 100 A: 15 \text{ kA}$
Characteristic	B, C, D
Max. back-up fuse	200 A gL/gG
Selectivity class	Compliant with class 3
Rated insulation voltage	440 V
Peak withstand voltage	$U_{imp} = 4\text{kV}$
Endurance	>10,000 Operations
Direction of incoming supply	Any
<b>Mechanical</b>	
Frame size	45 mm
Device height	90 mm
Width per pole	27 mm (1.5MU)
Terminal protection	Finger and hand touch safe according to BGV A2
Mounting	Quick fastening with 2 lock-in positions on DIN rail according to IEC/EN 60715
Terminals top and bottom	Lift terminals
Terminal capacity	2.5 – 50 mm <sup>2</sup> (solid)
Operation temperature	-25 °C up to +55 °C
Storage- and transport temperature	-40 °C up to +75 °C
Degree of protection	IP20
Degree of protection, built-in	IP40
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274


## Connection diagram

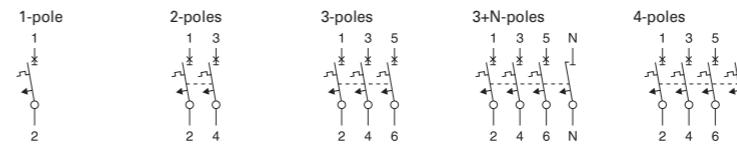

## Dimensions (mm)

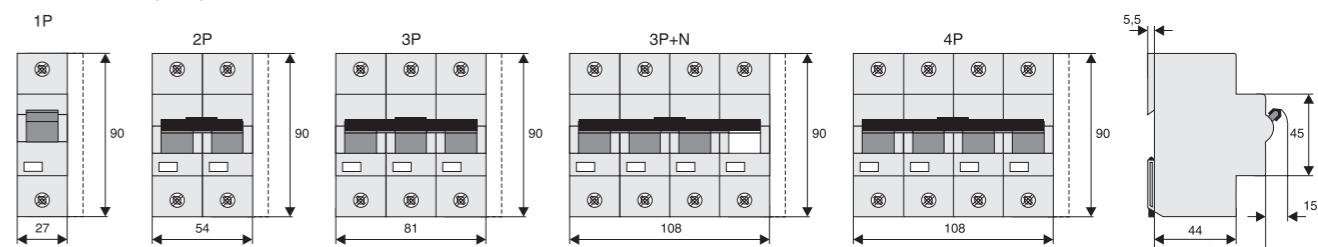


## Influence of Ambient Temperature AZ

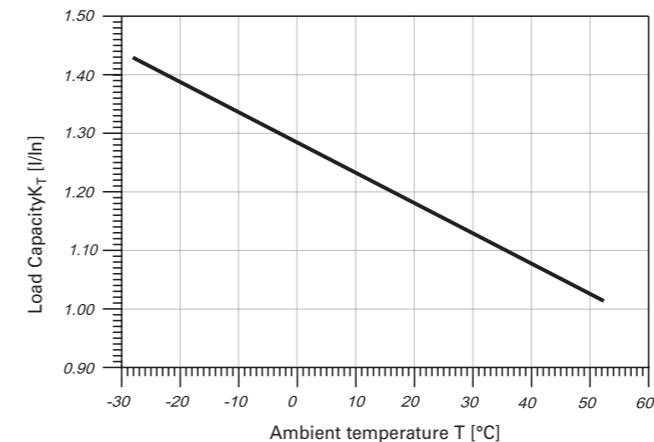


Permitted permanent load at ambient temperature T [°C] and n devices:  $I_{DL} = I_n K_T(T) K_N(N)$ .

Let-Through Energy AZ

## Maximum Let-Through Energy AZ, Characteristic B, 1poles

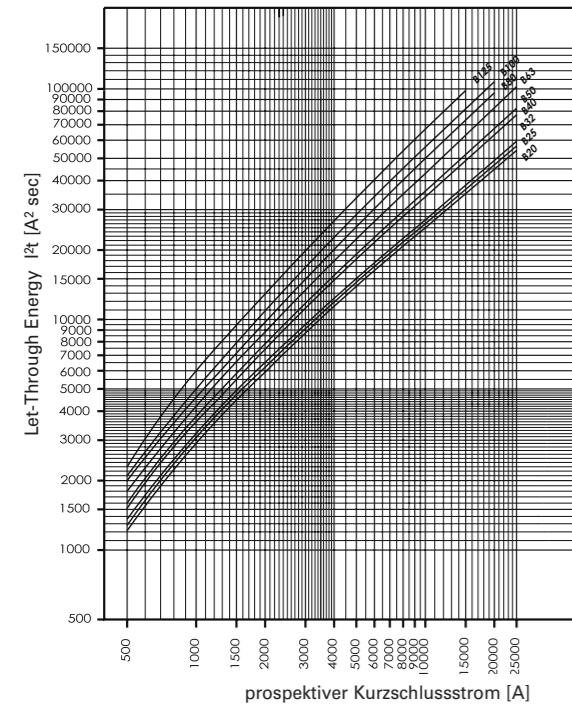


#### **Maximum Let-Through Energy AZ, Characteristic C, 1pole**

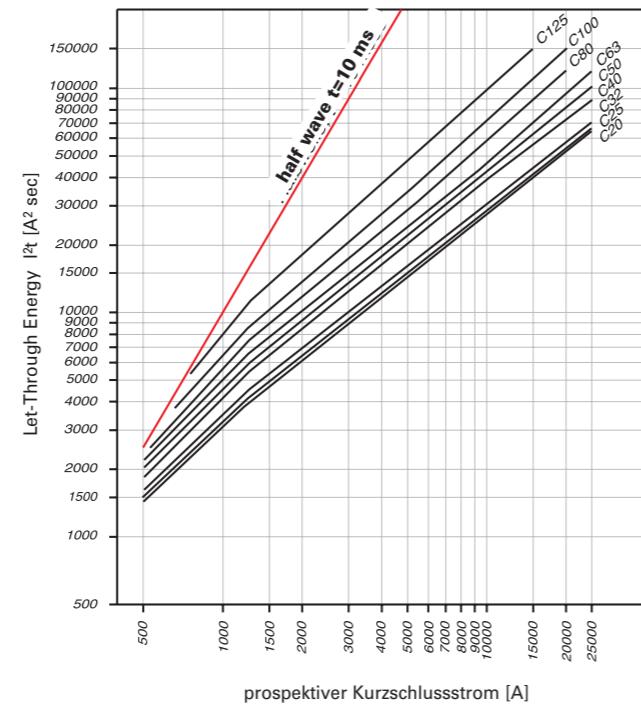


## Maximum Let-Through Current AZ


### Type B

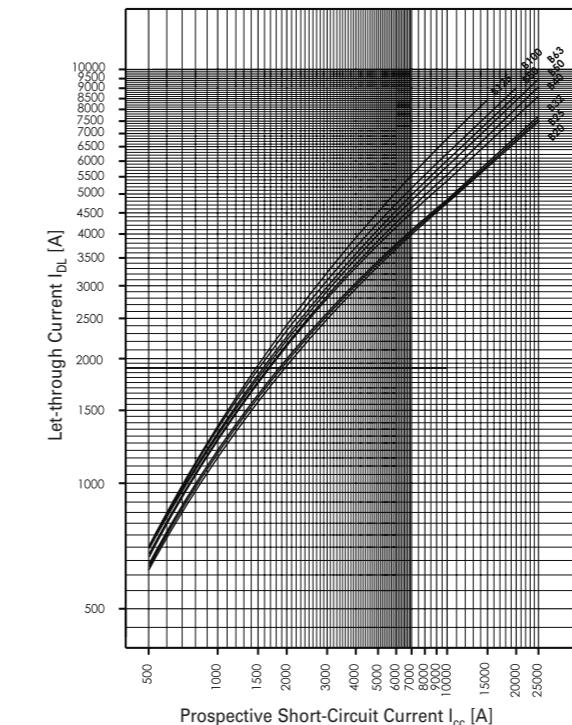

### Type C

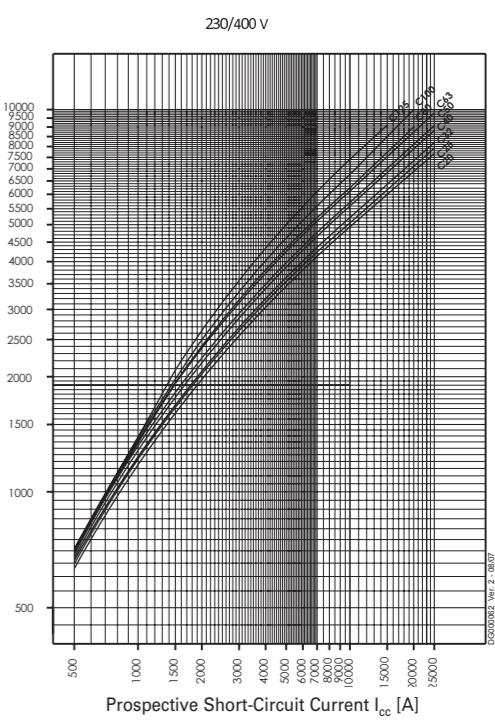


### **Maximum Let-Through Energy AZ, Characteristic D, 1poles**

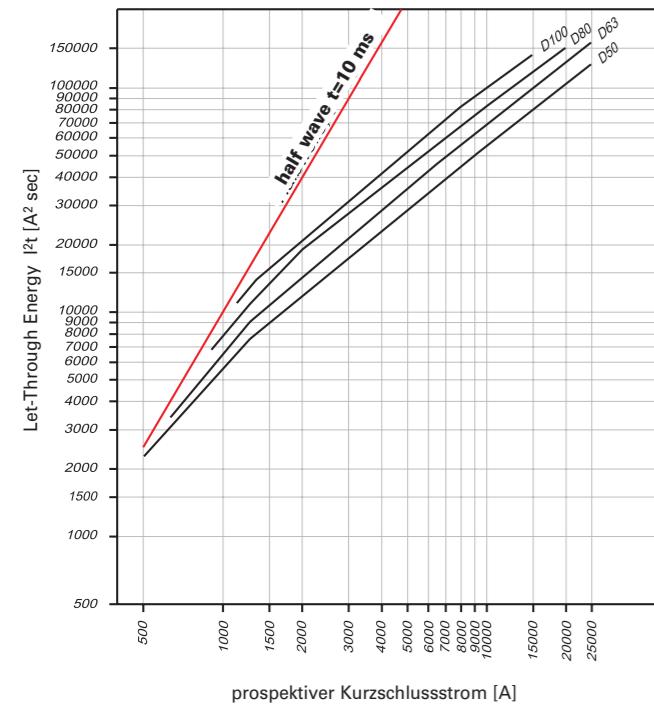

---

#### Type D

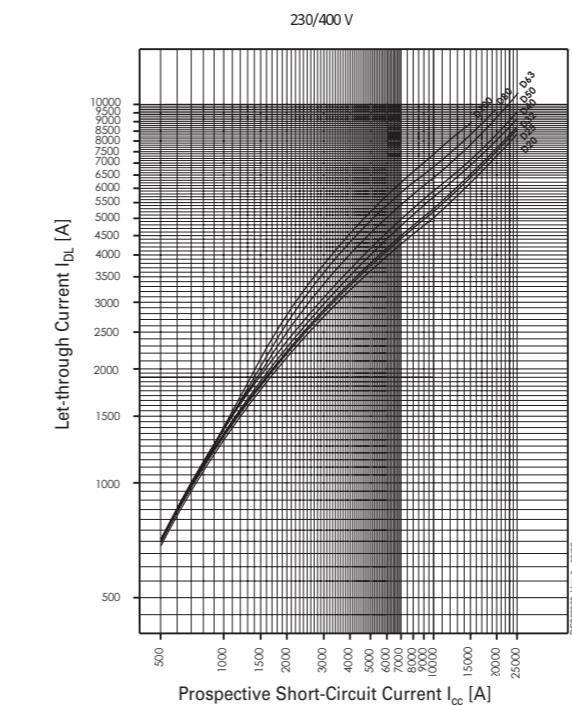

Determined according to EN 60898-1.

#### Short Circuit Selectivity AZ

In case of short circuit, there is selectivity between the miniature circuit breakers AZ and the upstream protection devices up to the specified values of the selectivity limit current  $I_s$  [kA] (i. e. in case of short-circuit currents  $I_{ks}$  under  $I_s$ , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

#### AZ towards back-up fuses D01, D02, D03

Characteristic C						Characteristic D								
AZ	D01.	D02.	D03	AZ	D01.	D02.	D03	AZ	D01.	D02.	D03			
<b>I<sub>n</sub> [A]</b>	<b>25</b>	<b>35</b>	<b>50</b>	<b>63</b>	<b>80</b>	<b>100</b>		<b>I<sub>n</sub> [A]</b>	<b>25</b>	<b>35</b>	<b>50</b>	<b>63</b>	<b>80</b>	<b>100</b>
<b>20</b>	0.5	1.0	2.0	2.9	3.9	7.6		<b>20</b>	0.5	0.9	1.7	2.5	3.4	6.7
<b>25</b>		1.0	1.9	2.8	3.8	7.3		<b>25</b>		0.9	1.6	2.3	3.2	6.2
<b>32</b>		1.0	1.8	2.7	3.6	7.0		<b>32</b>		0.9	1.5	2.3	3.0	6.0
<b>40</b>			1.6	2.2	3.0	5.6		<b>40</b>			1.4	2.0	2.6	4.7
<b>50</b>				2.1	2.8	5.2		<b>50</b>				1.8	2.3	4.3
<b>63</b>					2.7	4.8		<b>63</b>					2.1	3.7
<b>80</b>						4.3		<b>80</b>						3.1
<b>100</b>								<b>100</b>						
<b>125</b>														

Characteristic C						Characteristic D								
AZ	D01.	D02.	D03	AZ	D01.	D02.	D03	AZ	D01.	D02.	D03			
<b>I<sub>n</sub> [A]</b>	<b>25</b>	<b>35</b>	<b>50</b>	<b>63</b>	<b>80</b>	<b>100</b>		<b>I<sub>n</sub> [A]</b>	<b>25</b>	<b>35</b>	<b>50</b>	<b>63</b>	<b>80</b>	<b>100</b>
<b>20</b>	0.5	0.9	1.7	2.5	3.4	6.7		<b>20</b>	0.5	0.9	1.7	2.5	3.4	6.7
<b>25</b>								<b>25</b>						
<b>32</b>								<b>32</b>						
<b>40</b>								<b>40</b>						
<b>50</b>								<b>50</b>						
<b>63</b>								<b>63</b>						
<b>80</b>								<b>80</b>						
<b>100</b>								<b>100</b>						
<b>125</b>														

#### AZ towards back-up fuses NH Gr. 00

Characteristic C												Characteristic D																						
AZ	NH Gr. 00										AZ	NH Gr. 00										I <sub>n</sub> [A]	25	35	40	50	63	80	100	125	160	200		
I <sub>n</sub> [A]	25	35	40	50	63	80	100	125	160	200	I <sub>n</sub> [A]	25	35	40	50	63	80	100	125	160	200	I <sub>n</sub> [A]	<0.5	0.8	1.1	1.5	2.3	3.1	5.6	16.0	25.0	25.0		
<b>20</b>	0.5	1.0	1.3	1.9	2.7	3.7	6.7	17.0	25.0	25.0	<b>20</b>	<0.5	0.8	1.1	1.5	2.3	3.1	5.6	16.0	25.0	25.0	<b>25</b>												
<b>25</b>											<b>25</b>											<b>32</b>												
<b>32</b>											<b>32</b>											<b>40</b>												
<b>40</b>											<b>40</b>											<b>50</b>												
<b>50</b>											<b>50</b>											<b>63</b>												
<b>63</b>											<b>63</b>											<b>80</b>												
<b>80</b>											<b>80</b>											<b>100</b>												
<b>100</b>											<b>100</b>																							
<b>125</b>											<b>125</b>																							

Characteristic C												Characteristic D																				
AZ	NH Gr. 00										AZ	NH Gr. 00										I <sub>n</sub> [A]	25	35	40	50	63	80	100	125	160	200
I <sub>n</sub> [A]	25	35	40	50	63	80	100	125	160	200	I <sub>n</sub> [A]	25	35	40	50	63	80	100	125	160	200	I <sub>n</sub> [A]	<0.5	0.8	1.1	1.5	2.3	3.1	5.6	16.0	25.0	25.0
<b>20</b>	0.5	0.9	1.3	1.9	2.7	3.7	6.7	17.0	25.0	25.0	<b>20</b>	<0.5	0.8	1.1	1.5	2.3	3.1	5.6	16.0	25.0	25.0	<b>25</b>										
<b>25</b>																																

## Back-up Protection AZ

The up-stream protective devices will protect the down-stream AZ up to the short-circuit current specified.

### AZ and NZM(B)(C)(N)(H)1

AZ	NZMB1
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	25 kA
<b>25</b>	25 kA
<b>32</b>	25 kA
<b>40</b>	25 kA
<b>50</b>	25 kA
<b>63</b>	25 kA
<b>80</b>	25 kA
<b>100</b>	25 kA
<b>125</b>	25 kA

AZ	NZMC1
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	36 kA
<b>25</b>	36 kA
<b>32</b>	36 kA
<b>40</b>	36 kA
<b>50</b>	36 kA
<b>63</b>	36 kA
<b>80</b>	36 kA
<b>100</b>	36 kA
<b>125</b>	36 kA

AZ	NZMN1
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	50 kA
<b>25</b>	50 kA
<b>32</b>	50 kA
<b>40</b>	50 kA
<b>50</b>	50 kA
<b>63</b>	50 kA
<b>80</b>	50 kA
<b>100</b>	50 kA
<b>125</b>	50 kA

AZ	NZMH1
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	80 kA
<b>25</b>	80 kA
<b>32</b>	80 kA
<b>40</b>	80 kA
<b>50</b>	80 kA
<b>63</b>	80 kA
<b>80</b>	80 kA
<b>100</b>	80 kA
<b>125</b>	80 kA

### AZ and NZM(B)(C)(N)(H)2


AZ	NZMB2
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	25 kA
<b>25</b>	25 kA
<b>32</b>	25 kA
<b>40</b>	25 kA
<b>50</b>	25 kA
<b>63</b>	25 kA
<b>80</b>	25 kA
<b>100</b>	25 kA
<b>125</b>	25 kA

AZ	NZMC2
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	36 kA
<b>25</b>	36 kA
<b>32</b>	36 kA
<b>40</b>	36 kA
<b>50</b>	36 kA
<b>63</b>	36 kA
<b>80</b>	36 kA
<b>100</b>	36 kA
<b>125</b>	36 kA

AZ	NZMN2
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	50 kA
<b>25</b>	50 kA
<b>32</b>	50 kA
<b>40</b>	50 kA
<b>50</b>	50 kA
<b>63</b>	50 kA
<b>80</b>	50 kA
<b>100</b>	50 kA
<b>125</b>	50 kA

AZ	NZMH2
I <sub>n</sub> [A]	U <sub>e</sub> = 230/400 V
<b>20</b>	65 kA
<b>25</b>	65 kA
<b>32</b>	65 kA
<b>40</b>	65 kA
<b>50</b>	65 kA
<b>63</b>	65 kA
<b>80</b>	65 kA
<b>100</b>	65 kA
<b>125</b>	65 kA

## Load capacity in case of block installation AZ

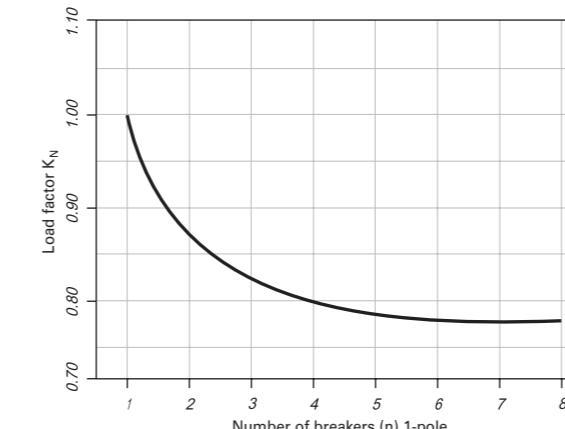

## Derating table for AZ above 2000m sea level

60947-2		U <sub>e</sub> 230/400 V		80/B, C, D and 100/B, C		80, 100/B, C, D		100/D and 125/B, C		100/D and 125/B, C	
Above sea level (m)	Oversupply category	Disconnect function	I/I <sub>n</sub>	I <sub>cu</sub>	I <sub>cs</sub>	I <sub>cu</sub>	I <sub>cs</sub>	I <sub>cu</sub>	I <sub>cs</sub>	I <sub>cu</sub>	I <sub>cs</sub>
m	X	X	X	kA	kA	kA	kA	kA	kA	kA	kA
<=2000	III	yes	1	20	10	15	7.5				
>2000-2500	II	no	0.93	15	7.5	10	6				
>2500-3000	II	no	0.88	15	7.5	10	6				
>3000-3500	II	no	0.83	15	7.5	10	6				
>3500-4000	II	no	0.78	15	7.5	10	6				

# 2.318 Photovoltaic - DC-Disconnection

DC Switch-Disconnect PV-DIS 2-poles


xEffect



sg09615

## Description

- Photovoltaic - Switch-disconnectors
- Acc. to EN 60947-3 DC-PV1 or DC-PV2 resp.
- Very compact
- Improved reliability due to independent manual operation
- Stable performance at any load current
- Polarity independent
- Only one path per pole => lower power loss



xEffect

Rated operating current  $I_e$   
(A)



sg09615

## 2-poles with rotary handle, 600 V

16	PV-DIS-06-16/2-ROT	179259	1
32	PV-DIS-06-32/2-ROT	179260	1
63	PV-DIS-06-63/2-ROT	179261	1
100	PV-DIS-06-100/2-ROT	185503	1
125	PV-DIS-06-125/2-ROT	179262	1

## 2-poles with rotary handle, 800 V

16	PV-DIS-08-16/2-ROT	179263	1
32	PV-DIS-08-32/2-ROT	179264	1
63	PV-DIS-08-63/2-ROT	179265	1
100	PV-DIS-08-100/2-ROT	185504	1
125	PV-DIS-08-125/2-ROT	179266	1

## 2-poles with rotary handle, 1000 V

16	PV-DIS-10-16/2-ROT	179267	1
32	PV-DIS-10-32/2-ROT	179268	1
63	PV-DIS-10-63/2-ROT	179269	1
100	PV-DIS-10-100/2-ROT	185505	1
125	PV-DIS-10-125/2-ROT	179270	1

## 2-poles without rotary handle, 600 V

16	PV-DIS-06-16/2	179255	1
32	PV-DIS-06-32/2	179256	1
63	PV-DIS-06-63/2	179257	1
100	PV-DIS-06-100/2	185502	1
125	PV-DIS-06-125/2	179258	1

# Photovoltaic - DC-Disconnection


DC Switch-Disconnect PV-DIS 2-poles

2.319


**Technical Data**

	PV-DIS-06...	PV-DIS-08...	PV-DIS-10...
Rated operating voltage	600 V	800 V	1000 V
Rated impulse withstand voltage	4 kV	6 kV	6 kV
	PV-DIS-.../2	PV-DIS-.../2-ROT	
Rated insulation voltage	630 V	1000 V	
Utilization category (acc. to EN 60947-3)			
Rated operating current $I_{\text{e}}$ 16-100 A	DC-PV2		
Rated operating current $I_{\text{e}}$ 125 A	DC-PV1		
Mechanical operations	acc. to IEC 60947-3 Category of utilization DC-PV2 or DC-PV1		
Electrical operations	acc. to IEC 60947-3 Category of utilization DC-PV2 or DC-PV1		
Rated frequency / Operating frequency	DC only		
Approbation	ÖVE, VDE		
Resistance to climatic conditions according to	IEC 60947-2		
Shock resistance, Vibration resistance acc. to	IEC 60947-2		
Dimensions	according to drawing		
Dimensions of terminals	2.5-50 mm <sup>2</sup>		
Cable material	Cu		
Degree of protection	IP20		
Degree of protection, built-in	IP40		
Mounting position	DIN-Rail, Rotation +90°, -90°, 180°		
Ambient temperature range	-40 to +85 °C		
Storage Temperature	-40 to +85 °C		
Max. DC contact rating	100 %		
Safe electrical isolation	yes		
Supply side	interchangeable		
Polarity	interchangeable		

**Wiring Examples**

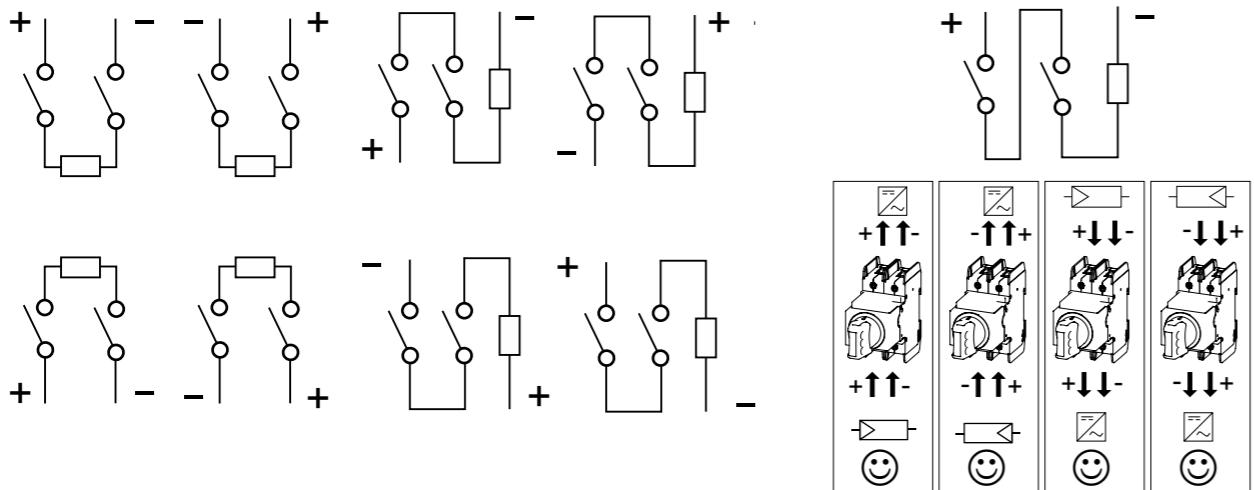

**Dimensions (mm)**

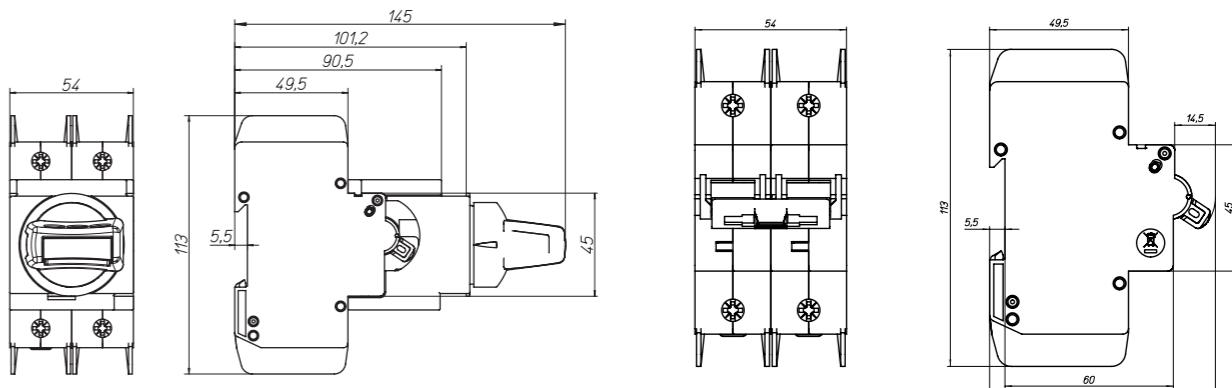

2-poles with rotary handle

2-poles without rotary handle

**Rated operating current at different voltages**

DC-PV1: Switching of single PV string(s) without reverse and overcurrents

DC-PV2: Switching of several PV strings with reverse and overcurrents

**2-poles with rotary handle, 600V**

Type designation	PV-DIS-06-16/2(-ROT)	PV-DIS-06-32/2(-ROT)	PV-DIS-06-63/2(-ROT)	PV-DIS-06-100/2(-ROT)	PV-DIS-06-125/2(-ROT)
DCPV1	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V	16A	32A	63A	100A	125A
600V					

Type designation	PV-DIS-06-16/2(-ROT)	PV-DIS-06-32/2(-ROT)	PV-DIS-06-63/2(-ROT)	PV-DIS-06-100/2(-ROT)	PV-DIS-06-125/2(-ROT)
DCPV2	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V	16A	32A	63A	100A	125A
600V					

**2-poles without rotary handle, 600V**

Type designation	PV-DIS-06-16/2	PV-DIS-06-32/2	PV-DIS-06-63/2	PV-DIS-06-100/2	PV-DIS-06-125/2
DCPV2	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V	16A	32A	63A	100A	125A
600V					

**2-poles with rotary handle, 800 V**

Type designation	PV-DIS-06-16/2(-ROT)	PV-DIS-06-32/2(-ROT)	PV-DIS-06-63/2(-ROT)	PV-DIS-06-100/2(-ROT)	PV-DIS-06-125/2(-ROT)
DCPV1	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V					
600V					
700V	16A	32A	63A	100A	125A
800V					

Type designation	PV-DIS-06-16/2(-ROT)	PV-DIS-06-32/2(-ROT)	PV-DIS-06-63/2(-ROT)	PV-DIS-06-100/2(-ROT)	PV-DIS-06-125/2(-ROT)
DCPV2	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V					
600V					
700V	16A	32A	63A	100A	125A
800V					

**Rated operating current at different voltages**

DC-PV1: Switching of single PV string(s) without reverse and overcurrents

DC-PV2: Switching of several PV strings with reverse and overcurrents

**2-poles with rotary handle, 1000 V**

Type designation	PV-DIS-06-16/2(-ROT)	PV-DIS-06-32/2(-ROT)	PV-DIS-06-63/2(-ROT)	PV-DIS-06-100/2(-ROT)	PV-DIS-06-125/2(-ROT)
DCPV1	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V					
600V					
700V				16A	
800V				32A	
900V				63A	
1000V				100A	
					125A

Type designation	PV-DIS-06-16/2(-ROT)	PV-DIS-06-32/2(-ROT)	PV-DIS-06-63/2(-ROT)	PV-DIS-06-100/2(-ROT)	PV-DIS-06-125/2(-ROT)
DCPV2	Utilization category (acc. to EN 60947-3)				
Rated operating voltage (DC)	Rated operating current $I_e$				
300V					
400V					
500V					
600V					
700V				16A	
800V				32A	
900V				63A	
1000V				90A	110A
				80A	100A

# 2.324 Main Load Disconnector Switch

Main Load Disconnector Switch (Isolator) IS

SG10911



## Description

- Load circuit breaker with isolating function
- Highly wear resistant contacts
- Quick make
- Terminal capacity 50 mm<sup>2</sup>
- Compatible busbars
- 1-, 2-, 3-, 4-pole
- Classified for the use in rail rolling stock

# xEffect

# xEffect

# Main Load Disconnector Switch

Main Load Disconnector Switch (Isolator) IS

# 2.325

Rated Current (A)	Number of Poles	Type Designation	Article No.	Units per package
-------------------	-----------------	------------------	-------------	-------------------

16	1	IS-16/1	276254	12/120
16	2	IS-16/2	276255	1/60
16	3	IS-16/3	276256	1/40
16	4	IS-16/4	276257	1/30
20	1	IS-20/1	276258	12/120
20	2	IS-20/2	276259	1/60
20	3	IS-20/3	276260	1/40
20	4	IS-20/4	276261	1/30
25	1	IS-25/1	276262	12/120
25	2	IS-25/2	276263	1/60
25	3	IS-25/3	276264	1/40
25	4	IS-25/4	276265	1/30
32	1	IS-32/1	276266	12/120
32	2	IS-32/2	276267	1/60
32	3	IS-32/3	276268	1/40
32	4	IS-32/4	276269	1/30
40	1	IS-40/1	276270	12/120
40	2	IS-40/2	276271	1/60
40	3	IS-40/3	276272	1/40
40	4	IS-40/4	276273	1/30
63	1	IS-63/1	276274	12/120
63	2	IS-63/2	276275	1/60
63	3	IS-63/3	276276	1/40
63	4	IS-63/4	276277	1/30
80	1	IS-80/1	276278	12/120
80	2	IS-80/2	276279	1/60
80	3	IS-80/3	276280	1/40
80	4	IS-80/4	276281	1/30
100	1	IS-100/1	276282	12/120
100	2	IS-100/2	276283	1/60
100	3	IS-100/3	276284	1/40
100	4	IS-100/4	276285	1/30
125	1	IS-125/1	276286	12/120
125	2	IS-125/2	276287	1/60
125	3	IS-125/3	276288	1/40
125	4	IS-125/4	276289	1/30



## Accessories

Description	Type Designation	Article No.	Units per package
-------------	------------------	-------------	-------------------



### PHASE OUT

Switching interlock without lock for Isolators, RCDs, combined RCD/MCBs, ...

101911 5/30



Terminal cover

Z-IS/AK-1TE

276290 10/600

## Switching interlock IS/SPE-1TE

- Without lock
- Also suitable for PFIM, CFI6, PKNM, CKN6

## Terminal Cover Caps Z-IS/AK-1TE

- Can be sealed with leads
- Modular design, width 1 MU

# 2.326 Main Load Disconnector Switch

Main Load Disconnector Switch (Isolator) IS

## xEffect

### Description

- Load circuit breaker with isolating function
- Design according to IEC/EN 60947-3
- Highly wear resistant contacts
- Quick make, black toggle
- Terminal capacity 50 mm<sup>2</sup>
- Compatible busbars with switchgear series Xpole by use of the mouth terminal in combination with standard fork busbar

### Technical Data

	IS-16	IS-20	IS-25	IS-32	IS-40	IS-63	IS-80	IS-100	IS-125
--	-------	-------	-------	-------	-------	-------	-------	--------	--------


#### Electrical

Design	according to IEC/EN 60947-3								
Classified according to	IEC 61373, EN 45545-2								
Current test marks as printed onto the device									
Rated voltage	240/415 V								
Frequency	50/60 Hz								
Rated insulation voltage	U <sub>i</sub>	690 V~							
Rated impulse withstand voltage	U <sub>imp</sub>	6 kV							
Pollution degree	3								
Rated short-time withstand current	I <sub>cw</sub>	2 kA							
Rated short-circuit making capacity	I <sub>cm</sub>	2.8 kA							
Rated current 240/415V, AC23A	16 A	20 A	25 A	32 A	40 A	63 A	80 A	100 A	125 A
Number of poles	1-, 2-, 3-, 4-poles								
Maximum back-up fuse	125 A gG								
Short circuit strength - with back-up fuse according to IEC/EN 60947-3	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	10 kA	10 kA
Endurance									
Electrical components operation cycles	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 2,000	
Mechanical components operation cycles	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 14,000


#### Mechanical

Frame size	45 mm
Device height	80 mm
Device width	17.5 mm/Pol
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Terminal protection	finger and hand touch safe according to BGV A3
Terminals top and bottom	open mouthed/lift terminals
Terminal capacity	2.5 - 50 mm <sup>2</sup>
Busbar thickness	0.8 - 2 mm
Fastening torque of terminal screws	2.5 - 5 Nm
Function	irrespective of the position of installation
Operation temperature	-25°C up to +40°C
Storage- and transport temperature	-35°C up to +75°C

### Connection diagram

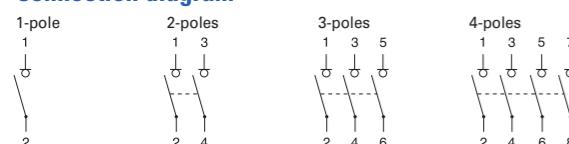

### Dimensions (mm)

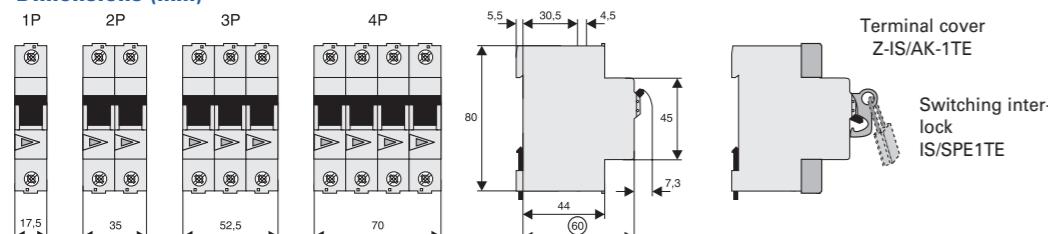

## xEffect

## xEffect

# Main Load Disconnector Switch

Main Load Disconnector Switch (Isolator) IS

# 2.327

### Derating table for Main Load Disconnector Switch (Isolator) IS above 2000m sea level

60947-3						
U <sub>n</sub> 240/415						
Above sea level (m)	Oversupply category	Disconnect function	U <sub>n</sub>	U <sub>i</sub>	U <sub>imp</sub>	I/I <sub>n</sub>
m	x	x	V	V	kV	x
<=2000	III	yes	240/415	690	6	1
>2000-2500	III	yes	240/415	415	4	0.93
>2500-3000	III	yes	240/415	415	4	0.88
>3000-3500	III	yes	240/415	415	4	0.83
>3500-4000	III	yes	240/415	415	4	0.78

## 2.328 Accessories for Protective Devices

Accessories for RCDs, MCBs, Combined RCD/MCB Devices

SG30811 SG60811



### xEffect

### xEffect

## Accessories for Protective Devices

Auxiliary SWD Module for MCBs, RCCBs and RCBOs

## 2.329

Description	Type Designation	Article No.	Units per package
SWD Module	MCB-HK-SWD	177175	1
Spare End Cap	SWD4-OS	178150	10



#### Description Auxiliary SWD Module

- Auxiliary module for the connection of an MCB, RCCB or RCBO to the SWD line
- Connection to an RCCB on the left side and to an MCB or RCBO on the right side
- Communication of on/off and trip status, trip indicator
- SWD connection on the top and bottom possible
- Integrated SWD-bus LED

#### Technical Data

##### MCB-HK-SWD

Pollution degree	2
Degree of protection	IP20
Power supply	via SWD line
Operation temperature	-25 up to +40°C
Dimensions	W x H x D = 17.5 x 88.3 x 77.3 mm

#### Combination with the following Types

##### RCCB

Residual Current Devices FRCdM, digital	✓
Residual Current Devices FRCmM	✓
Residual Current Devices FRCmM-NA & NA-110	✓
Residual Current Devices FRCmM-125	—


##### RCBO

Combined RCD/MCB Devices FRBdM, digital	✓
FI/LS-RCBO FRBmM, FRBm6, FRBm4	✓
Add-on Residual Current Protection Unit FBSmV	✓ (only on MCB side)
Add-on Residual Current Protection Unit FBHmV	—

##### MCB

Miniature Circuit Breaker FAZ	✓
Miniature Circuit Breaker FAZ-PN	✓
Miniature Circuit Breaker FAZ-HS	✓
Miniature Circuit Breaker FAZ-T	✓
Miniature Circuit Breaker FAZ-DC	✓
Miniature Circuit Breaker FAZ-NA, FAZ-RT	—
Miniature Circuit Breaker FAZ-NA-DC	—
Miniature Circuit Breaker AZ	—
Main Load Disconnector Switch (Isolator) IS	—

#### Dimensions (mm)

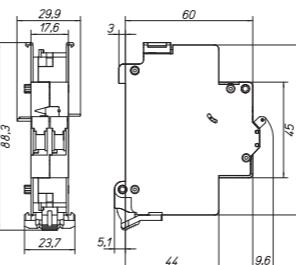

# 2.330 Accessories for Protective Devices

Auxiliary Switch Z-HK, Z-AHK, Z-HD; Tripping Signal Switch Z-NHK

## xEffect

For Protective Device / Function	Type Designation	Article No.	Units per package
<b>Design: for screwing</b>			
SG34812 	RCCB / 1NO+1NC	Z-HK	248432 4/120
SG60911 	MCB, RCBO (1+N, 3P, 3+N) / 1NO+1NC	Z-AHK	248433 4/120
SG61011 	MCB, RCBO, RCCB / 2CO	Z-NHK	248434 4/120
SG34412 	RCCB / 1CO+1NC	Z-HD	265620 1

### Description Auxiliary Switch Z-HK, Z-AHK; Tripping Signal Switch Z-NHK

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Can be mounted subsequently (screws) onto FRCmM, FRCdM
- The specified minimum voltages are per contact.  
Take into account particularly in case of series connection!
- **Z-AHK, Z-NHK:** Contact function with relative movement (selfcleaning contacts)
- Contact material and design particularly suitable for extra low voltage
- **Z-NHK:** The function of one of the two change-over contacts can be switched from "auxiliary switch" to "tripping signal switch"
  - Tripping signal contact transmits message of electric tripping, not mechanical switch-off
  - Test key for contact function "electrical tripping"

## xEffect

# Accessories for Protective Devices


Auxiliary Switch Z-HK, Z-AHK, Z-HD; Tripping Signal Switch Z-NHK

# 2.331


## Technical Data

	Z-HK	Z-AHK	Z-NHK
<b>Electrical</b>			
Classified according to	IEC 61373, EN 45545-2		
Current test marks as printed onto the device			
Contact function	1NO + 1NC	1NO + 1NC	2CO
Rated voltage	250 V	250 V	250 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Rated current	8 A	4 A	4 A
Rated thermal current	$I_{th}$	8 A	4 A
Utilisation category AC13			
Rated operational current	$I_e$	6 A / 250 V AC 2 A / 440 V AC	3 A / 250 V AC –
Utilisation category AC15			
Rated operational current	$I_e$	–	2 A / 250 V AC 2 A / 250 V AC
Utilisation category DC12			
Rated operational current	$I_e$	–	0.5 A / 110 V DC 0.5 A / 110 V DC
Utilisation category DC13			
Rated operational current	$I_e$	0.5 A / 230 V DC 2 A / 110 V DC 4 A / 60 V DC	– – –
Rated insulation voltage	$U_i$	250 V AC	250 V AC
Minimum operational voltage per contact	$U_{min}$	24 V AC/DC	5 V DC 5 V DC
Minimum operational current	$I_{min}$	50 mA AC/DC	10 mA DC 10 mA DC
Rated impulse withstand voltage (1,2/50μ)	$U_{imp}$	2.5 kV	2.5 kV 2.5 kV
Conditional short circuit current with back-up fuse 6 A or FAZ-B4-HS		1 kA	1 kA
Max. back-up fuse, overload and short circuit		6 A gL / FAZ-4..B-HS	4 A gL / FAZ-4..B-HS 4 A gL / FAZ-4..B-HS
<b>Mechanical</b>			
Can be mounted from the left onto	RCCB	MCB, RCBO (1+N, 3P, 3+N)	MCB, RCBO
Can be mounted from the right onto	–	–	FI
Tripping indicator "electrical tripping"	–	–	blue/white
Frame size	45 mm	45 mm	45 mm
Device height	80 mm	80 mm	80 mm
Device width	8.8 mm (0.5MU)	8.8 mm (0.5MU)	8.8 mm (0.5MU)
Mounting	onto switching device	onto switching device	onto switching device
Degree of protection, built-in	IP40	IP40	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274		
Terminals	Lift terminals	Lift terminals	Lift terminals
Terminal capacity	0.5-2.5 mm <sup>2</sup>	0.5-2.5 mm <sup>2</sup>	0.5-2.5 mm <sup>2</sup>
Terminal screws	M3.5 (Pozidrive Z2)	M3 (Pozidrive Z1)	M3 (Pozidrive Z1)
Fastening torque of terminal screws	max. 0.8-1.0 Nm	max. 0.8-1.0 Nm	max. 0.8-1.0 Nm
Operation temperature	-5 °C up to +55 °C	-5 °C up to +55 °C	-5 °C up to +55 °C

## Connection diagram

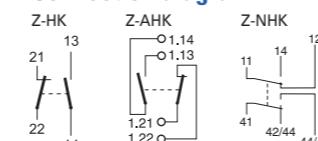

## Dimensions (mm)

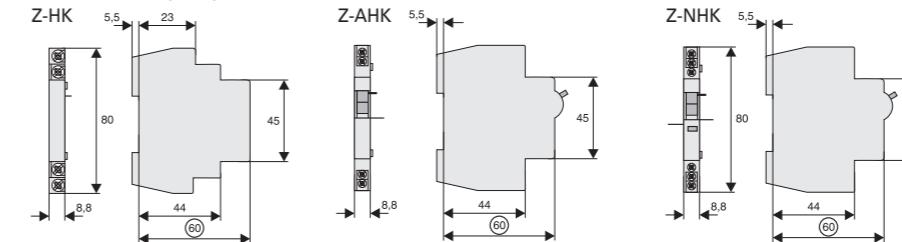


## 2.332 Accessories for Protective Devices

Auxiliary Switch Z-HK, Z-AHK, Z-HD; Tripping Signal Switch Z-NHK


xEffect

Example: Z-HK+FI




1NO+1NC 24V 50mA min.

Example: Z-AHK+LS



1NO+1NC 5V 10mA min.

Example: Z-NHK+LS FI+Z-NHK

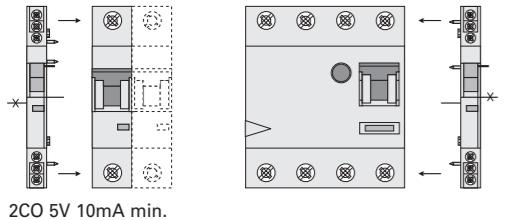

2CO 5V 10mA min.

### Description Auxiliary Switch Z-HD

#### Function Auxiliary Switch Z-HD

- Tripping signal switch: detects if RCD tripping occurred by an fault current
- Auxiliary switch: shows the contact position of the RCD

#### Technical Data

##### Z-HD

###### Electrical

Can be mounted from the left onto

FRCmM-125A

Contact functions

1CO + 1NC

Min. creeping distance

> 12.7 mm/50.8 mm (intern/external)

Load rating

AC11

DC11

6 A / 230 V AC


1 A / 230 V DC

###### Mechanical

Terminal capacity


up to 2.5 mm<sup>2</sup>

#### Connection diagram



#### Dimensions (mm)

Z-HD



xEffect

## Accessories for Protective Devices

Auxiliary Switch ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK

## 2.333

For Protective Device / Function

Type  
Designation

Article No.  
Units per  
package

#### Design: for snapping



SG60811  
MCB, RCBO / 1NO+1NC

ZP-IHK

286052 4/120



SG34612  
MCB, RCBO / 1CO

ZP-WHK

286053 4/120



SG34512  
MCB, RCBO / 2CO

ZP-NHK

248437 4/120

#### Description Auxiliary Switch ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK

- Design according to IEC/EN 62019
- No screws required. Can be snapped onto FAZ and FRBmM-1N subsequently
- **ZP-IHK, ZP-WHK:** Can be snapped on additionally 1 time onto itself
  - The specified minimum voltages are per contact. Take into account particularly in case of series connection!
  - Contact material and design particularly suitable for extra low voltage.
  - Contact function with relative movement (self-cleaning contacts)
- **ZP-NHK:** The function of one of the two change-over contacts can be switched from "auxiliary switch" to „tripping signal switch“
  - Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- **ZP-NHK:** The "Service button" is used to check whether or not the auxiliary switch is correctly wired in the tripping-signal-switch position. Activating the "service button" will mechanically simulate an electrical switch-off, so the mechanism for the electrical switchoff will disengage and can be checked. The main switchgear (MCB or combined MCB/RCD) connected to the ZP-NHK auxiliary switch does not need to trip as well during an inspection through the service button.

# 2.334 Accessories for Protective Devices


Auxiliary Switch ZP-IHK, ZP-WHK; Tripping Signal Switch ZP-NHK

## xEffect


### Technical Data

	ZP-IHK	ZP-WHK	ZP-NHK
<b>Electrical</b>			
Classified according to	IEC 61373, EN 45545-2		
Current test marks as printed onto the device			
Contact function	1NO + 1NC	1CO	2CO
Rated voltage	250 V	250 V	250 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Rated current	6 A	6 A	4 A
Rated thermal current	$I_{th}$	6 A	6 A
Utilisation category AC13			
Rated operational current	$I_e$	3 A / 250 V AC	3 A / 250 V AC
Utilisation category AC15			
Rated operational current	$I_e$	2 A / 250 V AC	2 A / 250 V AC
Utilisation category DC12			
Rated operational current	$I_e$	0.5 A / 110 V DC	0.5 A / 110 V DC
Rated insulation voltage	$U_I$	250 V AC	250 V AC
Minimum operational voltage per contact	$U_{min}$	5 V DC	5 V DC
Minimum operational current	$I_{min}$	10 mA DC	10 mA DC
Rated impulse withstand voltage (1,2/50μ)	$U_{imp}$	2.5 kV	2.5 kV
Conditional short circuit current with back-up fuse 6 A or FAZ-B4-HS		1 kA	1 kA
Max. back-up fuse, overload and short circuit	6 A gL / FAZ-4/..B-HS	6 A gL / FAZ-4/..B-HS	6 A gL / FAZ-4/..B-HS
<b>Mechanical</b>			
Can be mounted from the left onto	MCB, RCBO	MCB, RCBO	MCB, RCBO
Accessories	ZP-ASA	ZP-ASA	ZP-ASA
Tripping indicator "electrical tripping"	—	—	blue/white
Frame size	45 mm	45 mm	45 mm
Device height	80 mm	80 mm	80 mm
Device width	8.8 mm (0.5MU)	8.8 mm (0.5MU)	8.8 mm (0.5MU)
Mounting	onto switching device	onto switching device	onto switching device
Degree of protection, built-in	IP40	IP40	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274		
Terminals	Lift terminals	Lift terminals	Lift terminals
Terminal capacity	0.5-2.5 mm <sup>2</sup>	0.5-2.5 mm <sup>2</sup>	0.5-2.5 mm <sup>2</sup>
Terminal screws	M4 (Pozidrive Z2)	M4 (Pozidrive Z2)	M3 (Pozidrive Z1)
Fastening torque of terminal screws	max. 1.2 Nm	max. 1.2 Nm	max. 0.8-1.0 Nm
Operating temperature range	-5 °C to 55 °C	-5 °C to 55 °C	-5 °C to 55 °C


### Connection diagram

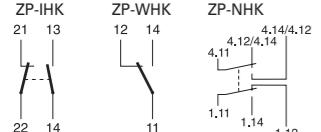


### Dimensions (mm)

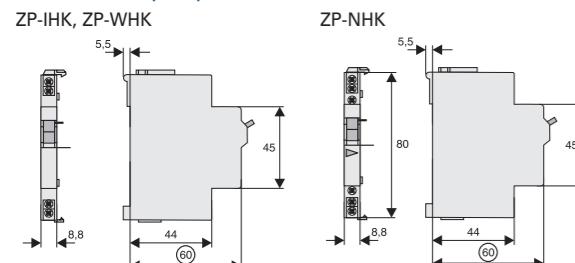

Example: ZP-IHK/(ZP-WHK)+LS

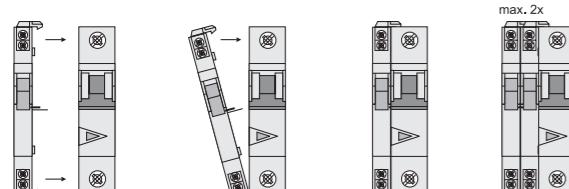

Example: ZP-NHK+LS

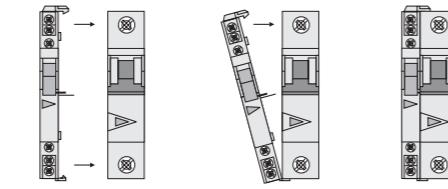

## xEffect

## xEffect

# Accessories for Protective Devices

RCCB Tripping Module Z-AM

2.335

For Protective Device	Type Designation	Article No.	Units per package
-----------------------	------------------	-------------	-------------------

SG16011	RCCB	Z-FAM	248293	1/60
---------	------	-------	--------	------

SG16211	RCBO	Z-KAM	248294	1/60
---------	------	-------	--------	------

SG16211	RCBO	Z-KAM	248294	1/60
---------	------	-------	--------	------

### Description RCCB Tripping Module Z-FAM, Z-KAM

- For remote switch-off of RCCBs, standard and electronic combined RCD/MCB devices
- Remote switch-off by one or several parallel potential-free contacts, e.g. pushbutton max. rated current 3 A at 250 V, take into account maximum pushbutton voltage
- Remote tripping test by means of remote testing module Z-FW
- Can be mounted subsequently, to be wired according to connection diagram with the respective terminals of the RCCB
- No undesired voltage rise in the consumer system during remote switch-off thanks to integrated breaker contact K1-K2

### Technical Data

Z-FAM	Z-KAM
-------	-------

<b>Electrical</b>	
-------------------	--

Classified according to	IEC 61373, EN 45545-2
-------------------------	-----------------------

Current test marks as printed onto the device	
---	--

Rated voltage	230(400) V AC	230(400) V AC
---------------	---------------	---------------

Frequency	50/60 Hz	50/60 Hz
-----------	----------	----------

Rated tripping current	$I_{\Delta n}$	0.01 - 0.3 A
------------------------	----------------	--------------

Function	1NO	1NO
----------	-----	-----

<b>Mechanical</b>	
-------------------	--

Tripping module for	RCCB	RCBO
---------------------	------	------

Frame size	45 mm	45 mm
------------	-------	-------

Device height	80 mm	80 mm
---------------	-------	-------

Device width	8.8 mm (0.5MU)	8.8 mm (0.5MU)
--------------	----------------	----------------

Degree of protection, built-in	IP40	IP40
--------------------------------	------	------

Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274	
---------------------	--	--

Terminal capacity	1 - 2x2.5 mm <sup>2</sup>	
-------------------	---------------------------	--

	1 - 2x2.5 mm <sup>2</sup>	
--	---------------------------	--

	1 - 2x2.5 mm <sup>2</sup>	
--	---------------------------	--


	1 - 2x2.5 mm <sup>2</sup>	
--	---------------------------	--

	1 - 2x2.5 mm <sup>2</sup>	
--	---------------------------	--





	1 - 2x2.5 mm <sup>2</sup>	
--	---------------------------	--

	1 - 2x2.5 mm <sup>2</sup>	
--	---------------------------	--

	1 - 2x2.5 mm <sup>2</sup>
--	---------------------------

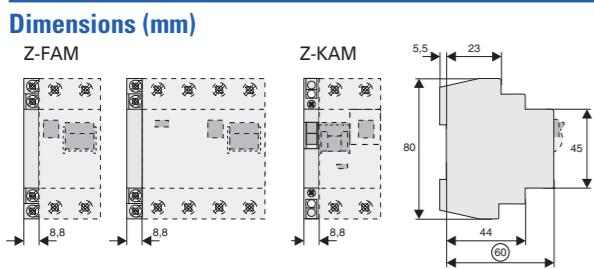

Connection examples: Lay lines to the switching devices with double insulation and overload protection, e.g. 4A gL or CLS6-4..-HS

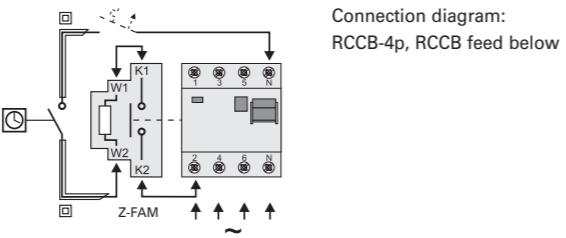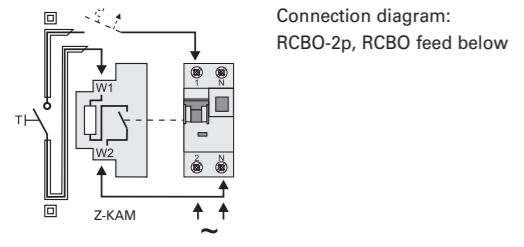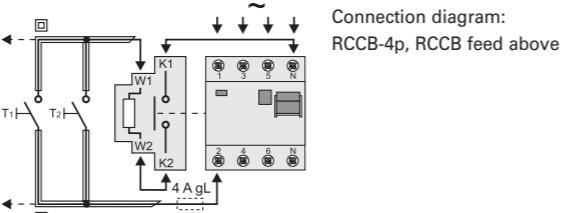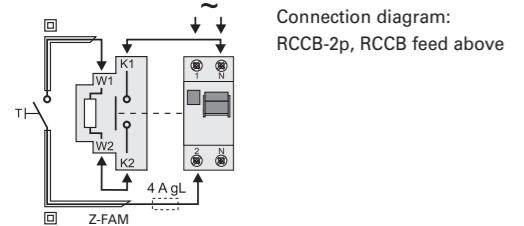

## xEffect

## xEffect

## Accessories for Protective Devices

MCB for Auxiliary Switch Circuits PLSM-B4/-HS

**2.337**

Poles	Rated Breaking Capacity (kA)	Type Designation	Article No.	Units per package
<b>MCB for Auxiliary Switch Circuits PLSM-B4/-HS,</b>				
1	10	PLSM-B4-HS	247221	2 / 120
1+N	10	PLSM-B4/1N-HS	236722	2 / 80
2	10	PLSM-B4/2-HS	247222	1 / 60



### Description MCB for Auxiliary Switch Circuits PLSM-B4/-HS

- Design according to EN 60898-1, 4 A, Characteristic B
- Very low let-through energy in order to prevent contact welding in auxiliary switches of any and all switchgear, as well as thermostats control devices, timers, etc.
- Busbar connection to PFIM, PKN, ...


### Technical Data

PLSM-B4/-HS	
<b>Electrical</b>	
Number of poles	1-, 1+N-, 2pole
Rated voltage	230/400 V
Frequency	50/60 Hz
Rated current	4 A
Rated breaking capacity	10 kA
<b>Mechanical</b>	
Frame size	45 mm
Device height	80 mm
Device width	17.5 mm (1MU) / 26.3 mm / 35 mm (2MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274
Terminals	Twin-purpose terminals
Terminal capacity	1-25 mm <sup>2</sup>
Terminal screws	M3 (Pozidrive)
Tightening torque of terminal screws	0.8-1.0 Nm
Busbar thickness	0.8 - 2 mm


### Connection diagram



### Dimensions (mm)

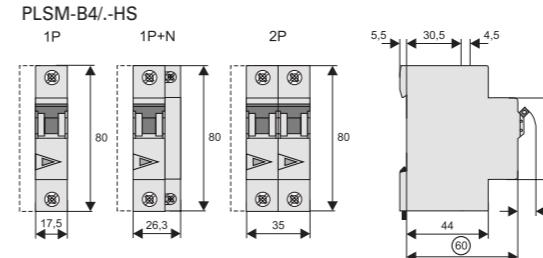

Let-through Energy PLSM-B4-HS, Characteristic B, 1pole

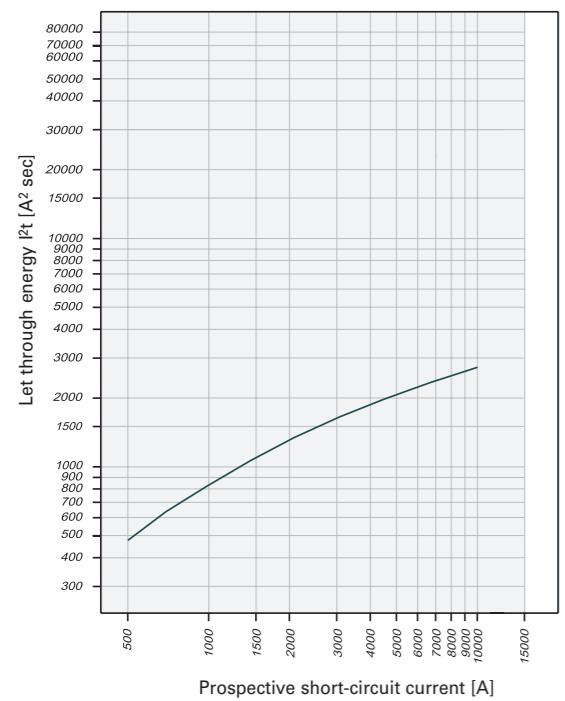

## xEffect

### Practical Hint

Even auxiliary switches must be protected against overload and short circuit by means of suitable back-up fuses according to manufacturer specification. According to IEC 60947-5 a maximum back-up fuse is specified for conditional short circuit prevention up to 1,000 A. Therefore, connection of the auxiliary switch to the nearest MCB is not permitted. Danger of contact welding! The MCB for auxiliary switch circuits ...HS offers a simple solution.

## xEffect

## Accessories for Protective Devices

Shunt Trip Release Z-ASA, ZP-ASA

**2.339**

Operational voltage range (V~)

Type  
Designation

Article No.  
Units per  
package

### To be glued on



### To be snapped on



### Description Shunt Trip Release Z-ASA, ZP-ASA


- Remote release for subsequent mounting onto PXL, PLI, PXK, FAZ, FRBmM-1N, Z-MS
- Module width 1MU
- Additional installation of standard auxiliary switch is possible
- Position indicator red - green
- Type ZP-ASA for snap-on mounting

### Technical Data



	Z-ASA24	Z-ASA230	ZP-ASA24	ZP-ASA230
<b>Electrical</b>		IEC 61373, EN 45545-2		
Classified according to 0				
Current test marks as printed onto the device				
Minimum pulse duration	15 ms	10 ms	15 ms	10 ms
Internal resistance	2,2 Ω	215 Ω	2,2 Ω	215 Ω
Duty cycle	100%	100%	100%	100%
Tripping time	< 20 ms	< 20 ms	< 20 ms	< 20 ms
Rated peak withstand voltage (1.2/50μs)	2.5 kV	2.5 kV	2.5 kV	2.5 kV
Endurance	>4000 operating cycles	>4000 operating cycles	>4000 operating cycles	>4000 operating cycles
<b>AC voltage range</b>				
Operating limit	10 V	60 V	10 V	60 V
Operational voltage range	12-110 V	110-415 V	12-110 V	110-415 V
Maximum current consumption during switch-on	15 A	2.1 A	15 A	2.1 A
Current flow time at max. current consumption	10 ms	10 ms	10 ms	10 ms
<b>DC voltage range</b>				
Operating limit	9 V	72 V	9 V	72 V
Operational voltage range	10-60 V	110-220 V	10-60 V	110-220 V
Maximum current consumption during switch-on	21 A	1 A	21 A	1 A
Current flow time at max. current consumption	2 ms	2 ms	2 ms	2 ms
<b>Mechanical</b>				
Frame size	45 mm	45 mm	45 mm	45 mm
Device height	80 mm	80 mm	80 mm	80 mm
Device width	17.5 mm (1MU)	17.5 mm (1MU)	17.5 mm (1MU)	17.5 mm (1MU)
Mounting	bonding	bonding	aufschappen	aufschappen
Degree of protection, built-in	IP40	IP40	IP40	IP40
Terminals above/below	open mouthed/lift	open mouthed/lift	open mouthed/lift	open mouthed/lift with guide
Terminal capacity	1-25 mm <sup>2</sup>	1-25 mm <sup>2</sup>	1-25 mm <sup>2</sup>	1-25 mm <sup>2</sup>
Fastening torque of terminal screws	max. 2.4 Nm	max. 2.4 Nm	max. 2.4 Nm	max. 2.4 Nm
Operating temperature range	-35 °C to 75 °C			

**xEffect**


**Connection diagram**




**Dimensions (mm)**

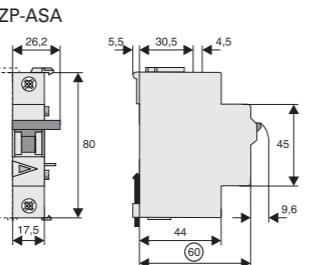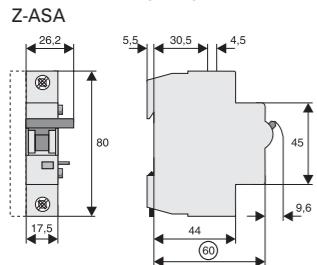


**Connection Example 230 V**

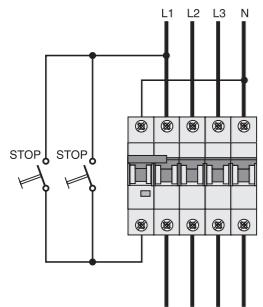


**Connection Example 24 V**

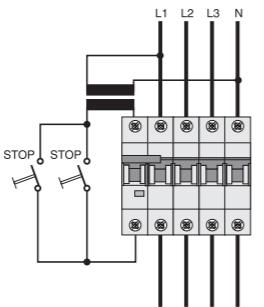

**Example: Z-ASA + LS**

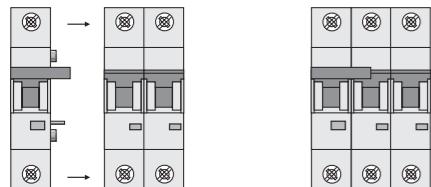

**Example: ZP-ASA + LS**

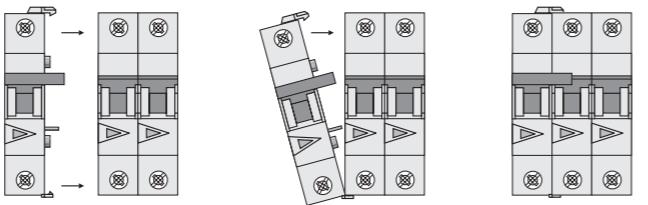

**xEffect**

**Accessories for Protective Devices**

Undervoltage Release Z-USA, Z-USD

**2.341**

Operational voltage range (V~)	Function	Type Designation	Article No.	Units per package
--------------------------------	----------	------------------	-------------	-------------------

**To be screwed on**



115	undelayed	Z-USA/115	248288	1/60
230	undelayed	Z-USA/230	248289	1/60
400	undelayed	Z-USA/400	248290	1/60
115	delayed 0.4s	Z-USD/115	248292	1/60
230	delayed 0.4s	Z-USD/230	248291	1/60


**Description Undervoltage Release Z-USA, Z-USD**

- Tripping:  
Instantaneous Z-USA  
Delayed Z-USD, typ. 0.4 s
- Voltage control indicator blue/white
- Service key for zero voltage switch-on for testing purposes
- Can be used with PXL, PLI, PXK, FAZ


**Technical Data**

	Z-US./115	Z-US./230	Z-US./400
<b>Electrical</b>			
Classified according to	IEC 61373, EN 45545-2		
Current test marks as printed onto the device			
Rated voltage	$U_n$ 115 V AC	230 V AC	400 V AC
Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Making threshold	80% of $U_n$	80% of $U_n$	80% of $U_n$
Tripping threshold	30% of $U_n$	30% of $U_n$	30% of $U_n$
<b>Mechanical</b>			
Frame size	45 mm	45 mm	45 mm
Device height	80 mm	80 mm	80 mm
Device width	17.5 mm (1MU)	17.5 mm (1MU)	17.5 mm (1MU)
Mounting	quick fastening on DIN rail IEC/EN 60715		
Degree of protection, built-in	IP40	IP40	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274		
Terminals	open mouthed/lift	open mouthed/lift	open mouthed/lift
Terminal capacity	1 - 2x2.5 mm <sup>2</sup>	1 - 2x2.5 mm <sup>2</sup>	1 - 2x2.5 mm <sup>2</sup>

**Connection diagram**




**Dimensions (mm)**

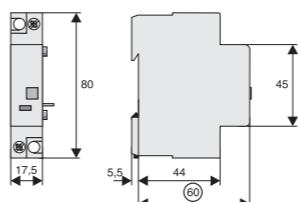


**xEffect**

**Connection Example Release**



**Connection Example 400V and 230V**

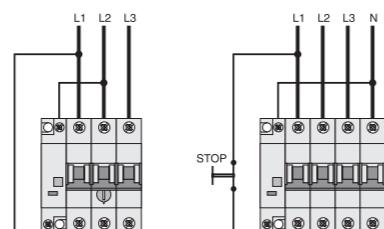

Connection Example  
Z-USA/400 + Z-MS

Connection Example  
Z-USA/230 + LS

**xEffect**

**Accessories for Protective Devices**

Switching Interlock IS/SPE-1TE, Z-IS/SPE-1TE

**2.343**

Description

Type  
Designation

Article No.  
Units per  
package



SG47812

PHASE OUT

Switching interlock without lock for Isolators,  
RCDs, combined RCD/MCBs, ...

Switching interlock without lock for MCBs and  
Circuit Breaker ZP-A

IS/SPE-1TE

101911 5/30

Z-IS/SPE-1TE

274418 5/30

**Description Switching Interlock IS/SPE-1TE, Z-IS/SPE-1TE**

- without lock

**Type IS/SPE-1TE:**

- for Isolators, RCDs, combined RCD/MCBs, ...

**Type Z-IS/SPE-1TE:**

- for MCBs
- maximum usable diameter of the padlock: 4-5 mm



# 2.344 Accessories for Protective Devices

## Accessories for Add-on Residual Current Protection Unit FBHmV

### xEffect

Operational voltage range (V~)	Type Designation	Article No.	Units per package
<b>Shunt Trip Release Kit Z-BHASA</b>			
SG09411	110-415	Z-BHASA/230	248445 8
	12-60	Z-BHASA/24	248444 8


#### Description Shunt Trip Release Kit Z-BHASA

- Can be mounted subsequently
- Contact position indicator red - green
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured FBHmV-ASA/24: min. 90 VA
- Screws for mounting included FBHmV => Z-BHASA => AZ


#### Technical Data

	Z-BHASA/24	Z-BHASA/230
<b>Electrical</b>		
Classified according to	IEC 61373, EN 45545-2	
Current test marks as printed onto the device		
Minimum pulse duration	15 ms	10 ms
Internal resistance	2 Ω	130 Ω
Duty cycle	100%	100%
Tripping time	< 20 ms	< 20 ms
Rated peak withstand voltage (1.2/50μs)	2 kV	2 kV
Endurance	>4000 operating cycles	>4000 operating cycles
<b>AC voltage range</b>		
Operating limit	8 V	70 V
Operational voltage range	12-60 V	110-415 V
Maximum current consumption during switch-on	14 A	3.4 A
Current flow time at max. current consumption	4.0 ms	4.0 ms
<b>DC voltage range</b>		
Operating limit	11 V	90 V
Operational voltage range	12-60 V	110-230 V
Maximum current consumption during switch-on	23.5 A typ.	1.7 A typ.
Current flow time at max. current consumption	2 ms	4 ms
<b>Mechanical</b>		
Frame size	45 mm	45 mm
Device height	90 mm	90 mm
Device width	27 mm	27 mm
Mounting	quick fastening on DIN rail IEC/EN 60715	
Degree of protection, built-in	IP40	IP40
Terminals above/below	Lift terminals	Lift terminals
Terminal capacity	2.5-30 mm <sup>2</sup>	2.5-30 mm <sup>2</sup>
Fastening torque of terminal screws	4 Nm	4 Nm

#### Connection diagram



#### Dimensions (mm)

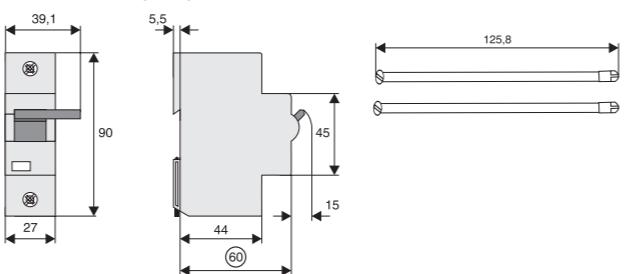

### xEffect

Operational voltage range (V~)	Type Designation	Article No.	Units per package
<b>Shunt Trip Release Z-LHASA</b>			
SG09311	110-415	Z-LHASA/230	248442 8
	12-60	Z-LHASA/24	248441 8


#### Description Shunt Trip Release Z-LHASA

- Can be mounted subsequently
- Contact position indicator red - green
- Wide operational voltage range
- Sufficient power of extra low voltage source must be ensured. Z-LHASA/24: min. 90 VA


#### Technical Data

	Z-LHASA/24	Z-LHASA/230
<b>Electrical</b>		
Classified according to	IEC 61373, EN 45545-2	
Current test marks as printed onto the device		
Minimum pulse duration	15 ms	10 ms
Internal resistance	2 Ω	130 Ω
Duty cycle	100%	100%
Tripping time	< 20 ms	< 20 ms
Rated peak withstand voltage (1.2/50μs)	2 kV	2 kV
Endurance	>4000 operating cycles	>4000 operating cycles
<b>AC voltage range</b>		
Operating limit	8 V	70 V
Operational voltage range	12-60 V	110-415 V
Maximum current consumption during switch-on	14 A	3.4 A
Current flow time at max. current consumption	4.0 ms	4.0 ms
<b>DC voltage range</b>		
Operating limit	11 V	90 V
Operational voltage range	12-60 V	110-230 V
Maximum current consumption during switch-on	23.5 A typ.	1.7 A typ.
Current flow time at max. current consumption	2 ms	4 ms
<b>Mechanical</b>		
Frame size	45 mm	45 mm
Device height	90 mm	90 mm
Device width	27 mm	27 mm
Mounting	quick fastening on DIN rail IEC/EN 60715	
Degree of protection, built-in	IP40	IP40
Terminals above/below	Lift terminals	Lift terminals
Terminal capacity	2.5-30 mm <sup>2</sup>	2.5-30 mm <sup>2</sup>
Fastening torque of terminal screws	4 Nm	4 Nm

#### Connection diagram



#### Dimensions (mm)

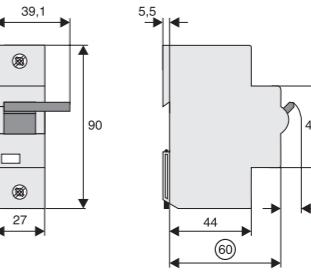

# 2.345

## Accessories for Protective Devices

### Accessories for Miniature Circuit Breakers AZ

Function	Type Designation	Article No.	Units per package
<b>Auxiliary Switch Z-LHK</b>			
SG16111 	1NO+1NC	Z-LHK	248440 10/100

#### Description Auxiliary Switch Z-LHK

- Auxiliary switch according to IEC 947-5-1
- Can be mounted subsequently


#### Technical Data

##### Z-LHK


###### Electrical

Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Contact function	1NO + 1NC
Rated voltage	250 V
Frequency	50/60 Hz
Rated current	8 A
Rated thermal current	$I_{th}$ 8 A
Utilisation category AC13	
Rated operational current	$I_e$ 6 A / 250 V AC 2 A / 440 V AC
Utilisation category AC15	
Rated operational current	$I_e$ –
Utilisation category DC12	
Rated operational current	$I_e$ –
Utilisation category DC13	
Rated operational current	$I_e$ 0.5 A / 230 V DC 2 A / 110 V DC 4 A / 60 V DC
Rated insulation voltage	$U_i$ 250 V AC
Minimum operational voltage per contact	$U_{min}$ 24 V AC/DC
Minimum operational current	$I_{min}$ 50 mA AC/DC
Rated impulse withstand voltage (1,2/50μ)	$U_{imp}$ 2.5 kV
Conditional short circuit current with back-up fuse 6 A or FAZ-B4-HS	1 kA
Max. back-up fuse, overload and short circuit	6 A gL / FAZ-4/.B-HS
<b>Mechanical</b>	
Can be mounted from the left onto	AZ
Can be mounted from the right onto	–
Tripping indicator "electrical tripping"	–
Frame size	45 mm
Device height	80 mm
Device width	8.8 mm (0.5MU)
Mounting	onto switching device
Degree of protection, built-in	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274
Terminals	Lift terminals
Terminal capacity	0.5-2.5 mm <sup>2</sup>
Terminal screws	M3.5 (Pozidrive Z2)
Fastening torque of terminal screws	max. 0.8-1.0 Nm

#### Connection diagram



#### Dimensions (mm)

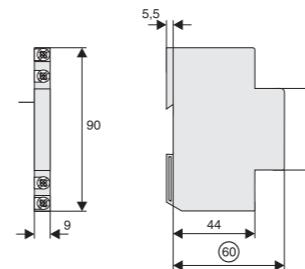

# 2.348 Accessories for Protective Devices

## Accessories for Miniature Circuit Breakers AZ

### xEffect

Function	Type Designation	Article No.	Units per package
<b>Switching Interlock LH-SP</b>			
SG02214	Switching interlock	LH-SPL	285752 1
			
SG01014	Switching interlock	LHSP-E	215999 1
			
SG01114	Switchoff interlock	LHSP-A	216000 1
			


### Description Switching Interlock LHSP-E, LH-SPL

- Prevents undesired switching ON or OFF

### Description Switchoff interlock LHSP-A

- Prevents undesired switch-OFF

### Dimensions (mm)

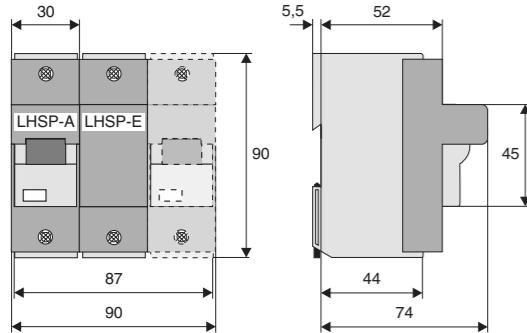

### xEffect

# Accessories for Protective Devices

## Accessories for Miniature Circuit Breakers FAZ-..-NA, -RT

Operational voltage range V~	Type Designation	Article No.	Units per package
<b>Auxiliary Switch Z-IHK-NA</b>			
250	Z-IHK-NA	113895	1



### Description Auxiliary Switch Z-IHK-NA

- Design according to IEC/EN 60947-5-1, IEC/EN 62019
- Field installable
- The specified minimum voltages are per contact—take into account particularly in case of series connection
- Self-cleaning contacts
- Contact material and design particularly suitable for extra low voltage
- Tripping signal contact transmits message of electric tripping, not mechanical switch-off
- Test key for contact function “electrical tripping”
- Will allow for > 480Y/277 VAC rating

### Technical Data

Z-IHK-NA		
<b>Electrical</b>		
Classified according to	IEC 61373, EN 45545-2	
Current test marks as printed onto the device		
Contact function	1NO + 1NC	
Rated voltage	250 V	
Rated current	6 A	
Rated thermal current	$I_{th}$	6 A
Utilisation category AC13		
Rated operational current	$I_e$	3 A / 250 V AC
Utilisation category AC15		
Rated operational current	$I_e$	2 A / 250 V AC
Utilisation category DC12		
Rated operational current	$I_e$	0.5 A / 110 V DC 0.25 A / 220 VDC
Rated insulation voltage	$U_i$	250 V AC
Minimum operational voltage per contact	$U_{min}$	5 V DC
Minimum operational current	$I_{min}$	10 mA AC/DC
Rated impulse withstand voltage (1,2/50μ)	$U_{imp}$	4 kV
Conditional short circuit current with back-up fuse 6 A or FAZ-B4-HS		1 kA
Max. back-up fuse, overload and short circuit		6 A gL / FAZ-4-..-B-HS
<b>Mechanical</b>		
Tripping indicator “electrical tripping”	—	
Frame size	45 mm	
Device height	80 mm	
Device width	8.8 mm (0.5MU)	
Mounting	onto switching device	
Degree of protection, built-in	IP40	
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274	
Terminals	Lift terminals	
Terminal capacity	0.5-2.5 mm <sup>2</sup>	
Terminal screws	M4 (Pozidrive Z2)	
Fastening torque of terminal screws	max. 1.2 Nm	


# 2.349

# 2.350 Accessories for Protective Devices


Accessories for Miniature Circuit Breakers FAZ-..-NA, -RT

## xEffect

### Connection diagram



### Dimensions (mm)

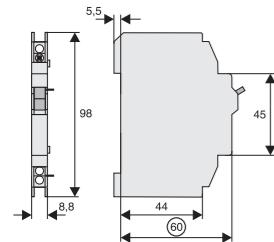

## xEffect

# Accessories for Protective Devices

Accessories for Miniature Circuit Breakers FAZ-..-NA, -RT

# 2.351

Type  
Designation

Article No.  
Units per  
package

Operational voltage range



### Shunt Trip Release FAZ-XAA-NA

12–110 V AC, 12–60 V DC  
110–415 V AC, 110–230 V DC

FAZ-XAA-NA12-110VAC  
FAZ-XAA-NA110-415VAC

102037 1  
102036 1


### Description Shunt Trip Release FAZ-XAA-NA

- Remote release for subsequent mounting onto FAZ-NA
- Additional installation of standard auxiliary switch is possible
- Position indicator red-green

### Technical Data

	FAZ-XAA-NA12-110VAC	FAZ-XAA-NA110-415VAC
<b>Electrical</b>		
Classified according to	IEC 61373, EN 45545-2	
Current test marks as printed onto the device		
Can be mounted onto	FAZ-NA / FAZ-NA-DC / FAZ-RT	FAZ-NA / FAZ-NA-DC / FAZ-RT
Operational voltage range	12–110 V AC 12–60 V DC	110–415 V AC 110–230 V DC
Frequency	50/60 Hz	50/60 Hz
Function	1NO	1NO
<b>Mechanical</b>		
Frame size	45 mm	45 mm
Device height	105 mm	105 mm
Device width	17.5 mm	17.5 mm
Mounting	Quick fastening with two lock-in positions on EN 50022	
Degree of protection, built-in	IP40	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274	
Terminals	open mouthed/lift	open mouthed/lift
Terminal capacity, one and two wires	18–10 AWG	18–10 AWG

### Connection diagram



# 2.352 Accessories for Protective Devices

## Terminal Covers

Description	Type Designation	Article No.	Units per package
<b>Terminal Covers for RCDs</b>			
SG82011	2-poles Z-RC/AK-2TE	285385	10
	4-poles Z-RC/AK-4TE	101062	10
<b>Terminal Covers for Add-on Device</b>			
SG02614	2-poles Z-TC/AO-2P	178097	10
	3+4-poles Z-TC/AO-3-4P	178098	10
<b>Terminal Covers for MCB, RCBO</b>			
SG02314	2-poles Z-TC/SD-2P	178099	10
	3-poles Z-TC/SD-3P	178100	10
	4-poles Z-TC/SD-4P	178101	10
<b>Terminal Cover for MCBS</b>			
	1-pole Z-TC/MCB-1P	178102	10

# xEffect

# xEffect

# Accessories for Protective Devices

## Remote Control and Automatic Switching Device Z-FW

# 2.353

Function	Type Designation	Article No.	Units per package
<b>Remote Control Device Z-FW</b>			
SG30811	Automatic restarting 230 VAC Z-FW-LP	248296	1/20
	Automatic restarting 24-58 VDC Z-FW-LPD	265244	1/20
	Restarting device, 220-240VAC FAZ/FIP-XAWM	262514	1/20
	Restarting device, 48VDC FAZ/FIP-XDWM	274404	1/20
+ Remote control module ON/OFF/TEST (only in connection with Z-FW-LP, -LPD from delivery date 2006!)			
SG30711	Z-FW-MO	284730	1
Rated Fault Current			
Rated Fault Current	Type Designation	Article No.	Units per package
SG12111	0.01 A Z-FW/001	248297	4/120
	0.03 A Z-FW/003	248298	4/120
	0.1 A Z-FW/010	248299	4/120
	0.3 A Z-FW/030	248300	4/120
	0.5 A Z-FW/050	248301	4/120
<b>Remote Testing Module Z-FW</b>			
• for Z-FW-LP/MO set use only			


**Description Remote Testing Module and Remote Control Device Z-FW**

- Shape compatible switching device suitable for subsequent installation for automatic re-setting and remote control of MCBs, RCCBs and Z-MS
- Mechanical interlock, can be sealed with leads
- Mechanical switching capability up to max. RCCB-100/4p, MCB-100/4p
- Operating and alarm display by green and red LED
- Function extension with Switching Modul Z-FW-MO
- Operating and trouble display by LED pre-assembled only with Z-FW...


**Technical Data**

	Z-FW-LP	Z-FW-LPD	Z-FW-MO
<b>Electrical</b>			
Possible operating voltages	220-240 V AC	24-48 V DC	–
Frequency	50/60 Hz	–	–
Testing module (0.5MU) for remote testing of RCDs	Z-FW...	Z-FW...	–
Control voltage for remote control	–	–	24-230 V AC/DC
Relay output for tripping test with Z-FW	–	–	400 V AC max.
Relay output for alarm, potential-free	5 A / 250 V AC	5 A / 250 V AC	–
Functions	Automatic restarting	Automatic restarting	+ON/OFF/TEST
Function selector	Automatic 5x, OFF/RESET	Automatic 5x, OFF/RESET	ON, OFF/RESET
Remote control function via telephone with Telecommander	–	–	–
<b>Mechanical</b>			
Frame size	45 mm	45 mm	45 mm
Device height	80 mm	80 mm	80 mm
Device width	70 mm	70 mm	35 mm
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715	–	–
Degree of protection, built-in	IP40	IP40	IP40
Terminal protection	finger and hand touch safe according to DGUV VS3, EN 50274	–	–
Terminals	Lift terminals	Lift terminals	Lift terminals
Terminal capacity	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>	2 x 1.5 mm <sup>2</sup> or 1 x 2.5 mm <sup>2</sup>	4 x 1.5 mm <sup>2</sup> or 2 x 2.5 mm <sup>2</sup>
Scope of delivery	–	–	Coupling plug


**Connection diagram**

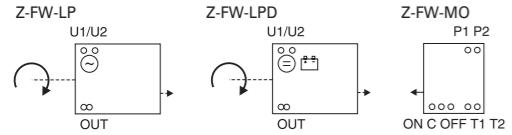


**Dimensions (mm)**

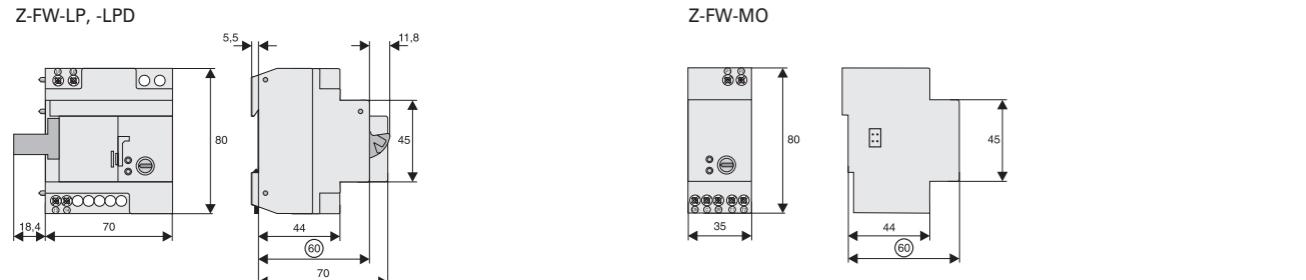

**Connection Example**

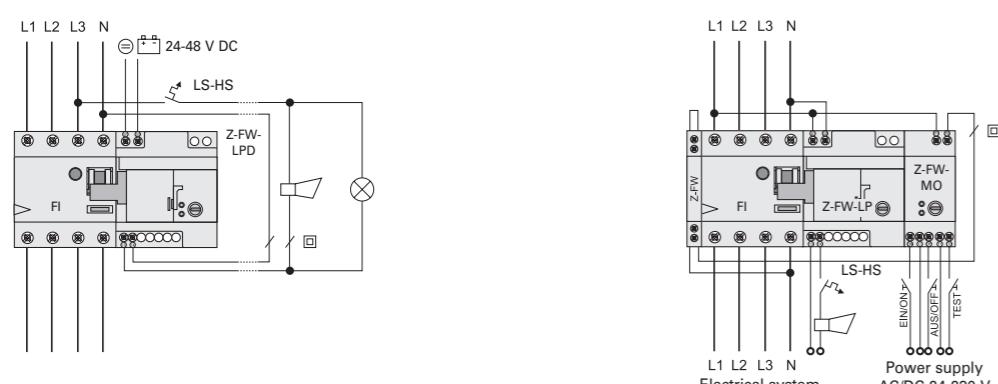

SG13113

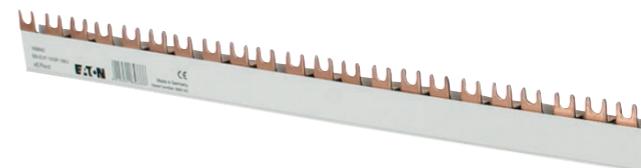

**Description**

Busbar System xEffect is the modular design system for busbars. xEffect busbars are available as yard goods with 1, 2 or 3 poles. Now, there is a special feature: each bar can easily be extended by one-pole bar as you like. The additional pole can be added completely without tools by easy clamping technique. The lugs or forks in the xEffect bars - available in 10 and 16 mm<sup>2</sup> and all common distances - can be broken out at a predetermined breaking point. There is actually no more flexibility available.

**Busbar System xEffect saves time and material**

The yard good can be cut with a saw of course.

However, there is no need neither for deburring nor for cutting the conductor. Just cut to the required dimension and close with the fitting end cap - ready! The end caps have also breakable edges, which enable further connecting of the Busbar System xEffect. By overlapping assembly, doubling the cross section can be achieved.

**Busbar System xEffect in use**

Busbar System xEffect is especially well suited for solving flexible busbar applications rack-mounted models in series. Fork-pin combinations for 1+N-applications can be realized by individual combinations - for this also the one-pole version with blue isolation is available besides the one with grey isolation. Even different cross sections can be combined in this case.

Accessories, such as feeder terminals and self adhesive phase marking labels will complete the comfortable total package. Existing contact prevention caps can be used.

**Busbar System xEffect at a glance:**

- Yard goods can be cut
- No cutting back of copper required
- No deburring required
- Almost no waste during cutting
- End caps available with 1- to 4-poles, end caps can be broken out for further extensions
- 4-pole end cap molded in pairs (left and right)
- Overlapping rail extension possible
- Protected technology

## xEffect

Description	Step Distance (mm)	Cu-factor	Type Designation	Article No.	Units per package
<b>For MCBs, RCCBs, RCBOs, SPDs</b>					
• Delivered without end caps					
<b>SG13113</b>					
<b>10 mm<sup>2</sup>, Rated current 63 A</b>					
1-phase	17.8	0.22	BB-EVF-10/1P-1MU	168826	10
	27	0.24	BB-EVF-10/1P-1,5MU	168830	10
	36	0.24	BB-EVF-10/1P-2MU	168834	10
<b>SG13413</b>					
2-phase	17.8	0.31	BB-EVF-10/2P-1MU	168838	10
	27	0.36	BB-EVF-10/2P-1,5MU	168840	10
<b>3-phase</b>					
17.8	0.46	BB-EVF-10/3P-1MU	168842	10	
	27	0.58	BB-EVF-10/3P-1,5MU	168844	10
	36	0.56	BB-EVF-10/3P-2MU	168850	10
<b>3-phase + AUX</b>					
3x17.8+1x9	0.58	BB-EVF-10/3P-1MU/AUX	168846	10	
3x17.8+2x9	0.57	BB-EVF-10/3P-1MU/2AUX	168848	10	
<b>Neutral</b>					
17.8	0.22	BB-EVF-10/N-1MU	168828	10	
	27	0.24	BB-EVF-10/N-1,5MU	168832	10
	36	0.24	BB-EVF-10/N-2MU	168836	10
<b>SG13213</b>					
<b>16 mm<sup>2</sup>, Rated current 80 A</b>					
1-phase	17.8	0.33	BB-EVF-16/1P-1MU	168827	10
	27	0.36	BB-EVF-16/1P-1,5MU	168831	10
	36	0.32	BB-EVF-16/1P-2MU	168835	10
<b>SG13613</b>					
2-phase	17.8	0.46	BB-EVF-16/2P-1MU	168839	10
	17.8	0.57	BB-EVF-16/2P-1MU/AUX	500526	10
	27	0.54	BB-EVF-16/2P-1,5MU	168841	10
<b>3-phase</b>					
17.8	0.69	BB-EVF-16/3P-1MU	168843	10	
	27	0.87	BB-EVF-16/3P-1,5MU	168845	10
	36	0.84	BB-EVF-16/3P-2MU	168851	10
<b>3-phase + AUX</b>					
3x17.8+1x9	0.87	BB-EVF-16/3P-1MU/AUX	168847	10	
3x17.8+2x9	0.86	BB-EVF-16/3P-1MU/2AUX	168849	10	
<b>Neutral</b>					
17.8	0.33	BB-EVF-16/N-1MU	168829	10	
	27	0.36	BB-EVF-16/N-1,5MU	168833	10
	36	0.32	BB-EVF-16/N-2MU	168837	10

## xEffect

Description	Step Distance (mm)	Cu-factor	Type Designation	Article No.	Units per package
<b>For MCBs, RCCBs, RCBOs, SPDs</b>					
• Delivered without end caps					
<b>SG13113</b>					
<b>10 mm<sup>2</sup>, Rated current 63 A</b>					
1-phase	17.8	0.22	BB-EVP-10/1P-1MU	168852	10
	27	0.24	BB-EVP-10/1P-1,5MU	168856	10
	36	0.24	BB-EVP-10/1P-2MU	168860	10
<b>SG13413</b>					
2-phase	17.8	0.31	BB-EVP-10/2P-1MU	168864	10
	27	0.36	BB-EVP-10/2P-1,5MU	168866	10
<b>3-phase</b>					
17.8	0.46	BB-EVP-10/3P-1MU	168868	10	
	27	0.58	BB-EVP-10/3P-1,5MU	168870	10
	36	0.56	BB-EVP-10/3P-2MU	168876	10
<b>3-phase + AUX</b>					
3x17.8+1x9	0.58	BB-EVP-10/3P-1MU/AUX	168872	10	
3x17.8+2x9	0.57	BB-EVP-10/3P-1MU/2AUX	168874	10	
<b>Neutral</b>					
17.8	0.22	BB-EVP-10/N-1MU	168854	10	
	27	0.24	BB-EVP-10/N-1,5MU	168858	10
	36	0.24	BB-EVP-10/N-2MU	168862	10
<b>SG13213</b>					
<b>16 mm<sup>2</sup>, Rated current 80 A</b>					
1-phase	17.8	0.33	BB-EVP-16/1P-1MU	168853	10
	27	0.36	BB-EVP-16/1P-1,5MU	168857	10
	36	0.32	BB-EVP-16/1P-2MU	168861	10
<b>SG13613</b>					
2-phase	17.8	0.46	BB-EVP-16/2P-1MU	168865	10
	17.8	0.57	BB-EVP-16/2P-1MU/AUX	168867	10
	27	0.54	BB-EVP-16/2P-1,5MU	168871	10
<b>3-phase</b>					
17.8	0.69	BB-EVP-16/3P-1MU	168869	10	
	27	0.87	BB-EVP-16/3P-1,5MU	168871	10
	36	0.84	BB-EVP-16/3P-2MU	168877	10
<b>3-phase + AUX</b>					
3x17.8+1x9	0.87	BB-EVP-16/3P-1MU/AUX	168873	10	
3x17.8+2x9	0.86	BB-EVP-16/3P-1MU/2AUX	168875	10	
<b>Neutral</b>					
17.8	0.33	BB-EVP-16/N-1MU	168855	10	
	27	0.36	BB-EVP-16/N-1,5MU	168859	10
	36	0.32	BB-EVP-16/N-2MU	168863	10
<b>Accessories</b>					
<b>End Caps BB-EV-EC</b>					
					
1-phase	-	-	BB-EV-EC/1P	168878	40
2+3-phase	-	-	BB-EV-EC/2-3P	168823	40
4-phase	-	-	BB-EV-EC/4P	168824	20
Neutral	-	-	BB-EV-EC/N	168879	20
<b>Terminal BB-EV-MU/35</b>					
					
-	-	0.04	BB-EV-MU/35	168825	3
<b>Sticker Phase Sequence</b>					
					
-	-	-	BB-S-PS	169831	5
<b>Busbar Tag Shrouds ZV-BS-G</b>					
					
-	-	-	ZV-BS-G	104903	10/600

## Busbar Systems

# 2.357

### Technical Data

#### BB-EV.

##### General




Heat deflection temperature	$\geq 80^\circ\text{C}$ UL94 V0
Standards	EN 60947-1:2007 / IEC 60947-1:2007 / IEC 60999:2000
Climate stability	according to DIN EN 60068
Insulation coordination	Oversupply category III / Pollution degree 2

##### Electrical






Impulse voltage strength	$\geq 4.5 \text{ kV}$
Min. air distance	>5.5 mm
Min. creeping distance	>5 mm
Max. operating voltage	690 V AC/DC 1,000 V DC 1-pole only
Max. busbar current	I <sub>s</sub> /Phase
10 mm <sup>2</sup>	63 A
16 mm <sup>2</sup>	80 A
Protection class	IP20
Short circuit rating	I <sub>cc</sub> 25 kA - NH3 355A, gC500V JM
Dielectric strength	PC - ABS >32 kV / mm

### Assembly instruction:




#### Cutting

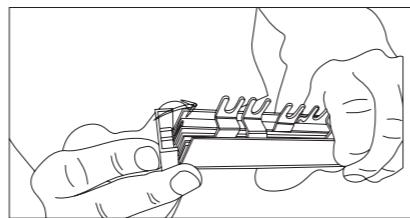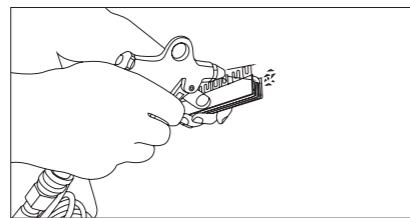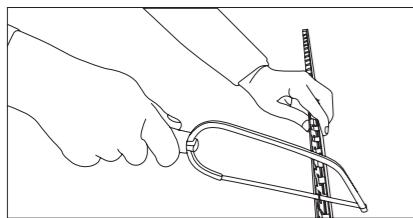



#### Mounting of an extension busbar

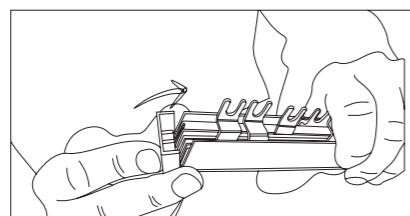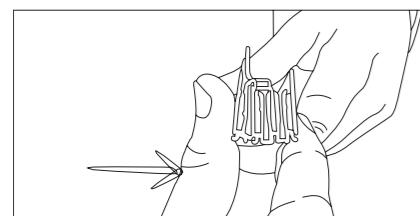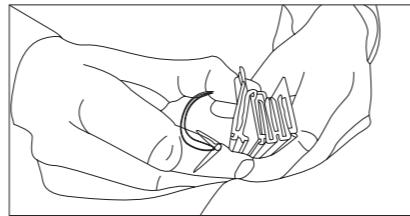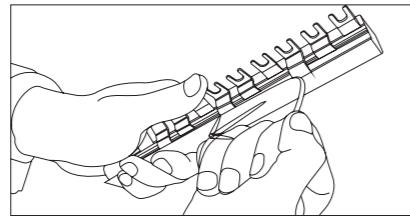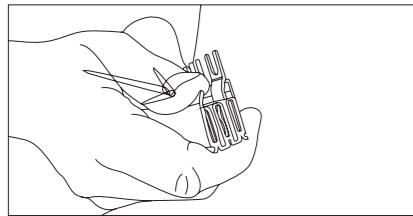

#### Overlapping mounting or further connection, resp.

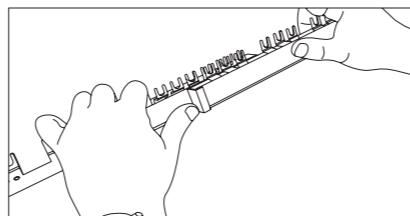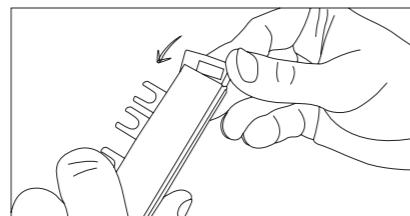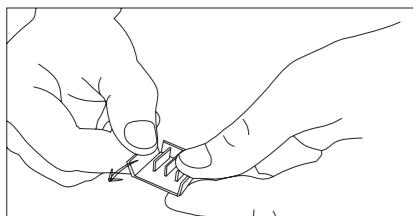

#### Breaking out of connection lugs

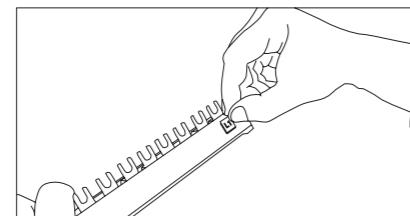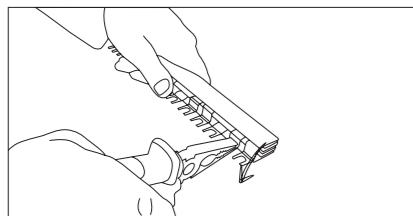


### Description

- For MCB FAZ-NA/RT
- Sliceable
- 18 and 25 mm<sup>2</sup>
- Pin busbar
- Accessories available:  
End cap  
Terminal  
Busbar tag shrouds
- Length 1 m

xEffect Busbar System UL489 sliceable 1m 18mm<sup>2</sup>, 25mm<sup>2</sup> (Pin) Z-BB/UL

## xEffect

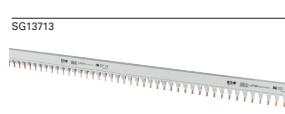


Description	Step Distance (mm)	Cu-factor	Type Designation	Article No.	Units per package
-------------	-----------------------	-----------	---------------------	-------------	----------------------

### For FAZ-NA/RT

- Delivered without end caps

#### 18 mm<sup>2</sup>, Rated current 80 A

1-phase	17.6	0.39	Z-BB/UL18/1P1MU/57	171128	10
1-phase + AUX	26.4	0.378	Z-BB/UL18/1P1MU+AUX/37	171134	10
2x 1-phase + AUX	26.4	0.56	Z-BB/UL18/2X1P1MU+AUX/38	171142	10
3x 1-phase + AUX	26.4	0.945	Z-BB/UL18/3X1P1MU+AUX/39	171140	10
2-phase	17.6	0.625	Z-BB/UL18/2P1MU/56	171129	10
2-phase + AUX	17.6 + 26.4	0.625	Z-BB/UL18/2P1MU+AUX/46	171135	10
3-phase	17.6	0.95	Z-BB/UL18/3P1MU/57	171130	10
3-phase + AUX	2x 17.6 + 26.4	0.93	Z-BB/UL18/3P1MU+AUX/48	171136	10

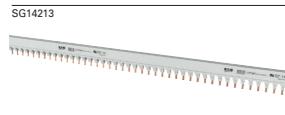

#### 25 mm<sup>2</sup>, Rated current 100 A

1-phase	17.6	0.535	Z-BB/UL25/1P1MU/57	171131	10
1-phase + AUX	26.4	0.745	Z-BB/UL25/1P1MU+AUX/37	171137	10
2x 1-phase + AUX	26.4	0.78	Z-BB/UL25/2X1P1MU+AUX/38	171143	10
3x 1-phase + AUX	26.4	1.315	Z-BB/UL25/3X1P1MU+AUX/39	171141	10
2-phase	17.6	0.888	Z-BB/UL25/2P1MU/56	171132	10
2-phase + AUX	17.6 + 26.4	0.87	Z-BB/UL25/2P1MU+AUX/46	171138	10
3-phase	17.6	1.31	Z-BB/UL25/3P1MU/57	171133	10
3-phase + AUX	2x 17.6 + 26.4	1.28	Z-BB/UL25/3P1MU+AUX/48	171139	10



### Accessories

#### End Cap Z-ECUL

-	-	Z-ECUL	171145	10
---	---	--------	--------	----



#### Terminal Z-MUUL35

-	-	0.038	Z-MUUL35	171144	10
---	---	-------	----------	--------	----



#### Busbar Tag Shrouds Z-FPUL

-	-	-	Z-FPUL	171146	10
---	---	---	--------	--------	----

## xEffect

## xEffect

xEffect Busbar System UL489 sliceable 1m 18mm<sup>2</sup>, 25mm<sup>2</sup> (Pin) Z-BB/UL - Technical Data

## Busbar Systems

# 2.361

### Description of the Busbar UL489 Z-BB/UL for FAZ-NA, -RT

Z-BB/UL18/1P1MU/57	171128	57	-	-	-	-	-	-	-	-	-	-
Z-BB/UL18/2P1MU/56	171129	-	56	-	-	-	-	-	-	-	-	-
Z-BB/UL18/3P1MU/57	171130	-	-	57	-	-	-	-	-	-	-	-
Z-BB/UL25/1P1MU/57	171131	57	-	-	-	-	-	-	-	-	-	-
Z-BB/UL25/2P1MU/56	171132	-	56	-	-	-	-	-	-	-	-	-
Z-BB/UL25/3P1MU/57	171133	-	-	57	-	-	-	-	-	-	-	-
Z-BB/UL18/1P1MU+AUX/37	171134	-	-	-	37	-	-	-	-	-	-	-
Z-BB/UL18/2P1MU+AUX/46	171135	-	-	-	-	-	-	-	-	46	-	-
Z-BB/UL18/3P1MU+AUX/48	171136	-	-	-	-	-	-	-	-	-	48	-
Z-BB/UL25/1P1MU+AUX/37	171137	-	-	-	37	-	-	-	-	-	-	-
Z-BB/UL25/2P1MU+AUX/46	171138	-	-	-	-	-	-	-	-	46	-	-
Z-BB/UL25/3P1MU+AUX/48	171139	-	-	-	-	-	-	-	-	-	48	-
Z-BB/UL18/3X1MU+AUX/39	171140	-	-	-	-	-	-	39	-	-	-	-
Z-BB/UL25/3X1MU+AUX/39	171141	-	-	-	-	-	-	39	-	-	-	-
Z-BB/UL18/2X1MU+AUX/38	171142	-	-	-	-	-	38	-	-	-	-	-
Z-BB/UL25/2X1MU+AUX/38	171143	-	-	-	-	-	38	-	-	-	-	-
Z-TEUL35	171144	-	-	-	-	-	-	-	-	-	-	-
Z-ECUL	171145	-	-	-	-	-	-	-	-	-	-	-
Z-FPUL	171146	-	-	-	-	-	-	-	-	-	-	-

### Technical Data

#### Z-BB/UL

##### General

Heat deflection temperature >100°C - UL94 V0

Standards UL489, EN 60947-1, IEC 60947-1:2004

Climate stability according to DIN EN 60068

Insulation coordination Overvoltage category III / Pollution degree 2

##### Electrical

Impulse voltage strength ≥ 10 kV

Min. air distance ≥ 1" ext.

Min. creeping distance ≥ 2" ext.

Max. operating voltage 1-pole 1.000 V AC/DC

2-, 3-poles 600 V AC/DC

Max. busbar current I<sub>s</sub>/Phase

18 mm<sup>2</sup> 80 A

25 mm<sup>2</sup> 100 A


Protection class IP20

Short circuit rating I<sub>CC</sub> 10 kA

Dielectric strength PA66-V0, >35 kV

**Mounting example of busbar UL489 Z-BB/UL for FAZ-NA, -RT**

Z-BB/UL18/XX  
Z-BB/UL25/XX

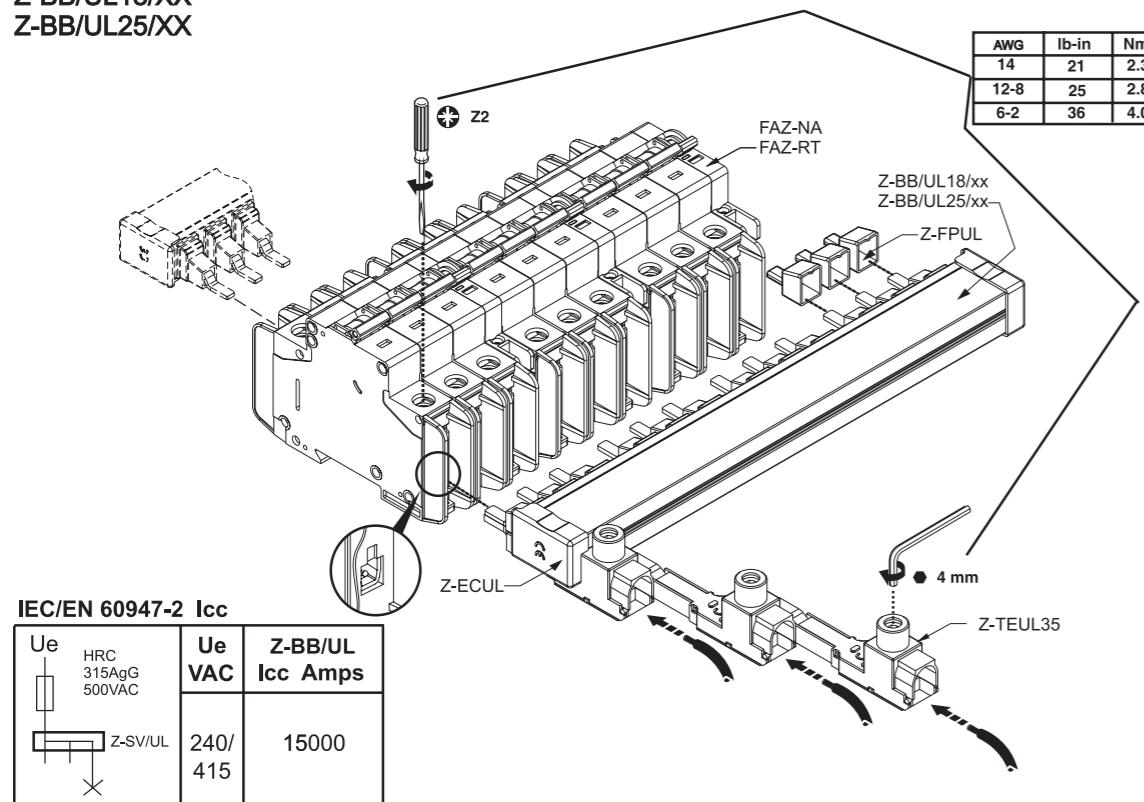

**Description**

- For MCB FAZ
- Sliceable
- 18 and 25 mm<sup>2</sup>
- Pin busbar
- Accessories available:  
End caps  
Terminals  
Busbar tag shrouds
- Length 1 m




Description	Step Distance (mm)	Cu-factor	Type Designation	Article No.	Units per package
-------------	--------------------	-----------	------------------	-------------	-------------------

### For FAZ

- Delivered without end caps

#### 18 mm<sup>2</sup>, Rated current 80 A

1-phase	17.8	0.33	BB-UL-18/1P-1M/57	121981	10
2-phase	17.8	0.508	BB-UL-18/2P-2M/56	121982	10
3-phase	17.8	0.8	BB-UL-18/3P-3M/57	121983	10
1-phase + AUX	27	0.33	BB-UL-18/1P-1,5M/37	121984	10
2-phase + AUX	17.8 + 26.7	0.52	BB-UL-18/2P+AS-2,5M/46	121987	10
3-phase + AUX	2x 17.8 + 26.7	0.8	BB-UL-18/3P+AS-3,5M/48	121988	10

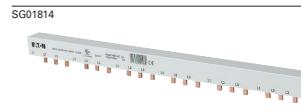

#### 25 mm<sup>2</sup>, Rated current 100 A

1-phase	17.8	0.45	BB-UL-25/1P-1M/57	121989	10
2-phase	17.8	0.68	BB-UL-25/2P-2M/56	121990	10
3-phase	17.8	1.07	BB-UL-25/3P-3M/57	121991	10
1-phase + AUX	27	0.45	BB-UL-25/1P-1,5M/37	121992	10
2-phase + AUX	17.8 + 26.7	0.69	BB-UL-25/2P+AS-2,5M/46	121995	10
3-phase + AUX	2x 17.8 + 26.7	1.03	BB-UL-25/3P+AS-3,5M/48	121996	10

### Accessories

#### End Caps BB-UL-EC



1-phase	-	-	BB-UL-EC/1	122000	10
3-phase	-	-	BB-UL-EC/3	122001	10



#### Terminals BB-UL-TE

6 - 35mm <sup>2</sup> (single and multi wire)	0.035	BB-UL-TEP/35	121997	10
6 - 50mm <sup>2</sup>	0.038	BB-UL-TEPA/35	169823	10
6 - 50mm <sup>2</sup> (single and multi wire)	0.038	BB-UL-TE/50	121998	10



#### Busbar Tag Shrouds BB-IP/5

for 5 pins	-	-	BB-IP/5	121999	10
------------	---	---	---------	--------	----

### Description of the Busbar UL508 BB-UL for FAZ

Article No.	Image	57	-	-	-	-	-
121981	BB-UL-18/1P-1M/57	57	-	-	-	-	-
121982	BB-UL-18/2P-2M/56	-	28	-	-	-	-
121983	BB-UL-18/3P-3M/57	-	-	19	-	-	-
121984	BB-UL-18/1P-1,5M/37	-	-	-	37	-	-
121987	BB-UL-18/2P+AS-2,5M/46	-	-	-	-	23	-
121988	BB-UL-18/3P+AS-3,5M/48	-	-	-	-	-	16
121989	BB-UL-25/1P-1M/57	57	-	-	-	-	-
121990	BB-UL-25/2P-2M/56	-	28	-	-	-	-
121991	BB-UL-25/3P-3M/57	-	-	19	-	-	-
121992	BB-UL-25/1P-1,5M/37	-	-	-	37	-	-
121995	BB-UL-25/2P+AS-2,5M/46	-	-	-	-	23	-
121996	BB-UL-25/3P+AS-3,5M/48	-	-	-	-	-	16
121997	BB-UL-TEP/35	-	-	-	-	-	-
169823	BB-UL-TEPA/35	-	-	-	-	-	-
121998	BB-UL-TE/50	-	-	-	-	-	-
121999	BB-IP/5	-	-	-	-	-	-
122000	BB-UL-EC/1	-	-	-	-	-	-
122001	BB-UL-EC/3	-	-	-	-	-	-

### Technical Data

#### BB-UL

##### General

Heat deflection temperature	125°C - UL94 V0
Standards	DIN EN 60947-2, VDE 0660 - 101 = IEC 60947-2, IEC 60999:2000, UL508, UL486A, CSA C22.2

##### Climate stability

according to DIN EN 60068

##### Insulation coordination

Overshoot category III / Pollution degree 2

##### Electrical

Impulse voltage strength	≥ 9.5 kV
Min. air distance	> 9.5 mm
Min. creeping distance	> 12.7 mm

##### Max. operating voltage

1-pole	1.000 V AC/DC
2-, 3-poles	IEC/EN 690 V AC/DC
	600 V AC/DC UL Fuse
	480 V AC/DC UL-SP

##### Max. busbar current I<sub>g</sub>/Phase


18 mm <sup>2</sup>	80 A
25 mm <sup>2</sup>	100 A

##### Protection class IP20

Short circuit rating	10 kA 3 cycles @ 480 V / 100 kA Fuse Class J 175 A @ 18 mm <sup>2</sup> - 200 A @ 25 mm <sup>2</sup>
----------------------	---

##### Dielectric strength >32 kV/mm

## Mounting example of busbar UL508, BB-UL for FAZ

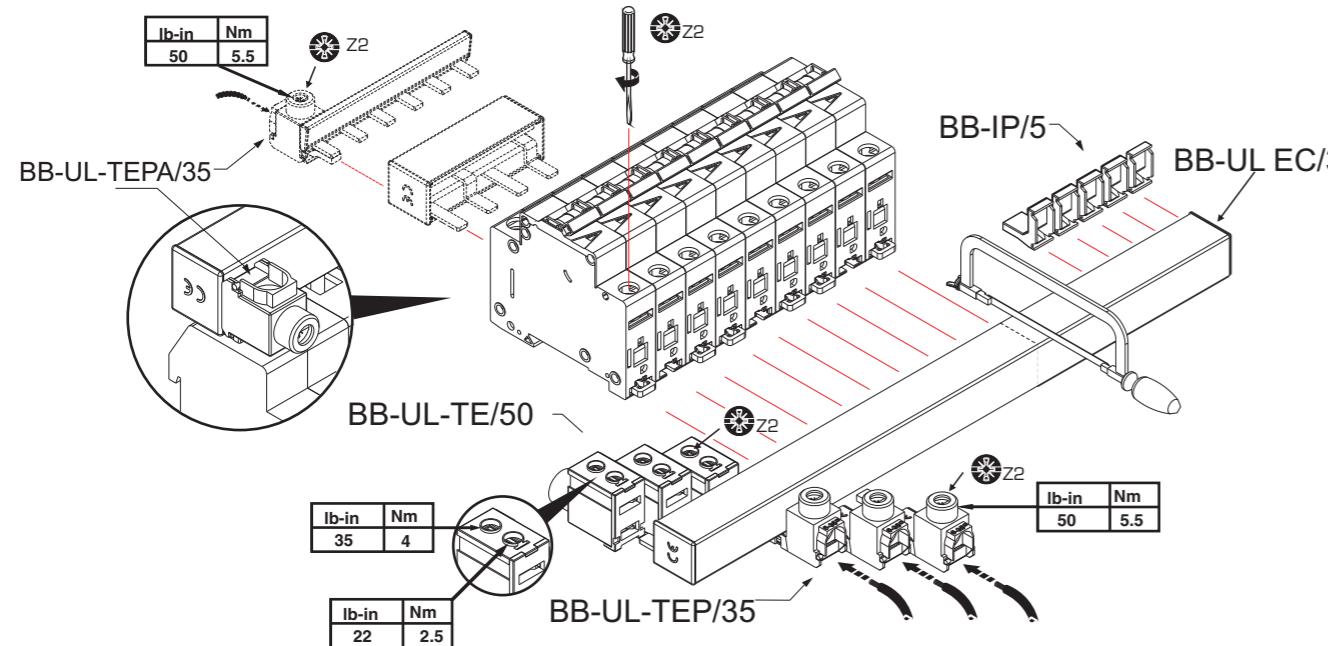


BB-UL-TE/50		
	<b>UL508</b>	<b>EN/IEC 60947-2</b>
<b>U<sub>e</sub></b>	480 V AC	240/690V AC
<b>f</b>	50/60 Hz	50/60 Hz
<b>I<sub>e</sub></b>	115 A @ 40°C	160 A @ 30°C
	#1-14 AWG 60/75°C Cu	1.5–50 mm <sup>2</sup> Cu
	0.56 in	14 mm

BB-UL		
	<b>UL508</b>	<b>EN/IEC 60947-2</b>
<b>U<sub>e</sub></b>	480 V AC	690V AC
<b>f</b>		50/60 Hz
<b>I<sub>pk</sub></b>	10kA	15kA
<b>I<sub>e</sub></b>	18mm <sup>2</sup>	25mm <sup>2</sup>
Infeed at the start of the busbar	80A@40 °C	100A@30°C
Infeed at the center of the busbar	160A@40°C	200A@30°C

BB-UL-TEP/35 / BB-UL-TEPA/35		
	<b>UL508</b>	<b>EN/IEC 60947-2</b>
<b>U<sub>e</sub></b>	480 V AC	240/690V AC
<b>f</b>	50/60 Hz	50/60 Hz
<b>I<sub>e</sub></b>	115 A@40°C	80 A@30°C
	#2-14 AWG 60/75°C Cu	2.5–35 mm <sup>2</sup> Cu
	0.56 in	14 mm

\*-UL508 SHORT CIRCUIT RATINGS  
-SUITABLE FOR USE ON A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN 10,000 RMS SYMETRICAL AMPERES, 600 VOLTS MAXIMUM.  
-SUITABLE FOR USE ON A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN 100,000 RMS SYMETRICAL AMPERES, 600 VOLTS MAXIMUM WHEN PROTECTED BY A CLASS J FUSE RATED 175A.

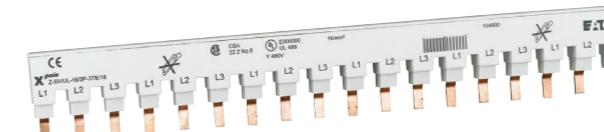


## Description

- For MCB FAZ-NA/RT
- 16 mm<sup>2</sup>
- Pin busbar
- Accessories available:  
Terminals  
Busbar tag shrouds
- Several length



### Mounting example of busbar UL489 Z-SV/UL-16 for FAZ-NA/RT

**ATTENTION:** Maximum of 3 common links allowed. Any combination of same pole configuration.  
**ATTENTION:** 3 liaisons communes autorisées au maximum.  
Toute combinaison de configurations de polarité identiques.  
**ACHTUNG:** Maximal 3 Schienenblöcke. Beliebige Kombination gleichpoliger Konfigurationen.  
**ATTENZIONE:** Sono consentiti al massimo 3 pettini di collegamento in qualsiasi combinazione della stessa configurazione di poli.  
**ATEÖION:** Se permite un máximo de 3 enlaces comunes.  
Cualquier combinación del mismo tipo de configuración de polo

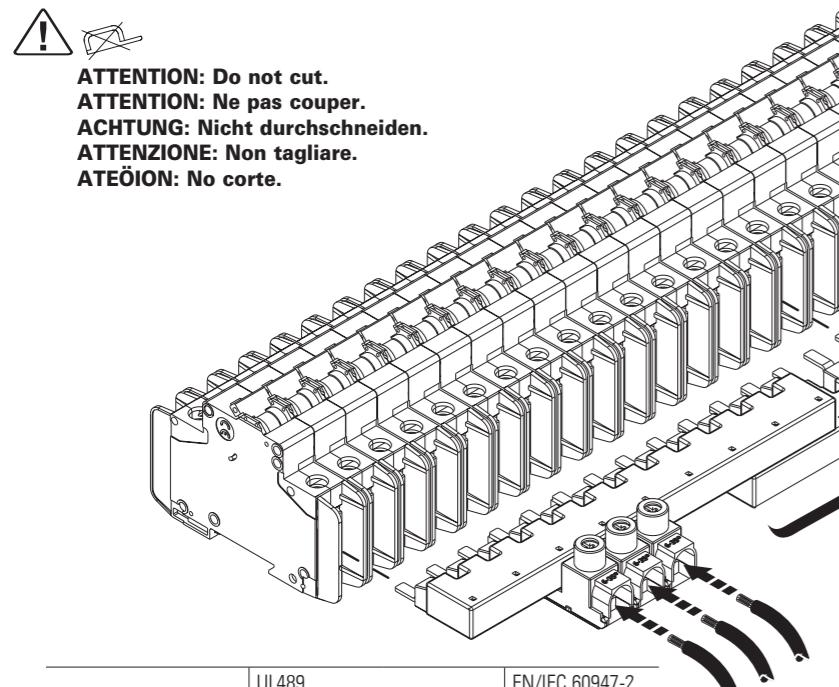

	UL489	EN/IEC 60947-2
$U_e$	480 V AC	96 V DC
f	50/60 Hz	—
$U_{imp}$	—	9,5 kV
$I_e$	80 A @ 40°C	80 A @ 30°C
Terminal capacity	—	16 mm <sup>2</sup>


#### Z-EB/50/UL

	UL489	EN/IEC 60947-2
$U_e$	480 V AC	96 V DC
f	50/60 Hz	—
$U_{imp}$	—	9,5 kV

#### Cross section:

	U - single wire	K - fine wire (with sleeve)	Torque
	R - multi wire	F - fine wire (with sleeve)	
Max. cross section	50 mm <sup>2</sup> 1 AWG copper wire	35 mm <sup>2</sup> 2 AWG copper wire	4 Nm 35 lbf.in
Min. cross section	1,5 mm <sup>2</sup> 14 AWG copper wire		
Busbar-side	Pin max. 5,5x2 / 0,2"x0,07" Länge min. 12,7 mm / Length min. 0,5"	2,5 Nm 22 lbf.in	

### Mounting example of busbar UL489 Z-SV/UL-16 for FAZ-NA/RT

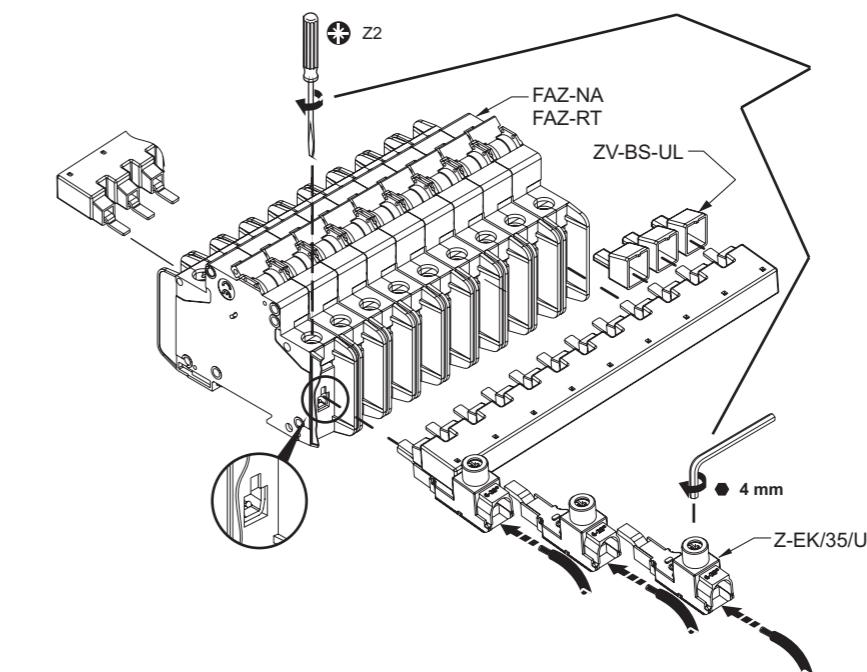


AWG	lb-in	Nm
14	21	2.3
12-8	25	2.8
6-2	36	4.0

#### IEC/EN 60947-2 $I_{cc}$

	$U_e$ V AC	Z-SV/UL $I_{cc}$ A
X	240/415	15000

#### UL SCCR

	FAZ-NA FAZ-RT $I_n$ A	$U_e$ V AC	Z-SV/UL SCCR RMS Sym A
X	0.5-32	480Y/277	10000
	35-40	240	10000

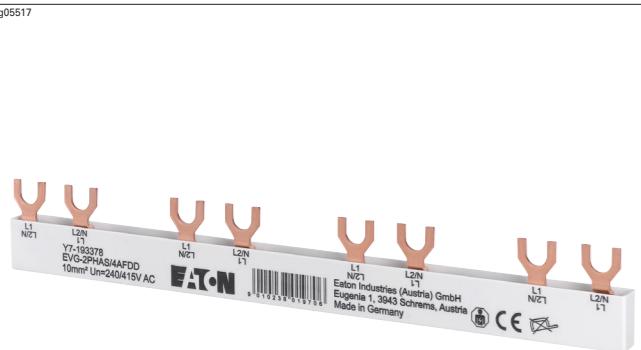

Phases	Cu-factor	Type Designation	Article No.	Units per package
--------	-----------	------------------	-------------	-------------------



2-phase 0.114 EVG-2PHAS/4AFDD

193378 10

#### Technical Data



#### EVG-2PHAS/4AFDD

##### General

Busbar	Copper
Surface busbar	plain
Insulation	PC/ABS
Surface insulation	grey
Standards	EN 60947-1:2007 / IEC 60947-1:2007
Heat deflection temperature	90 °C – UL94 VO
Glow Wire Flammability Index	960 °C / 1 mm
Insulation coordination	Overvoltage category III / Pollution degree 2


##### Electrical


Max. operating voltage	690 V AC/DC
Protection class	IP20
Rated impulse withstand voltage	$U_{imp}$ ≥ 4,5 kV
Max. operating voltage 1- 3-phase	690 V IEC 480Y/277V & 240 V AC

##### Load Capacity at 35°C ambient temperature depending of feeding point

Max. busbar current feeding at beginning / ending	I <sub>s</sub> /Phase 50 A
Busbar cross section	10 mm <sup>2</sup>
Connection cross section	10 mm <sup>2</sup>


#### Dimensions (mm)

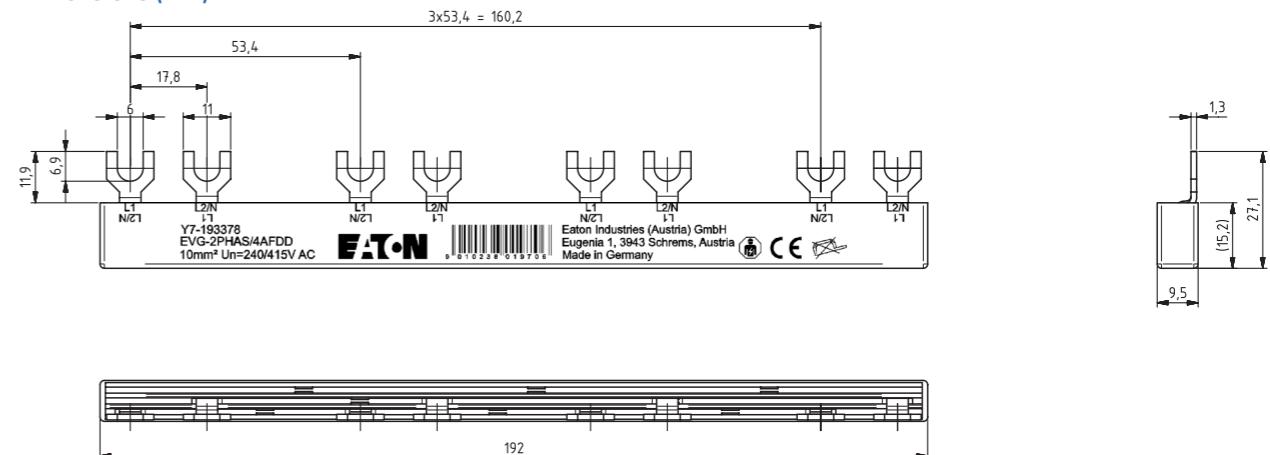

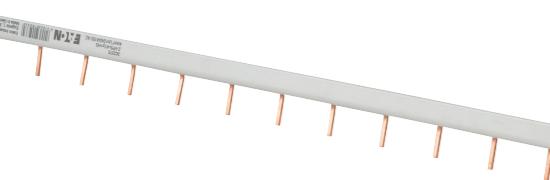

#### Description

- For Auxiliary and Signal Switches
- Sliceable
- 4 mm<sup>2</sup>
- Pin busbar
- Length ~ 1m
- Accessories available:  
End cap

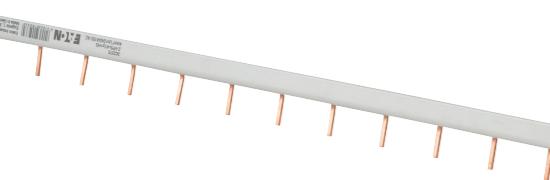

Description	Type Designation	Article No.	Units per package
<b>Busbar for auxiliary contact</b>			
<b>4 mm<sup>2</sup></b>			
Short pin	Z-VPS-4/1p+HS	302375	20/200
Long pin	Z-VPL-4/1p+HS	302376	20/200
End cap	Z-VP-AK/1p	302377	10/500

#### Description Busbar 4 mm<sup>2</sup>



Products are CE conform and correspond to the RoHS of the EU

#### Technical Data

##### Z-VPS / Z-VPL

###### General

Busbar	Copper
Surface busbar	plain
Insulation	PC/ABS
Surface insulation	grey
Standards	EN 60947-1:2007 / IEC 60947-1:2007
Heat deflection temperature	90 °C flame-retardant
Comparative Tracking Index	PLC 1
Insulation coordination	Overvoltage category III / Pollution degree 2


###### Electrical


Max. operating voltage	1000 V AC / 1500V DC
Protection class	IP20

#### Load Capacity at 35 °C ambient temperature depending of feeding point

Max. busbar current feeding at beginning / ending	I <sub>s</sub> /Phase 32 A
Busbar cross section	4 mm <sup>2</sup>

#### Dimensions (mm)

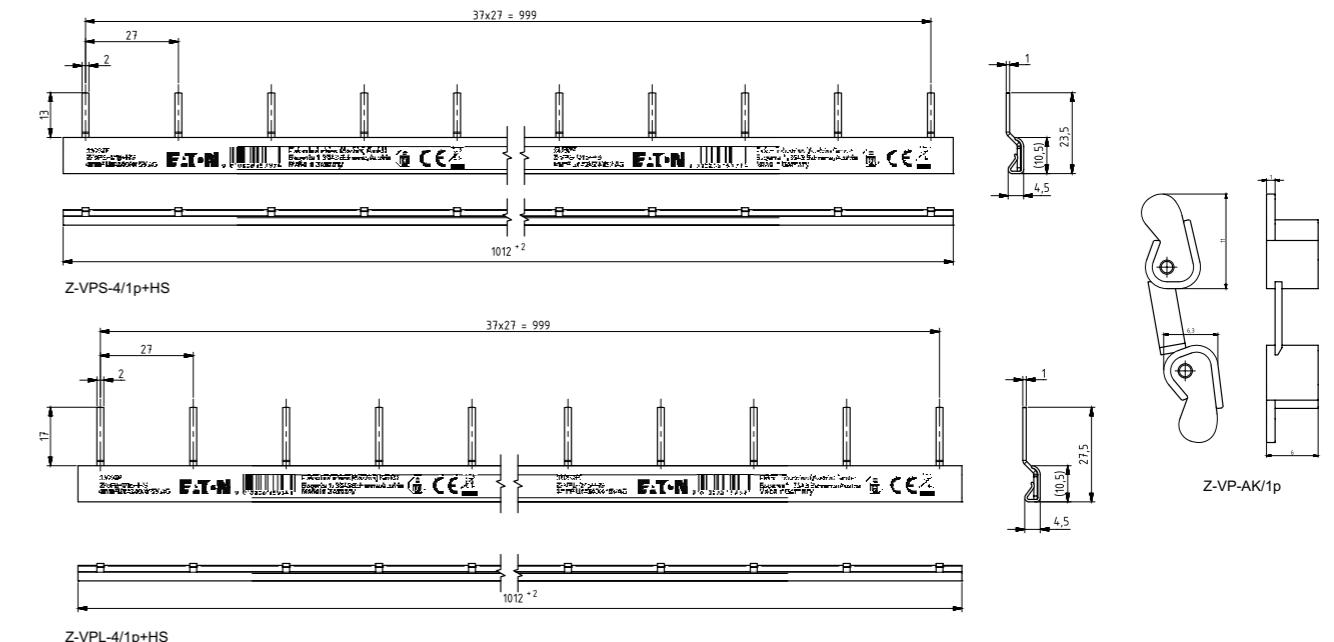

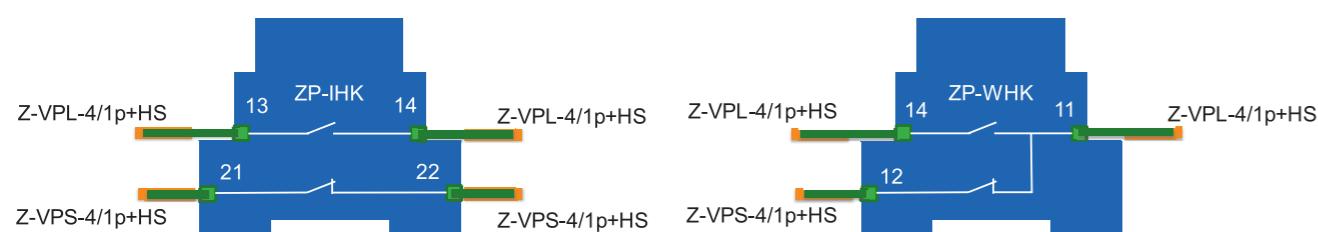**Connection examples**

**In their basic version, the Moeller-branded Eaton devices are approved for use throughout the world, including the USA and Canada. As such, they can be used without restriction as devices for world markets. The standard versions of some devices, such as circuit breakers, can be used worldwide except in the USA and Canada.**

**For export to North America, numerous devices are available in special UL- and CSA-approved versions.**  
For currently available approvals, see our website:  
<http://www.eaton.eu/approvals>

Eaton's Moeller-branded low-voltage switchgear and switchgear assemblies conform to national and international specifications, making it possible to construct control systems that will conform to the national and international specifications of any country in the world. This, of course, means that due consideration must be given to the national standards of the respective country, such as those concerning installation, operation, installation materials and methods, as well as any pertaining to circumstances such as severe environmental conditions.

The device rating data given in this catalog for 220 – 240 V, 380 – 440 V, 500 V, 600 V, and 690 V covers virtually all existing three-phase systems worldwide.

Deviating requirements for the USA and Canada are given in detail in each chapter of this catalog. Read also the detailed description "Switchgear for North America" from Page 22/13. For the worldwide use of switchgear, special installation standards and approval requirements must also be observed in addition to the widely differing system conditions: Where screw fuses are used in a control system, some European countries – such as Denmark, Finland, the Netherlands, Norway and Sweden – require gage screws. In this case, "FORM P" fuse bases must be used. Switzerland no longer requires the use of gage screws, but they are still often requested by customers. The majority of countries permit the import of switchgear assemblies and devices on the manufacturer's undertaking that they have been constructed in accordance with the pertinent specifications. In some countries, such as the USA and Canada, however, there is a legal obligation to obtain official approval. In these countries, devices and enclosures – sometimes even complete control systems – are tested and approved by independent bodies.

In Scandinavia and in Switzerland, an official approval for low-voltage switchgear and controlgear had to be sought to some extent. For industrial switchgear, this legal obligation has now been abolished, provided the devices have been manufactured and tested in accordance with harmonized European standards (such as IEC/EN 60947). There is then no longer a requirement for them to carry their country's own approval mark. Eaton develops switchgear to international

standards, such as IEC/EN 60947 and applies the corresponding marks. Devices that conform to the European Low-Voltage Directive and are sold within the European Union must contain the CE mark.



**Europe, Conformité Européenne (CE)**

The CE mark indicates that the device corresponds with all relevant requirements and standards. Mandatory marking allows unrestricted use of marked devices within the European economic area.

Devices sold within the European union must comply with the Electromagnetic Compatibility (EMC) Directive. Eaton has performed the required tests for all Moeller-branded products subject to this Directive and applied the CE mark, which demonstrates compliance with the EMC Directive.

Because devices bearing the CE mark comply with the harmonized standards, approval and the associated marking is no longer required in the following countries: Belgium, Denmark, Finland, France, the Netherlands, Norway, Sweden, and Switzerland.

An exception is installation material. In some areas, miniature circuit breakers and residual current device must still be labeled and therefore carry the corresponding approval mark.



**Belgien, Comité Electrotechnique Belge/Belgisch Elektrotechnisch Comité (CEBEC)**



**Germany, Verband Deutscher Elektrotechniker (VDE)**




**France, Union Technique de l'Electricité (UTE)**



**Austria, Österreichischer Verband für Elektrotechnik (ÖVE)**



**Switzerland, Schweizerischer Elektrotechnischer Verein (SEV)**



**USA, Underwriters Laboratories (UL) - Listing**

**Selection of devices**

In addition to the required approvals and conformance with applicable regulations, the design of devices and systems themselves must be suitable for the target market.

Points to keep in mind when selecting switchgear for export include:



**USA, Underwriters Laboratories (UL) - Recognition**



**Canada, Canadian Standards Association (CSA)**

Approval for electrical products is also required in Argentina, China, Russia, South Africa, and the Ukraine. Marking is partly mandatory for these countries. As in other European countries, the IEC rating data is accepted here.

Romania requires that components that are to be used in public buildings must be approved by the Romanian test authority ICECON.



**Russia, Goststandart (GOST-R)**



**Ukraine, Goststandart (Ukrain-GOST)**



**China, China Suitable Certification (CCC)**



**Germany, Verband Deutscher Elektrotechniker (VDE)**



**South Africa, South African Bureau of Standards (SABS)**



**Argentina, Instituto Argentino de Normalización y Certificación (IRAM)**

**Advantages**

Can be positioned anywhere and are fully independent of the local circuit-protection system; no spare part problems

**Circuit-breakers**

Use makes with visible contacts, and quick-make and quick-break operation as standard. For high short-circuit levels, use current-limiting circuit breakers. Selective switches are recommended for the selective graduation of networks.

**Advantages**

Independence from local accident prevention regulations requiring visible contacts, and safety from faults caused by inexperienced operating personnel. The effects of shortcircuits are kept to a minimum.

Fuseless installations offer greater safety and reliability in plant operation. In the event of a fault, only the faulty section of the system is isolated.

**Contactors**

Use contactors whose entire range provides consistently reliable operation in the event of voltage drops (80% Un should be aimed for) and whose contact system will not assume an indeterminate position on closing or opening under these conditions.

**Advantages**

During the electrification work in areas such as Africa and the Middle East, an insufficient voltage stability is – at least for a certain time – likely in many applications (for example due to long spur lines or small local generators).

The use of devices that fulfil the above requirements will eliminate one of the main failure causes related to contactors.

**Enclosures**

Use insulated enclosures with transparent covers (i.e. "totally insulated" enclosures).

## Approvals and shipping classifications for world markets

### Advantages

Total insulation is the best possible protective measure from the user's point of view, avoiding, reliance on the possibly doubtful skills of unknown installation personnel. Furthermore, protective measures based on grounding are often extremely difficult, if not impossible (in the Middle East, for example, due to the dryness of the ground). Insulated enclosures completely eliminate the need for any additional protection against corrosion. The transparent covers contribute significantly to the correct operation of a system, because switchgear operation can be monitored even with the doors or covers closed, thus virtually eliminating the possibility of these being left open through carelessness. The transparent cover is an important contribution to safety, especially where exports to areas of uncertain skills are concerned.

### Overcurrent protection devices

Always use circuit breakers or motor-protective circuit breakers and avoid fuses wherever possible.

### Advantages

The operational reliability of a system is especially important for export contracts. Circuit-breakers and motor-protective circuit breakers provide this reliability in full measure since they can be immediately reclosed once a fault has been cleared, they disconnect all poles, they have ideal protection through high tripping accuracy and they can be used for selective operation. Because they have no fuses or other consumables, they also greatly reduce the problem of obtaining replacement parts. The advantages of fuseless design for export are especially evident in this case. No complicated investigation is needed to find out which fusing system is used in the respective location and which specifications have to be followed to select the correct fuses. Often several different fuse systems with widely varying characteristics are used side-by-side in the same country. For the uninitiated, it may be almost impossible to find the right fuse in these circumstances.

Please see our corresponding, up-to-date information on the Internet. <http://www.eaton.eu/approvals>

These problems do not arise where a circuit-breaker is used.

### Main switch and safety switch

Use devices with positive contact separation and clear switch position indication.

### Advantages


The mechanical coupling of the actuating element with the contacts ensures that the Off position is indicated only when all main contacts are separated by the prescribed distance, and only in this position can the switch be padlocked. This ensures safety when carrying out maintenance and repair work on the installation or machinery.

### Shipping classifications

Many Moeller-branded Eaton devices are approved by all important shipping associations: Germanischer Lloyd, Lloyd's Register of Shipping, Bureau Veritas, Russian Maritime Register of Shipping, Registro Italiano Navale, Det Norske Veritas, Polski Rejestr Statków, etc. Because the status of currently valid shipping approvals is subject to significant variations, this Catalog does not provide an overview, as this would quickly be out of date.

Please see our corresponding, up-to-date information on the Internet. <http://www.eaton.eu/approvals>

## Switchgear for the global market and for North America:

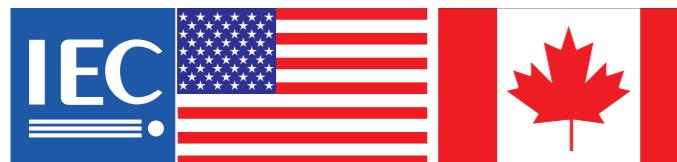

### Information relevant for export to North America

Product Standards	IEC/EN 60947-5; UL 508, CSA-C22.2 No. 14; CE marking
UL File No.	E29184
UL CCN	NKCR
CSA File No.	12528
CSA Class No.	3211-03
NA Certification	UL Listed, CSA Certified
Degree of Protection	IEC: IP65, UL/CSA Type 3R, 4X (indoor use only), 12, 13

Practically all devices can be used in compliance with IEC norms.

The selection pages of this catalogue indicate the products that have been approved for the North American market with the USA and Canadian flags. This does not mean these devices are exclusively for North America! Approval for North America has been granted special emphasis due to the strong export share of these devices and because standards deviate from IEC/EN norms, selection and processing requirements must be highlighted. The article "Switchgear for North America" in the appendix of this catalogue contains everything you need to know about this subject. A glossary in the appendix explains the specifically American technical terms.

Example for such an instruction.

# Eaton Online Catalog – find product details quickly and efficiently!

You can find comprehensive up-to-date product information at <http://ecat.eaton.com>

### Lookup

You can search by keywords, product names, article numbers, technical data: The search understands everything and takes you straight to the product you're looking for.

The screenshot shows the Eaton Online Catalog interface with a search bar at the top. Below it, a detailed product data sheet for a 'Safety control relay 24 V DC,trans.' is displayed. The data sheet includes sections for Product Info, Delivery programme, Technical data, Dimensions, Engineering characteristics, and Links. It shows technical specifications like individual laser inscription with E54-EASY COMBINATION, safety control relay, 24 V DC, trans., and various input and output configurations. At the bottom, there's a note about IEC/EN see Technical Data, UL 508, CSA-C22.2 No. 142-481987, CE marking.

HTML data sheet; can be saved as PDF file.

The screenshot shows a parts list interface with a table header: Item, Qty., Photo, Article no., Part no., and Short Text. Below the header, five items are listed with their respective details. At the bottom, there are buttons for Delete position, Save changes, and Add free position, along with a next button.


Item	Qty.	Photo	Article no.	Part no.	Short Text
<input type="checkbox"/>	1		111017	ES4P-221-DMXD1	Safety control relay,24 V DC,trans.
<input type="checkbox"/>	2		229758	FAK-COMBINATION-*	Complete unit
<input type="checkbox"/>	1		264831	M22S-DOLM-GR-X100	Double act.,illum.,flat,off-button ext.
<input type="checkbox"/>	4		290090	DILM15-01 (110V50Hz/120V60Hz)	Contactor,7.5kW400V,AC-operated
<input type="checkbox"/>	1		138516	PKE65-XTU2-65	PKE65 + trip block Standard S-65A

Select all

Delete position  Save changes  Add free position

next



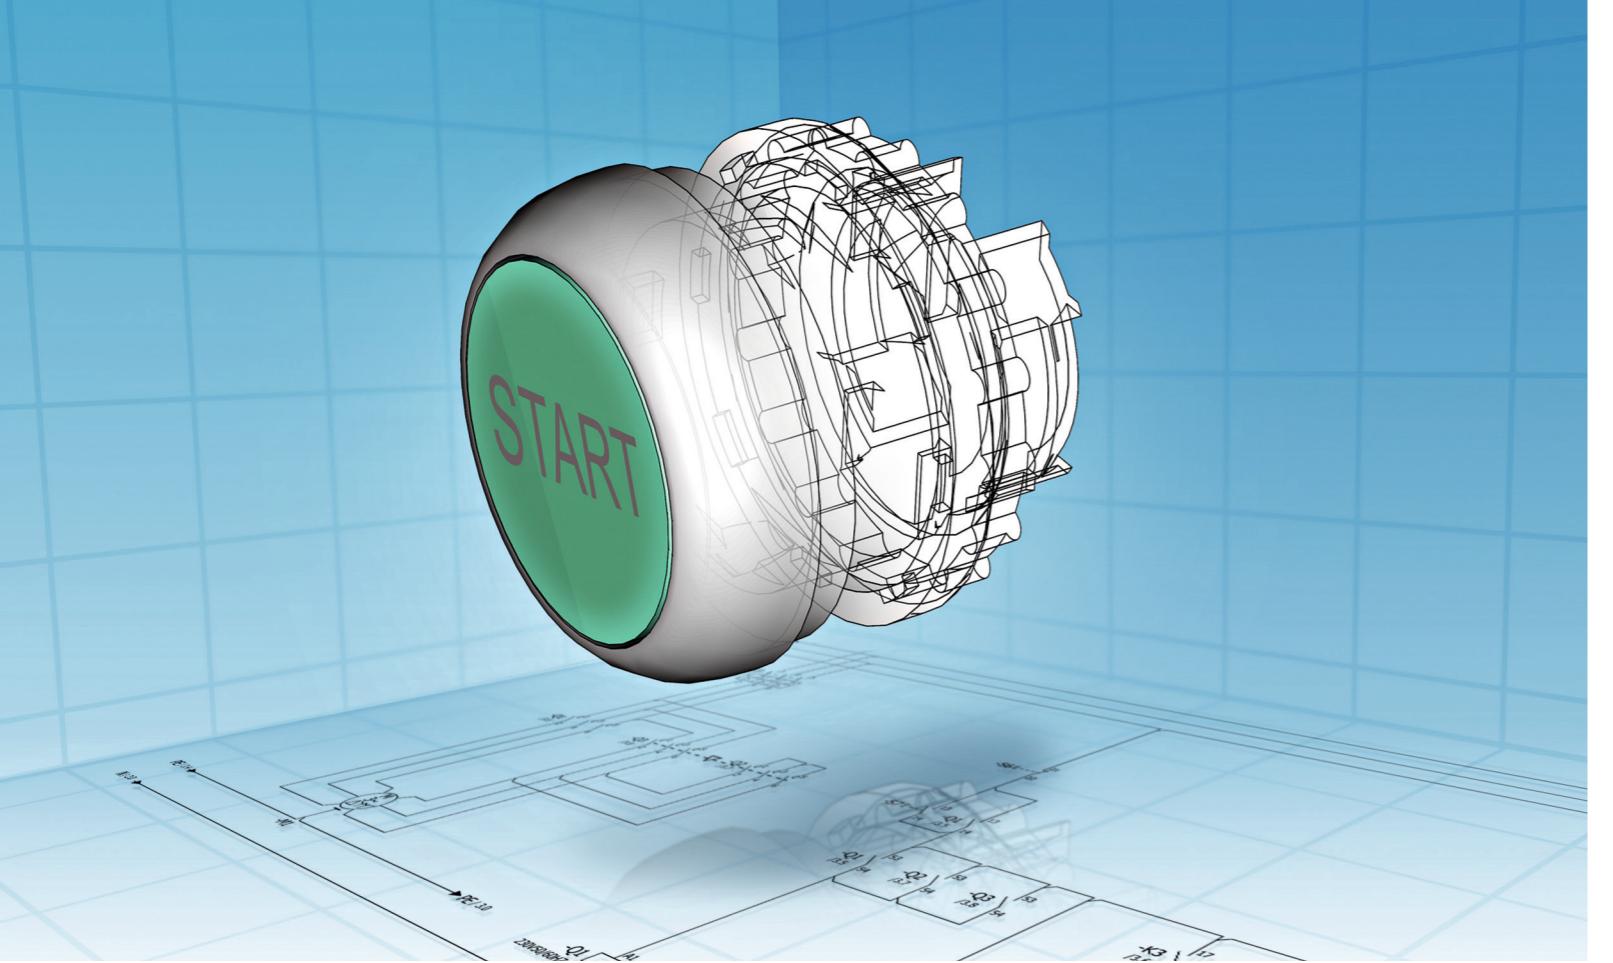

## Planning safety and process optimization: CAD data at the click of a mouse!



- 22,000 article data items and macros
- Download from EPLAN Data Portal
- Version P8

Eaton is providing its customers with CAD data to offer optimum support during planning. Both electrical and mechanical design data can be called up quickly and conveniently from the Internet at any time. This reduces processing times, minimizes errors and thus reduces costs already in the engineering phase of control panels, systems and machinery.

**eCAD:** Eaton has product data and macros available for EPLAN Electric P8. More than 22,000 products, but will also be able to export them and import them into your own EPLAN item database.

**mCAD:** Eaton makes 2D and 3D data available for more than 20,000 products. Over 80 different neutral and native formats guarantee compatibility with the project engineering systems of the customer. The models can either be integrated directly into the planning software from the Partcommunity Portal on the Internet or via the CADENAS Partsolution software.




- Models for approx. 22,000 products
- 80 different neutral & native formats




**2.382** Busbar Systems

Notes

**xEffect**

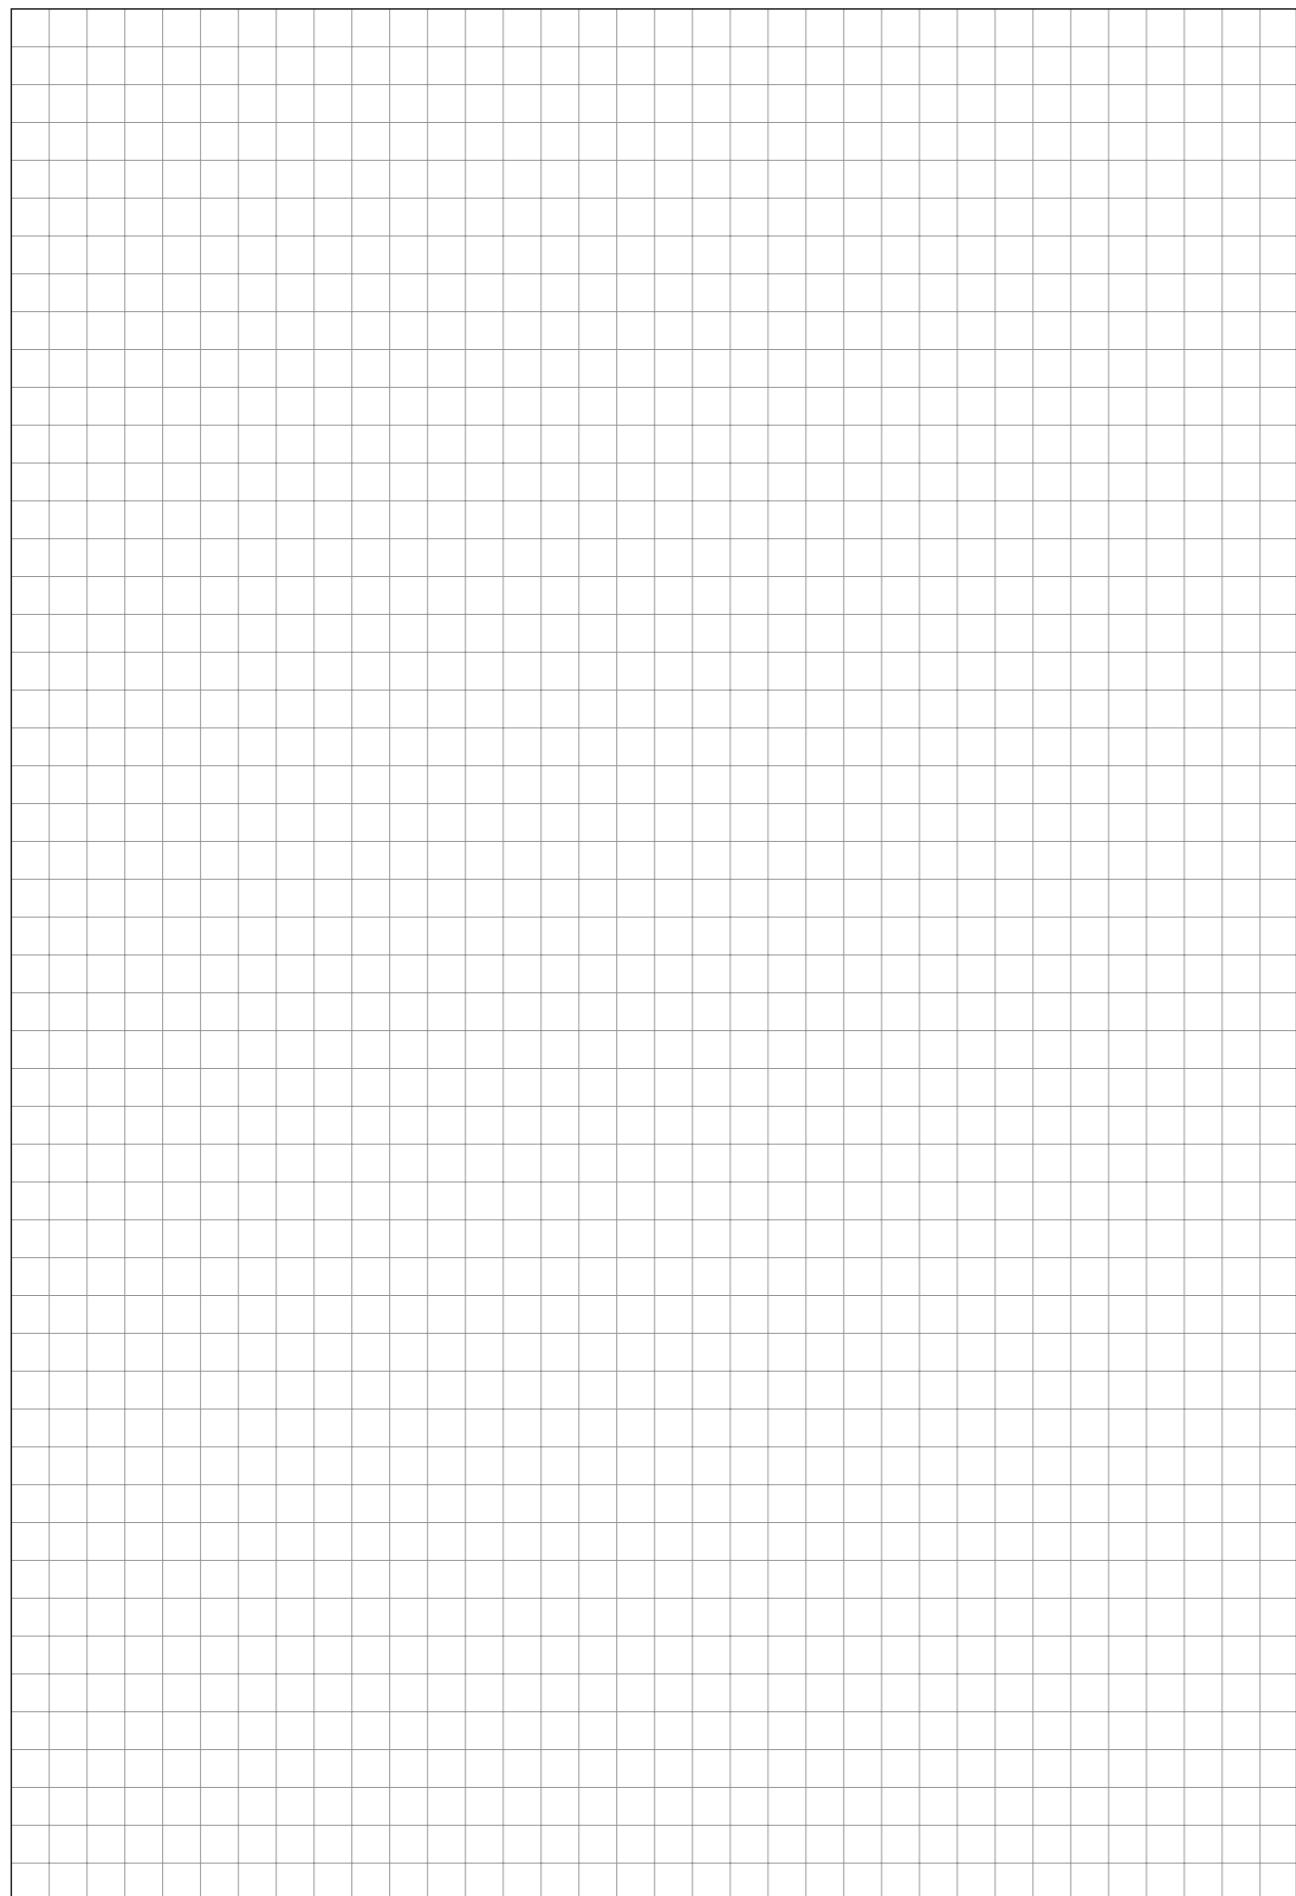

**xEffect**

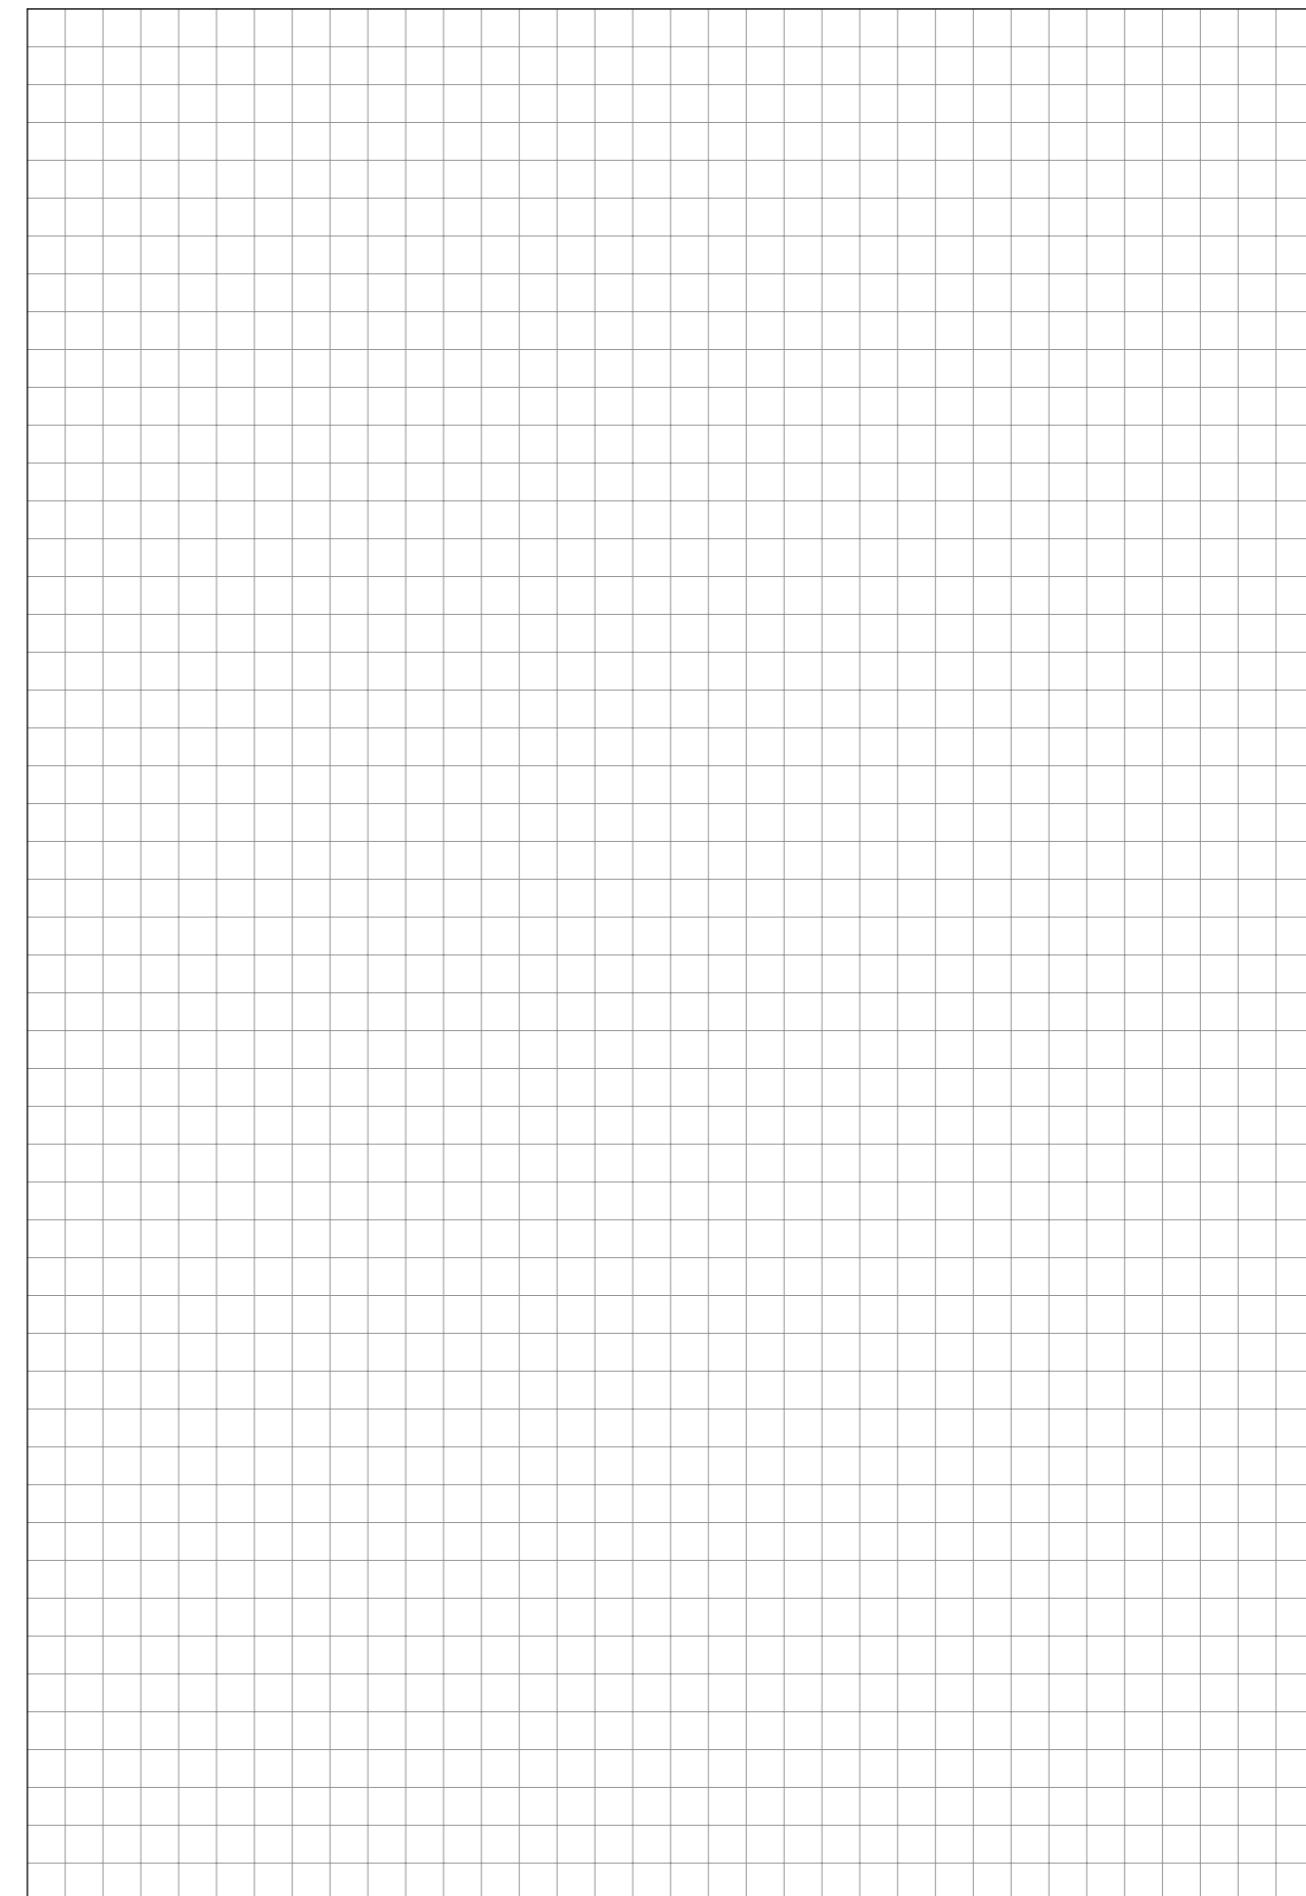

Busbar Systems

Notes

**2.383**

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



To contact us please visit <https://www.eaton.com/contacts>

For technical questions please contact your local Eaton team.

