


Features

- Pure sin output wave, AVR mode,
- Wall mounted metal case,
- Synchronize with working mains voltage and frequency
- Automatic charger and inverter mode,
- Energy save mode,
- Many parameters to set in LCD user MENU.

Photo



Applications

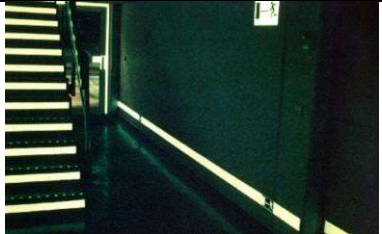
		
Heating systems	Gas and solar systems	Security systems
		
Emergency lighting	Home electronics	Home automations

Technical parameters

MODEL	IPS300-SIN-WM	IPS600-SIN-WM
Output power (apparent/active)	300VA/300W	600VA/600W
INPUT		
Input voltage	Rated: 230VAC Input voltage range: 156Vac – 294Vac	
Input frequency	50/60Hz ± 10% (autodetect)	
OUTPUT		
Output voltage	Mains mode: 182Vac – 253Vac, Battery mode: 230Vac +/- 5%,	
Frequency	50/60Hz ± 1% (auto-detect)	
Output waveform	Mains mode: pure sin, Battery mode: pure sin,	
Transfer time	Max.: 10 ms	
Output sockets	CEE 7/3 2pcs (Schuko)	
Efficiency	Mains mode: <95% Battery mode: <80%	
Power factor	1,0	
Loads	Resistance, inductive, capacitive, rectifiers	
Overload in mains mode	105% - 300s, 110% - 120s, 125% - 60s, 150% - 10s; SWITCH TO BYPASS MODE	
Overload in battery mode	105% - 300s, 110% - 60s, 125% - 10s, 150% - 0,7s; INVERTER SHUTDOWN	
BATTERY		
Battery type	Lead Acid VRLA voltage: 12V	Lead Acid VRLA voltage: 12V
Charger current	1 - 15A * (default 10A)	1 - 30A * (default 20A)
Charger current level	1,2,3,4,5,6,7,8,9,10,15A	1,2,3,4,5,6,7,8,9,10,15,20,25,30A
Boost voltage	14,4V Vdc	14,4V Vdc
Float voltage	13,6Vdc	13,6Vdc
End of discharge voltage	10,2Vdc	10,2Vdc
Eod level	9,6-11,5Vdc	9,6-11,5Vdc
Batteries capacity:	1szt 12V 18....200Ah in 12V system	1szt 12V 18....400Ah in 24V system
Battery cable length:	0,8m	0,8m
Cross-section of battery cables:	6mm ² , M10	6mm ² , M10
PROTECTINS		
Full protections	Overcurrent, short circuit, temperature, overvoltage, low discharge, over charge	
ENVIRONMENT		
Humidity	20~90% RH @ 0~40°C (non-condensate)	
Noise	Regulated fan speed	
DIMMENSIONS & WEIGHT		
Net weight / gross weight (kg)	7,5 / 8,3 kg	10,5 / 11,3 kg
Dimensions width / depth / height (mm)	400 / 210 / 127	400 / 210 / 127
Package width / depth / height (mm)	490 / 290 / 195	490 / 290 / 195

*best charger current is 0,1C₂₀ capacity.

Battery connection:

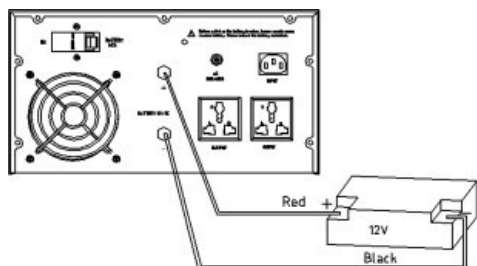


Standard Accessories:

- input wire
- instruction manual

Charger characteristic

3-stage charger : CC -> Boost CV -> Float.

- 1) Stage I – constant current, up to equalizing charge voltage
- 2) Stage II – constant voltage, time 10seconds
- 3) Stage III – floating voltage , after 10days recover

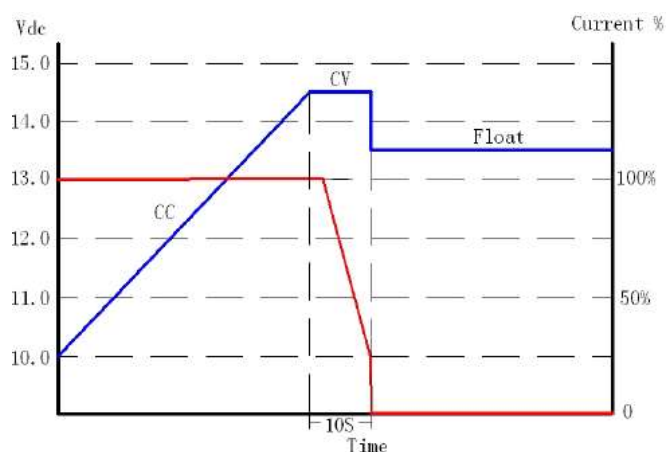

LCD MENU function description:

	Function	Description	Default value	Options
1	OUT	Rated output voltage of the inverter	230V	220V/230V/240V
2	HZ	Rated output frequency of the inverter	50Hz	50Hz/60Hz
3	B	Equalizing charge voltage	14,1V	13,6...15V
4	F	Floating charge voltage	13,5V	13,2...14,6V
5	E	End of discharge voltage	10,2V	9,6...11,5V
6	CUR	Charging current	10A	1,2,3,4,5,6,7,8,9,10,15A (20,25,30A)
7	IECO	Inverter no-load ECO mode	No	No/Yes N/Y
8	INLS	Inverter no-load shutdown function	No	No/Yes N/Y
9	DCAU	DC auto restart function	No	No/Yes N/Y
10	ACAU	AC self-starting function	Yes	No/Yes N/Y
11	INP	Input power matching of the generator	120%	10%-120% rated power
12	INLS	Inverter shutdown load rate	3%	3%-50% rated power
13	T	DC auto restart time	1h	0,5h...8h
14	SAVE	Save and exit	-	No/Yes N/Y