


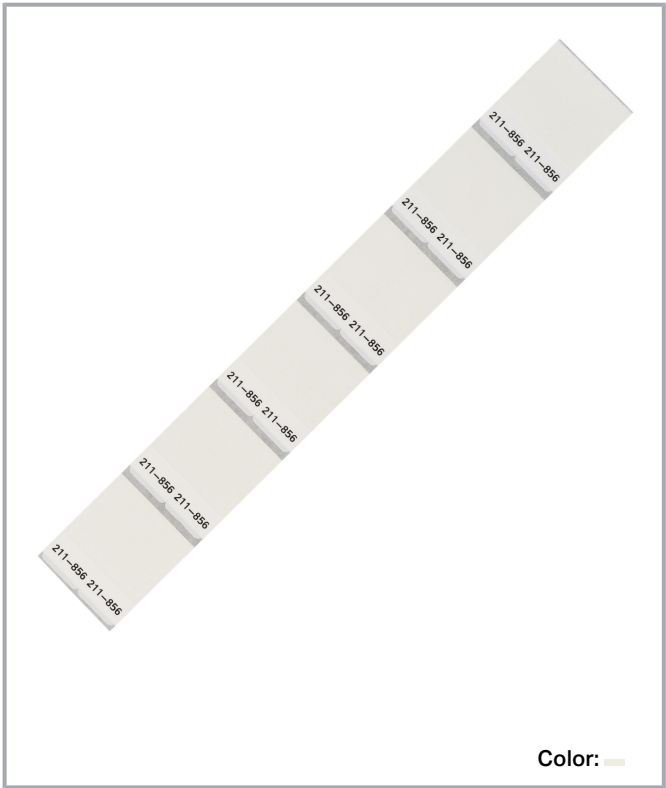

Data
Technical data

Marking method	thermal transfer
Marking	plain
Pre-assembly	1,000 pcs/reel
Properties	for max. 12 mm cable diameter
Marking device	Smart Printer (Thermal Transfer Printer)

Physical data

Depth	0.12 mm
Marking surface	12 x 23 mm

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at 01788 568 008.

Mechanical data

Mounting type	Wrapping
Smear resistance	in conjunction with ribbon 258-5014

Material data

Color	white
Material	PVC
UV resistance	EN 60068-2-5:2010 Procedure B
Adhesive information	Acrylic; permanent
Halogen-free	Yes
Weight	181 g

Environmental requirements

Surrounding air temperature (storage)	10 ... 22 °C
Surrounding air temperature (operation)	-30 ... 120 °C
Relative humidity	40 ... 50 %

Installation Notes


Marking



Remove the printed label from the sheet or reel.



Wrap the label around the conductor or cable.

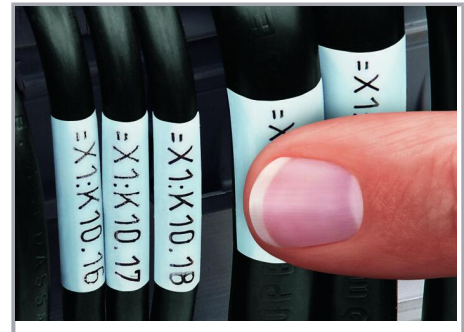

The transparent laminate protects the marking.

Subject to changes. Please also observe the further product documentation!