

Type TCC / TCC-P Time Lag Ceramic Fuse 5 x 20 mm



www.optifuse.com

(619) 593-5050

Part number:

TCC-XXA or

TCC-P-XXA

Where **XX** is Amperage

P is for Pigtail version

Agency Standards and Listings:



Approvals:

PSE 5.1A-15A (250V)

KTL 1.5A-20A

Time Characteristic

Rated Current	1 In	1.35 In	2 In	
	MIN	MAX	MIN	MAX
100mA~20A	4 Hrs	1 Hr	2 Sec	120 Sec

Interrupt Ratings:

100mA~15A: 10,000 amperes at 125VAC

100mA~1A: 35 amperes at 250VAC

1.25A~3.5A: 100 amperes at 250VAC

3.75A~10A: 200 amperes at 250VAC

10.1A~15A: 750 amperes at 250VAC

15.1A~20A 200 amperes at 250VAC

Operating Temperature:

-55°C to +125°C

Physical Specifications:

Materials:

Ceramic body / Nickel Plated Brass Caps


Lead Wire:

Diameter Ø0.8 mm 14A and less.

Diameter Ø1.0 mm for rating above 15A to 19A.

Diameter Ø1.2 mm for rating above 20A.

Mechanical Dimensions:

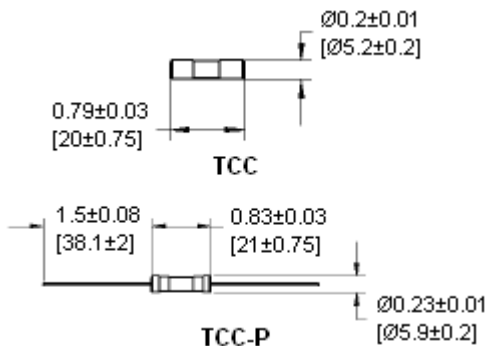

Cartridge Part Number.	Axial Lead Part Number	Ampere Rating (In)	Voltage Rating (V)	Nominal Resistance Cold Ohms	Nominal Melting I ² t A ² Sec
TCC-100mA	TCC-P-100mA	100mA	250V	16.860	0.0400
TCC-125mA	TCC-P-125mA	125mA		7.8250	0.0703
TCC-150mA	TCC-P-150mA	150mA		5.6874	0.0832
TCC-160mA	TCC-P-160mA	160mA		4.5000	0.0896
TCC-175mA	TCC-P-175mA	175mA		3.9200	0.1148
TCC-200mA	TCC-P-200mA	200mA		3.5400	0.1400
TCC-250mA	TCC-P-250mA	250mA		2.0475	0.2180
TCC-300mA	TCC-P-300mA	300mA		1.8920	0.2700
TCC-350mA	TCC-P-350mA	350mA		1.2320	0.2900
TCC-400mA	TCC-P-400mA	400mA		0.9350	0.3200
TCC-500mA	TCC-P-500mA	500mA		0.6430	0.3800
TCC-600mA	TCC-P-600mA	600mA		0.4620	0.4300
TCC-700mA	TCC-P-700mA	700mA		0.3200	0.5400
TCC-800mA	TCC-P-800mA	800mA		0.2267	0.6400
TCC-1A	TCC-P-1A	1A		0.1970	1.1520
TCC-1.25A	TCC-P-1.25A	1.25A		0.1285	2.3250
TCC-1.5A	TCC-P-1.5A	1.5A		0.0890	4.4384
TCC-1.6A	TCC-P-1.6A	1.6A		0.0852	5.2838
TCC-2A	TCC-P-2A	2A		0.0585	10.656
TCC-2.5A	TCC-P-2.5A	2.5A		0.0872	5.1183
TCC-3A	TCC-P-3A	3A		0.0615	9.8370
TCC-3.15A	TCC-P-3.15A	3.15A		0.0607	12.145
TCC-4A	TCC-P-4A	4A		0.0410	24.023
TCC-5A	TCC-P-5A	5A		0.0344	35.087
TCC-6A	TCC-P-6A	6A		0.0231	48.413
TCC-6.3A	TCC-P-6.3A	6.3A		0.0221	52.411
TCC-7A	TCC-P-7A	7A		0.0117	61.740
TCC-8A	TCC-P-8A	8A		0.0104	75.422
TCC-10A	TCC-P-10A	10A		0.0074	174.02
TCC-12A	TCC-P-12A	12A		0.0057	274.65
TCC-15A	TCC-P-15A	15A		0.0041	534.24
TCC-20A	TCC-P-20A	20A		0.0028	959.40

* Please contact Optifuse

Packaging :

1. In Bulk : TCC – 1,000 pcs : TCC-P – 500 pcs per box.
2. On Axial Tape & Reel: 1,000 pcs per reel.
3. Tape & Reel specification: Per EIA-296-E & IEC 286-1 @ 10mm Pitch and 56.5mm inside Tape spacing.

Type TCC / TCC-P
Time Lag Ceramic Fuse
5 x 20 mm




www.optifuse.com

(619) 593-5050

Part Number TCC/TCC-P

Time Current Curve

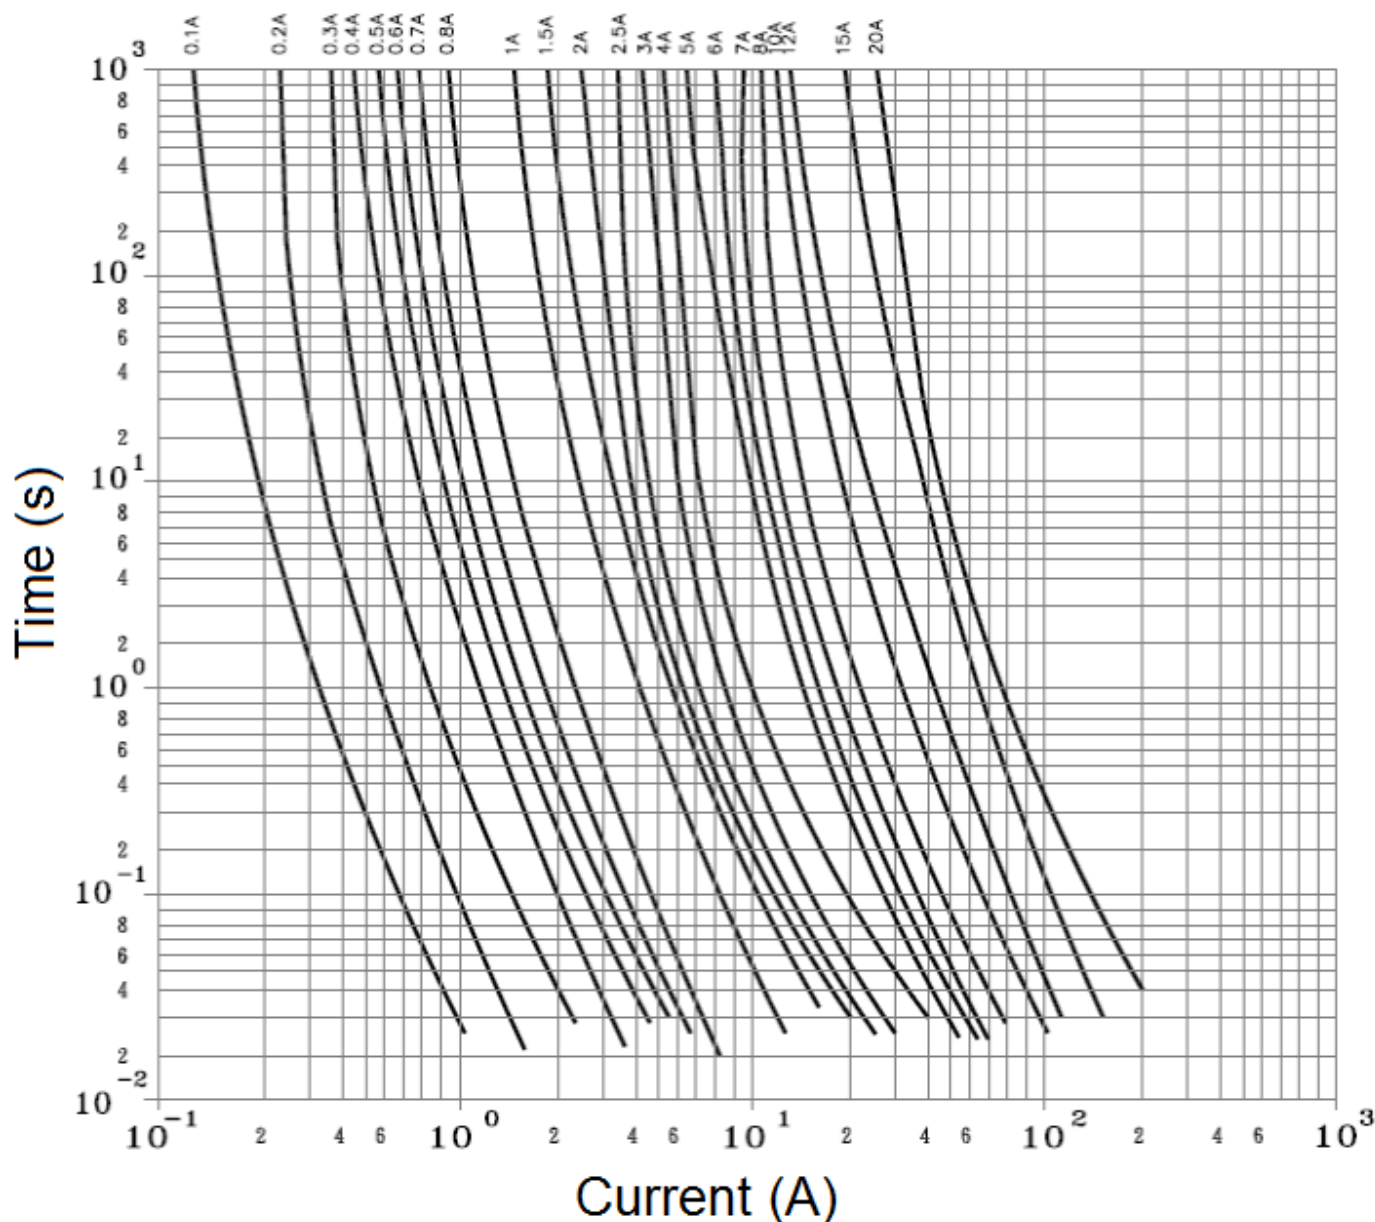

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of fuse with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev D 02/2015 - Page: 2/2
Code C01-01H