

Type TPK

Class M

Supplementary Protection

Time Delay - 13/32"x 1-1/2"



www.optifuse.com

(619) 593-5050

For use as supplemental protection in motor, solenoid and transformer applications.

Electrical:

500VAC – 100mA - 30A


Interrupt Ratings:

10,000A @ 500VAC (100mA-30A)

Supplementary Protection Only –

Not rated for branch circuit protection.

Mechanical Dimensions:

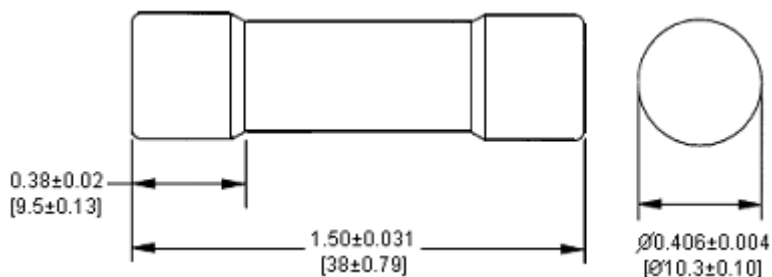

Part Number	Ampere Rating
TPK-100mA	100mA
TPK-125mA	125mA
TPK-187mA	187mA
TPK-200mA	200mA
TPK-250mA	250mA
TPK-300mA	300mA
TPK-400mA	400mA
TPK-500mA	500mA
TPK-600mA	600mA
TPK-800A	800mA
TPK-1A	1A
TPK-1.125A	1.125A
TPK-1.25A	1.25A
TPK-1.4A	1.4A
TPK-1.5A	1.5A
TPK-1.6A	1.6A
TPK-1.8A	1.8A
TPK-2A	2A
TPK-2.125A	2.125A
TPK-2.25A	2.25A
TPK-2.5A	2.5A
TPK-2.8A	2.8A
TPK-3A	3A
TPK-3.2A	3.2A
TPK-3.5A	3.5A
TPK-4A	4A
TPK-4.5A	4.5A
TPK-5A	5A
TPK-5.6A	5.6A
TPK-6A	6A
TPK-6.25A	6.25A
TPK-7A	7A
TPK-8A	8A
TPK-9A	9A
TPK-10A	10A
TPK-12A	12A
TPK-14A	14A
TPK-15A	15A
TPK-20A	20A
TPK-25A	25A
TPK-30A	30A

Warning:



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of fuse with chemical solvent. Prolonged contact may damage the device performance.

Note: All specifications subject to change without notice.

Rev A 01/2008 - Page: 1/2
Code F02-01H

Type TPK
UL Class M
Supplementary Protection
Time Delay - 13/32"x 1-1/2"



www.optifuse.com

(619) 593-5050

Time Current Curve Graphs

