ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	39014031	3CKT RECEPTACLE HOUSING 555703R2210	2	PC
C	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	6	PC
D	--	RESIN TPE NAT SANTOPRENE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC
F	--	MASTER BATCH BLACK COLOR	A/R	KG
G	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	3CX16AWG UNSHD BK UL2464	BLACK
A2	B2		RED
A3	B3		WHITE

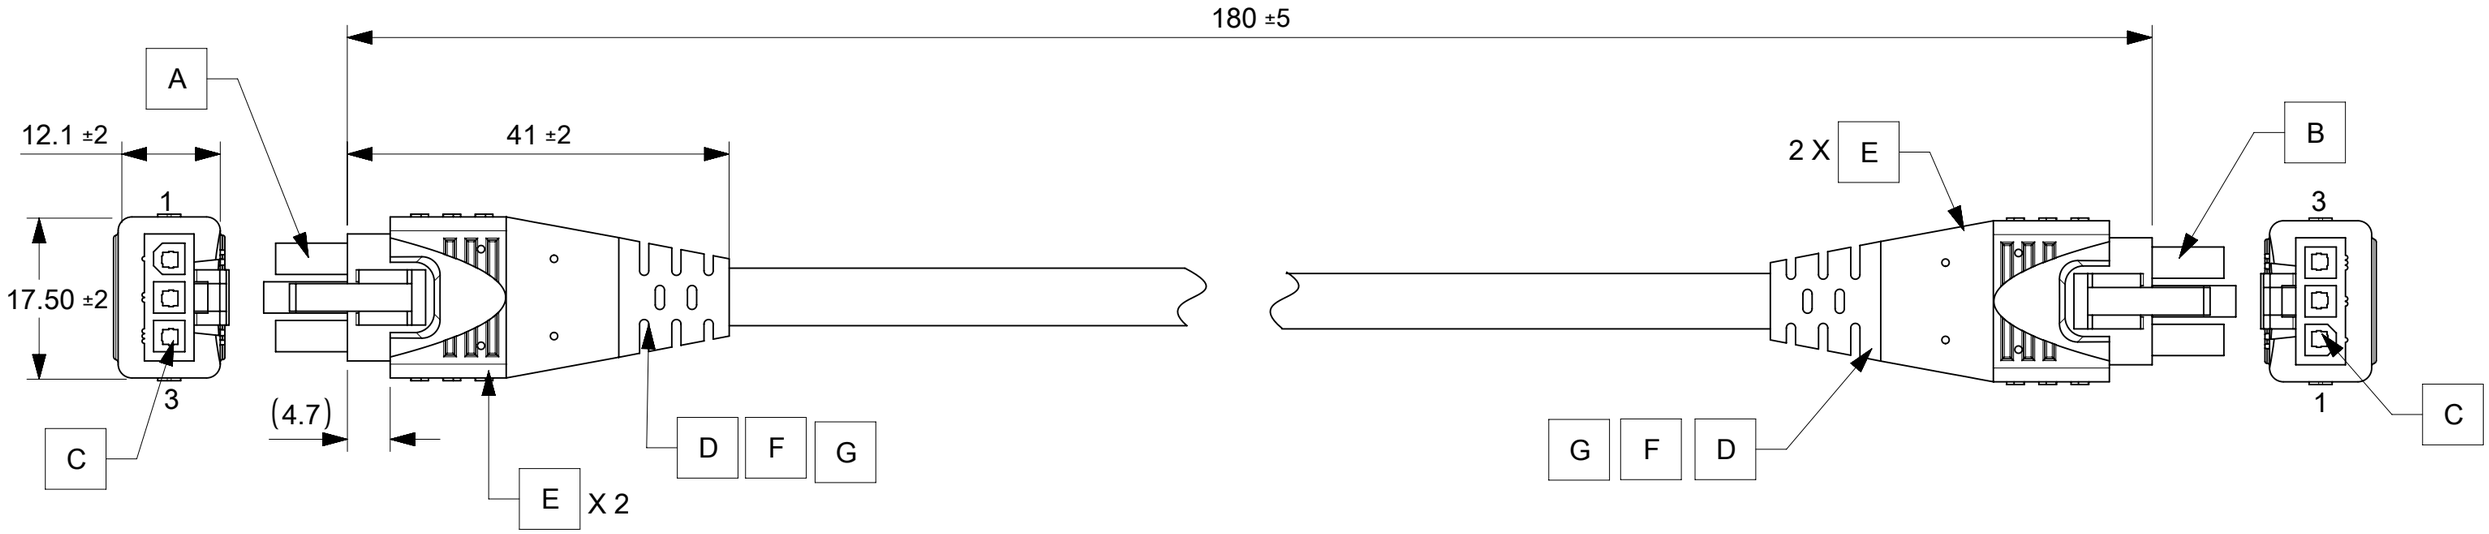

NOTES:

1. MOLDING MATERIAL:
   1.1 INNERCAP: PA66 NYLON RESIN.
   1.2 OVERMOLD: SANTOPRENE TPE RESIN & MASTER BATCH BLACK
   1.3 INNERMOLD: PP NAT UL94V-0
2. ELECTRICAL PERFORMANCE:
   2.1 VOLTAGE RATING: 300V AC.
   2.2 THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
      1) DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
      2) INSULATION RESISTANCE: 20M OHMS
3. CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
4. MECHANICAL PERFORMANCE:
   4.1 CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
   4.2 OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0, FC = 0, FP = 0
DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
mm	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC:

EC NO: 670688
DRWN: SBS04 2021/07/16
CHK'D: RDESAI01 2021/07/19
APPR: RDESAI01 2021/07/19

INITIAL REVISION:
DRWN: AS20 2020/10/06
APPR: RDESAI01 2021/03/22

THIRD ANGLE PROJECTION | DRAWING: A3-SIZE | SERIES: 215330

molex

3 CKT OVERMOLDED MINIFIT JR CABLE 180MM

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
2153300300	PSD	000	B1

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
2153300300	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/07/19 15:45:46

FORMAT: master Sheet A3
REVISION: J
DATE: 2020/01/14