LogiLink ®
PROFESSIONAL

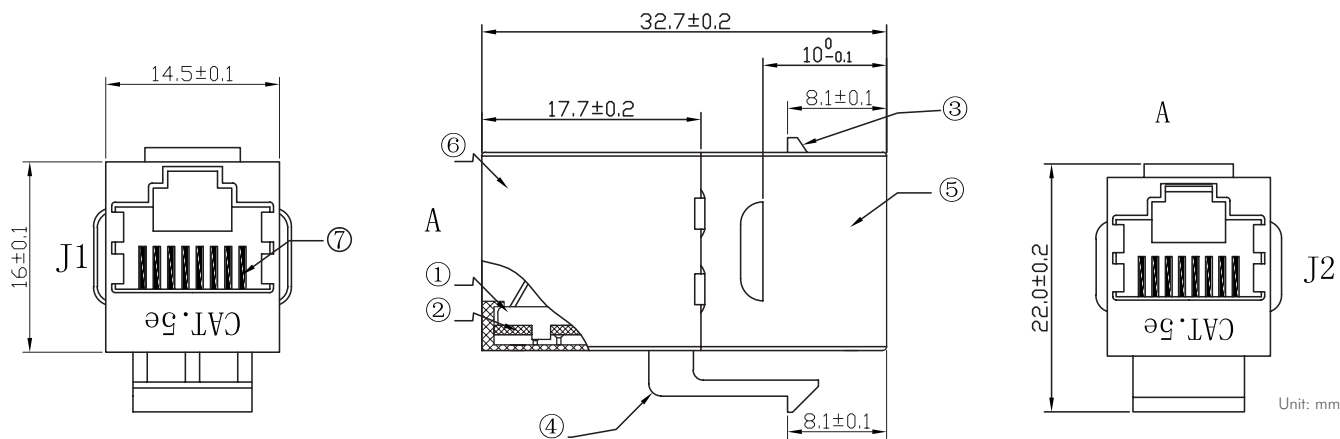# CAT.5e Keystone Coupler, STP

Art no.: NK4029

Technical Features

CAT.5e 100 MHz

2x RJ45 jack, fully shielded

Metal housing

Technical Drawings

14.5 ± 0.1

16 ± 0.1

J1

CAT.5e

⑦

32.7 ± 0.2

$10^{0}_{-0.1}$

17.7 ± 0.2

8.1 ± 0.1

⑥

A

①
②

③

⑤

④

8.1 ± 0.1

A

22.0 ± 0.2

J2

CAT.5e

Unit: mm

Connection Method

J1 { 1 —— 1
2 —— 2
3 —— 3
4 —— 4
5 —— 5
6 —— 6
7 —— 7
8 —— 8 } J2

① Lock Pin: PBT black
② PCB: FR-4, t=0.8
③ Shell I: ABS black
④ Shell II: ABS black
⑤ Shielded Enclosure I: Nickel Plated brass, t=0.2 mm
⑥ Shielded Enclosure II: Nickel Plated brass, t=0.2 mm
⑦ RJ45: Housing-Fireproof PBT Pin-8P8C gold plated

NK4029

4 052792 061802

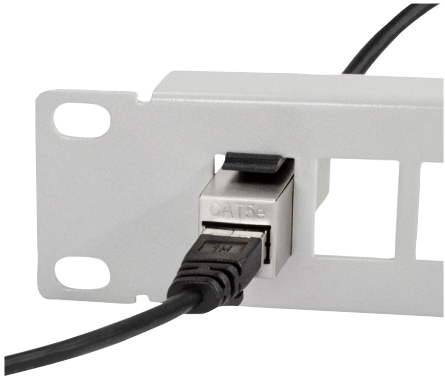Made in China

RoHS
compliant

www.logilink.com

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

LogiLink®

PROFESSIONAL

Package Contents

1x CAT.5e Keystone Coupler, STP

Packaging Informations

Packing Dimension	85x118 mm
Packing Weight	0.0095 kg
Carton Dimension	350x300x380 mm
Carton Q'ty	500 pcs
Carton Weight	5.8 kg

NK4029

4 052792 061802

Made in China

www.logilink.com

RoHS
compliant