

1500W CONVECTION COOLED

AC-DC POWER SUPPLIES

The HDS1500 series offers users both output voltage and output current programming (0–105%) via resistance, voltage or I2C bus in a very high efficiency, high power density 1.5kW chassis mount package. Measuring just 12.32" x 2.5" x 5.0", the HDS1500 also features active current sharing, remote on/off, remote sense and a power OK signal. The standby output is available whenever the mains supply is present and can be user selected as either 5V at 0.5A or 9V at 0.3A.



Features

- High Efficiency up to 92%
- High Power Density
- Programmable Output Voltage (0-105%)
- Programmable Output Current (0-105%)
- Parallel Operation
- Fully Featured Signals & Controls
- 3 Year Warranty

Applications



Industrial Electronics



Lasers



LED Heating



Robotics

Dimensions

12.32" x 2.50" x 5.00" (294.5 x 63.5 x 127mm)

Models & Ratings

Model Number	Output Voltage V1	Output Current		Efficiency ⁽¹⁾	Output Power
		Min	Max		
HDS1500PS12	12.0VDC	0.0A	125.0A	89%	1500W
HDS1500PS15	15.0VDC	0.0A	100.0A	90%	1500W
HDS1500PS24	24.0VDC	0.0A	62.5A	91%	1500W
HDS1500PS30	30.0VDC	0.0A	50.0A	92%	1500W
HDS1500PS36	36.0VDC	0.0A	41.7A	92%	1500W
HDS1500PS48	48.0VDC	0.0A	31.3A	92%	1500W
HDS1500PS60	60.0VDC	0.0A	25.0A	93%	1500W

Notes:

1. Measured with 230VAC input and full load.

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage	90		264	VAC	See derating curve
Input Frequency	47		63	Hz	
Power Factor		0.99/0.98			115/230VAC Full load
Input Current			18/9	A	115/230VAC
Inrush Current			30/60	A	115/230VAC
Earth Leakage Current			1.0	mA	264VAC/60Hz
Input Protection	F20 A/250 V internal fuse				


Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	12		60	VDC	See Models & Ratings table
Output Trim		±5.0		%	By potentiometer
Output Voltage Program	0		105	%	Of rated output
Output Current Program	0		105	%	Of rated output
Initial Set Accuracy			±1	%	
Minimum Load	No minimum load required				
Start Up Delay			1	s	
Start Up Rise Time			120	ms	At full load
Hold Up Time	8			ms	
Line Regulation			±1	%	
Load Regulation			±1	%	V1, 0-100% load
			±3	%	5V standby, 0-100% load
Transient Response			1	%	For a 25% step load change
Ripple & Noise			1	% pk-pk	1.25% for 12V model. Measured with 20 MHz bandwidth and using 12" twisted pair wire terminated with 0.1µF ceramic capacitor and 47µF electrolytic.
Overvoltage Protection	Tracks output voltage. See application notes, recycle AC to reset				
Overtemperature Protection	Primary and secondary heatsinks monitored. Output shuts down, auto recovers				
Overload Protection		105		%	Rated power, constant current
Short Circuit Protection	Auto recovery				
Temperature Coefficient		±0.02		%/°C	0-50°C
Remote Sense	Compensates for 0.5V max voltage drop If remote sense is not required, local sense must be used				
Enable	Output must be enabled. See application notes, power supply is shipped with enable links fitted				
Current Share	5 supplies can share within 5%				
Standby Output	5V at 0.5A, present whenever AC is applied (9V at 0.3A, user selectable, by connecting 'VSET', Pin 8 of CN2 to 'GND')				


Output

Output Voltage Programming

Via External Voltage

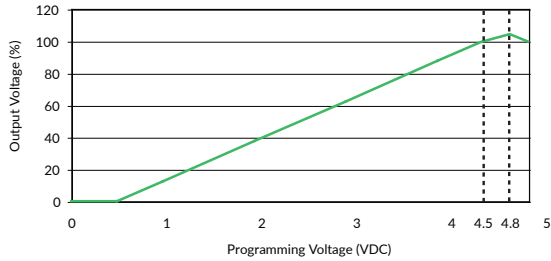


Via External Resistor

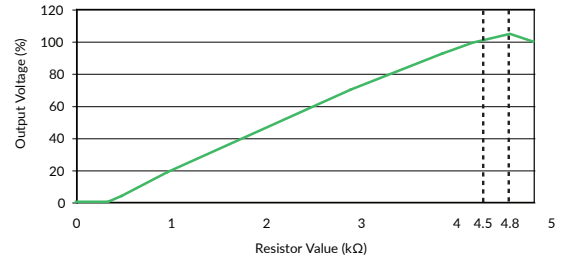


Output Current Programming

Via External Voltage

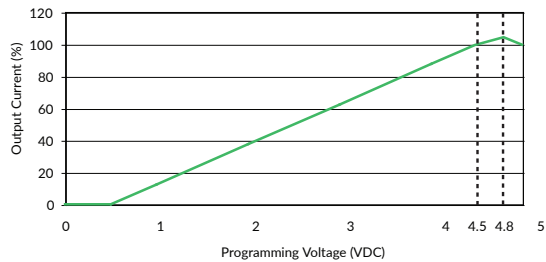

Via External Resistor

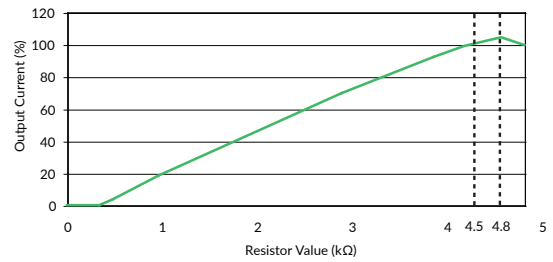

General


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency	89		93	%	230VAC Full load
Isolation: Input to Output	3000			VAC	
Input to Ground	1500			VAC	
Output to Ground	500			VAC	
Switching Frequency		65		kHz	PFC converter
	40		200		PWM, variable
Power Density			9.7	W/in ³	
Signals and Controls					Enable, Current Share, V Program, I Program, 5V Standby, Power OK
Mean Time Between Failure		115		khrs	MIL-HDBK-217F, Notice 2 25°C GB
Weight		5.7 (2.6)		lb (kg)	

Environmental


Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-25		+60	°C	Derate linearly from 100% load at 50°C to 60% load at 60°C
Storage Temperature	-40		+85	°C	
Cooling	Internal fan fitted, speed increases with load and internal temperature				
Humidity	20		90	%RH	
Vibration			2	g	10-500 Hz, 10 min/cycle, 60 min period for each axis, compliant to IEC68-2-6, IEC 68-2-64

Derating Curve


Thermal Derating Curve

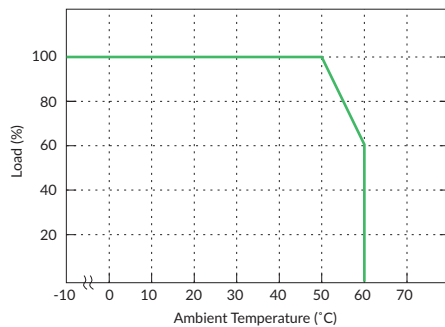

Input Derating Curve

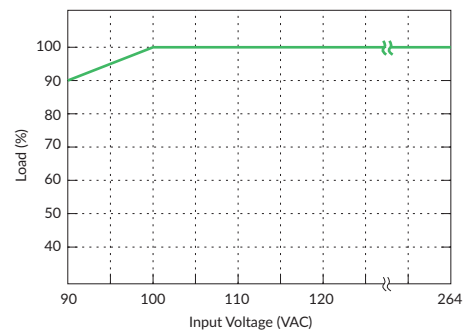


External Programming Voltage Connection

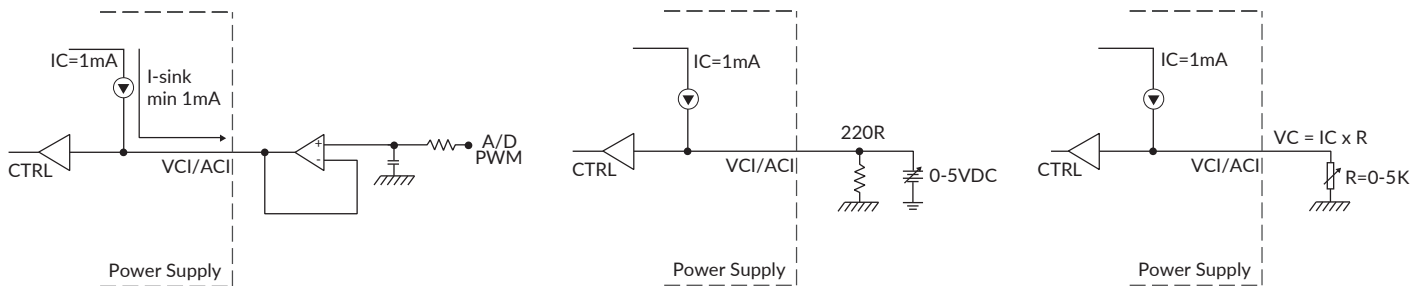


Signals & Controls

LED Status	Output Status
Solid (Green)	DC Output OK
Solid (Orange)	DC Output OK in remote control mode
Slow Blink (Green)	Output Not Enabled
Slow Blink (Orange)	Output Not Enabled in remote control mode
Fast Blink (Red)	Over Voltage
Solid (Red)	Over Loaded
Slow Blink (Red)	Over Temperature
Intermittent Blink (Red)	Fan Fail
Short & Long Blink (Red)	AUX Standby Failure


Remote Enable



(A) Using internal 5 V standby

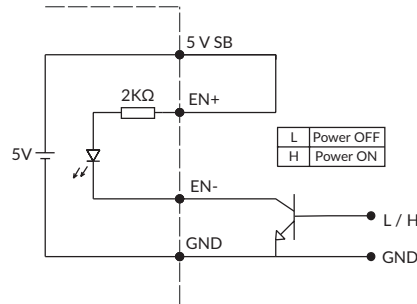

(B) Using external transistor

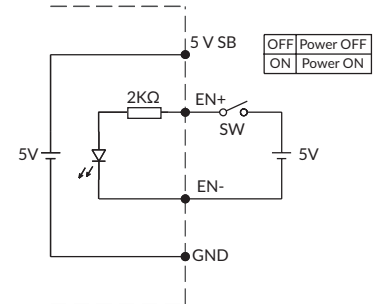

(C) Using external voltage source

*GND shown in above diagram is referring to the GND of CN2, not the grounding from output power (NEG (-))

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55032	Class A	
Radiated	EN55032	Class A	
Harmonic Currents	EN61000-3-2	Class A	
Voltage Flicker	EN61000-3-3		

EMC: Immunity


Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD Immunity	EN61000-4-2	2/3	A	±4kV contact, ±8kV air discharge
Radiated	EN61000-4-3	3	A	
EFT/Burst	EN61000-4-4	3	A	
Surges	EN61000-4-5	Installation class 3	A	
Conducted	EN61000-4-6	3	A	
Magnetic Field	EN61000-4-8	3	A	
Dips and Interruptions	EN55035	Dip 30% 500ms	A/B	High line/Low line
		Int >95% 10ms	A	
		Int >95% 5000ms	B	

Safety Approvals

Certification	Standard	Notes & Conditions
CB	IEC62368-1	Audio/Video, Information and Communication Technology Equipment
UL	UL62368-1, CSA C22.2 No 62368-1-14	
EN	EN62368-1	
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	


Application Notes

POK Signal

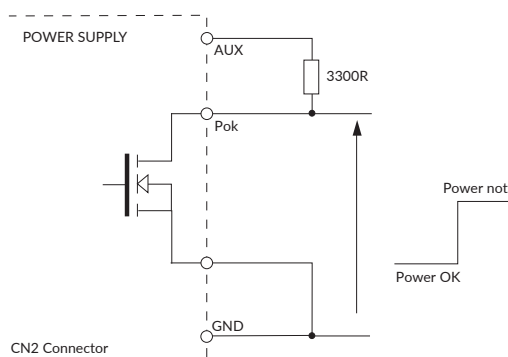


Open drain signal, low when PSU turns on
 Maximum sink current: 20mA
 Maximum drain voltage: 40V

OVP Setting

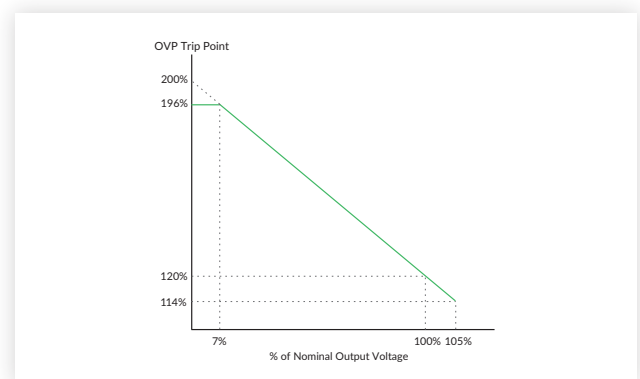


Application Notes


Remote Sense

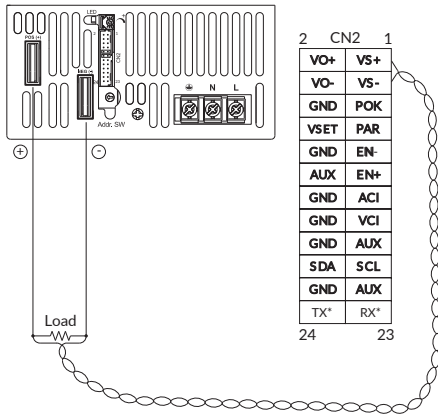


Current Share with Remote Sensing

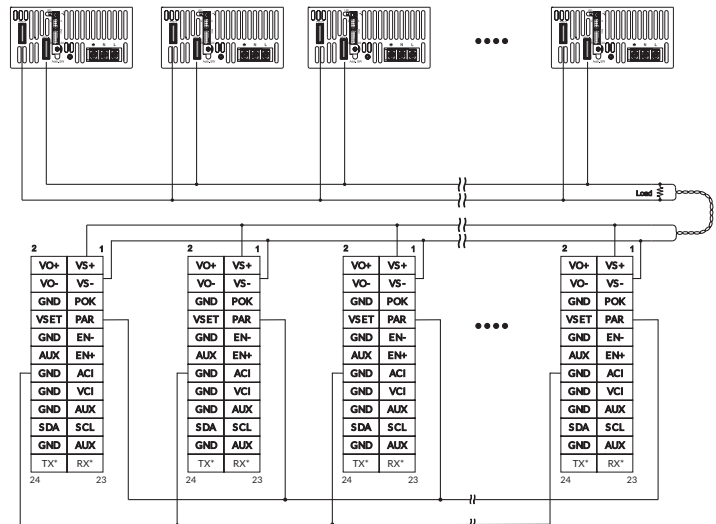

Local Sense

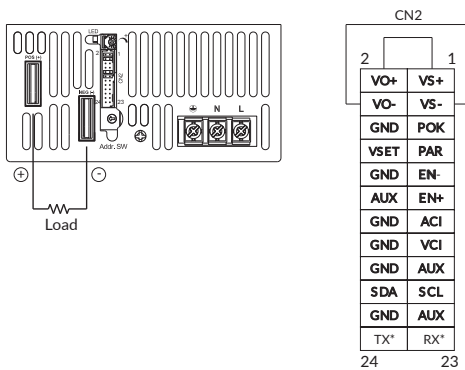

Current Share with Local Sensing

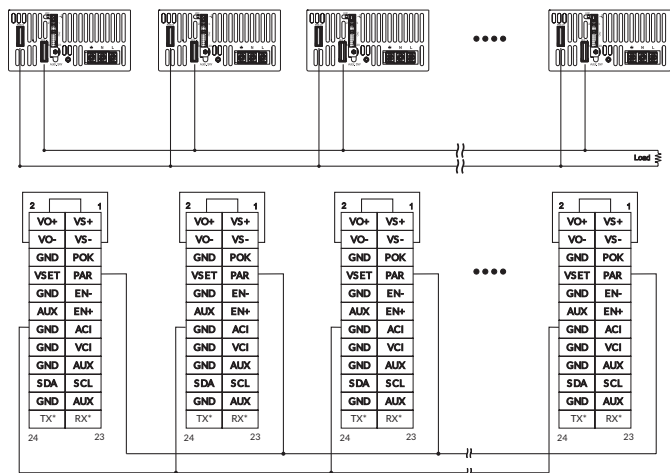

Must be used if remote sense is not required.

Notes:

In parallel operation, it is possible that only one unit will operate if the load is less than 5% of the combined rated output load.

It is possible to have more than five units in parallel, contact sales for details.

*Pin 23 and 24, Only usable with driver board "KIT-RS232-X" or "KIT-RS485-1"

AC-DC POWER SUPPLIES

Technical drawing of the 1U rackmount server showing front, top, and side views with dimensions in mm and inches.

Front View Dimensions:

- Total width: 12.36 (313.85)
- Internal width: 11.02 (280.0)
- Internal width (excluding side rails): 9.33 (237.0)
- Height (excluding side rails): 1.38 (35.0)
- Height (including side rails): 0.55 (14.0)
- Height (including side rails and top/bottom flanges): 3.86 (98.0)
- Height (including side rails and top/bottom flanges, excluding mounting holes): 0.57 (14.5)

Top View Dimensions:

- Width: 5.0 (127.0)
- Height: 2.5 (63.5)

Side View Dimensions:

- Width: 9.84 (250.0)
- Height (excluding side rails): 1.34 (34.0)
- Height (including side rails): 0.59 (15.0)

Mounting and Torque:

- 8-M4 (both sides) L=0.12 (3.0) max
- 4-M4 L=0.12 (3.0) max
- Torque: $2.5 \pm 2 \text{Kgf.cm}$ ($2.5 \pm 0.2 \text{Nm}$)

AIR FLOW: Indicated by an arrow pointing right.

Notes:

1. All dimensions are in inches (mm).
2. Weight 5.7lb (2.6kg)
3. Maintain 2" (50mm) clear space at each end.
4. Mating connector CN2: Manufacturer: JST Housing: PHDR-24VS, Contacts:

- SPHD-002T-P0.5 contacts (28-24 AWG)
5. Torque of mounting M4 screw: 1.27Nm (13.0kgf.cm)
*Only usable with driver board "KIT-RS232-X" or "KIT-RS485-1"