

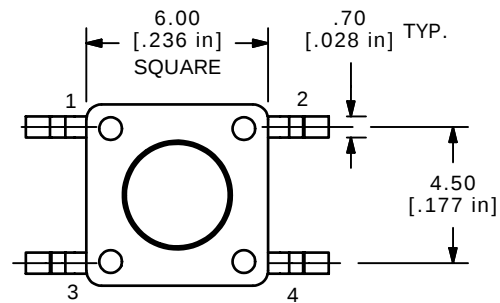
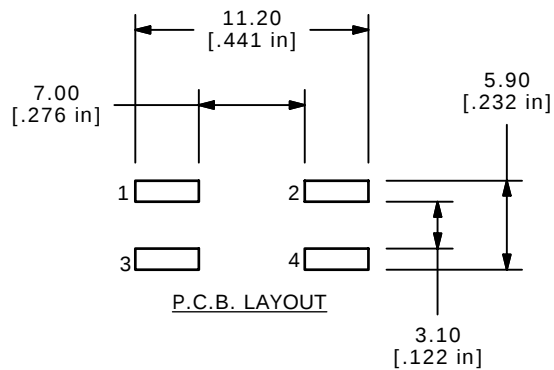



ISOMETRIC



CIRCUIT: SPST

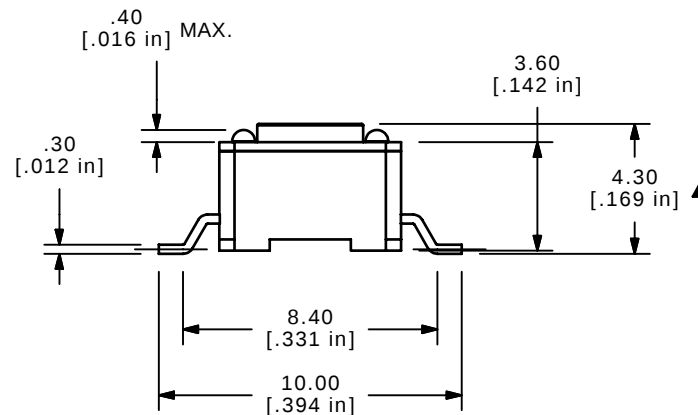

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲4. RATING: 12VDC, 50mA
5. OPERATING FORCE: 160 ± 50 gf
6. TRAVEL: 0.25mm +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 1,000,000 CYCLES.
- ▲9. CONTACT MATERIAL: SILVER
10. 2002/95/EC (ROHS) COMPLIANT
11. PACKAGING: TAPE AND REEL/1200 PER REEL.
12. ▲ DENOTES CRITICAL PARAMETER
13. STAINLESS STEEL DOME

E-SWITCH®

TITLE TL3301NF160QG SSDOME

D	16708	UPDATED, CONVERTED INVENTOR	11/28/06	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 11/28/2006

DR TN

DWG P010613

REV D