

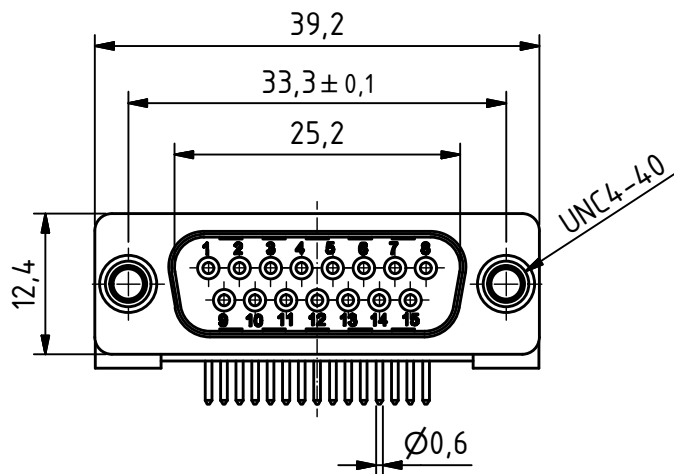
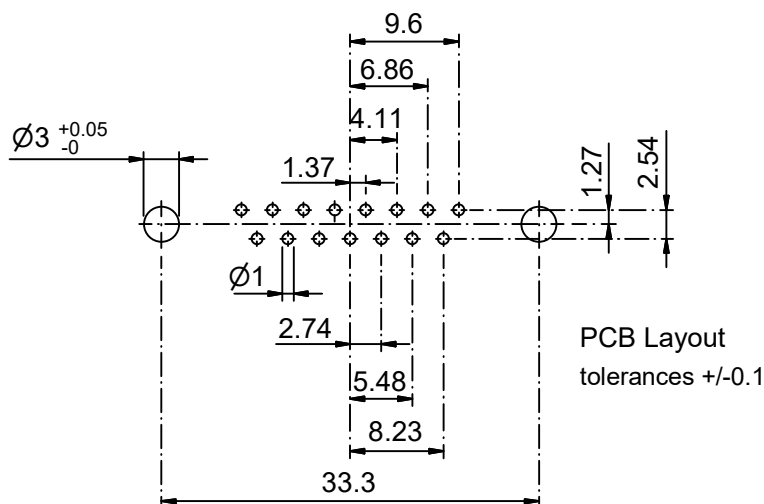
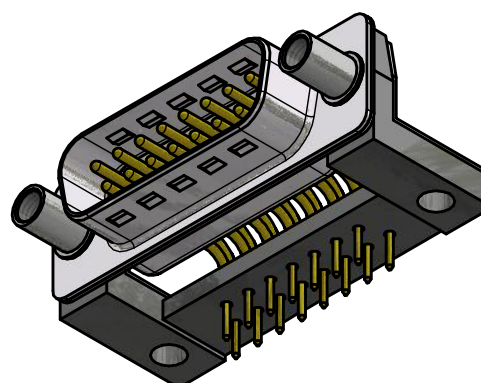


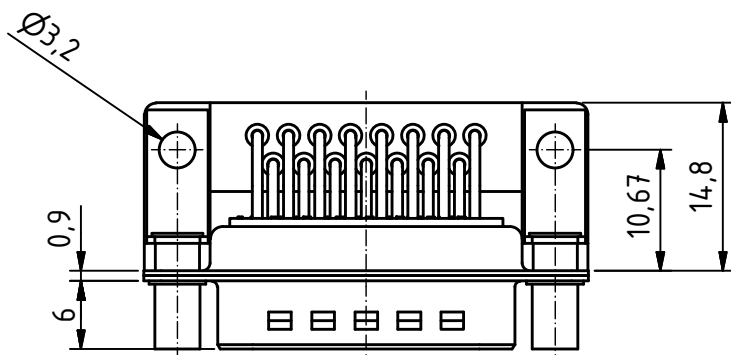

RoHS compliant

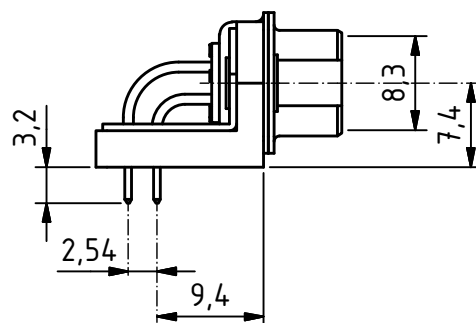

Product is
suitable for
Wave Solder
Process


MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Delttron standard)				
size in mm	tolerances			
	> 0.5 up to 3	> 3 up to 6	> 6 up to 30	> 30 up to 120
	±0.1	±0.2	±0.2	±0.3

	All dimensions in mm	Rev. a) 24.04.2003 mr	Rev. b) 09.01.2019 mw	Rev.	DE002555		
		Rev.	Rev.	Rev.	part no.		
DTS15PYC/2M66UN				1.5:1 scale	drawn	09.01.2019	mw
					checked		
					approved		
DELTRON CONNECT 2 CUSTOMIZE SWISS Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss				K053003 b			
				drawing no.			