



RAYSTAR

RAYSTAR Optronics, Inc.
曜凌光電股份有限公司



曜凌光電股份有限公司 Raystar Opttronics, Inc.

42881台中市大雅區科雅路25號5樓

5F, No. 25, Keya Road, Daya Dist., Taichung City 42881, Taiwan

T : +886-4-2565-0761 | F : +886-4-2565-0760

sales@raystar-opttronics.com | www.raystar-opttronics.com

RFS390D-1LW-DHG

SPECIFICATION

CUSTOMER:

APPROVED BY	
PCB VERSION	
DATE	

FOR CUSTOMER USE ONLY

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

Release DATE:

TFT Display Inspection Specification: <https://www.raystar-opttronics.com/download/products.htm>

Precaution in use of TFT module: <https://www.raystar-opttronics.com/download/declaration.htm>

Revision History

VERSION	DATE	REVISED PAGE NO.	Note
0	2022/11/10		First issue
A	2022/12/30		Modify Optical Characteristics
B	2023/06/09		Modify interface (HDMI (only for DVI) → DVI)

Contents

1.Module Classification Information

2.Summary

3.General Specifications

4.Interface

5.Contour Drawing

6.Absolute Maximum Ratings

7.Electrical Characteristics

8.DC Characteristics

9.Optical Characteristics

10.Reliability

11.Touch Panel Information

12.Other

1.Module Classification Information

R	F	S	39	0D	-	1	L	W	-	D	H	G
1	2	3	4	5	-	6	7	8	-	9	10	11

Item	Description	
1	R : Raystar Optronics Inc.	
2	Display Type : F→TFT Type, J→ Custom TFT	
3	Solution: A: 128x160 B:320x234 C:320x240 D:480x234 E:480x272 F:800x480 G:640x480 H:1024x600 I:320x480 J:240x320 K:1280x800 L:240x400 M:1024x768 N:128x128 O:480x800 P:640x320 Q:800x600 S:480x128 T:800x320	
4	Display Size : 3.9" TFT	
5	Version Code.	
6	Model Type: A : TFT LCD E : TFT+FR+CONTROL BOARD J : TFT+FR+A/D BOARD N : TFT+FR+A/D BOARD+CONTROL BOARD S : TFT+FR+POWER BOARD (DC TO DC) 1 : TFT+CONTROL BOARD	6 : TFT+FR H : TFT+D/V BOARD I : TFT+FR+D/V BOARD B : TFT+POWER BD
7	Polarizer Type, Temperature range, View direction	I→Transmissive, W. T, 6:00 ; C→Transmissive, N. T, 6:00 L→Transmissive, W.T,12:00 ; F→Transmissive, N.T,12:00 Y→Transmissive,W.T, IPS TFT ; A→Transmissive, N.T, IPS TFT Z→Transmissive, W.T, O-TFT R→Transmissive, Super W.T, O-TFT N→Transmissive, Super W.T, 6:00; Q→Transmissive, Super W.T, 12:00 V→Transmissive, Super W.T, VA TFT
8	Backlight	W : LED, White H : LED, High Light White F : CCFL, White
9	Driver Method	D: Digital A: Analog L : LVDS M:MIPI
10	Interface	N : without control board A : 8Bit B : 16Bit S:SPI Interface R: RS232 U:USB I: I2C
11	TS	N : Without TS S : resistive touch panel C : capacitive touch panel capacitive touch panel (G-F-F) G : capacitive touch panel(G-G)

2.Summary

TFT 3.9" is a TN transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT_LCD module, It is usually designed for industrial application and this module follows RoHs.

RAYSTAR OPTRONICS

3.General Specifications

- Size: 3.9 inch
- Dot Matrix: 480x128 x RGB dots
- Module dimension: 125.0 x 66.5 x 13.95 (Max) mm
- Active area: 95.04 x 25.34 mm
- Pixel pitch: 0.198(H) x 0.198(V) mm
- LCD type: TFT, Normally White, Transmissive
- View Direction: 6 o'clock
- Gray Scale Inversion Direction: 12 o'clock
- Aspect Ratio: Bar Type
- Backlight Type: LED, Normally White
- Controller IC: TFP401
- Interface: HDMI(only for DVI)
- CTP IC: GT911 or equivalent
- CTP FW Version: 0X99
- CTP Interface: USB
- CTP Resolution: 480*128
- With /Without TP: With CTP
- Surface: Glare

*Color tone slight changed by temperature and driving voltage.

4.Interface

4.1. LCM PIN Definition

DVI

Pin No.	Symbol	I/O	Function	Remark
1	Rx2+	I	Channel-2 positive receiver input; low-voltage signal differential- input pair.	
2	GND	P	Ground	
3	Rx2-	I	Channel-2 negative receiver input; low-voltage signal differential- input pair.	
4	Rx1+	I	Channel-1 positive receiver input; low-voltage signal differential- input pair.	
5	GND	P	Ground	
6	Rx1-	I	Channel-1 negative receiver input; low-voltage signal differential- input pair.	
7	Rx0+	I	Channel-0 positive receiver input; low-voltage signal differential- input pair.	
8	GND	P	Ground	
9	Rx0-	I	Channel-0 negative receiver input; low-voltage signal differential- input pair.	
10	RxC+	I	Clock positive receiver input; low-voltage signal differential- input pair.	
11	GND	P	Ground	
12	RxC-	I	Clock negative receiver input; low-voltage signal differential- input pair.	
13-16	NC	-	No connection	
17	GND	P	Ground	
18	5V	-	Power Supply	
19	Detect	-	Hot plug detect	

I: input, O: output, P: Power

Note 1: Only supports Raspberry Pi series


4.2. PW (Micro USB type B)

Pin No.	Symbol	I/O	Function	Remark
1	5V	P	Power Supply	
2	NC	-	No connection	
3	NC	-	No connection	
4	NC	-	No connection	
5	GND	P	Ground	

4.3. CTP USB (Micro USB type B)

Pin No.	Symbol	I/O	Function	Remark
1	5V	P	Power Supply	
2	D-	-	Data line -	
3	D+	-	Data line +	
4	NC	-	No connection	
5	GND	P	Ground	

5. Contour Drawing

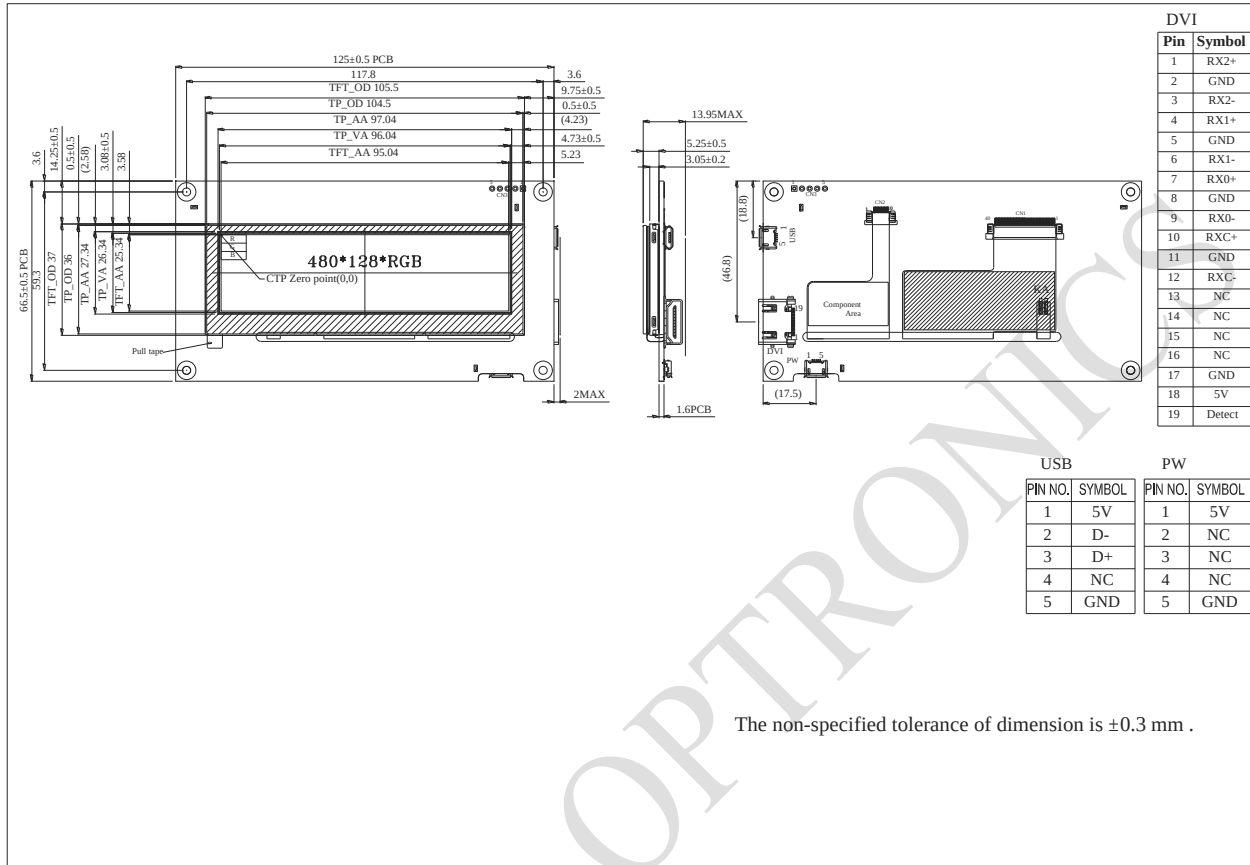

The non-specified tolerance of dimension is ± 0.3 mm .

6. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

- Temp. ≤ 60°C, 90% RH MAX. Temp. > 60°C, Absolute humidity shall be less than 90% RH at 60°C

7. Electrical Characteristics

7.1. Operating conditions:

Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
Supply Voltage For LCM	VDD	—	—	5	—	V	—
Supply Current For LCM	IDD	—	—	300	450	mA	Note 2
LED life time	—	—	—	50,000	—	Hr	Note 3

Note 1 : This value is test for VDD =5.0V , Ta=25°C only

Note 2 : Display with Raspberry pi the driver power is over USB , first make sure you have a 2A power supply, with a good quality USB cable, a thin wire power cable is no good. Make sure its 24AWG or smaller, shorter USB cables are better too.

Note3: The “LED life time” is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL =40mA. The LED lifetime could be decreased if operating IL is larger than 40mA

Note4 : CTP driver is base on the mouse driver program and through USB port connect to PC or embedded board.Can only support the single touch.

8.DC CHARATERISTICS

Parameter	Symbol	Rating			Unit	Condition
		Min	Typ	Max		
Low level input voltage	V_{IL}	0	-	0.3VDD	V	
High level input voltage	V_{IH}	0.7VDD	-	VDD	V	

9. Optical Characteristics

Item	Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time	Tr+Tf	$\theta=0^\circ$ 、 $\phi=0^\circ$	-	25	40	ms	Note 3
Contrast ratio	CR	At optimized viewing angle	300	500	-	-	Note 4
Color Chromaticity	White	Wx	0.264	0.314	0.364	-	Note 2,6,7
		Wy	0.269	0.319	0.369	-	
Viewing angle (Gray Scale Inversion Direction)	Hor.	θ_R	-	65	-	Deg.	Note 1
		θ_L	-	65	-		
	Ver.	ϕ_T	-	65	-		
		ϕ_B	-	50	-		
Brightness	-	-	300	400	-	cd/m ²	Center of display
Uniformity	(U)	-	75	-	-	%	Note 5

Ta=25±2°C, ILED=40mA

Note 1: Definition of viewing angle range

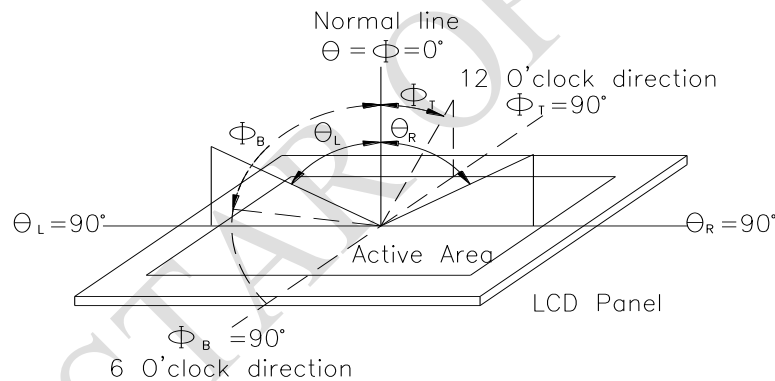


Fig. 9.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


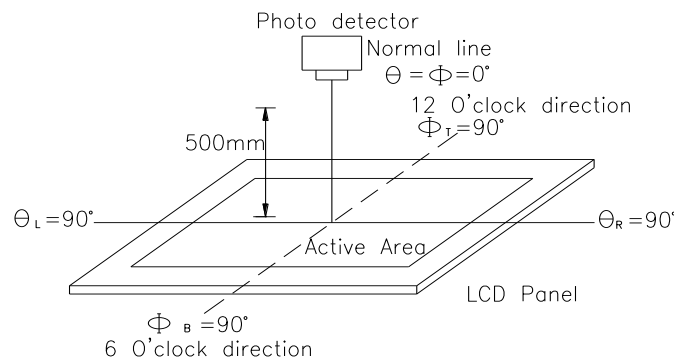


Fig. 9.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

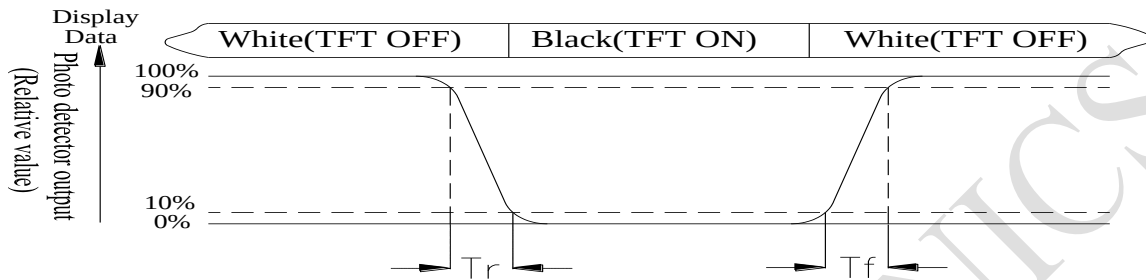

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (U) = $L_{\min}/L_{\max} \times 100\%$

L = Active area length

W = Active area width

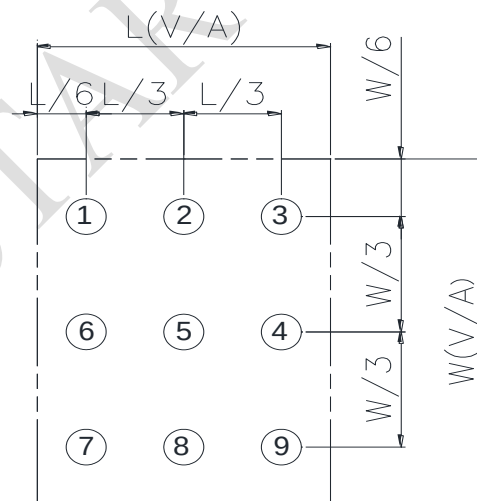


Fig9.3. Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

RAYSTAR OPTRONICS

10. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)


Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 200hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60°C,90%RH max	60°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation -20°C 25°C 70°C  30min 5min 30min 1 cycle	-20°C/70°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±8KV(contact), ±8KV(air), RS=330Ω CS=150pF 10 times	—

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

11.Touch Panel Information

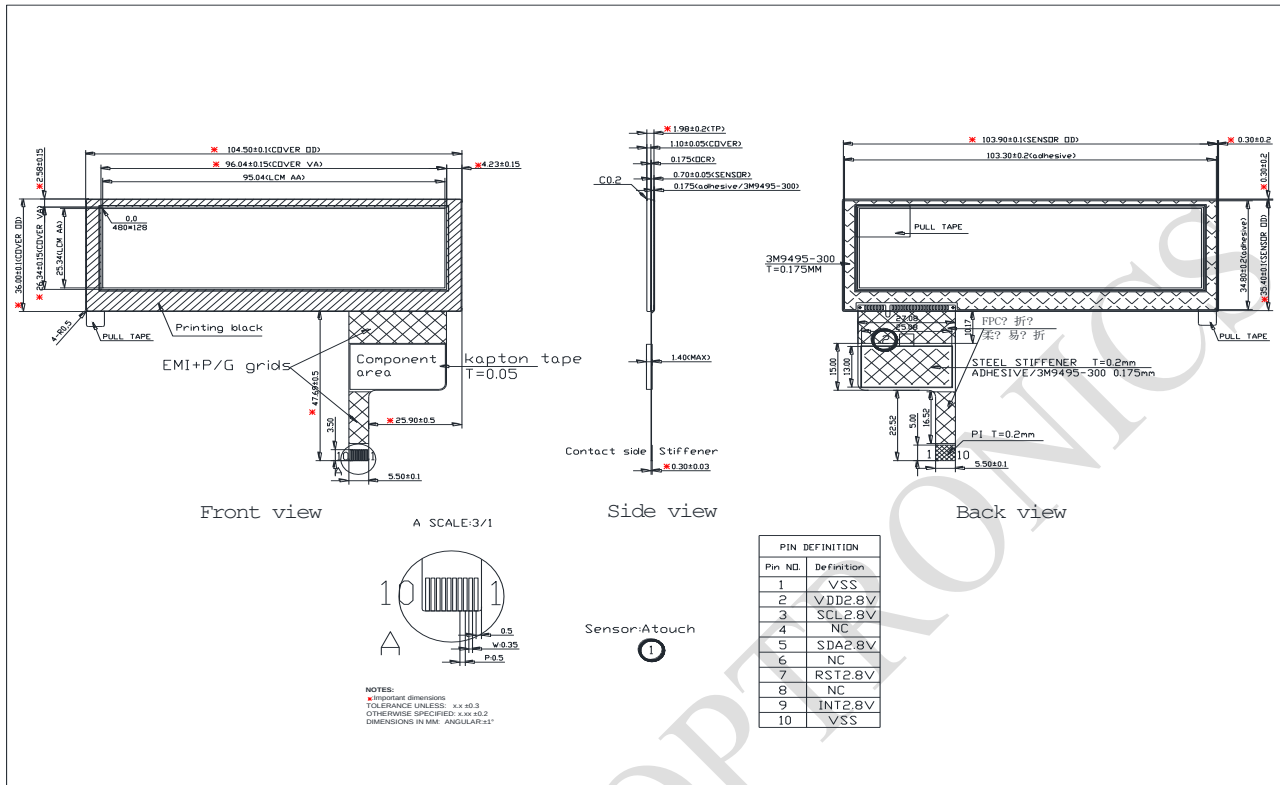

LCM Sample Estimate Feedback Sheet

Module Number : _____

1 、 Panel Specification :

1. Panel Type :	☐ Pass	☐ NG , _____
2. View Direction :	☐ Pass	☐ NG , _____
3. Numbers of Dots :	☐ Pass	☐ NG , _____
4. View Area :	☐ Pass	☐ NG , _____
5. Active Area :	☐ Pass	☐ NG , _____
6. Operating Temperature :	☐ Pass	☐ NG , _____
7. Storage Temperature :	☐ Pass	☐ NG , _____
8. Others : _____		

2 、 Mechanical Specification :

1. PCB Size :	☐ Pass	☐ NG , _____
2. Frame Size :	☐ Pass	☐ NG , _____
3. Material of Frame :	☐ Pass	☐ NG , _____
4. Connector Position :	☐ Pass	☐ NG , _____
5. Fix Hole Position :	☐ Pass	☐ NG , _____
6. Backlight Position :	☐ Pass	☐ NG , _____
7. Thickness of PCB :	☐ Pass	☐ NG , _____
8. Height of Frame to PCB :	☐ Pass	☐ NG , _____
9. Height of Module :	☐ Pass	☐ NG , _____
10. Others :	☐ Pass	☐ NG , _____

3 、 Relative Hole Size :

1. Pitch of Connector :	☐ Pass	☐ NG , _____
2. Hole size of Connector :	☐ Pass	☐ NG , _____
3. Mounting Hole size :	☐ Pass	☐ NG , _____
4. Mounting Hole Type :	☐ Pass	☐ NG , _____
5. Others :	☐ Pass	☐ NG , _____

4 、 Backlight Specification :

1. B/L Type :	☐ Pass	☐ NG , _____
2. B/L Color :	☐ Pass	☐ NG , _____
3. B/L Driving Voltage (Reference for LED Type) : ☐ Pass ☐ NG , _____		
4. B/L Driving Current :	☐ Pass	☐ NG , _____
5. Brightness of B/L :	☐ Pass	☐ NG , _____
6. B/L Solder Method :	☐ Pass	☐ NG , _____
7. Others :	☐ Pass	☐ NG , _____

>> **Go to page 2** <<

Module Number : _____

5 、 Electronic Characteristics of Module :

1.Input Voltage :	☐ Pass	☐ NG , _____
2.Supply Current :	☐ Pass	☐ NG , _____
3.Driving Voltage for LCD :	☐ Pass	☐ NG , _____
4.Contrast for LCD :	☐ Pass	☐ NG , _____
5.B/L Driving Method :	☐ Pass	☐ NG , _____
6.Negative Voltage Output :	☐ Pass	☐ NG , _____
7.Interface Function :	☐ Pass	☐ NG , _____
8.LCD Uniformity :	☐ Pass	☐ NG , _____
9.ESD test :	☐ Pass	☐ NG , _____
10.Others :	☐ Pass	☐ NG , _____

6 、 Summary :
Sales signature : _____

Customer Signature : _____

Date : / /