# Spring-loaded test probe

## GKS-113 313 180 R 3002 M

Item GKS-113-0625







- Screw-in test probes for applications with possible vibrations or unwanted side and axial forces (migration of the test probe out of the receptacle is reliably prevented)
- The screw-in test probe is securely installed in the KS using a torque screwdriver and bit tool. The required screw-in torque is applied via a square post on the receptacle.
- Stainless steel versions for temperatures from -100 °C up to +200 °C available





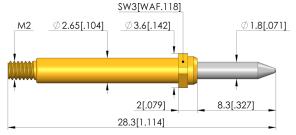



### **General data**

Screw-in test probe Product group: Sub-product group: Screw-in test probe Series: GKS-113 M screw-in Grid: 4 mm [157 mil] Contacting from: Pad, Female connector Magnetic: Installation type: Quick-exchange system: Adjustable installation height:

Non-rotating: Screw-in torque: Compatible receptacle(s): Min. temperature: + 80 °C [+ 176 °F] Max. temperature: RoHS-compliant:

Yes Screw-in Yes No

RoHS-3;6c

10 - 20 cNm [.885 - 1.77 lbf·in] KS-113 M - 40 °C [- 104 °F]

Tip style data Tip style:

Tip diameter: Tip style surface: Tip style material:

**Electrical data** Current load capacity / rated current: 8 A Typical resistance (Ri): <30 mOhm

**Mechanical data** 

Total length: 28.3 mm [1.11 in] Barrel diameter: 2.65 mm [.104 in] 5.3 mm [.208 in] Maximum stroke: Spring pre-load: 0.8 N [2.87 ozf] Collar height: 02 Spring force at working stroke: 3 N [10.7 ozf] Recommended working stroke: 4 mm [.157 in]

> 13 30° needle tip, rounded 1.8 mm [.070 in] R rhodium 3 CuBe

# **SCREW-IN TEST PROBE**


# Spring-loaded test probe

## GKS-113 313 180 R 3002 M

Item GKS-113-0625





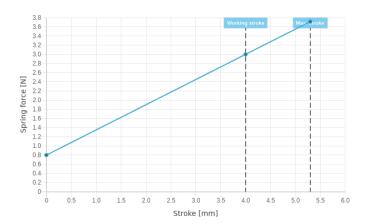

## **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about Screw-in test probe

