

Industrial contactors

9 - 10 - 12 - 18 - 24 - 32 - 50 - 74 A



Power
generators



Back-up
generators



Industrial
motors



Panels for
electrical
distribution



Pump control



Mini industrial contactors

Type 6K.04.x.xxx.4x09

- 9 A - 400 V AC3
- 4 kW - 400 V AC3

Type 6K.04.x.xxx.4x12

- 12 A - 400 V AC3
- 5.5 kW - 400 V AC3

- 3 NO contacts + 1 NC (2 A 400 V AC15)
- Version 47xx
- 3 NO contacts + 1 NO (2 A 400 V AC15)
- Version 48xx
- 4 NO contacts
- Version 43xx
- According to IEC EN 60947-4-1
- Nominal voltage: 110 V AC, 230 V AC, 24 V AC or 24 V DC
- NC auxiliary contact in "mirror contact" configuration according to EN 60947-4-1
- Auxiliary block contact 2 A (AC15 - 400 V) in various configurations availables
- AgSnO₂ contacts
- 35 mm rail (EN 60715) mount

6K.04

Screw terminal



* Mirror contact configuration

For outline drawings see page 12

NEW 6K.04.x.xxx.4x09




• AgSnO₂ contacts


NEW 6K.04.x.xxx.4x12




• AgSnO₂ contacts



3 NO + 1 NC
(47xx)



3 NO + 1 NO
(48xx)



4 NO
(43xx)

Contact specification

Contact configuration	3 NO + 1 NC* or 3 NO + 1 NO or 4 NO	
Rated current AC3	A	9
Rated voltage	V AC	400
Rated power AC3 @ 440 V	kW	4
Rated power AC3 @ 690 V	kW	4
Rated current AC1 @ 690 V	A	20
Breaking capacity DC1: 24/110/220 V	A	20/5/0.6
Breaking capacity DC3: 24/110/220 V	A	20/1/0.15
Contact material	AgSnO ₂	

Coil specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24 - 110 - 230
	V DC	24
Rated power AC/DC	VA (50 Hz)/W	4/1.2
Operating range	V AC (50/60 Hz)	(0.85...1.1) U _N
	V DC	(0.8...1.1) U _N

Technical data

Mechanical life AC/DC	cycles	5 · 10 ⁶ / 15 · 10 ⁶
Electrical life at rated load AC3	cycles	For electric life see page 8
Operate/release time	ms	15/8
Ambient temperature range	°C	-40...+70 (+90)**
Protection category		IP 20
Approvals (according to type)		CE UK CA cULus

** with reduced voltage range (0.9...1.0) U_N

Industrial contactors

Type 6K.14.x.xxx.4x10

- 10 A - 400 V AC3
- 4 kW

Type 6K.14.x.xxx.4x18

- 18 A - 400 V AC3
- 7.5 kW
- 3 NO contacts + 1 NC (2 A 400 V AC15)
- Version 47xx
- 3 NO contacts + 1 NO (2 A 400 V AC15)
- Version 48xx
- 4 NO contacts
- Version 43xx
- According to IEC EN 60947-4-1
- Nominal voltage: 110 V AC, 230 V AC, 24 V AC
- NC auxiliary contact in "mirror contact" configuration according to EN 60947-4-1
- Auxiliary contact 1 NO or 1 NC 2 A - 400 V AC15 available
- AgSnO₂ contacts
- 35 mm rail (EN 60715) mount

6K.14

Screw terminal



* Mirror contact configuration

For outline drawings see page 12

Contact specification

Contact configuration	3 NO + 1 NC* or 3 NO + 1 NO or 4 NO	
Rated current AC3	A	10
Rated voltage	V	400
Rated power AC3 @ 400 V	kW	4
Rated power AC3 @ 690 V	kW	5.5
Rated current AC1 @ 690 V	A	25
Breaking capacity DC1: 24/110/220 V	A	20/6/0.8
Breaking capacity DC3: 24/110/220 V	A	20/1.2/0.2
Contact material	AgSnO ₂	AgSnO ₂

Coil specification

Nominal voltage (U _N)	V AC	24 - 110 - 230
Rated power AC	VA (50 Hz)	7
Operating range	V AC	(0.85...1.1) U _N

Technical data

Mechanical life AC	cycles	10 · 10 ⁶
Electrical life at rated load AC3	cycles	For electric life see page 9
Operate/release time	ms	10/8
Ambient temperature range	°C	-40...+70 (+90)**
Protection category		IP 20




Approvals (according to type)



NEW 6K.14.x.xxx.4x10

• AgSnO₂ contacts

NEW 6K.14.x.xxx.4x18

• AgSnO₂ contacts3 NO + 1 NC
(47xx)3 NO + 1 NO
(48xx)4 NO
(43xx)** with reduced voltage
range (0.9...1.0) U_N

Industrial contactors

Type 6K.13.8.230.4324

- 24 A - 400 V AC3
- 11 kW - 400 V AC3

Type 6K.13.8.230.4332

- 32 A - 400 V AC3
- 15 kW - 400 V AC3

- According to IEC EN 60947-4-1
- Nominal voltage: 110 V AC, 230 V AC, 24 V AC
- Auxiliary contact 1 NO or 1 NC 2 A - 400 V AC15 available
- AgSnO₂ contacts
- 35 mm rail (EN 60715) mount

NEW 6K.13.8.xxx.4324




- AgSnO₂ contacts

NEW 6K.13.8.xxx.4332



- AgSnO₂ contacts

6K.13
Screw terminal



3 NO

For outline drawings see page 12

Contact specification

Contact configuration		3 NO	
Rated current AC3	A	24	32
Rated voltage	V AC	400	400
Rated power AC3 @ 400 V	kW	11	15
Rated power AC3 @ 690 V	kW	15	18.5
Rated current AC1 @ 690 V	A	50	65
Breaking capacity DC1: 24/110/220 V	A	50/10/1.4	65/10/1.4
Breaking capacity DC3: 24/110/220 V	A	50/1.8/0.2	65/1.8/0.2
Contact material		AgSnO ₂	AgSnO ₂

Coil specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24 - 110 - 230
Rated power AC	VA (50 Hz)	9
Operating range	AC (50/60 Hz)	(0.85...1.1) U _N

Technical data

Mechanical life AC	cycles	10 · 10 ⁶
Electrical life at rated load AC3	cycles	For electric life see page 9
Operate/release time	ms	10/8
Ambient temperature range	°C	-40...+70 (+90)*
Protection category		IP 20

Approvals (according to type)



* with reduced voltage
range (0.9...1.0) U_N

Industrial contactors

Type 6K.13.8.xxx.4350

- 50 A - 400 V AC3
- 22 kW - 400 V AC3

Type 6K.13.8.xxx.4374

- 74 A - 400 V AC3
- 37 kW - 400 V AC3

- According to IEC EN 60947-4-1
- Nominal voltage: 110 V AC, 230 V AC, 24 V AC
- Auxiliary contact 1 NO or 1 NC 2 A - 400 V AC15 available
- AgSnO₂ contacts
- 35 mm rail (EN 60715) mount

6K.13
Screw terminal



NEW 6K.13.8.xxx.4350




- AgSnO₂ contacts

NEW 6K.13.8.xxx.4374



- AgSnO₂ contacts



3 NO

For outline drawings see page 12

Contact specification

Contact configuration		3 NO	
Rated current AC3	A	50	74
Rated voltage	V	400	400
Rated power AC3 @ 400 V	kW	22	37
Rated power AC3 @ 690 V	kW	30	45
Rated current AC1 @ 690 V	A	110	130
Breaking capacity DC1: 24/110/220 V	A	110/12/1.4	130/12/1.4
Breaking capacity DC3: 24/110/220 V	A	110/1.8/0.25	130/1.8/0.25
Contact material		AgSnO ₂	AgSnO ₂

Coil specification

Nominal voltage (U _N)	V AC	24 - 110 - 230
Rated power AC	VA (50 Hz)	13
Operating range	V AC	(0.85...1.1) U _N

Technical data

Mechanical life AC	cycles	10 · 10 ⁶
Electrical life at rated load AC3	cycles	For electric life see page 9
Operate/release time	ms	12/8
Ambient temperature range	°C	-40...+60 (+90)*
Protection category		IP 20


Approvals (according to type)



* with reduced voltage range (0.9...1.0) U_N

Ordering information

Example: 6K series, industrial contactor, 3 contacts, 230 V AC, all NO contacts, 24 A AC3-400 V

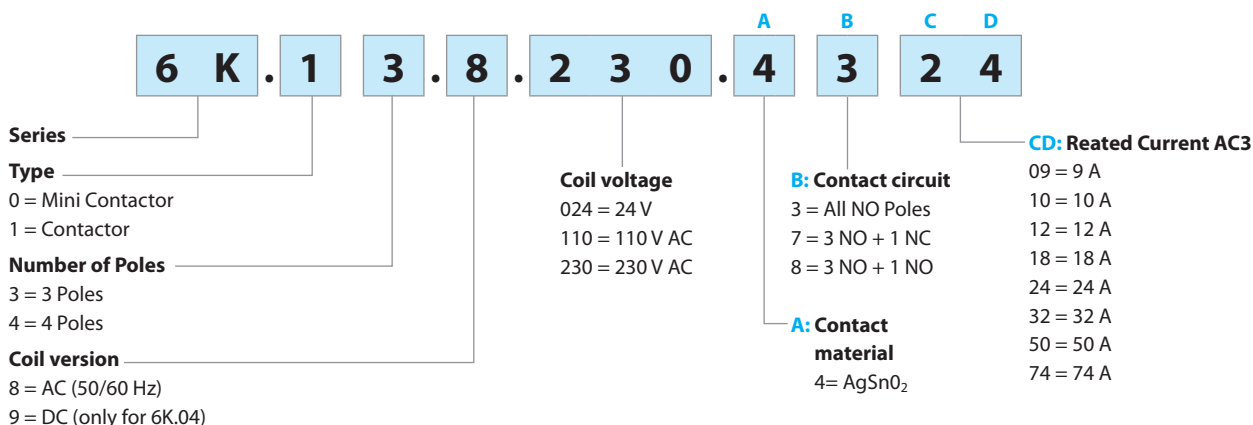

Selecting features and options: only combinations in the same row are possible.

Type	A	B	CD
6K.04	4	3 - 7 - 8	09 - 12
6K.14	4	3 - 7 - 8	10 - 18
6K.13	4	3	24 - 32 - 50 - 74

Technical data

Short circuit protection		6K.04	6K.14	6K.13 - 4324/4332	6K.13 - 4350/4374	
Rated conditional short circuit current	kA	3	10	10	10	
Back-up fuse	A	40 (gL/gG type)	63	100	160	
Terminals		Solid and stranded cable				
		6K.04	6K.14	6K.13 - 4324/4332	6K.13 - 4350/4374	
Max. wire size	mm²	1 x 2.5	1 x 6	1 x 25	1 x 50	
	AWG	1 x 14	1 x 10	1 x 10	1 x 10	
Min. wire size	mm²	1 x 0.5	1 x 0.75	1 x 1.5	1 x 4	
	AWG	1 x 18	1 x 18	1 x 16	1 x 12	
 Screw torque	Nm	0.8	0.8	2.5	3.5	
Wire strip length	mm	8	11	13	20	
Other data		6K.04	6K.14	6K.13 - 4324/4332	6K.13 - 4350	6K.13 - 4374
Shock resistance NO/NC	g	5/5	10/6	8/—	8/—	8/—
Power lost per pole AC3-400 V	W	0.20	0.35	1.3	2.2	5.5

Contact specification


Ratings and utilization categories according to EN 60947-4-1

Type	Utilization category					
	AC-4		AC-6a		AC-6b	
	Rated current I_E @ 400V (A)	Rated power @440V (kW)	Rated current I_E @ 400V (A)	Rated power @400V (kVA)	Rated current I_E @ 500V (A)	Rated power @400V (kVA)
6K.04-4x09	9	4	—	—	—	—
6K.04-4x12	12	5.5	—	—	—	—
6K.14-4x10	10	4	4.5	3.1	8	5
6K.14-4x18	18	7.5	7.5	5.2	15.5	10
6K.13-4324	24	11	1.5	7.3	23	15
6K.13-4332	32	15	13.5	9.3	32	20
6K.13-4350	50	22	20	13.5	45	29
6K.13-4374	74	37	33	22.5	70	46

Utilization categories


Kind of current	Utilization categories	Additional category designation	Typical load
AC	AC-1	General use	Non-inductive or slightly inductive loads
	AC-3		Squirrel-cage motors ^d : starting, switching off motors during running, reversing ^a
	AC-4		Squirrel-cage motors ^d : starting, plugging, inching
	AC-6a		Transformers
	AC-6b		Capacitor banks

F 6K - Electrical life AC3 (kW) and AC1 (A) - Type 6K.04

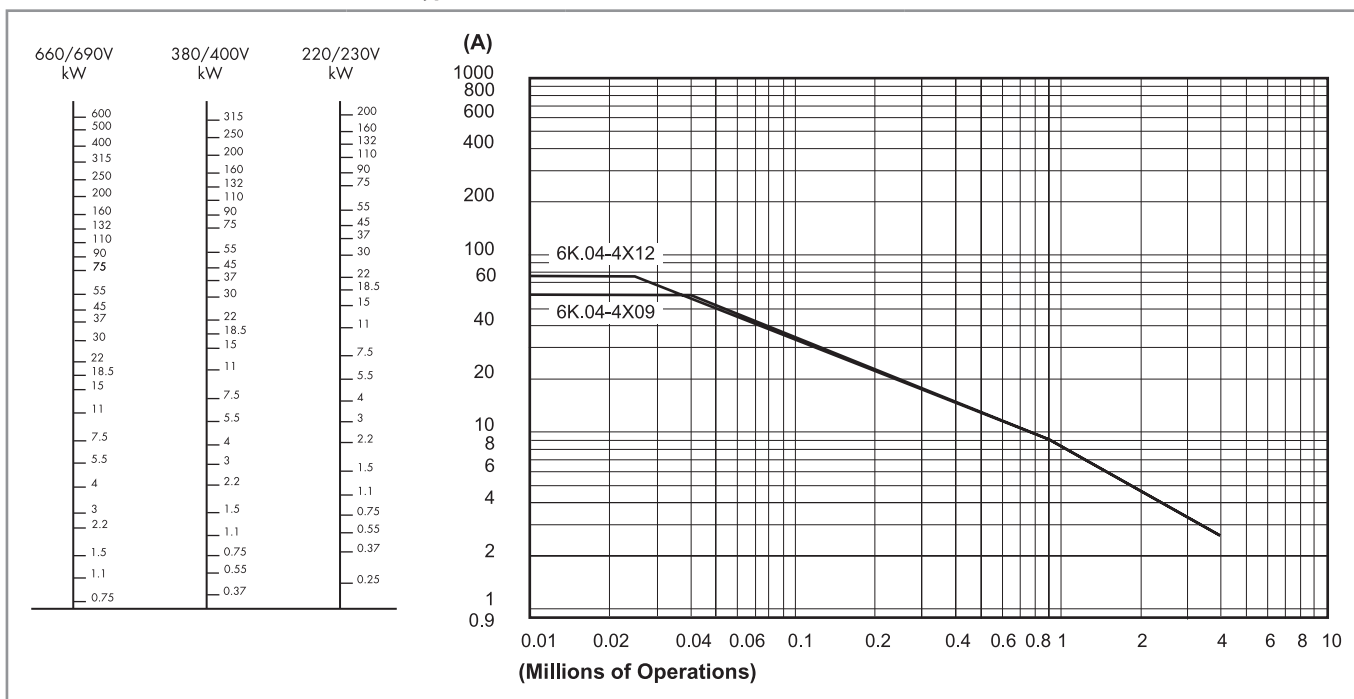


Contact specification

F 6K - Electrical life AC3 (kW) and AC1 (A) - Type 6K.13

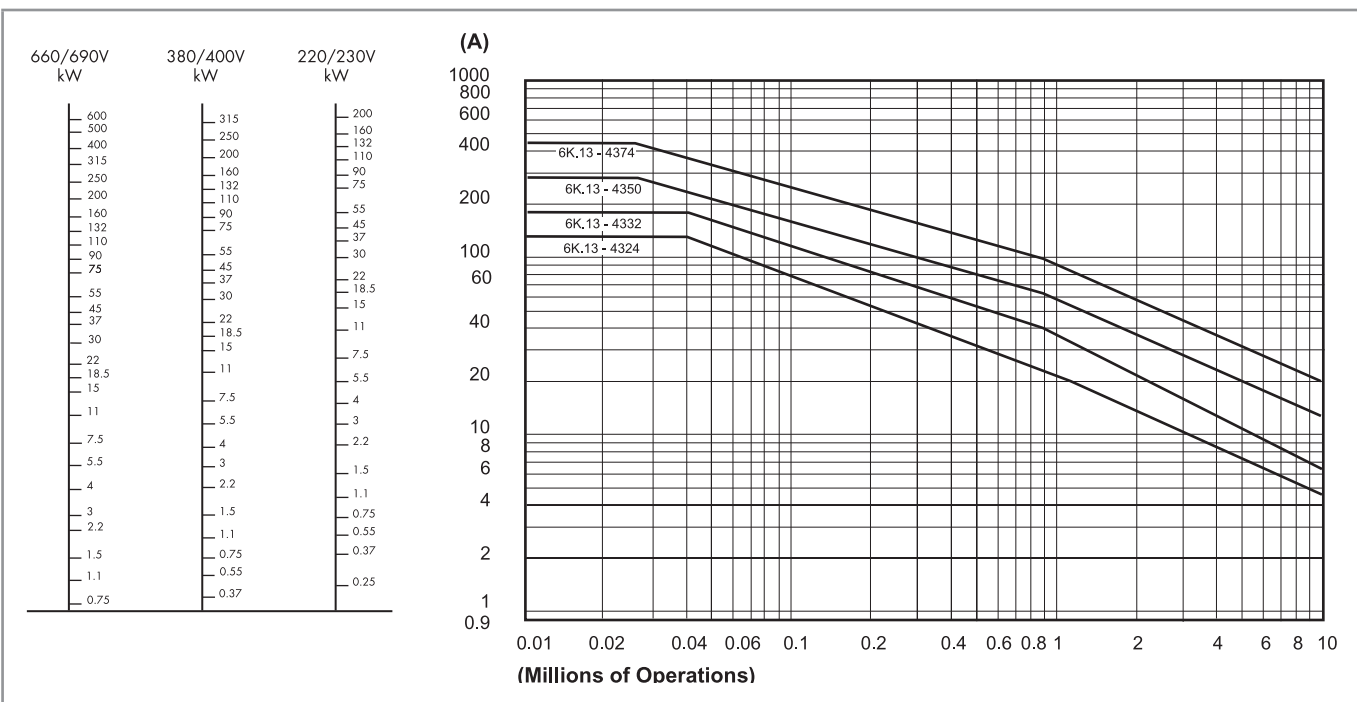

F 6K - Electrical life AC3 (kW) and AC1 (A) - Type 6K.14

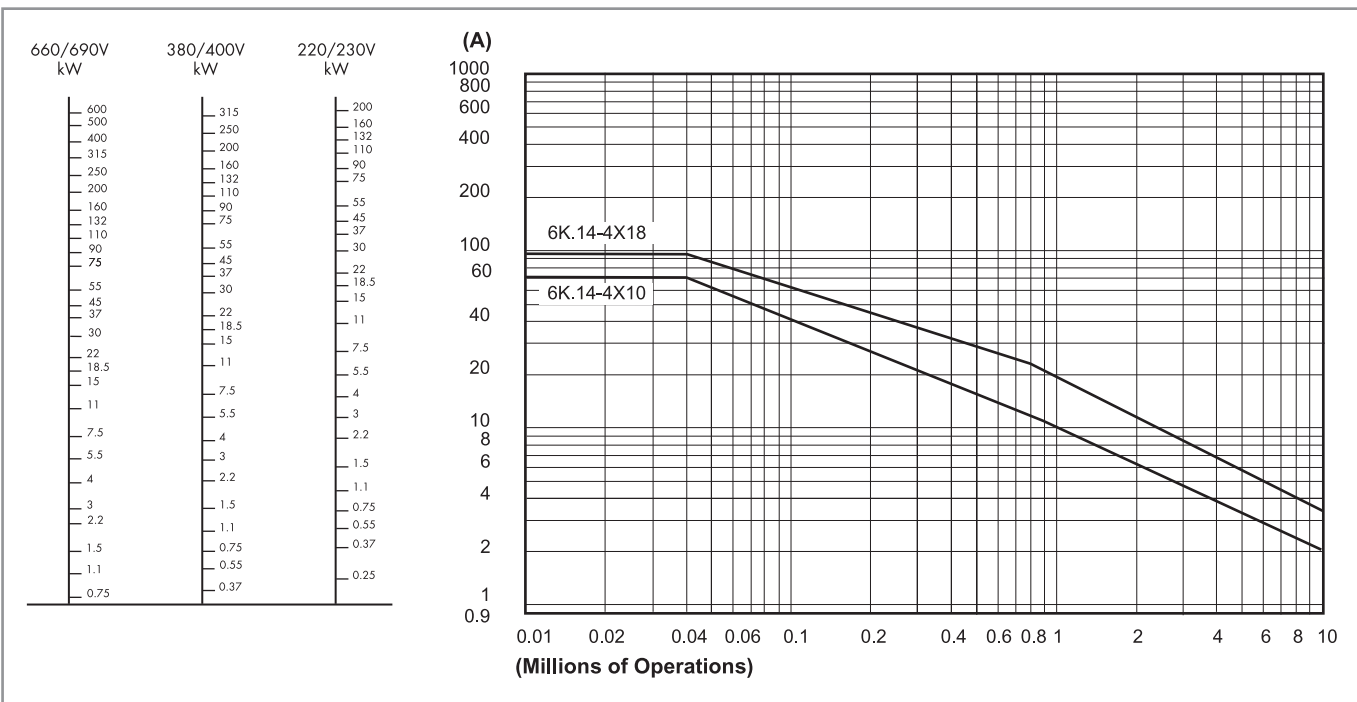

Coil specifications

AC version data (type 6K.04/14/13)

A	Nominal voltage U_N	Coil code	Operating range	
	V		U_{min} V	U_{max} V
	24	8.024	20.4	26.4
	110	8.110	93.5	132
	230	8.230	187	253

DC version data (type 6K.04)


Nominal voltage U_N	Coil code	Operating range	
V		U_{min} V	U_{max} V
24	9.024	19.2	26.4

Coil operating range v ambient temperature


Temperature	Operating range U_N
	Min...Max
70 °C	0.85...1.1
75 °C	0.86...1.08
80 °C	0.88...1.05
85 °C	0.89...1.02
90 °C	0.9...1.0

Wiring diagrams


A

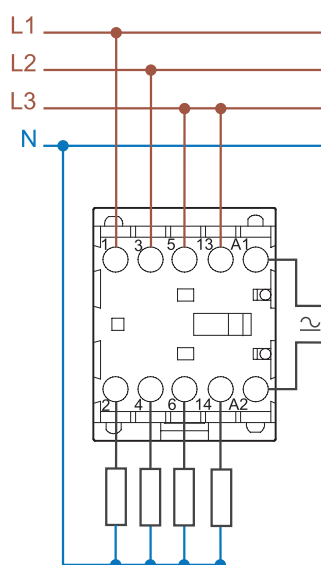


Type 6K.04-4x09/4x12

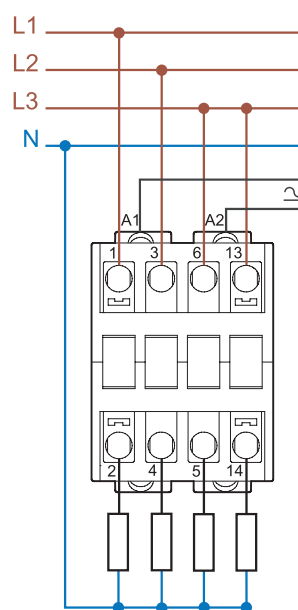

Type 6K.14-4x10/4x18

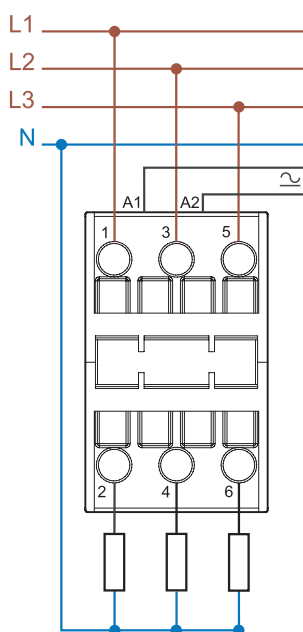





Type 6K.13-4324/4332

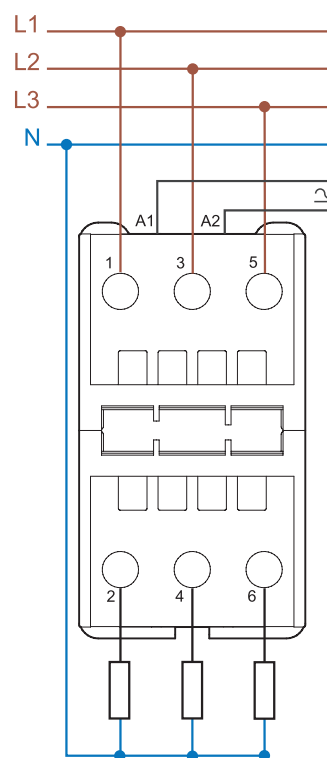


Type 6K.13-4350/4374

Outline drawings


A

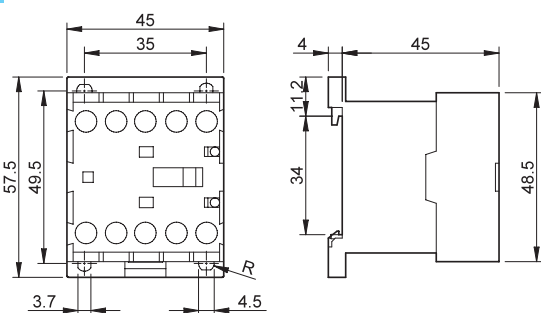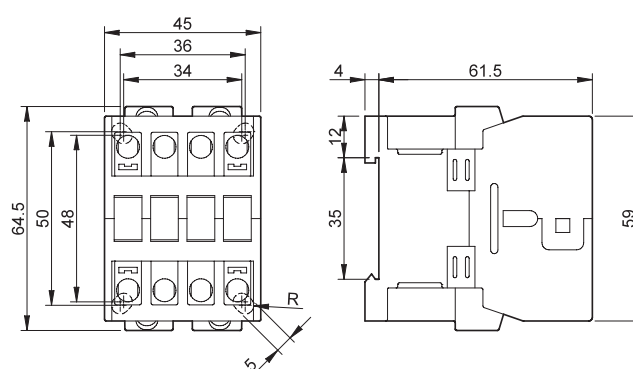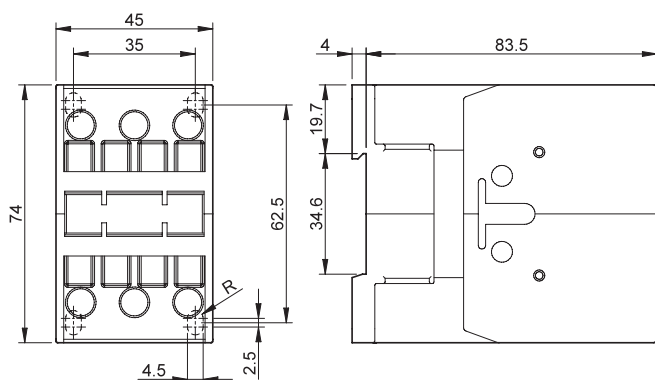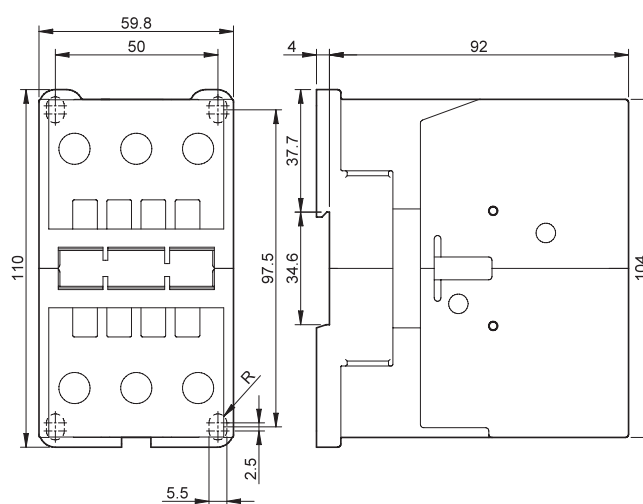Type 6K.04
Screw terminalType 6K.14
Screw terminalType 6K.13-4324/4332
Screw terminalType 6K.13-4350/4374
Screw terminal


Type 06K.03/06

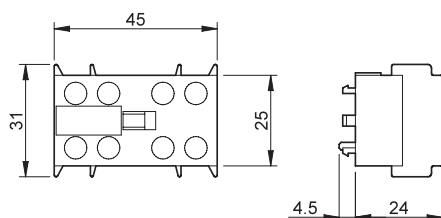

Type 06K11






Type 06K12



Auxiliary modules

Mechanically linked contacts according
to EN 60947-5-1, IEC 947-5-1

		06K.11	06K.12	06K.03 / 06K.06
				
				
Type of contactor		Type 6K.13 and 6K.14	Type 6K.13 and 6K.14	Type 6K.04
Contact specification				
Contact configuration (Bifurcated)		1 NO	1 NC	1 NO + 1 NC or 2 NO + 2 NC
Rated current @ 400 V AC15	A	2	2	2
Thermal rated current	A	10	10	10
Breaking capacity DC13: 24/110/220 V	A	2/0.4/0.1	2/0.4/0.1	2/0.4/0.1
Contact material		AgNi	AgNi	AgNi
Short circuit protection				
Max fuse size gL (gG)	A	20	20	20
Terminals				
Max. wire size	mm ²	2.5	2.5	2.5
	AWG	12	12	14
Min. wire size	mm ²	0.75	0.75	0.5
	AWG	14	14	18
 Screw torque	Nm	0.8	0.8	0.8
Wire strip length	mm	8	8	8
Power lost to the environment				
with rated current per pole @ AC1	W	0.5	0.5	1.2
Approvals (according to type)		  	  	  

