

Pushbutton Ø 19 mm silver contact

82-5162.1000.B001



<https://eao.com/p/82-5162.1000.B001>

Your product:



82-5162.1000.B001

Pushbutton Ø 19 mm silver contact

FRONT

Front bezel shape:	flush
Front bezel material:	Stainless steel

MOUNTING

Mounting cut-out:	Ø 19 mm
-------------------	---------

OPERATING-/INDICATION PART

Lens colour:	Silver
Lens shape:	raised
Lens illumination:	non illuminative
Lens material:	Stainless steel
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Electrical lifetime:	50 000 cycles of operation
Rated insulation voltage U_i :	250 V
Rated Operational Voltage U_e :	250 VAC
Switching voltage and switching current:	

according to IEC 60947-5-1 (Silver contacts)	
Service categorie AC-15	
Voltage	Current
24 VAC	1 A
35 VAC	1 A (M12 version)
110 VAC	1 A
220 VAC	0.5 A
Switch rating DC service categorie DC-13 (Silver contacts)	
Voltage	Current
24 VDC	0.7 A
35 VDC	0.5 A (M12 version)
110 VDC	0.2 A
220 VDC	0.1 A

according to UL 508 (Silver contacts)	
cosφ 0,75 ... 0,8	
Voltage	Current
120 VAC	5 A
240 VAC	3 A
24 VAC	1 A

Pollution degree:	2, according to EN IEC 60947-1
Electric strength:	1500 VAC, 50 Hz 1 minute between life terminals and ground
Contacts:	1 C
Thermal current Ith:	5 A

MECHANICAL CHARATERISTIC

Switching action:	Momentary
Terminal:	Screw terminal
Weight:	0.02 kg
Tightening torque:	0.5 ... 0.6 Nm, Screw terminal 0.1 Nm
Operating force:	4 N ... 7 N
Switching system:	Snap-action switching element
Operating Travel:	ca. 3 mm
Mechanical lifetime:	1 Mio. cycles of operation
Contact material:	Silver

AMBIENT CONDITION

Shock resistance:	Max. 500 m / s ² as per IEC 60068-2-27
Storage temperature:	– 40 °C ... + 80 °C
Operating temperature:	– 30 °C ... + 70 °C
Vibration resistance:	10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6
Climate resistance:	

Damp heat, 21 days according to IEC 60512-11

CERTIFICATE

Conformities: CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)


Approbations: CB, CCC, C UL, UL

OTHER

Symbol: ON/OFF


Short Description: Pushbutton Ø 19 mm silver contact, Momentary, 1 C, Screw terminal, Stainless steel, ON/OFF, Silver

Dimension drawings:

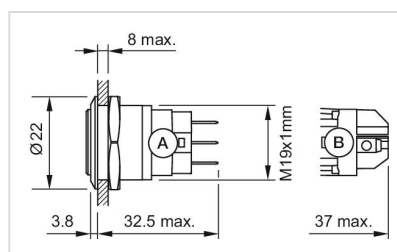


A = Solder terminal
B = Screw terminal

Wiring diagrams:

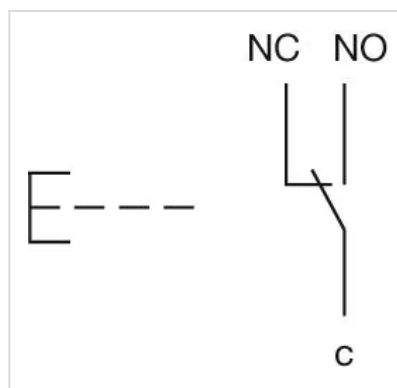

Component layouts:

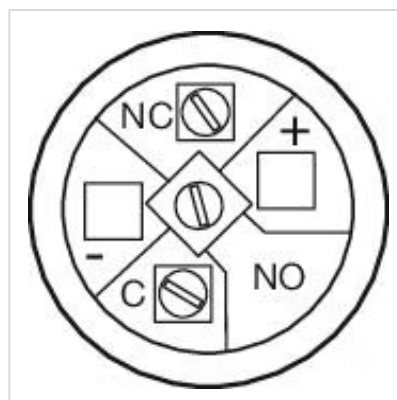

Mounting cut-outs:

