




Temperature sensor with process connection

TM-025KFBR14-

/US/

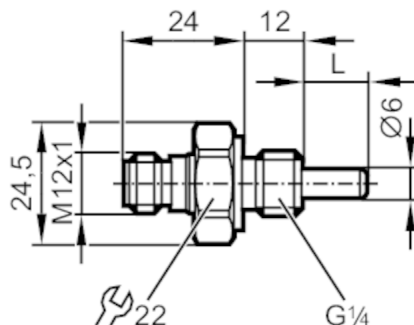

Product characteristics

Measuring range	-40...150 °C	-40...302 °F
Process connection	threaded connection G 1/4 external thread	
Installation length EL [mm]	25	

Application

Special feature	Gold-plated contacts	
Measuring element	1 x Pt 100; (to DIN EN 60751, class A)	
Media	liquids and gases	
Pressure rating [bar]	400	
Pressure rating [MPa]	40	

Electrical data

Protection class	III
------------------	-----

Measuring/setting range

Probe length L	[mm]	12
Measuring range	-40...150 °C	-40...302 °F

Accuracy / deviations

Accuracy [K]	$\pm (0,15 K + 0,002 x t)$
--------------	-----------------------------

Response times

Dynamic response T05 / T09 [s]	1 / 3; (to DIN EN 60751)
--------------------------------	--------------------------

Operating conditions

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68; IP 69K

Tests / approvals

Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF [years]	22831.05	

Mechanical data

Weight [g]	61
Housing	cylindrical
Dimensions [mm]	$\varnothing 24.5 / L = 48$

TM4101



Temperature sensor with process connection


TM-025KFBR14- /US/

Materials	stainless steel (316L/1.4404)
Materials (wetted parts)	stainless steel (316L/1.4404); FKM
Tightening torque [Nm]	35
Process connection	threaded connection G 1/4 external thread
Probe diameter [mm]	6
Installation length EL [mm]	25

Remarks	
Remarks	operating voltage "supply class 2" according to cULus The values for accuracy apply to flowing water.
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Connection

