



Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	2024.05.09	The first release	Guoxue
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

1. Current: 150A.
2. Torque: 15 lbf.in.
3. Mark "▲" is the Critical dimension.

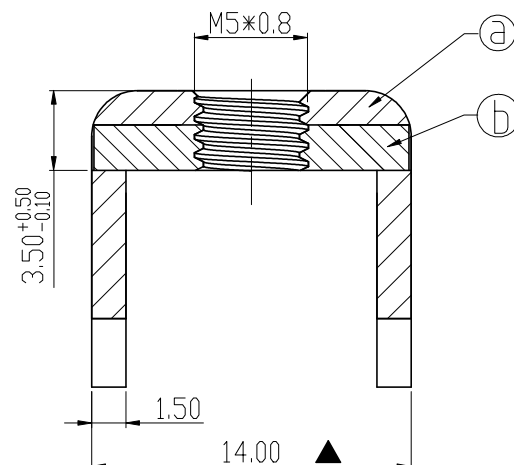

Top view of the 45003DB component. The component is rectangular with a central square cutout. The width of the component is 8.50. The distance from the center of the cutout to the right edge is 3.50(4x).

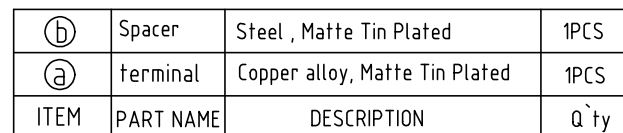

Amphenol ANYTEK				CUSTOMER COPY ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD			
TITLE	AMT45003DB Conductive Bracket						
PART NO.	AMT0450003DB0000G			DWG NO.	8AMT0001		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Guoxue 2024.05.09	Guoxue 2024.05.09		UNIT: mm	>30 ±0.60 6-30 ±0.40 0-6 ±0.30	
				SHEET: 01/01	REV: B	ANGLES ±1°	