


SPECIFICATIONS

CUSTOMER	:	HCN080
SAMPLE CODE	:	SH102600T019-IBA
MASS PRODUCTION CODE	:	PH102600T019-IBA
SAMPLE VERSION	:	01
SPECIFICATIONS EDITION	:	002
DRAWING NO. (Ver.)	:	JLMD-PH102600T019-IBA_001
PACKAGING NO. (Ver.)	:	JPKG-PH102600T019-IBA_001

Customer Approved

Date:



Approved	Checked	Designer
劉進 Jin Liu	劉進 Jin Liu	陳璐 Lu Chen

- ☐ Preliminary specification for design input
☒ Specification for sample approval

POWERTIP TECH. CORP.**Headquarters:**

No.8, 6th Road, Taichung Industrial Park,
Taichung, Taiwan
台中市 407 工業區六路 8 號

TEL: 886-4-2355-8168
FAX: 886-4-2355-8166

E-mail: sales@powertip.com.tw
[Http://www.powertip.com.tw](http://www.powertip.com.tw)

History of Version

<u>Date</u> (mm / dd / yyyy)	<u>Ver.</u>	<u>Edi.</u>	<u>Description</u>	<u>Page</u>	<u>Design by</u>
11/08/2023	01	001	Preliminary	-	陳璐
12/20/2023	01	002	First Sample	-	陳璐

Contents

1. SPECIFICATIONS

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Unit Characteristics

2. MODULE STRUCTURE

- 2.1 Counter Drawing
- 2.2 Interface Pin Description
- 2.3 Power Sequence
- 2.4 Timing Characteristics

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart
- 3.2 Inspection Specification

4. RELIABILITY TEST

- 4.1 Reliability Test Condition

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety
- 5.2 Handling
- 5.3 Storage
- 5.4 Terms of Warranty

- Appendix : 1. LCM Drawing
2. LCM Packaging

1. SPECIFICATIONS

1.1 Features

<u>Item</u>	<u>Standard Value</u>
Display Type	1024 * 3 (RGB) * 600 Dots
LCD Type	a-Si TFT , Normally white , Transmissive type
Screen size(inch)	8.0 inch
Viewing Direction	6 O'clock
Color configuration	RGB-Strip
Interface	LVDS Interface
Other(controller/driver IC)	Source--- HX8282- A00DPD300 Gate----- HX8969-A01DPD300
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer website : http://www.powertip.com.tw/news_detail.php?Key=1&cID=1

Note : For detailed information please refer to IC data sheet :

Primacy(TFT LCD):

Himax: Source--- HX8282- A00DPD300

Gate----- HX8969-A01DPD300

1.2 Mechanical Specifications

<u>Item</u>	<u>Standard Value</u>	<u>Unit</u>
Outline Dimension	192.8(W) * 116.9 (L) * 6.4(H)	mm

LCD panel

<u>Item</u>	<u>Standard Value</u>	<u>Unit</u>
View Area	177.64 (W) * 100.36 (L)	mm
Active Area	176.64 (W) * 99.36 (L)	mm

Note : For detailed information please refer to LCM drawing

1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply for TFT Panel	V _{DD}	GND=0V	-0.5	3.96	V
	AV _{DD}	GND=0V	-0.5	14.85	V
	V _{GH}		-0.3	V _{GL} +42.0	V
	V _{GL}		-25	+0.3	V
	V _{GH} -V _{GL}		-0.3	42	V
Operating Temperature	T _{OP} (Ts)	Note 1	-20	+70	°C
Storage Temperature	T _{ST} (Ta)	Note 2	-30	+80	°C

The absolute maximum rating values of this product are not allowed to be exceeded at any time. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

Note 1: Ts is the temperature of panel's surface

Note 2: Ta is the ambient temperature of samples

1.4 DC Electrical Characteristics

GND = 0V, Ta = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Power Voltage	V _{DD}	-	3.0	3.3	3.6	V	-
	AV _{DD}	-	10.5	11.0	11.5	V	-
	V _{GH}	-	16	20.0	24	V	-
	V _{GL}	-	-9.8	-6.8	-3.8	V	-
Input signal Voltage	V _{COM}	-	3.4	3.7	4.0	V	-
Input H/L Level Voltage	V _{IH}	-	0.7V _{DD}	-	V _{DD}	V	-
	V _{IL}	-	0	-	0.3 V _{DD}	V	
Supply Current	I _{GH}	V _{GH} =20V	-	0.6	0.9	mA	-
	I _{GL}	V _{GL} =-6.8V	-	0.6	0.9	mA	-
	I _{AVDD}	AV _{DD} =11V	-	18.5	28	mA	-
	I _{DD}	V _{DD} = 3.3 V	-	50	75	mA	-

1.5 Optical Characteristics

VDD = 3.3 V, Ta=25°C

Item		Symbol	Condition	Min.	Typ.	Max.	unit	:
Response time	T _r		Ta = 25°C θX, θY = 0°	-	10	20	ms	Note 2
	T _f			-	20	30		
Viewing angle	Top	θY+	CR ≥ 10	-	60	-	Deg.	Note 4
	Bottom	θY-		-	60	-		
	Left	θX-		-	60	-		
	Right	θX+		-	60	-		
Contrast ratio		CR	Ta = 25°C θX , θY = 0°	500	600	-	-	Note 3
Color of CIE Coordinate	White	X		0.27	0.32	0.37	-	Note1
		Y		0.31	0.36	0.41		
	Red	X		0.60	0.65	0.70		
		Y		0.28	0.33	0.38		
	Green	X		0.28	0.33	0.38		
		Y		0.59	0.64	0.69		
	Blue	X		0.10	0.15	0.20		
		Y		0.02	0.07	0.12		
Average Brightness Pattern=white display (With LCD) *1		IV	IF= 270 mA	330	420	-	cd/m ²	Note1
Uniformity (With LCD) *2		△B	IF= 270 mA	70	-	-	%	Note1

Note 1:

*1 : $\Delta B = B(\min) / B(\max) * 100\%$



*2 : Measurement Condition for Optical Characteristics:

a : Environment: 25°C±5°C / 60±20%R.H , no wind , dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: 500 ± 50 mm , (θ= 0°)

c : Equipment: TOPCON BM-7 fast , (field 1°) , after 10 minutes operation.

d : The uncertainty of the C.I.E coordinate measurement ±0.01 , Average Brightness ± 4%

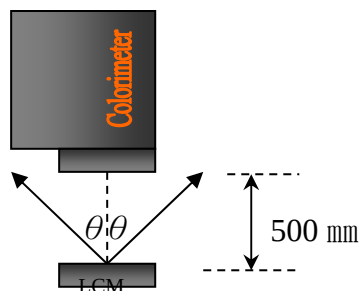

Colorimeter=BM-7 fast


To be measured at the center area of panel with a viewing cone of 1° by Topcon luminance meter BM-7, after 10 minutes operation (module)

Note2: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

Normally White

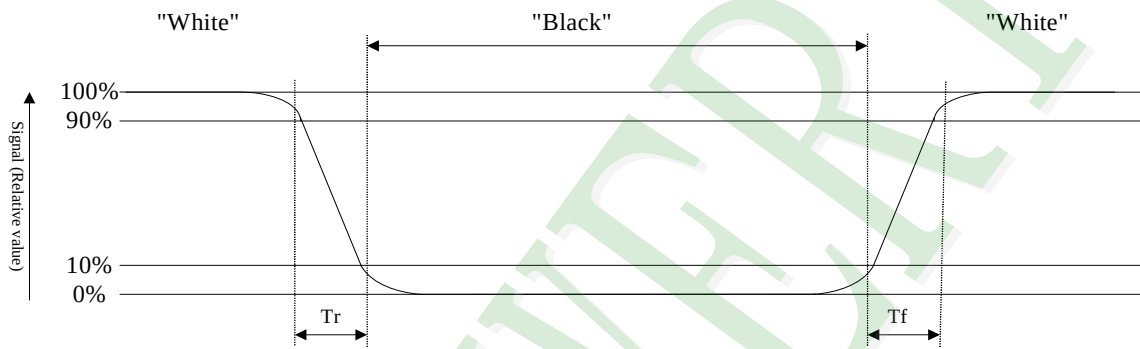

Normally Black

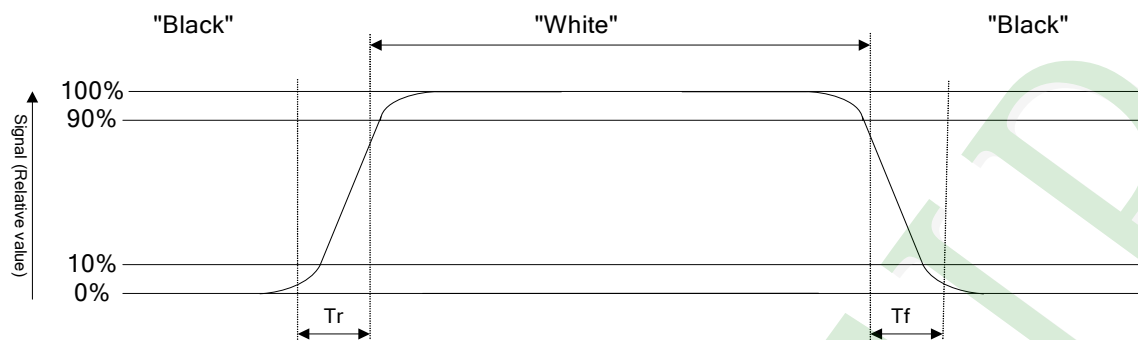


Note3: Definition of contrast ratio:

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note4: Definition of viewing angle:

Refer to figure as below:

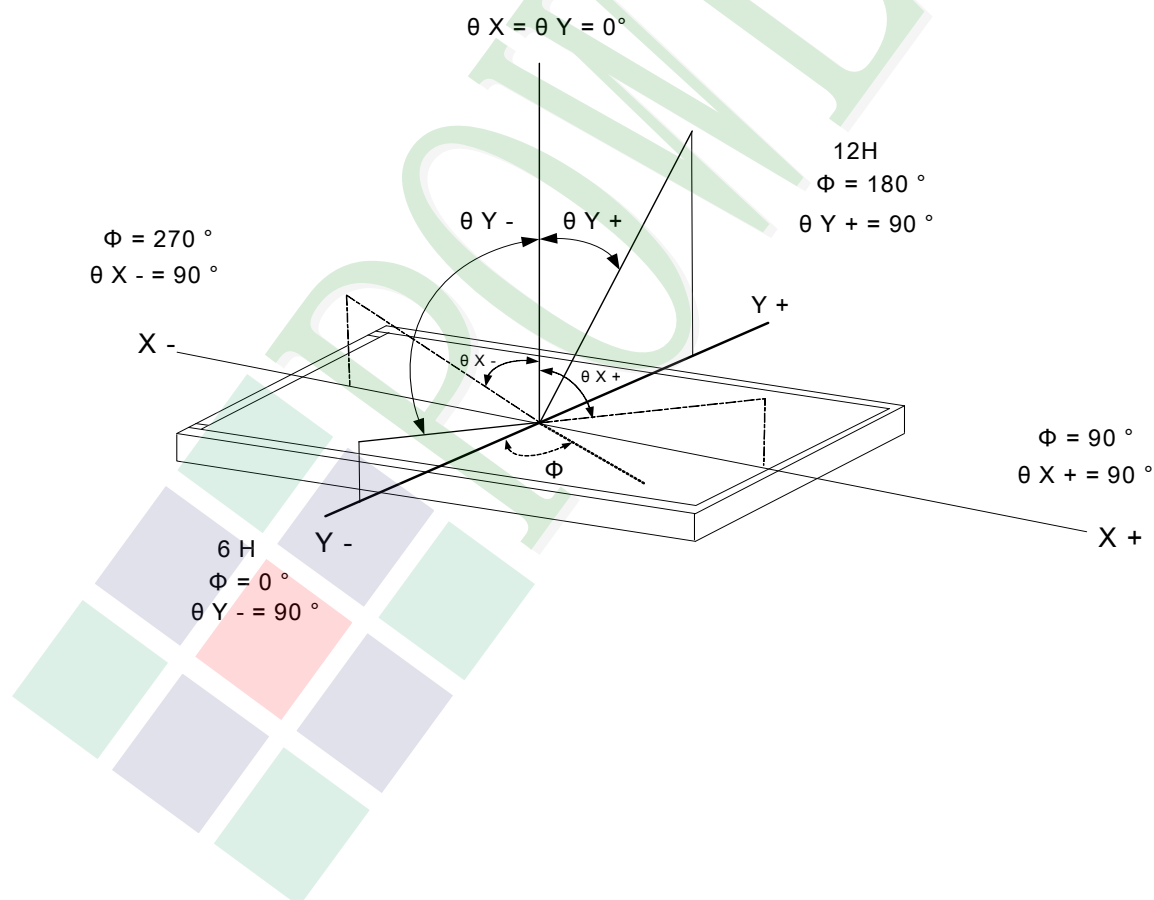

1.6 Backlight Unit Characteristics

Maximum Ratings

Item	Symbol	Conditions	Min.	Max.	Unit
LED Forward Current	IF	Ta =25℃	-	80*6	mA
LED Reverse Voltage	VR	Ta =25℃	-	5	V
Power Dissipation	PD	Ta =25℃	-	765.6*6	mW


Backlight Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF=270mA	7.77	9.0	9.57	V
Average Brightness (Without LCD)	IV		10400	12000	-	cd/m ²
CIE Color Coordinate (Without LCD)	X		0.25	0.28	0.31	-
	Y		0.25	0.28	0.31	
Uniformity *1	△B		70	-	-	*2
Color		White				

*1 : This value will be changed while mass production.

*2 : $\Delta B = B(\text{min}) / B(\text{max})\%$

B/L Internal Circuit Diagram

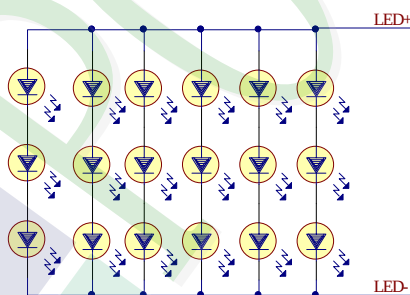

Other Description

Item	Conditions	Description
Life Time	Ta =25℃ IF=270mA	20000 hrs


2. MODULE STRUCTURE

2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

* See Appendix

2.1.2 Block Diagram

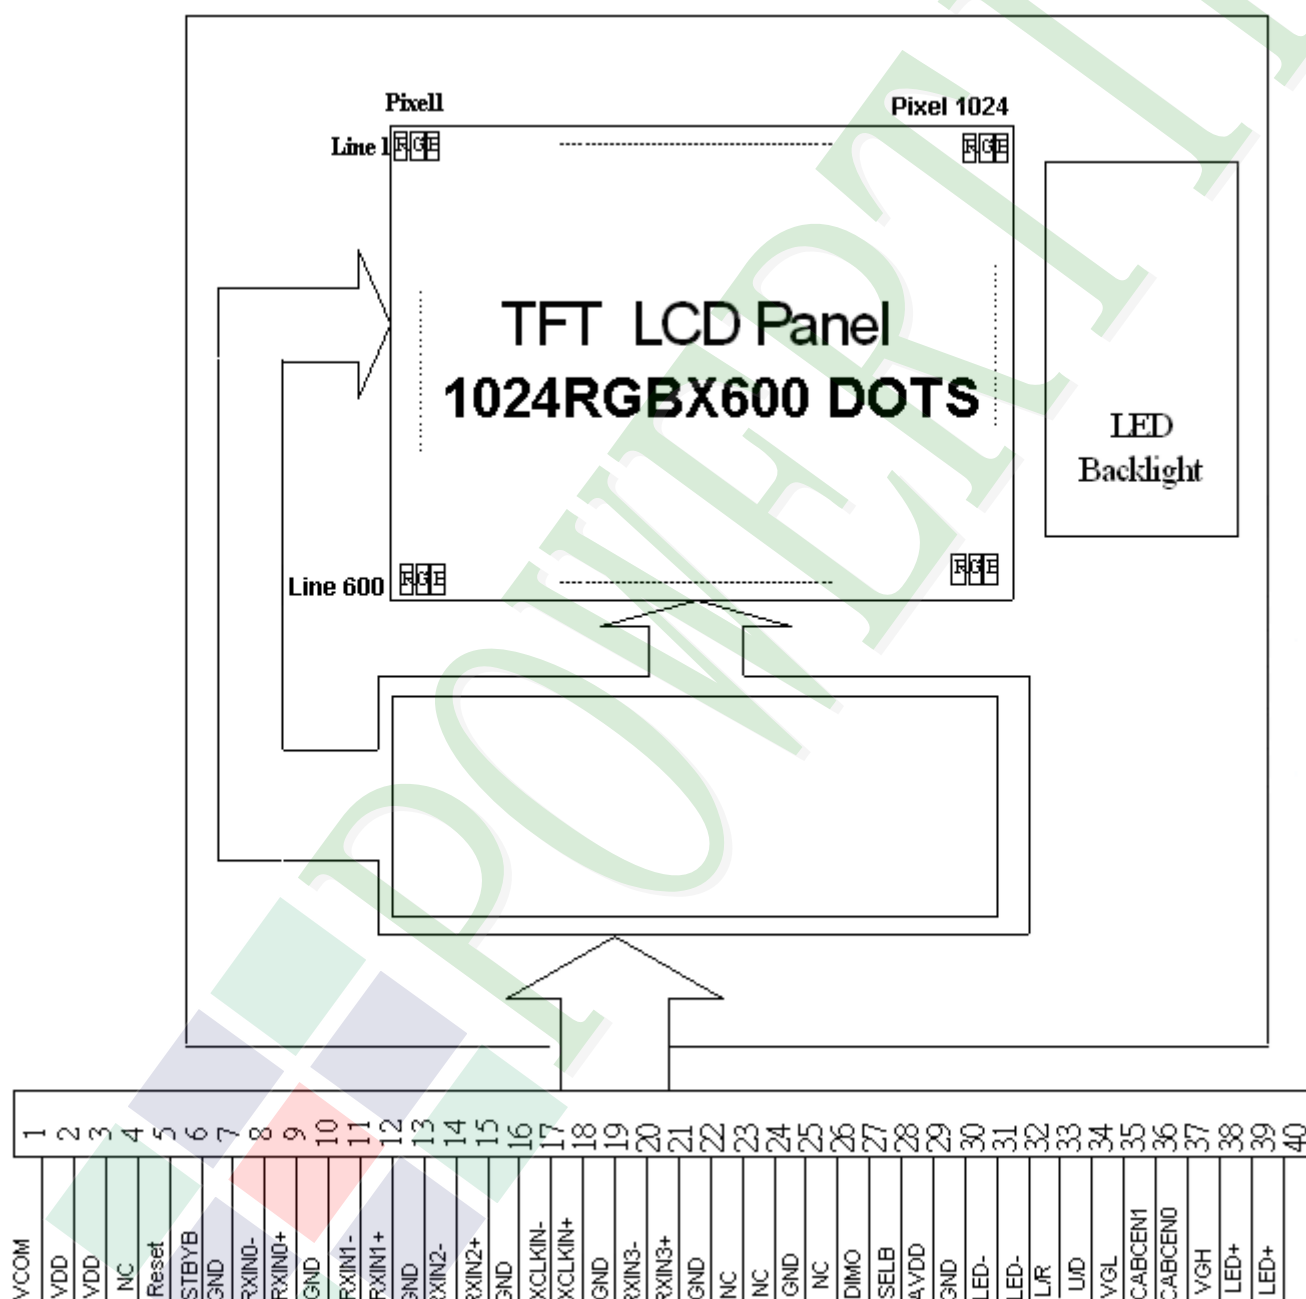

2.2 Interface Pin Description

Pin No.	Symbol	Function
1	VCOM	Common Voltage
2	VDD	Power Voltage for digital circuit
3	VDD	Power Voltage for digital circuit
4	NC	No connection
5	Reset	Global reset pin
6	STBYB	Standby mode, Normally pulled high STBYB = “1” , normal operation STBYB = “0” , timing controller, source driver will turn off, all output are High-Z
7	GND	Ground
8	RXIN0-	- LVDS differential data input
9	RXIN0+	+ LVDS differential data input
10	GND	Ground
11	RXIN1-	- LVDS differential data input
12	RXIN1+	+ LVDS differential data input
13	GND	Ground
14	RXIN2-	- LVDS differential data input
15	RXIN2+	+ LVDS differential data input
16	GND	Ground
17	RXCLKIN-	- LVDS differential clock input
18	RXCLKIN+	+ LVDS differential clock input
19	GND	Ground
20	RXIN3-	- LVDS differential data input

<u>Pin No.</u>	<u>Symbol</u>	<u>Function</u>
21	RXIN3+	+ LVDS differential data input
22	GND	Ground
23	NC	No connection
24	NC	No connection
25	GND	Ground
26	NC	No connection
27	DIMO	Backlight CABC controller signal output
28	SELB	6bit/8bit mode select If LVDS input data is 6 bits ,SELB must be set to High; If LVDS input data is 8 bits ,SELB must be set to Low.
29	AVDD	Power for Analog Circuit
30	GND	Ground
31	LED-	LED Cathode
32	LED-	LED Cathode
33	L/R	Horizontal inversion When L/R=" 0" , set right to left scan direction. When L/R=" 1" , set left to right scan direction.
34	U/D	Vertical inversion When U/D=" 0" , set top to bottom scan direction. When U/D=" 1" , set bottom to top scan direction.
35	VGL	Gate OFF Voltage
36	CABCEN1	CABC H/W enable--- Note1
37	CABCEN0	CABC H/W enable--- Note1
38	VGH	Gate ON Voltage
39	LED+	LED Anode
40	LED+	LED Anode

Note1: When CABC_EN="00", CABC OFF.

When CABC_EN="01", user interface image.


When CABC_EN="10", still picture.

When CABC_EN="11", moving image.

When CABC off, don't connect DIMO, else connect it to backlight.


Note2: When L/R="0", set right to left scan direction.
When L/R="1", set left to right scan direction.
When U/D="0", set top to bottom scan direction.
When U/D="1", set bottom to top scan direction

Note3: Definition of scanning direction.Refer to the figure as below:

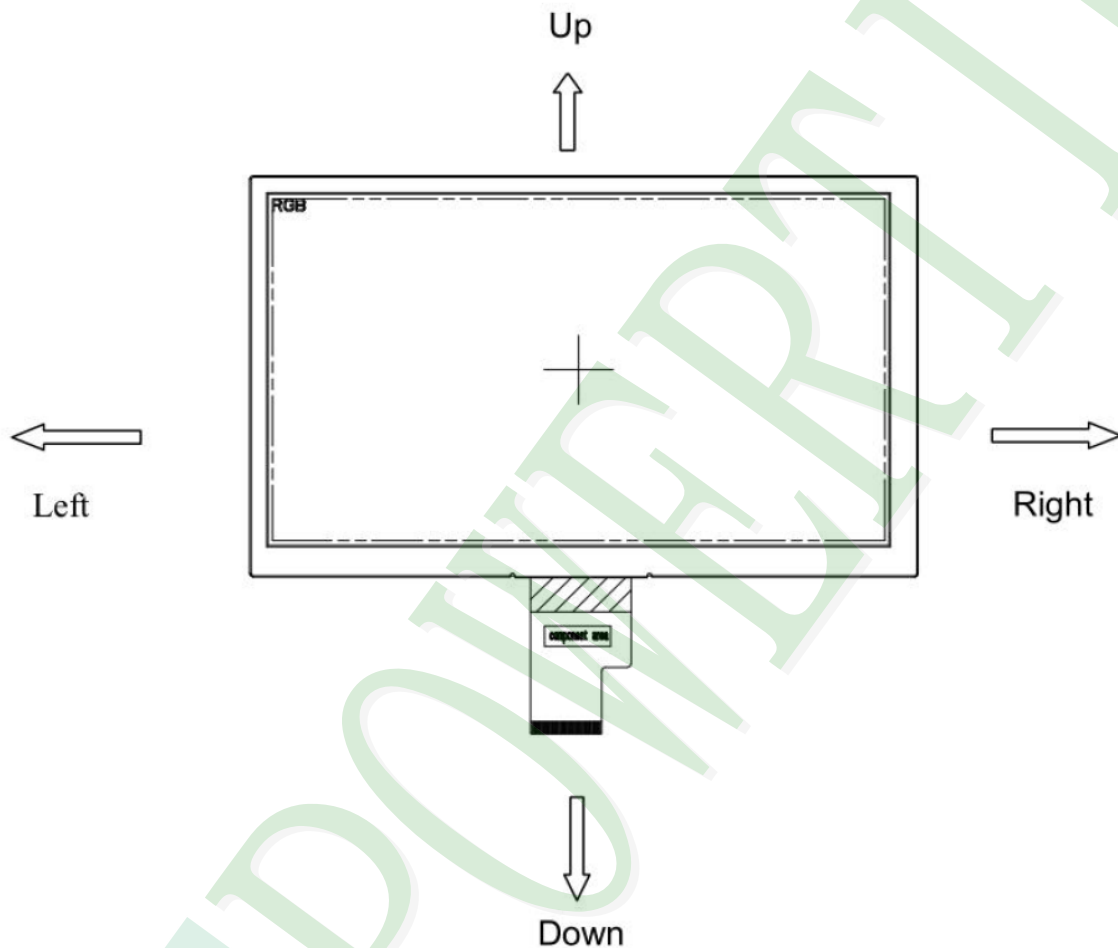


2.3 Power Sequence

2.3.1 Power on

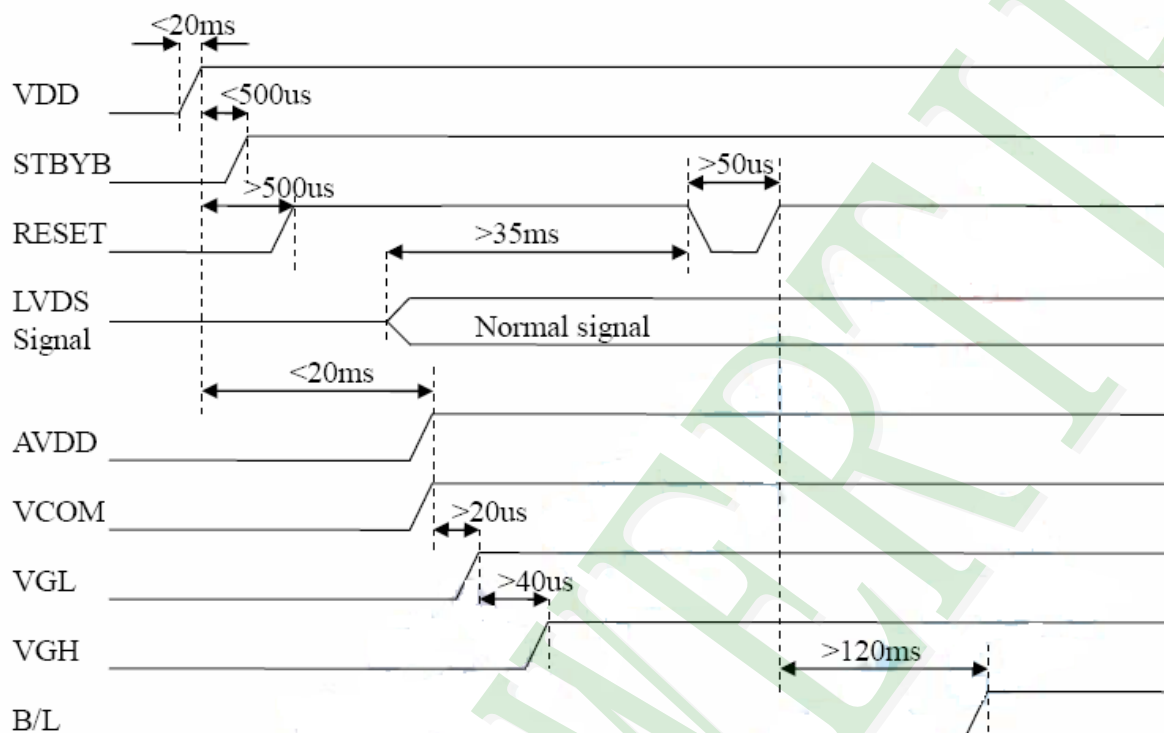

2.3.2 Power off

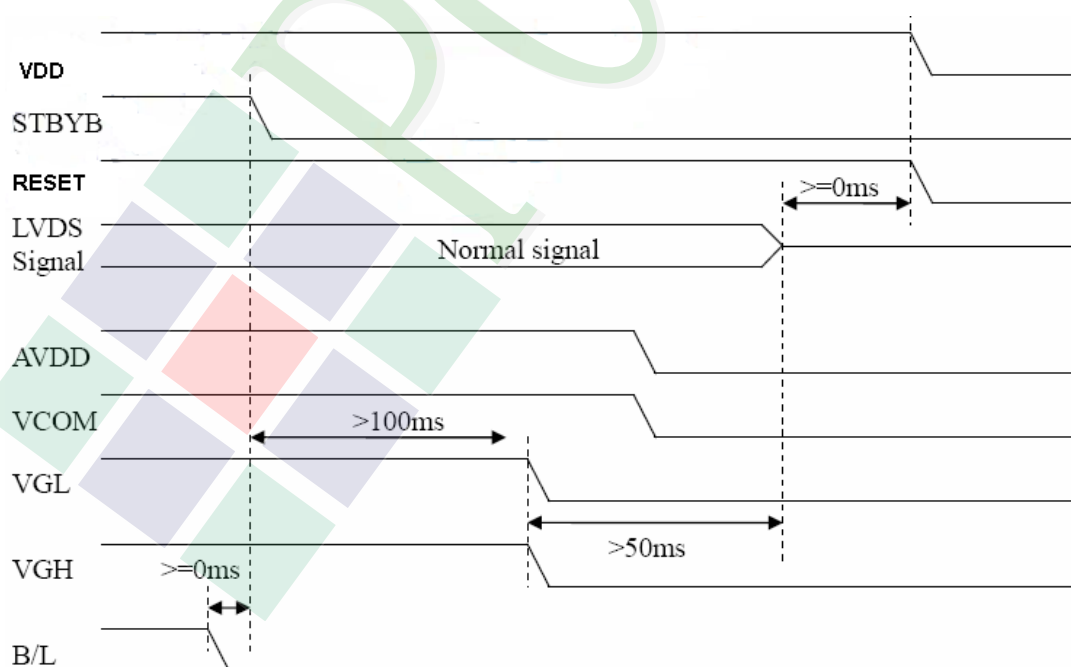



2.4 Timing Characteristics

2.4.1 AC Electrical Characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
CLK frequency	RxfCLK	20	-	71	MHz	
Input data skew margin	T _{RSKM}	500	-	-	ps	VID =400mV RXVCM=1.2V RXFCLK=71MHz
Clock high time	T _{LVCH}	-	$4/(7 \cdot R_{xFCLK})$	-	ns	
Clock low time	T _{LVCL}	-	$3/(7 \cdot R_{xFCLK})$	-	ns	


2.4.2 Input Clock and Data Timing

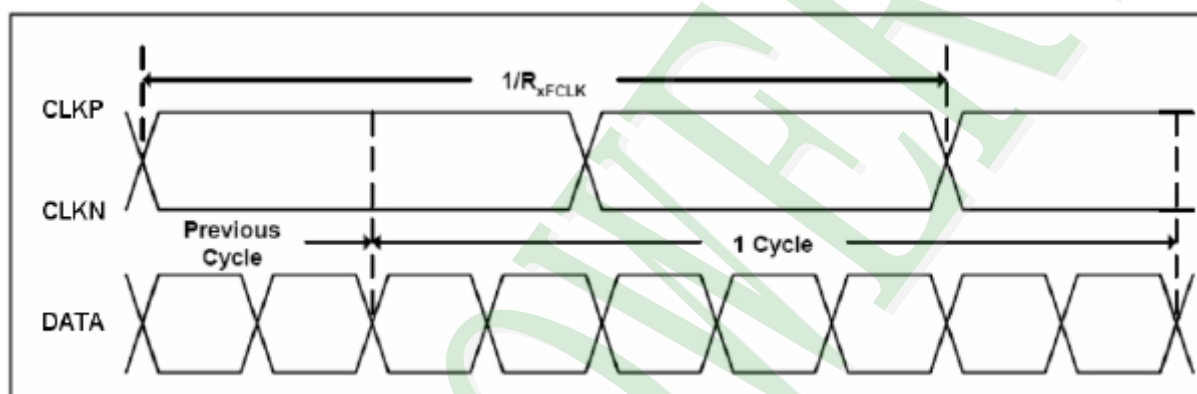

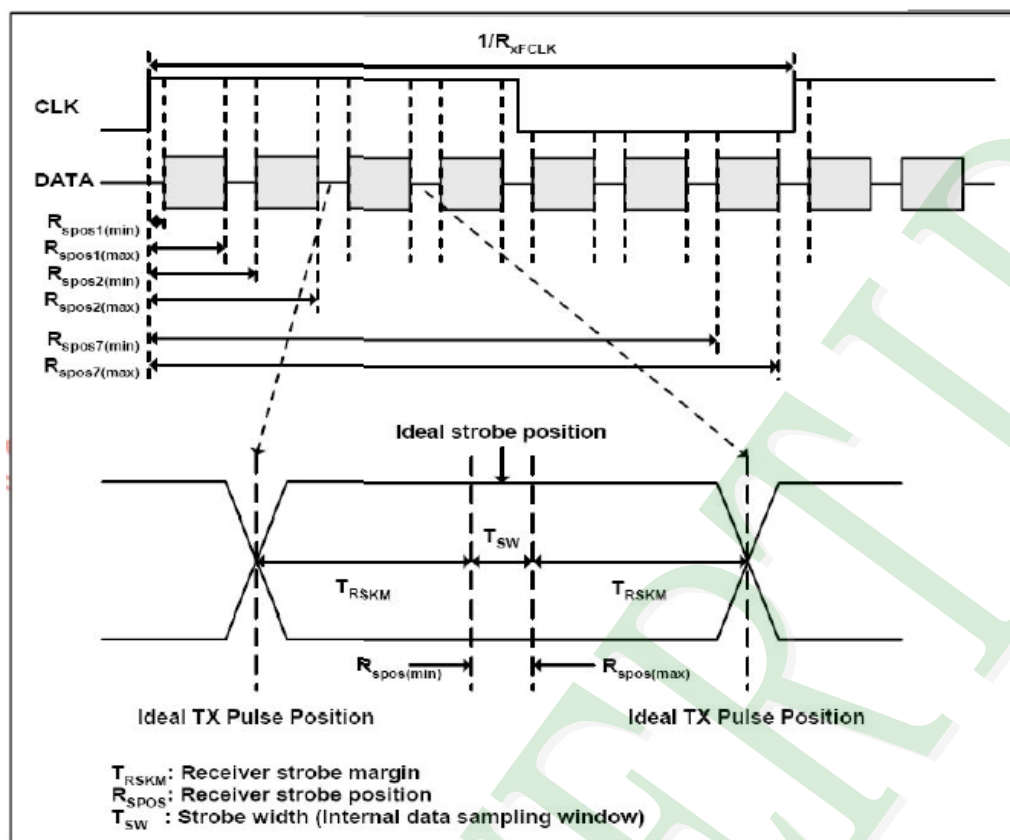

2.4.3 DC Electrical Characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
Differential input high Threshold voltage	R_{xVTH}	-	-	+0.1	V	RXVCM=1.2V
Differential input low Threshold voltage	R_{xVTL}	-0.1	-	-	V	
Input voltage range (singled-end)	R_{xVIN}	0	-	$VDD-1.2+$ $ V_{ID} /2$	V	
Differential input common mode voltage	R_{xVCM}	$ V_{ID} /2$	-	$VDD-1.2$	V	
Differential voltage	$ V_{ID} $	0.2	-	0.6	V	
Differential input leakage current	$R_{V_{xliz}}$	-10	-	+10	uA	
LVDS Digital Operating Current	I_{ddlvds}	-	15	30	mA	Fclk=65MHz, VDD=3.3V
LVDS Digital Stand-by Current	I_{stlvds}	-	10	50	uA	Clock & all Functions are stopped

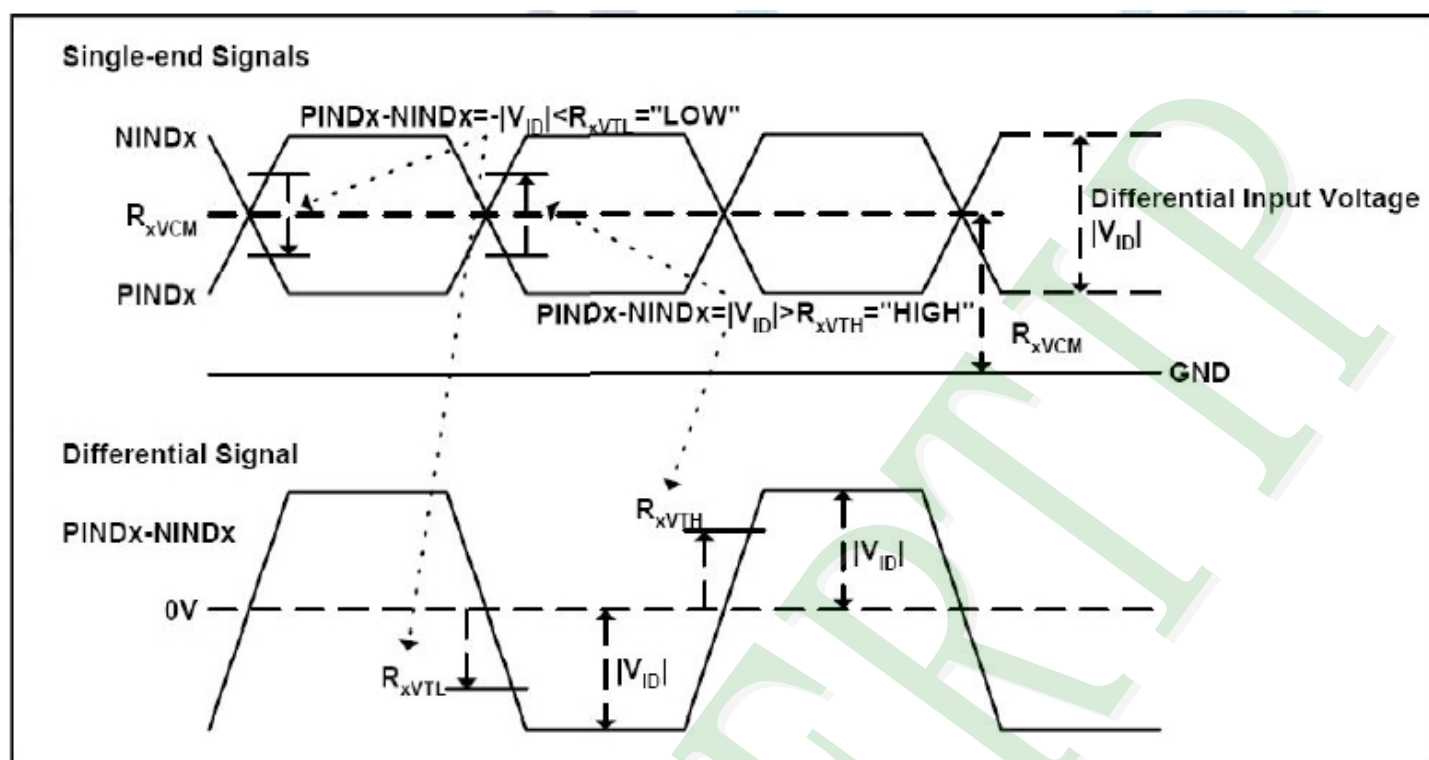



2.4.4 Timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	fclk	40.8	51.2	67.2	MHz
Horizontal display area	thd	1024			DCLK
HS period Time	th	1114	1344	1400	DCLK
HS Blanking	T _{hb}	90	320	376	DCLK
Vertical display area	tvd	600			H
VS period Time	tv	610	635	800	H
VS Blanking	thb	10	35	200	H

3. QUALITY ASSURANCE SYSTEM

3.1 Quality Assurance Flow Chart

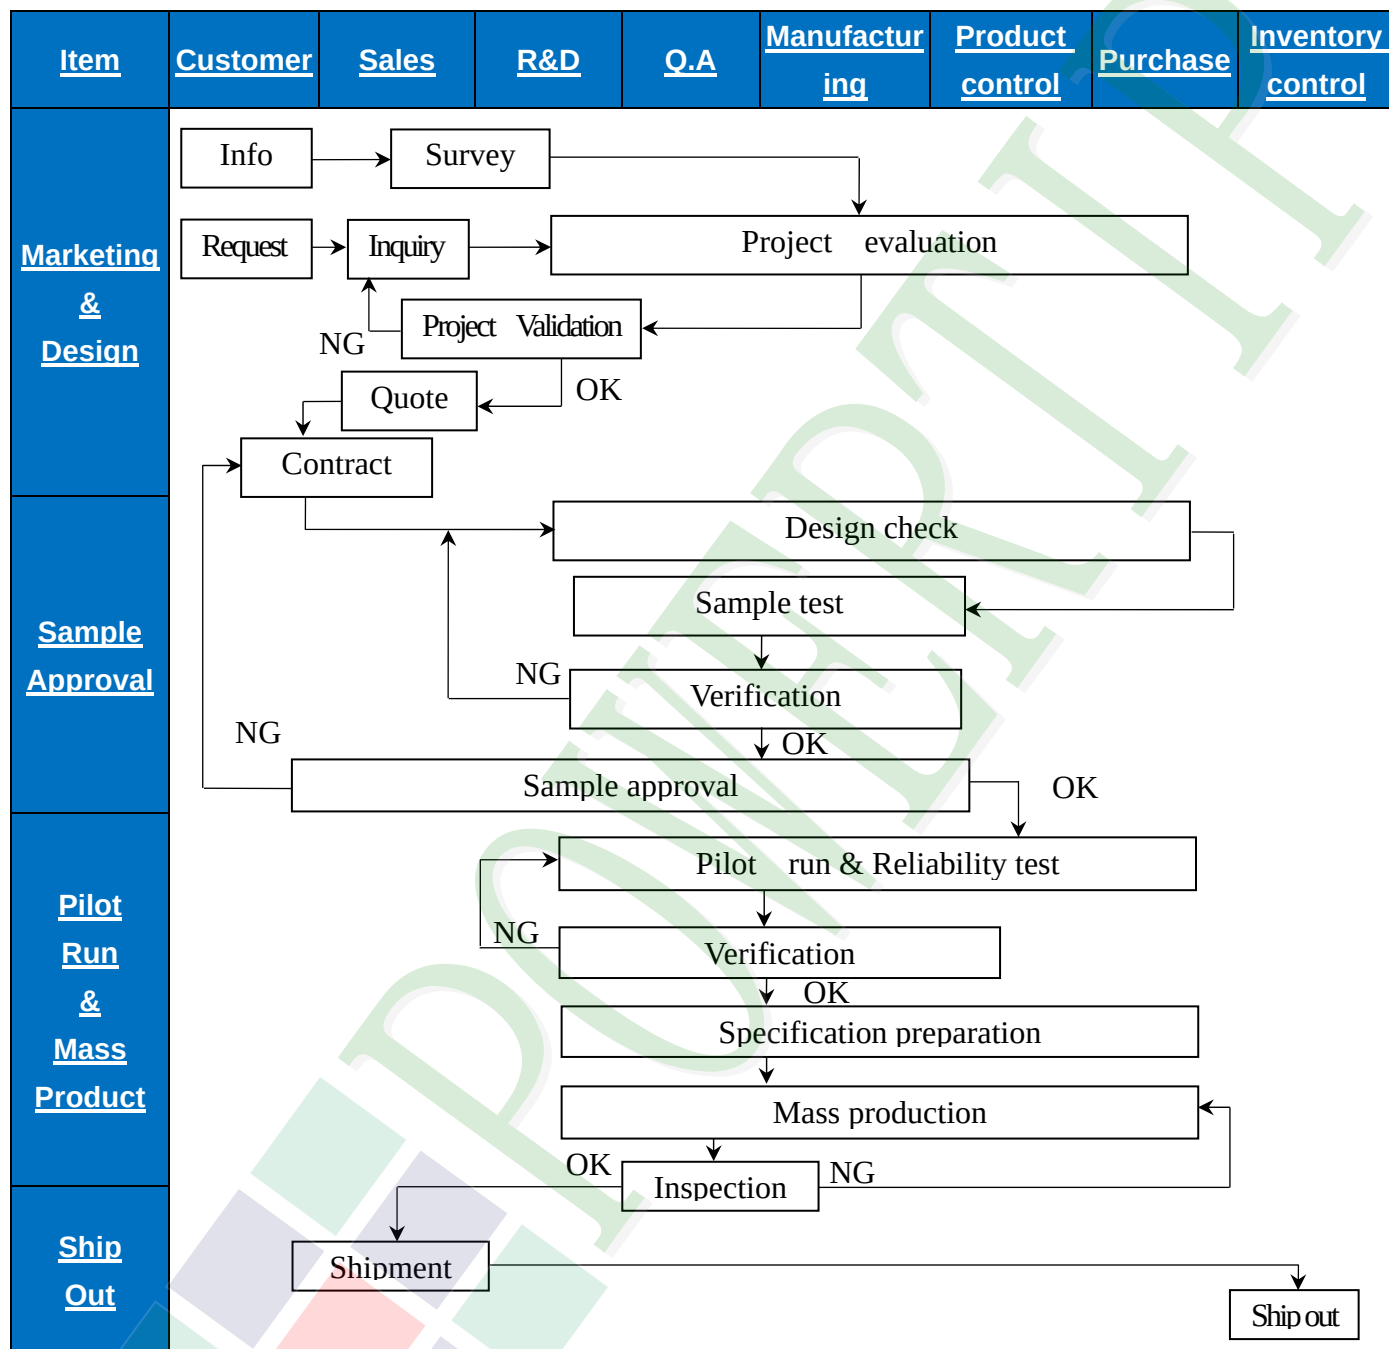

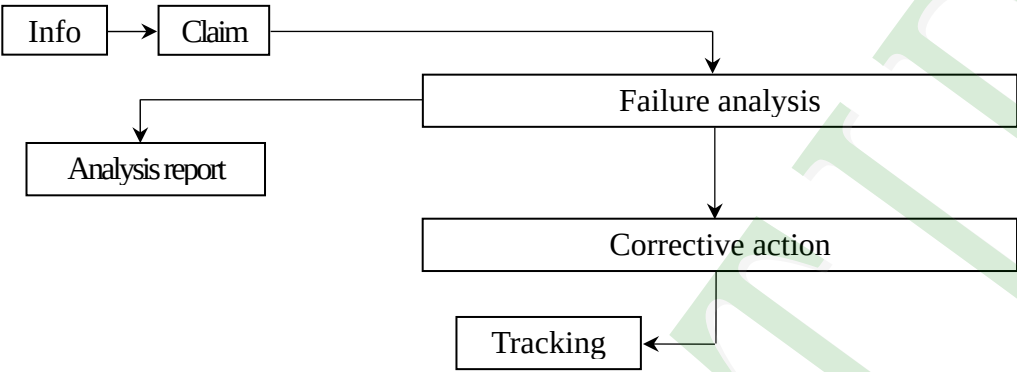
Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
<u>Sales Service</u>	 <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Claim --> Report[Analysis report] Failure --> Action[Corrective action] Action --> Tracking[Tracking] </pre>							
<u>Q.A Activity</u>	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education And Training Activities			

3.2. Inspection Specification


- ◆Scope: The document shall be applied to TFT-LCD Module for 3.5" -15" (Ver.B01).
- ◆Inspection Standard: MIL-STD-105E Table Normal Inspection Single Sampling Level II.
- ◆Equipment: Gauge, MIL-STD, Powertip Tester, Sample
- ◆Defect Level: Major Defect AQL: 0.4; Minor Defect AQL: 1.5
- ◆OUT Going Defect Level: Sampling.
- ◆Standard of the product appearance test:

a. Manner of appearance test:

- (1). The test best be under 20W×2 fluorescent light(about 300lux ~500lux)
, and distance of view must be at 30~40 cm.
- (2). The test direction is base on about around 45° of vertical line.

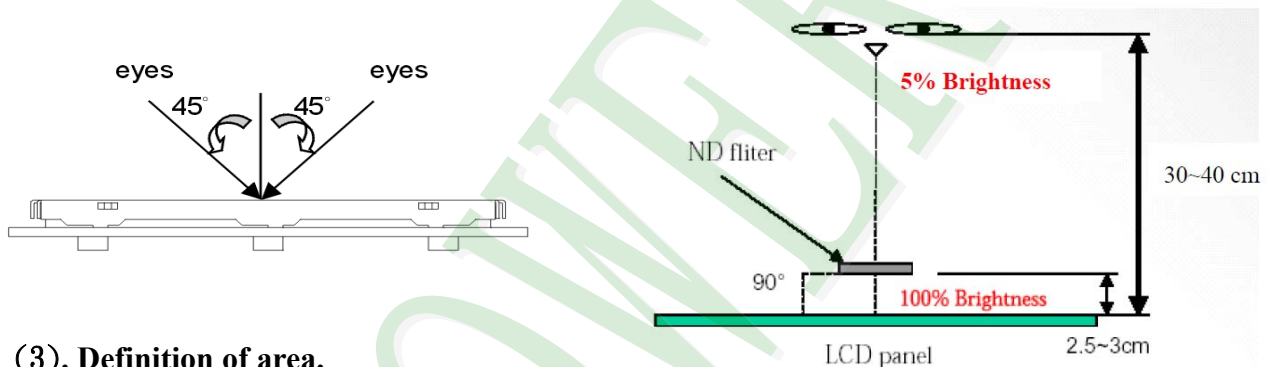

(3). Definition of area.

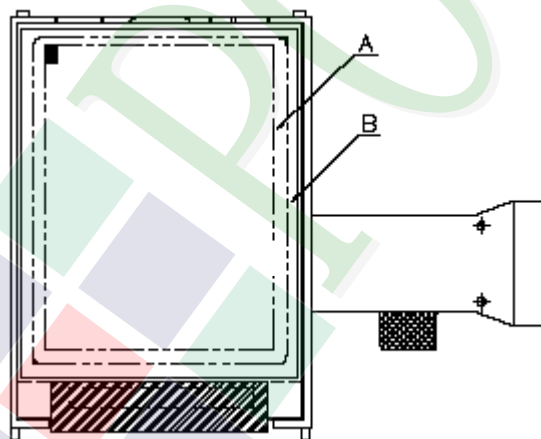

A area: viewing area

B area: Outside of viewing area



(4). Standard of inspection : (Unit : mm)

◆Specification For TFT-LCD Module 3.5" ~15" :
(Ver.B01)

NO	Item	Criterion	Level												
01	Product condition	1. 1The part number is inconsistent with work order of production.	Major												
		1. 2 Mixed product types.	Major												
		1. 3 Assembled in inverse direction.	Major												
02	Quantity	2. 1The quantity is inconsistent with work order of production.	Major												
03	Outline dimension	3. 1Product dimension and structure must conform to structure diagram.	Major												
04	Electrical Testing	4. 1 Missing line character and icon.	Major												
		4. 2 No function or no display.	Major												
		4. 3 Display malfunction.	Major												
		4. 4 LCD viewing angle defect.	Major												
		4. 5 Current consumption exceeds product specifications.	Major												
		4. 6Mura cannot be seen through 5% ND filter at 50% Gray , should be judged by the viewing angle of 90 degree.	Minor												
05	Dot defect (Bright dot, Dark dot) On -display	<table><tr><th colspan="2">Item</th><th>Acceptance (Q'ty)</th></tr><tr><td rowspan="4">Dot Defect</td><td>Bright Dot</td><td>≤ 4</td></tr><tr><td>Dark Dot</td><td>≤ 5</td></tr><tr><td>Joint Dot</td><td>≤ 3</td></tr><tr><td>Total</td><td>≤ 7</td></tr></table>	Item		Acceptance (Q'ty)	Dot Defect	Bright Dot	≤ 4	Dark Dot	≤ 5	Joint Dot	≤ 3	Total	≤ 7	Minor
		Item		Acceptance (Q'ty)											
Dot Defect	Bright Dot	≤ 4													
	Dark Dot	≤ 5													
	Joint Dot	≤ 3													
	Total	≤ 7													
5.1 Inspection pattern: full white, full black, Red, Green and blue screens. 5.2 It is defined as dot defect if defect area > 1/2 dot. 5.3 The distance between two dot defect ≥5 mm. 5.4 Bright dot : Dots appear bright and unchanged in visible with 5% ND filter is defined. 5.5 Tiny bright dot: bright dot area ≤1/2 dot. a. Dots appear bright and unchanged in visible with 5% ND filter is defined defect and is judged in accordance with 6.1 b. Dots invisible with 5% ND Filter is Ignored.															

◆Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)



NO	Item	Criterion	Level																																																		
06	Black or white Dot, scratch, contamination Round type  $\Phi = (x + y) / 2$ Line type 	6. 1 Round type (Non-display or display): <table><tr><th rowspan="2">Dimension (diameter : Φ)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td>$\Phi \leq 0.25$</td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>$0.25 < \Phi \leq 0.50$</td><td>5</td></tr><tr><td>$\Phi > 0.50$</td><td>0</td></tr><tr><td>Total</td><td>5</td></tr></table> 6. 2 Line type(Non-display or display): <table><tr><th rowspan="2">module size</th><th rowspan="2">Length (L)</th><th rowspan="2">Width (W)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td rowspan="5">3.5" to less 9"</td><td>---</td><td>$W \leq 0.03$</td><td>Ignore</td><td rowspan="5">Ignore</td></tr><tr><td>$L \leq 10.0$</td><td>$0.03 < W \leq 0.05$</td><td>4</td></tr><tr><td>$L \leq 5.0$</td><td>$0.05 < W \leq 0.10$</td><td>2</td></tr><tr><td>---</td><td>$W > 0.10$</td><td>As round type</td></tr><tr><td>Total</td><td>5</td></tr><tr><td rowspan="5">9" to 15"</td><td>---</td><td>$W \leq 0.05$</td><td>Ignore</td><td rowspan="5">Ignore</td></tr><tr><td>$L \leq 10.0$</td><td>$0.05 < W \leq 0.10$</td><td>5</td></tr><tr><td>---</td><td>$W > 0.10$</td><td>As round type</td></tr><tr><td>Total</td><td>5</td></tr></table>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	5	$\Phi > 0.50$	0	Total	5	module size	Length (L)	Width (W)	Acceptance (Q'ty)		A area	B area	3.5" to less 9"	---	$W \leq 0.03$	Ignore	Ignore	$L \leq 10.0$	$0.03 < W \leq 0.05$	4	$L \leq 5.0$	$0.05 < W \leq 0.10$	2	---	$W > 0.10$	As round type	Total	5	9" to 15"	---	$W \leq 0.05$	Ignore	Ignore	$L \leq 10.0$	$0.05 < W \leq 0.10$	5	---	$W > 0.10$	As round type	Total	5	Minor
Dimension (diameter : Φ)	Acceptance (Q'ty)																																																				
	A area	B area																																																			
$\Phi \leq 0.25$	Ignore	Ignore																																																			
$0.25 < \Phi \leq 0.50$	5																																																				
$\Phi > 0.50$	0																																																				
Total	5																																																				
module size	Length (L)	Width (W)	Acceptance (Q'ty)																																																		
			A area	B area																																																	
3.5" to less 9"	---	$W \leq 0.03$	Ignore	Ignore																																																	
	$L \leq 10.0$	$0.03 < W \leq 0.05$	4																																																		
	$L \leq 5.0$	$0.05 < W \leq 0.10$	2																																																		
	---	$W > 0.10$	As round type																																																		
	Total	5																																																			
9" to 15"	---	$W \leq 0.05$	Ignore	Ignore																																																	
	$L \leq 10.0$	$0.05 < W \leq 0.10$	5																																																		
	---	$W > 0.10$	As round type																																																		
	Total	5																																																			
	07	Polarizer Bubble	<table><tr><th rowspan="2">Dimension (diameter: Φ)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td>$\Phi \leq 0.25$</td><td>Ignore</td><td rowspan="5">Ignore</td></tr><tr><td>$0.25 < \Phi \leq 0.50$</td><td>4</td></tr><tr><td>$0.50 < \Phi \leq 0.80$</td><td>1</td></tr><tr><td>$\Phi > 0.80$</td><td>0</td></tr><tr><td>Total</td><td>5</td></tr></table>		Dimension (diameter: Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	4	$0.50 < \Phi \leq 0.80$	1	$\Phi > 0.80$	0	Total	5	Minor																																
Dimension (diameter: Φ)	Acceptance (Q'ty)																																																				
	A area	B area																																																			
$\Phi \leq 0.25$	Ignore	Ignore																																																			
$0.25 < \Phi \leq 0.50$	4																																																				
$0.50 < \Phi \leq 0.80$	1																																																				
$\Phi > 0.80$	0																																																				
Total	5																																																				



◆Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)

NO	Item	Criterion	Level									
08	The crack of glass	Symbols : X: The length of crack Z: The thickness of crack t: The thickness of glass Y: The width of crack. W: terminal length a: LCD side length 8.1 General glass chip: 8.1.1 Chip on panel surface and crack between panels: Seal width <table><thead><tr><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>≤ a</td><td>Crack can't enter viewing area</td><td>≤1/2 t</td></tr><tr><td>≤ a</td><td>Crack can't exceed the half of SP width.</td><td>1/2 t < Z ≤2 t</td></tr></tbody></table>	X	Y	Z	≤ a	Crack can't enter viewing area	≤1/2 t	≤ a	Crack can't exceed the half of SP width.	1/2 t < Z ≤2 t	Minor
X	Y	Z										
≤ a	Crack can't enter viewing area	≤1/2 t										
≤ a	Crack can't exceed the half of SP width.	1/2 t < Z ≤2 t										

◆Specification For TFT-LCD Module 3.5" ~15" :
(Ver.B01)

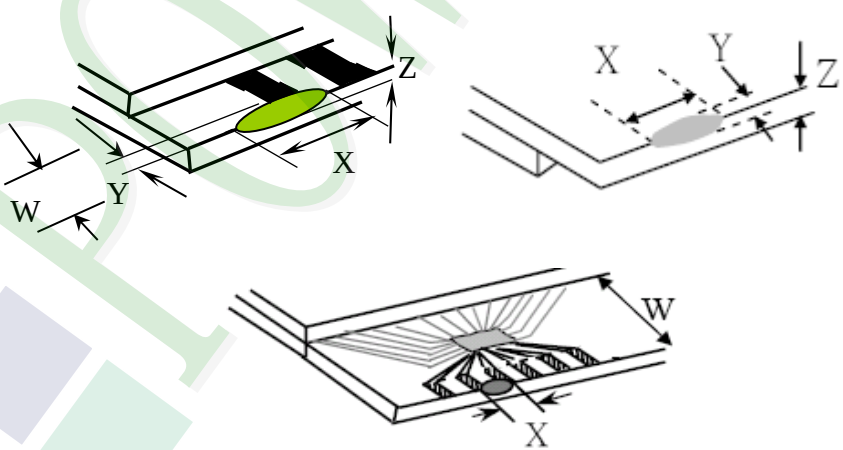NO	Item	Criterion	Level									
08	The crack of glass	Symbols : X: The length of crack Z: The thickness of crack t: The thickness of glass Y: The width of crack. W: terminal length a: LCD side length 8.1.2 Corner crack:  <table><thead><tr><th><u>X</u></th><th><u>Y</u></th><th><u>Z</u></th></tr></thead><tbody><tr><td>$\leq 1/5 a$</td><td>Crack can't enter viewing area</td><td>$Z \leq 1/2 t$</td></tr><tr><td>$\leq 1/5 a$</td><td>Crack can't exceed the half of SP width.</td><td>$1/2 t < Z \leq 2 t$</td></tr></tbody></table>	<u>X</u>	<u>Y</u>	<u>Z</u>	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$	Minor
		<u>X</u>	<u>Y</u>	<u>Z</u>								
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$										
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$										
8.2 Protrusion over terminal: 8.2.1 Chip on electrode pad:  <table><thead><tr><th></th><th><u>X</u></th><th><u>Y</u></th><th><u>Z</u></th></tr></thead><tbody><tr><td>Front</td><td>$\leq a$</td><td>$\leq 1/2 W$</td><td>$\leq t$</td></tr><tr><td>Back</td><td>$\leq a$</td><td>$\leq W$</td><td>$\leq 1/2 t$</td></tr></tbody></table>		<u>X</u>	<u>Y</u>	<u>Z</u>	Front	$\leq a$	$\leq 1/2 W$	$\leq t$	Back	$\leq a$	$\leq W$	$\leq 1/2 t$
	<u>X</u>	<u>Y</u>	<u>Z</u>									
Front	$\leq a$	$\leq 1/2 W$	$\leq t$									
Back	$\leq a$	$\leq W$	$\leq 1/2 t$									

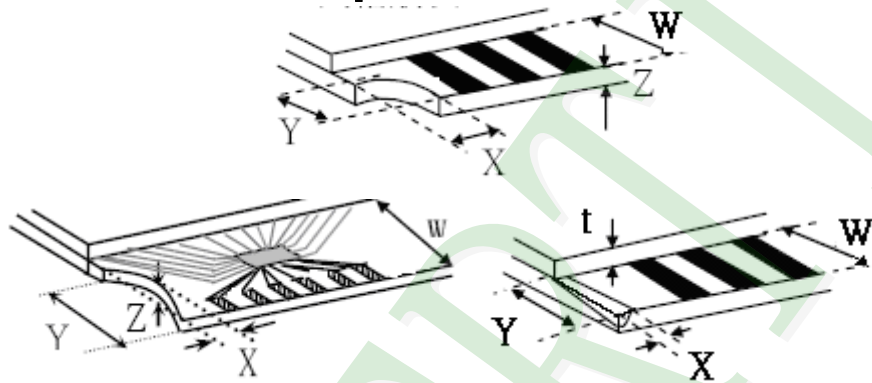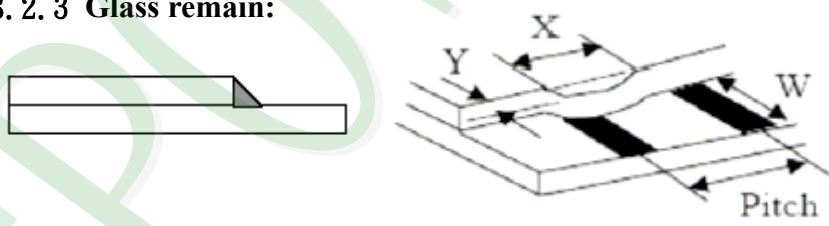NO	Item	Criterion	Level												
08	The crack of glass	Symbols: X: The length of crack Z: The thickness of crack t: The thickness of glass Y: The width of crack. W: terminal length a: LCD side length 8.2.2 Non-conductive portion:  <table> <tr> <th><u>X</u></th> <th><u>Y</u></th> <th><u>Z</u></th> </tr> <tr> <td>$\leq 1/3 a$</td> <td>$\leq W$</td> <td>$\leq t$</td> </tr> </table> ⊙ If the chipped area touches the ITO terminal, over 2/3 of ● the ITO must remain and be inspected according to electrode terminal specifications. 8.2.3 Glass remain:  <table> <tr> <th><u>X</u></th> <th><u>Y</u></th> <th><u>Z</u></th> </tr> <tr> <td>$\leq a$</td> <td>$\leq 1/3 W$</td> <td>$\leq t$</td> </tr> </table> 8.2.4 Cracking:  Not Allowed	<u>X</u>	<u>Y</u>	<u>Z</u>	$\leq 1/3 a$	$\leq W$	$\leq t$	<u>X</u>	<u>Y</u>	<u>Z</u>	$\leq a$	$\leq 1/3 W$	$\leq t$	Minor
<u>X</u>	<u>Y</u>	<u>Z</u>													
$\leq 1/3 a$	$\leq W$	$\leq t$													
<u>X</u>	<u>Y</u>	<u>Z</u>													
$\leq a$	$\leq 1/3 W$	$\leq t$													

◆Specification For TFT-LCD Module 3.5" ~15" :
(Ver.B01)

<u>NO</u>	<u>Item</u>	<u>Criterion</u>	<u>Level</u>
09	Backlight elements	9. 1 Backlight can't work normally.	Major
		9. 2 Backlight doesn't light or color is wrong.	Major
		9. 3 Illumination source flickers when lit.	Major
10	General appearance	10. 1 Pin type 、 quantity 、 dimension must match type in structure diagram.	Major
		10. 2 No short circuits in components on PCB or FPC.	Major
		10. 3 Parts on PCB or FPC must be: no wrong parts, missing parts or excess parts.	Major
		10. 4 Product packaging must the same as specified on packaging specification sheet.	Minor
		10. 5 The folding and peeled off in polarizer are not acceptable.	Minor
		10. 6 The PCB or FPC between B/L assembled distance(PCB or FPC) is ≤ 1.5 mm.	Minor

4. RELIABILITY TEST

4.1 Reliability Test Condition

(Ver.B01)

NO.	TEST ITEM	TEST CONDITION										
1	High Temperature Storage Test	Keep in 80 ±5℃ 240 hrs										
2	Low Temperature Storage Test	Keep in -30 ±5℃ 240 hrs										
3	High Temperature / High Humidity Storage Test	Keep in 60 °C / 90% R.H duration for 240 hrs (Excluding the polarizer)										
4	Temperature Cycling Storage Test	-30℃ → +25℃ → 80℃ → +25℃ (30mins) (5mins) (30mins) (5mins) ← 20 Cycle →										
5	ESD Test	Air Discharge: Apply 2 KV with 5 times Discharge for each polarity +/-	Contact Discharge: Apply 250 V with 5 times discharge for each polarity +/-									
		1. Temperature ambience : 15℃ ~35℃ 2. Humidity relative : 30%~60% 3. Energy Storage Capacitance(Cs+Cd) : 150pF±10% 4. Discharge Resistance(Rd) : 330 Ω±10% 5. Discharge, mode of operation : Single Discharge (time between successive discharges at least 1 sec) (Tolerance if the output voltage indication : ±5%)										
6	Vibration Test (Packaged)	1. Sine wave 10~55 Hz frequency (1 min/sweep) 2. The amplitude of vibration :1.5 mm 3. Each direction (X、Y、Z) duration for 2 Hrs										
7	Drop Test (Packaged)											
		<table><tr><th>Packing Weight (Kg)</th><th>Drop Height (cm)</th></tr><tr><td>0 ~ 45.4</td><td>122</td></tr><tr><td>45.4 ~ 90.8</td><td>76</td></tr><tr><td>90.8 ~ 454</td><td>61</td></tr><tr><td>Over 454</td><td>46</td></tr></table>	Packing Weight (Kg)	Drop Height (cm)	0 ~ 45.4	122	45.4 ~ 90.8	76	90.8 ~ 454	61	Over 454	46
Packing Weight (Kg)	Drop Height (cm)											
0 ~ 45.4	122											
45.4 ~ 90.8	76											
90.8 ~ 454	61											
Over 454	46											
		Drop Direction :※1 corner / 3 edges / 6 sides each 1time										

◎Inspection conditions after test:

Temperature : +20~30℃

Humidity : 50~70%

Atmospheric pressure : 86~106Kpa

5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

5.2 HANDLING



- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module, be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So, please handle it very carefully, do not touch, push or rub the exposed polarizing with anything harder than an HB pencil lead (glass, tweezers, etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands, this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320 \pm 10^{\circ}\text{C}$ and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM
- 5.2.10 Caution!(LCM products with Capacitive Touch Panel)
Strong EMI-sources such as switch-mode power supplies (SMPS) can lead to touch malfunction (e.g. ghost-touches).
Therefore, the touch needs to be thoroughly tested inside the target application.
- 5.2.11 CAUTION: Continuously displaying same static image will result in high possibility of image sticking/image burn-in effect due to TFT panel characteristic.
- 5.2.12 Double-sided tape designed to be attach with the customer's mechanical device, please follow up the rules and regulations published by the original manufacturer of double-sided tape for the attachment operation.

5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush, shake, or jolt the module.

5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment, fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

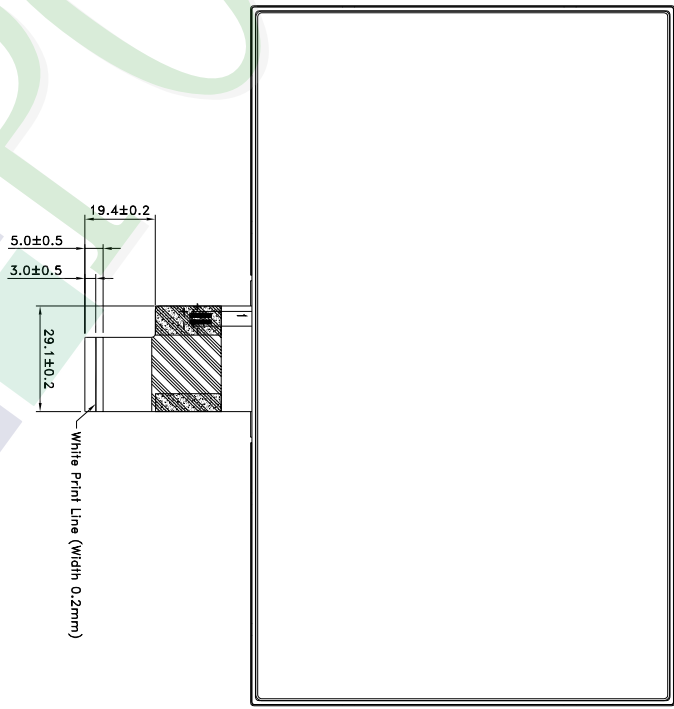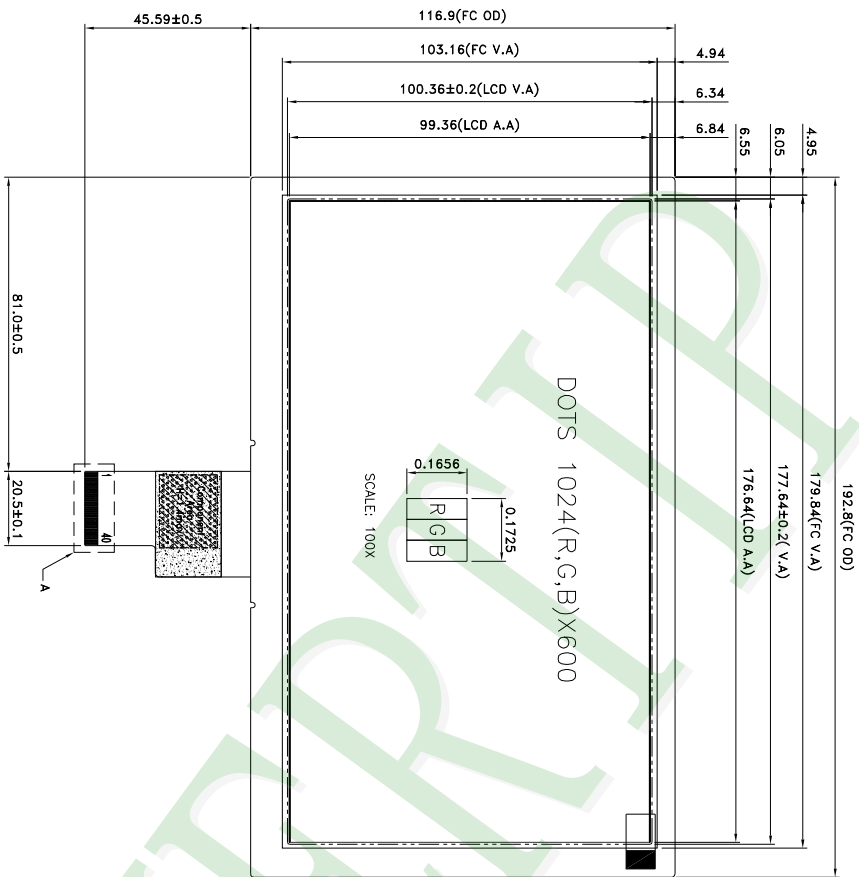

- NOTES:
- 1.LCD TYPE: TFT LCD
 - 2.LCD DISPLAY: Normally White /TRANSMISSIVE
 - 3.VIEW DIRECTION: 6 O'CLOCK
 - 4.THE TOLERANCE UNLESS CLASSIFIED ±0.3mm
 - 5.BENDING RADIUS OF FPC SHOULD BE LARGER THAN 1.0mm
 - 6.LCM FPC suggested connector : FH12A-40S-0.5SH (HIROSE) or compatible
 7. :Koplon tape; :Component area; :Unbending area

007					PART NO:	久正光电股份有限公司 POWER TIP TECHNOLOGY CORPORATION											
006					PH102600T019-IBA												
005																	
004					DRAWING NAME :												
003					JLMD-PH102600T019-IBA	Design	Sally				Surface				Tolerance (mm)		Precision Level
002					TITLE:	Check	Air				Unit	MM	Material			1 ~ 4	-
											Scale	FIT	Thickness			63 ~ 63	-
						Approve	LuJin				Page	1/1	Quantity			250 ~ 1000	-
001	NEW DRAWING		Sally	2023/11/09	LCD MODULE DRAWING												-
REV		REV BY	REVISER	DATE													

Ver.001	包裝規格書 Packaging Specifications (For Tray)		Approve	Check	Contact
Documents NO. JPKG-PH102600T019-IBA			Liujin	Air	Sally


1.包裝材料規格表 (Packaging Material) : (per carton)

No.	Item	Model	Dimensions (mm)	1Pcs Weight	Quantity	Total Weight
1	成品 (LCM)	PH102600T019-IBA	192.8 X 116.9 X 6.4	0.2435	48	11.688
2	多層薄膜(1)POF	OTFILM0BA03ABA	19"X350X0.015	——	6	——
3	TRAY 盤 (2)Tray	TYSG000000718	352 X 260 X 15.7	0.08	30	2.4
4	內盒(3)Product Box	BX36627063ABBA	383 X 270 X 66	0.182	6	1.092
5	保利龍板(4)Polylon board	OTPLB00PL08ABA	550 X 393 X 20	0.0284	2	0.0568
6	外紙箱(5)Carton	BX57041027CCBA	570 X 410 X 265	1.0	1	1.0
7						
8						
9						

2.一 整箱總重量 (Total LCD Weight in carton) : 16.24 Kg±10%

3.單箱數量規格表 (Packaging Specifications and Quantity) :

(1)LCM quantity per box : no per tray	2	x no of tray	4	=	8
(2)Total LCM quantity in carton : quantity per box	8	x no of boxes	6	=	48

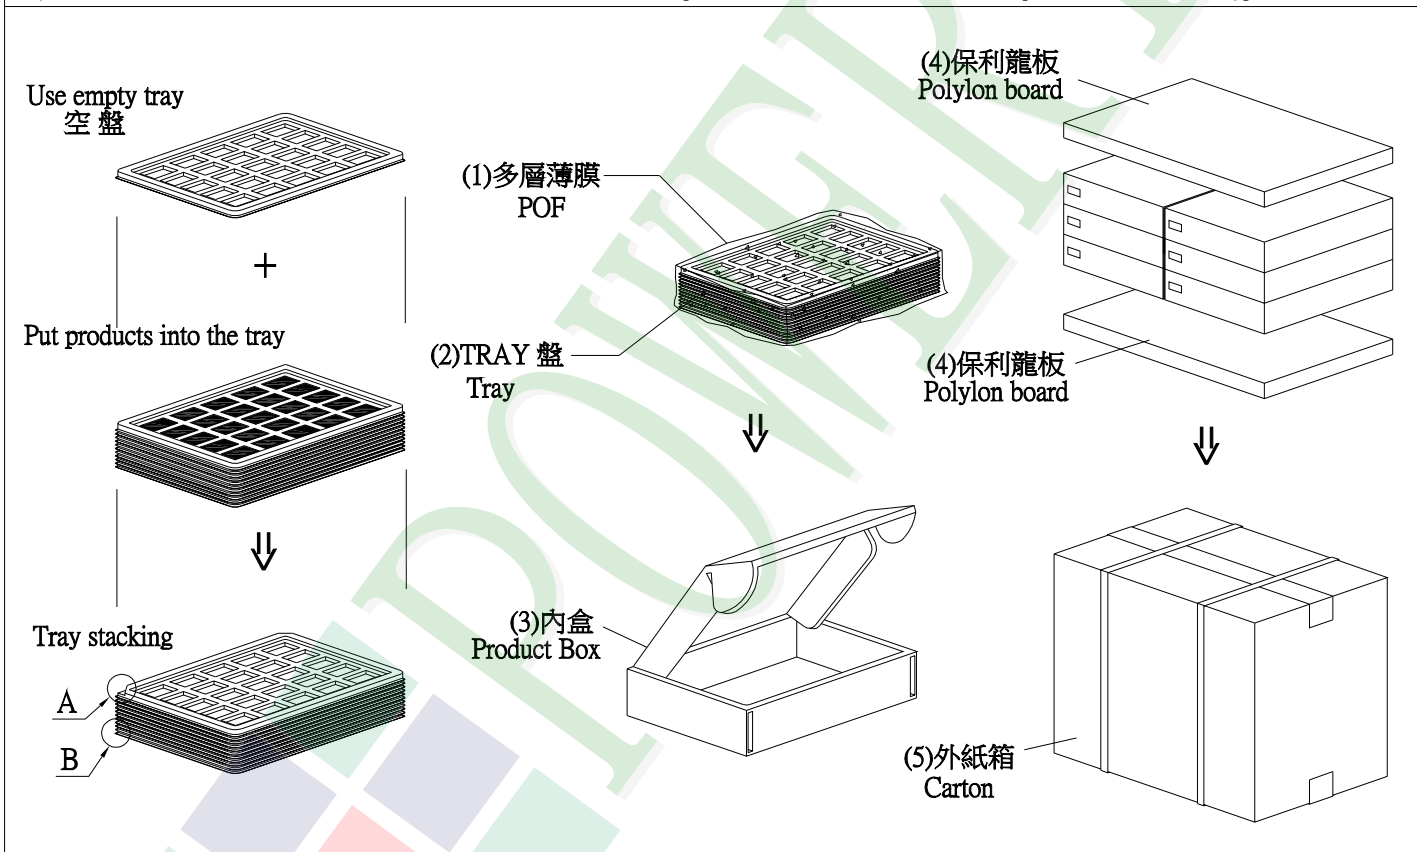

特 記 事 項 (REMARK)

4. TRAY盤相疊時,需旋轉180度,請詳見B視圖 Rotate tray 180 degrees and place on top of stack. Check the tray stack using Fig. B.	
---	--