



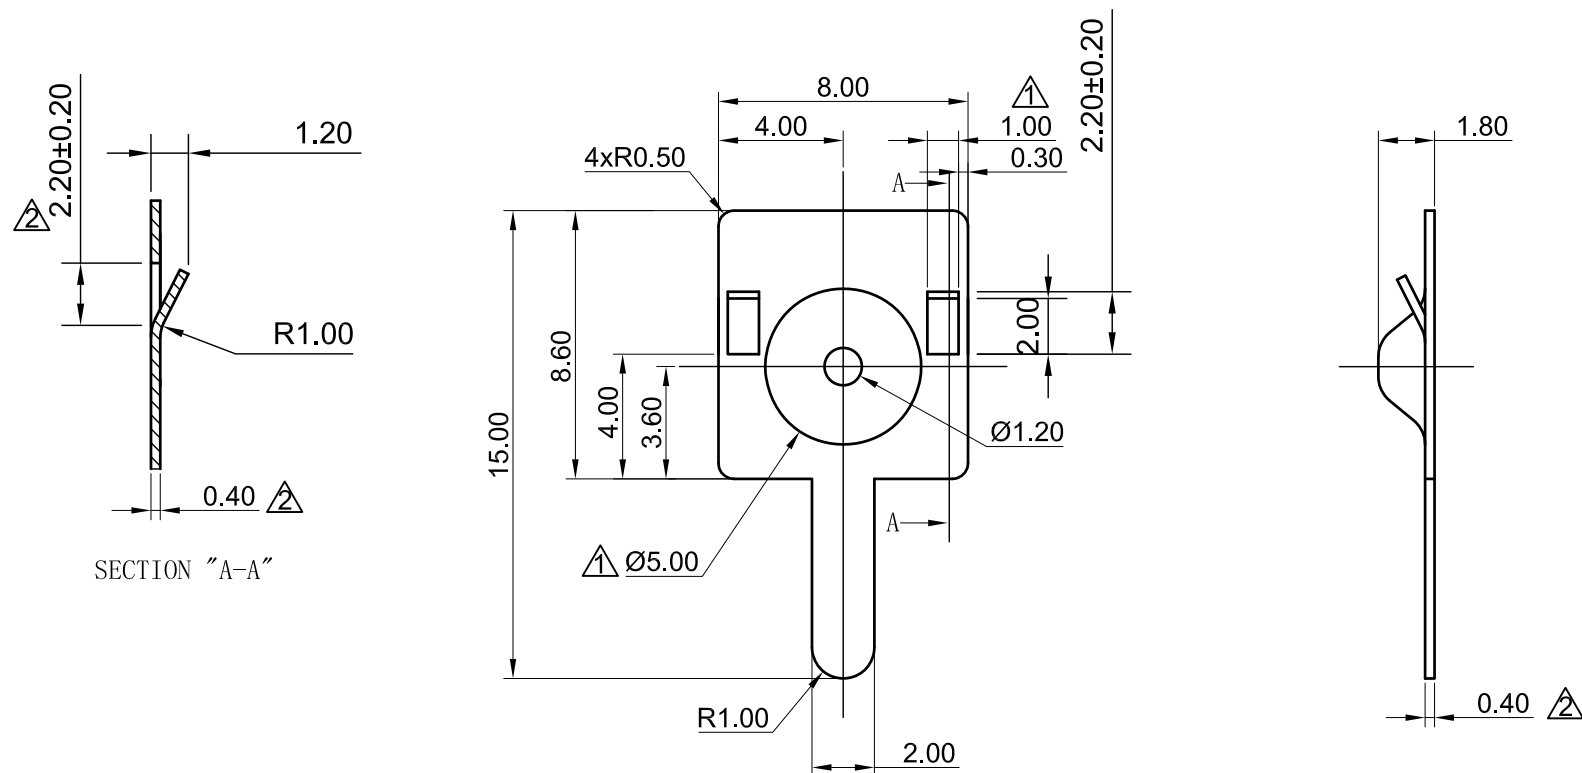

NOTES

- (1) PART NO. : 223-2A ANODE
- (2) MATERIAL: 0.4MM STEEL NICKEL PLATED
- (3) SPRING MATERIAL: Ø0.5MM SPRING STEEL NICKEL PLATED
- (4) TOLERANCE: ISO 2768-M, UNLESS OTHERWISE SPECIFIED
- (5) PROCESS CORNER R=0.40MM
- (6) SURFACE NO BURRS, NO GREASE
- (7) RoHS COMPLIANT


3	Change the material to steel	Apr/29/2019
2	Change the size from 2.0 to 2.2mm from 0.3 to 0.4mm	Oct/24/2018
1	Change the size from 6.0 to 5.0mm from 0.8 to 1.0mm Add the size 0.3mm	JUL/23/2018
NO.	MODIFICATION	DATE
General Tolerances		
0 ~ >3	± 0.10	30 ~ >120 ± 0.50
3 ~ >6	± 0.20	120 ~ >400 ± 0.80
6 ~ >30	± 0.30	Angle: ± 3°
The Third Angle Projection		
COMFORTABLE ELECTRONIC CO.LTD.		
NAME	BATTERY CONTACT: 223-2A ANODE	
SCALE	4:1	APPD
UNIT	MM	CHKD
MAT'L	SEE NOTES	DWN
DATE	APR. 29. 2019	DR NO
D2-2232A-0419		REV D

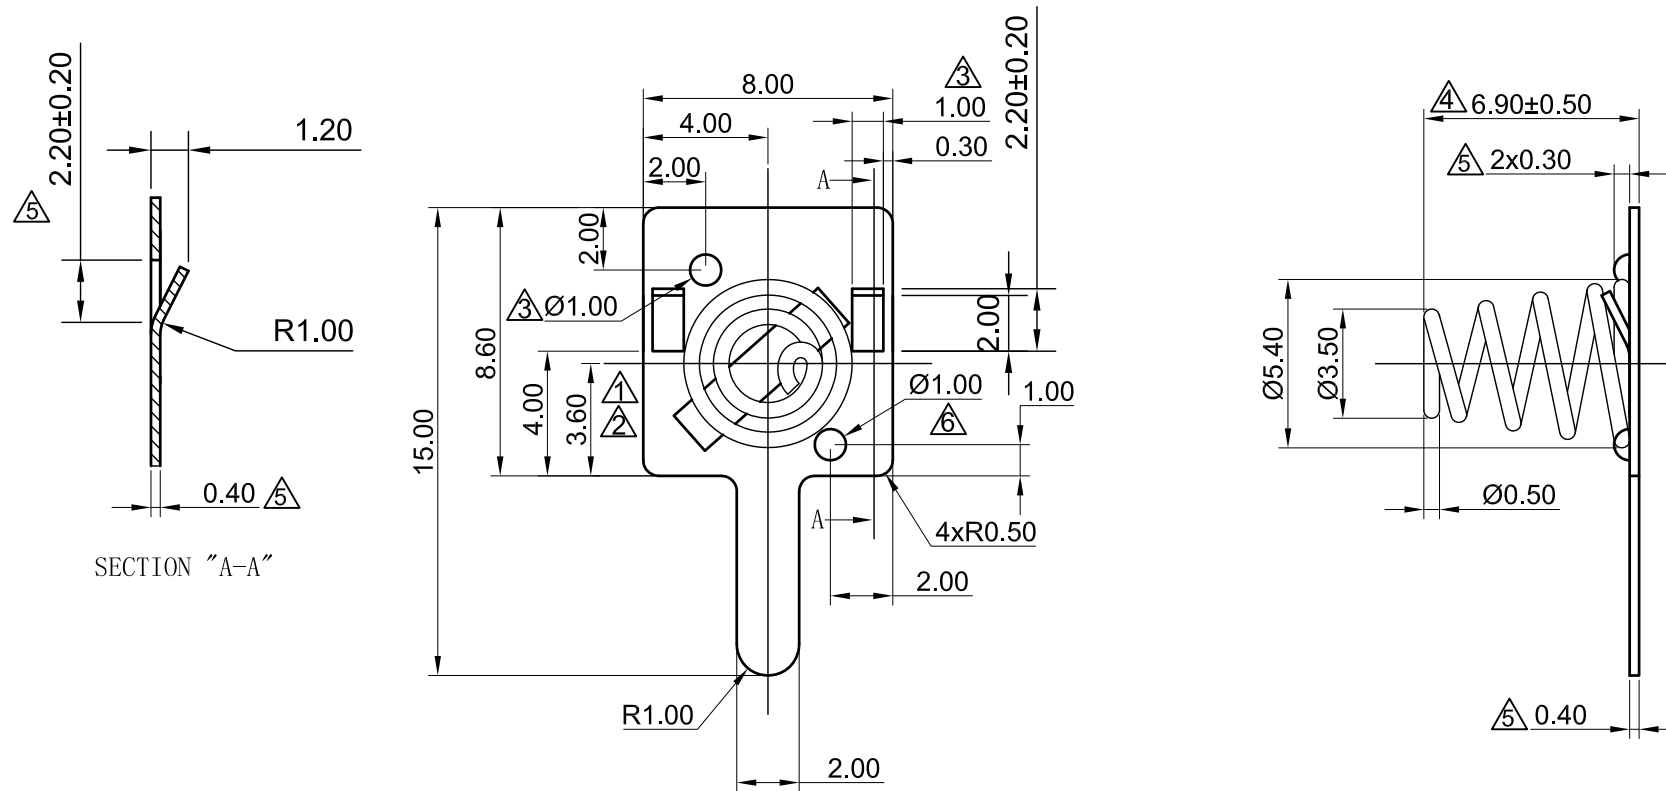


NOTES


- (1) PART NO. : 223-2B CATHODE
- (2) MATERIAL: 0.40MM THICK STEEL NICKEL PLATED
- (3) SPRING MATERIAL: Ø0.5MM SPRING STEEL NICKEL PLATED
- (4) TOLERANCE: ISO 2768-M, UNLESS OTHERWISE SPECIFIED
- (5) PROCESS CORNER R=0.40MM
- (6) SURFACE NO BURRS, NO GREASE
- (7) RoHS COMPLIANT


6	Add the convex	Nov/10/2018
5	Change the size from 2.0 to 2.2mm from 0.3 to 0.4mm, from 0.5 to 0.3mm	Oct/24/2018
4	Change the size from 11.0 to 6.9mm	Aug/14/2018
3	Change the size from 0.8 to 1.0mm Add the size 0.3mm Changed the position : 1mm	Jul/23/2018
2	Change the size from 4.25 to 3.6mm	Jun/07/2018
1	Change the size from 5.0 to 4.25mm	May/30/2018
NO.	MODIFICATION	DATE
General Tolerances		
0 ~ >3	± 0.10	30 ~ >120 ± 0.50
3 ~ >6	± 0.20	120 ~ >400 ± 0.80
6 ~ >30	± 0.30	Angle: ± 3°



COMFORTABLE ELECTRONIC CO.LTD.			
NAME	BATTERY CONTACT: 223-2B CATHODE		
SCALE	4:1	APPD	
UNIT	MM	CHKD	
MAT'L	SEE NOTES	DWN	
DATE	NOV. 10. 2018	DR NO	D2-2232B-1118
			REV G

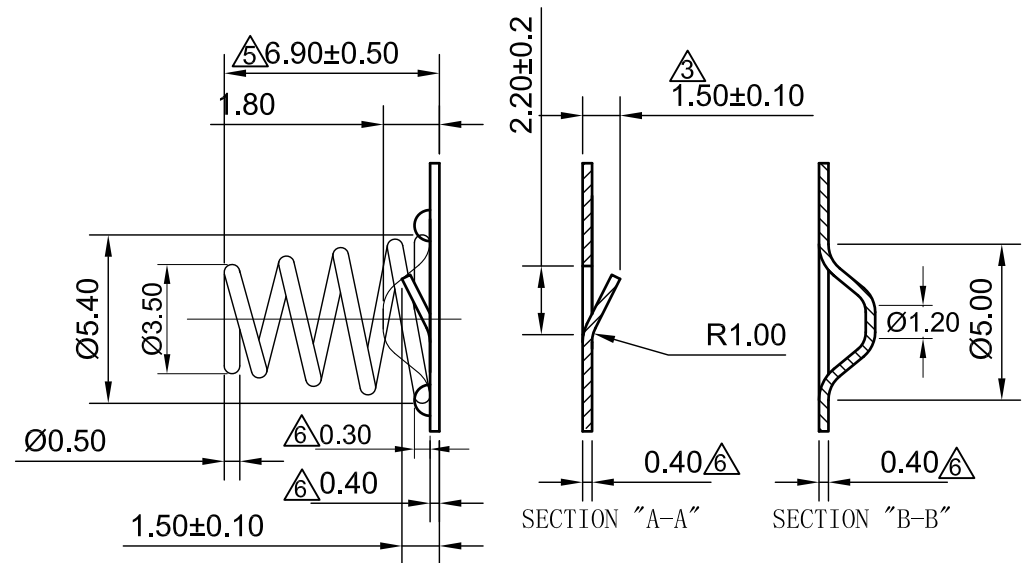


	Add the convex	Nov/10/2018																								
	Change the size from 0.5 to 0.3mm from 0.3 to 0.4mm	Oct/24/2018																								
	Change the size from 11.0 to 6.9mm	Aug/14/2018																								
	Change the size from 6.0 to 5.0mm from 0.8 to 1.0mm Add the size 0.3mm	JUL/23/2018																								
	Change these size: from 1.2 to 1.5mm	Jun/11/2018																								
	Change these size: from 4.25 to 3.6mm from 9.7 to 10.4mm	Jun/11/2018																								
	Change these size: from 5.0 to 4.25mm from 18.0 to 18.7mm	May/30/2018																								
NO.	MODIFICATION	DATE																								
General Tolerances 0 ~ >3 ± 0.10 30 ~ >120 ± 0.30 3 ~ >6 ± 0.10 120 ~ >400 ± 0.50 6 ~ >30 ± 0.20 Angle: ± 3°		 The Third Angle Projection																								
COMFORTABLE ELECTRONIC CO.LTD. <table><tr><td>NAME</td><td colspan="3">BATTERY CONTACT: 223-2C ANODE CATHODE</td></tr><tr><td>SCALE</td><td>4:1</td><td>APPD</td><td></td></tr><tr><td>UNIT</td><td>MM</td><td>CHKD</td><td></td></tr><tr><td>MAT'L</td><td>SEE NOTES</td><td>DWN</td><td></td></tr><tr><td>DATE</td><td>NOV. 10. 2018</td><td>DR NO</td><td>D2-2232C-1118</td></tr><tr><td></td><td></td><td></td><td>REV H</td></tr></table>			NAME	BATTERY CONTACT: 223-2C ANODE CATHODE			SCALE	4:1	APPD		UNIT	MM	CHKD		MAT'L	SEE NOTES	DWN		DATE	NOV. 10. 2018	DR NO	D2-2232C-1118				REV H
NAME	BATTERY CONTACT: 223-2C ANODE CATHODE																									
SCALE	4:1	APPD																								
UNIT	MM	CHKD																								
MAT'L	SEE NOTES	DWN																								
DATE	NOV. 10. 2018	DR NO	D2-2232C-1118																							
			REV H																							

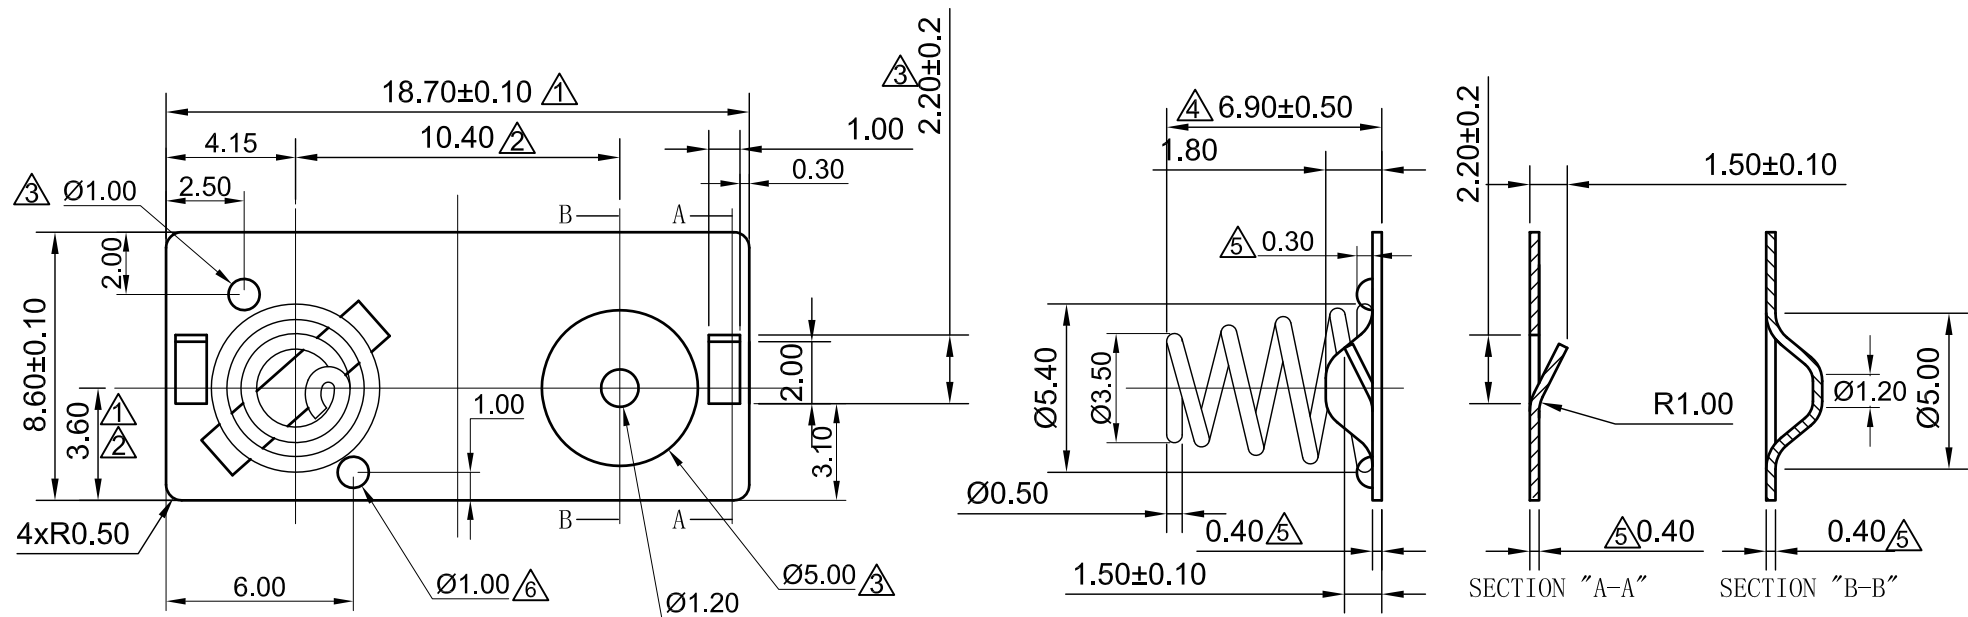

NOTES

- (1) PART NO. : 223-2D CATHODE ANODE
- (2) MATERIAL: 0.40MM THICK STEEL NICKEL PLATED
- (3) SPRING MATERIAL: Ø0.5MM SPRING STEEL NICKEL PLATED
- (4) TOLERANCE: ISO 2768-M, UNLESS OTHERWISE SPECIFIED
- (5) PROCESS CORNER R=0.40MM
- (6) SURFACE NO BURRS, NO GREASE
- (7) RoHS COMPLIANT

6	Add the convex	Nov/10/2018
5	Change the size from 0.5 to 0.3mm from 0.3 to 0.4mm	Oct/24/2018
4	Change the size from 11.0 to 6.9mm	Aug/14/2018
3	Change the size from 6.0 to 5.0mm from 0.8 to 1.0mm Add the size 0.3mm Changed the position : 1mm	Jul/23/2018
2	Change these size: from 4.25 to 3.6mm from 9.7 to 10.4mm	Jun/11/2018
1	Change these size: from 5.0 to 4.25mm from 18.0 to 18.7mm	May/30/2018
NO.	MODIFICATION	DATE
General Tolerances		
0 ~ >3	± 0.10	30 ~ >120 ± 0.30
3 ~ >6	± 0.10	120 ~ >400 ± 0.50
6 ~ >30	± 0.20	Angle: ± 3°



The Third Angle Projection

COMF COMFORTABLE ELECTRONIC CO.LTD.

NAME	BATTERY CONTACT: 223-2D CATHODE ANODE		
SCALE	4:1	APPD	
UNIT	MM	CHKD	
MAT'L	SEE NOTES	DWN	
DATE	NOV. 10. 2018	DR NO	D2-2232D-1118
		REV	G