SIGN	DATE	DESCRIPTION	APPROVER
1	02/07'06	Part No. changed	Tony
2	1/31'07	Soldering temperature changed from 245° to 250°	Tony
3	04/18'11	Dimension is changed	Aaron
4	11/17'14	Soldering temperature changed from 250° to 260°	Evan
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

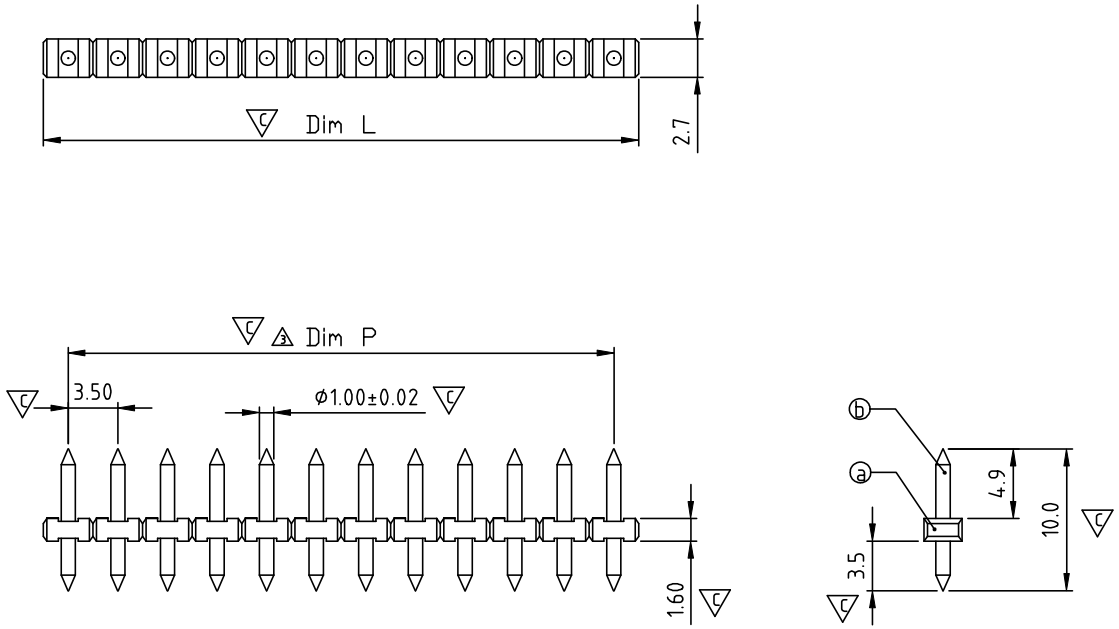

P.C.B. LAYOUT

Material:

- Item ⓐ Terminal(housing): PA66 (UL94V-0)
- Item ⓑ Contact pin: Brass

Electrical:	cULus
Voltage rating:	150V
Current rating:	10A
Withstanding Voltage:	1.3KV
Operating temperature:	-40°C to +115°C
4 2 Soldering temperature:	260°C±5°C/5 Sec
Safety Approval:	
Critical dimension:	
1 Part No.:	

OP xx 2 B x 0 xxxx G

POLES
02 pole
,,, ,,,
24 pole

0 Tin
1 Gold plating 10u"
2 Gold flash

0000: Standard
Any special item by customer requst. please contact sales department.

G RoHS compliant (lead<4%) In copper Alloy

Poles	02	03	04	05	06	07	08	09	10	11	12	13
Dim L	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	45.50
Dim P	3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00
TOL	±0.10				±0.15				±0.20			
Poles	14	15	16	17	18	19	20	21	22	23	24	
Dim L	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00	
Dim P	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	
TOL	±0.25				±0.30							

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	OP 3.5 Series (配EH專用)				
PART NO.	OPxx2Bx0xxxxG			DWG NO.	8OP0501
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Evan 2014.11.17	Evan 2014.11.17	UNIT: mm	
				SCALE: NONE	
				SHEET: 01/01	REV.: F

Tolerance	
X.	±0.50
X.X	±0.30
X.XX	±0.10
X°	±1°