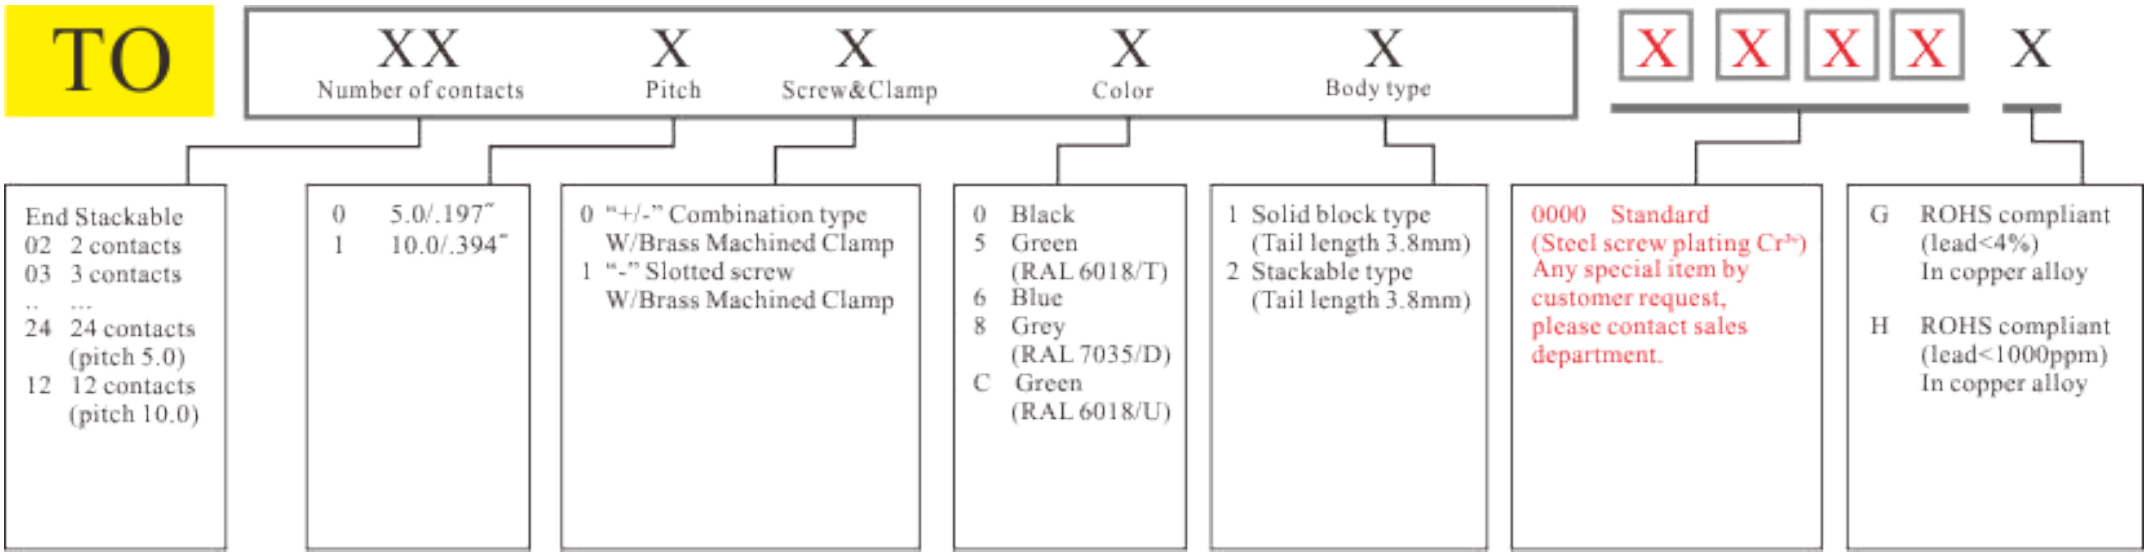
TO
XX
Number of contacts
X
Pitch
X
Screw&Clamp
X
Color
X
Body type
X X X X
X
End Stackable
02 2 contacts
03 3 contacts
.. ...
24 24 contacts (pitch 5.0)
12 12 contacts (pitch 10.0)
0 5.0/.197"
1 10.0/.394"
0 "+/-" Combination type W/Brass Machined Clamp
1 "-" Slotted screw W/Brass Machined Clamp
0 Black
5 Green (RAL 6018/T)
6 Blue
8 Grey (RAL 7035/D)
C Green (RAL 6018/U)
1 Solid block type (Tail length 3.8mm)
2 Stackable type (Tail length 3.8mm)
0000 Standard
(Steel screw plating Cr3+)
Any special item by customer request, please contact sales department.
G ROHS compliant (lead<4%) In copper alloy
H ROHS compliant (lead<1000ppm) In copper alloy