


SMBJ



Automotive grade 600 W Transient voltage suppressor



Product features

- Automotive grade (AEC-Q101 qualified)
- Low profile SMB package
- Excellent clamping capability
- High reliability application
- 600 W peak pulse power capability at 10/1000 μ s waveform
- Typical I_R less than 1 μ A above 9 V
- Fast response time: typically less than 1.0 ps from 0 V to V_{BR} minimum
- Plastic package meets UL 94 V-0 flammability rating
- Meets moisture sensitivity level (MSL) level 1
- Terminal: tin plated, solderable per J-STD-002
- UL 497B recognized.
File No. : E198449 Guide QVGQ2

PIN configuration



Applications

- Automotive chassis and safety systems
- Advanced driver assistance systems (ADAS)
- Communication and infotainment systems
- Network systems and body electronics
- Power Train controls
- xEV and battery systems

Environmental compliance and general specifications

- AEC-Q101 qualified



Ordering part number

	SMBJ	5.0	C	A	H
Family name	_____	_____	_____	_____	_____
V_R voltage	_____	_____	_____	_____	_____
Bi-/Uni-Directional (Blank=Uni, C=Bi)	_____	_____	_____	_____	_____
Voltage tolerance	_____	_____	_____	_____	_____
High reliability application	_____	_____	_____	_____	_____

Alternate ordering part number

	SMBJE	5-0	C	A	H
Family name	_____	_____	_____	_____	_____
V_R voltage ("-" indicates decimal point)	_____	_____	_____	_____	_____
Bi-/Uni-Directional (Blank=Uni, C=Bi)	_____	_____	_____	_____	_____
Voltage tolerance	_____	_____	_____	_____	_____
High reliability application	_____	_____	_____	_____	_____


Absolute maximum ratings

(+25 °C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage operating junction temperature range	T_{STG}/T_J	-55 to +150	°C
Steady state power dissipation at $T_L = +75$ °C	$P_{M(AV)}$	5	W
Peak pulse power dissipation on 10/1000 μ s waveform	P_{PP}	600	W
Maximum instantaneous forward voltage at 100 A for unidirectional	V_F	5	V
Peak forward surge current, 8.3 ms single half sine wave ¹	I_{FSM}	100	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	20	°C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	100	°C/W

1. Measured on 8.3 ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle = 4 per minute maximum

Mechanical parameters, pad layout- mm/inches

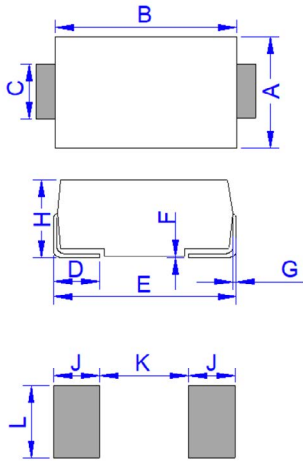

Dimension	Millimeters		Inches	
	Minimum	Maximum	Minimum	Maximum
A	3.30	3.94	0.130	0.155
B	4.30	4.80	0.169	0.189
C	1.90	2.20	0.075	0.087
D	0.95	1.52	0.037	0.060
E	5.20	5.60	0.205	0.220
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.10	2.40	0.083	0.094
J	2.00	-	0.087	-
K	-	2.60	-	0.102
L	2.30	-	0.091	-

Part marking




Cathode band (uni-polar only)
Part marking: xx = Refer to marking designator listed in Electrical Characteristics table
yyyy- date code

Packaging information - mm/inches

Drawing not to scale.

Supplied in tape and reel packaging, 3,000 parts per 13" diameter reel (EIA-481 compliant)

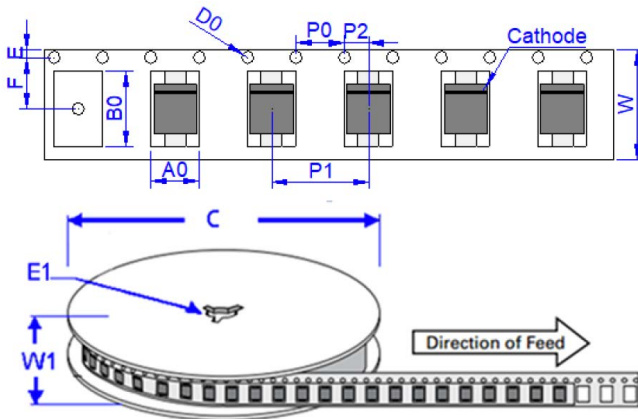

Dimensions	Millimeters	Inches
A0	3.76 ± 0.3	0.148 ± 0.012
B0	5.69 ± 0.3	0.224 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	5.50 ± 0.2	0.217 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	12.0 ± 0.2	0.472 ± 0.008
W1	15.7 ± 2.0	0.618 ± 0.079

SMBJ

Automotive grade 600 W Transient voltage suppressor

Technical Data ELX1063
Effective September 2024


Electrical specifications (+25 °C) * = not UL497B recognized

Part number		Marking		V _R	I _R @ V _R	V _{BR} @ I _T		I _T	V _C @ I _{PP}	I _{PP}
Uni-polar	Bi-polar	Uni	Bi	(V)	(μA)	min (V)	max (V)	(mA)	max (V)	(A)
SMBJ5.0AH	SMBJ5.0CAH	KE	AE	5	120	6.4	7	10	9.2	65.2
SMBJ6.0AH	SMBJ6.0CAH	KG	AG	6	120	6.67	7.37	10	10.3	58.3
SMBJ6.5AH	SMBJ6.5CAH	KK	AK	6.5	120	7.22	7.98	10	11.2	53.6
SMBJ7.0AH	SMBJ7.0CAH	KM	AM	7	50	7.78	8.6	10	12	50
SMBJ7.5AH	SMBJ7.5CAH	KP	AP	7.5	50	8.33	9.21	1	12.9	46.5
SMBJ8.0AH	SMBJ8.0CAH	KR	AR	8	20	8.89	9.83	1	13.6	44.1
SMBJ8.5AH	SMBJ8.5CAH	KT	AT	8.5	10	9.44	10.4	1	14.4	41.7
SMBJ9.0AH	SMBJ9.0CAH	KV	AV	9	5	10	11.1	1	15.4	39
SMBJ11AH	SMBJ11CAH	KZ	AZ	11	1	12.2	13.5	1	18.2	33
SMBJ12AH	SMBJ12CAH	LE	BE	12	1	13.3	14.7	1	19.9	30.2
SMBJ13AH	SMBJ13CAH	LG	BG	13	1	14.4	15.9	1	21.5	27.9
SMBJ14AH	SMBJ14CAH	LK	BK	14	1	15.6	17.2	1	23.2	25.9
SMBJ15AH	SMBJ15CAH	LM	BM	15	1	16.7	18.5	1	24.4	24.6
SMBJ16AH	SMBJ16CAH	LP	BP	16	1	17.8	19.7	1	26	23.1
SMBJ17AH	SMBJ17CAH	LR	BR	17	1	18.9	20.9	1	27.6	21.8
SMBJ18AH	SMBJ18CAH	LT	BT	18	1	20	22.1	1	29.2	20.6
SMBJ20AH	SMBJ20CAH	LV	BV	20	1	22.2	24.5	1	32.4	18.6
SMBJ22AH	SMBJ22CAH	LX	BX	22	1	24.4	26.9	1	35.5	16.9
SMBJ24AH	SMBJ24CAH	LZ	BZ	24	1	26.7	29.5	1	38.9	15.4
SMBJ26AH	SMBJ26CAH	ME	CE	26	1	28.9	31.9	1	42.1	14.3
SMBJ28AH	SMBJ28CAH	MG	CG	28	1	31.1	34.4	1	45.4	13.2
SMBJ30AH	SMBJ30CAH	MK	CK	30	1	33.3	36.8	1	48.4	12.4
SMBJ33AH	SMBJ33CAH	MM	CM	33	1	36.7	40.6	1	53.3	11.3
SMBJ36AH	SMBJ36CAH	MP	CP	36	1	40	44.2	1	58.1	10.4
SMBJ40AH	SMBJ40CAH	MR	CR	40	1	44.4	49.1	1	64.5	9.3
SMBJ43AH	SMBJ43CAH	MT	CT	43	1	47.8	52.8	1	69.4	8.7
SMBJ45AH	SMBJ45CAH	MV	CV	45	1	50	55.3	1	72.7	8.3
SMBJ48AH	SMBJ48CAH	MX	CX	48	1	53.3	58.9	1	77.4	7.8
SMBJ51AH	SMBJ51CAH	MZ	CZ	51	1	56.7	62.7	1	82.4	7.3
SMBJ54AH	SMBJ54CAH	NE	DE	54	1	60	66.3	1	87.1	6.9
SMBJ58AH	SMBJ58CAH	NG	DG	58	1	64.4	71.2	1	93.6	6.4
SMBJ60AH	SMBJ60CAH	NK	DK	60	1	66.7	73.7	1	96.8	6.2
SMBJ64AH	SMBJ64CAH	NM	DM	64	1	71.1	78.6	1	103	5.8
SMBJ70AH	SMBJ70CAH	NP	DP	70	1	77.8	86	1	113	5.3
SMBJ75AH	SMBJ75CAH	NR	DR	75	1	83.3	92.1	1	121	5
SMBJ78AH	SMBJ78CAH	NT	DT	78	1	86.7	95.8	1	126	4.8
SMBJ85AH	SMBJ85CAH	NV	DV	85	1	94.4	104	1	137	4.4
SMBJ90AH	SMBJ90CAH	NX	DX	90	1	100	111	1	146	4.1
SMBJ100AH	SMBJ100CAH	NZ	DZ	100	1	111	123	1	162	3.7
SMBJ110AH	SMBJ110CAH	PE	EE	110	1	122	135	1	177	3.4
SMBJ120AH	SMBJ120CAH	PG	EG	120	1	133	147	1	193	3.1
SMBJ130AH	SMBJ130CAH	PK	EK	130	1	144	159	1	209	2.9
SMBJ150AH	SMBJ150CAH	PM	EM	150	1	167	185	1	243	2.5
SMBJ160AH	SMBJ160CAH	PP	EP	160	1	178	197	1	259	2.3
SMBJ170AH	SMBJ170CAH	PR	ER	170	1	189	209	1	275	2.2
SMBJ180AH	SMBJ180CAH	PT	ET	180	1	201	222	1	292	2.1
SMBJ190AH	SMBJ190CAH	PV	EV	190	1	211	234	1	307	2
SMBJ200AH	SMBJ200CAH	PX	EX	200	1	224	247	1	324	1.9
SMBJ210AH	SMBJ210CAH	PZ	EZ	210	1	233	258	1	337	1.8
SMBJ220AH	SMBJ220CAH	QE	FE	220	1	246	272	1	356	1.7
SMBJ250AH	SMBJ250CAH	QG	FG	250	1	279	309	1	405	1.5
SMBJ300AH	SMBJ300CAH	QK	FK	300	1	335	371	1	486	1.3
SMBJ350AH	SMBJ350CAH	QM	FM	350	1	391	432	1	567	1.1
SMBJ400AH	SMBJ400CAH	QP	FP	400	1	447	494	1	648	0.9
SMBJ440AH	SMBJ440CAH	QR	FR	440	1	492	543	1	713	0.8
SMBJ460AH*	SMBJ460CAH*	QT	FT	460	1	510	560	1	735	0.8


Note: Standard part numbers listed. Alternate part numbers have the addition of an E and a “-” for the “.” where applicable. Example standard part number SMBJ5.0AH, Alternate part number SMBJE5-0AH

Ratings and V-I characteristic curves (+25 °C unless otherwise noted)

V- I curve characteristics (Uni-directional)

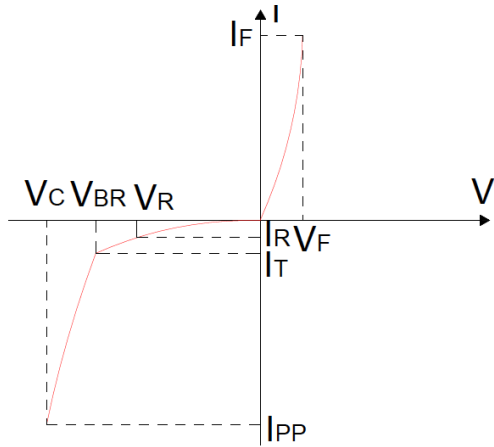

V- I curve characteristics (Bi-directional)

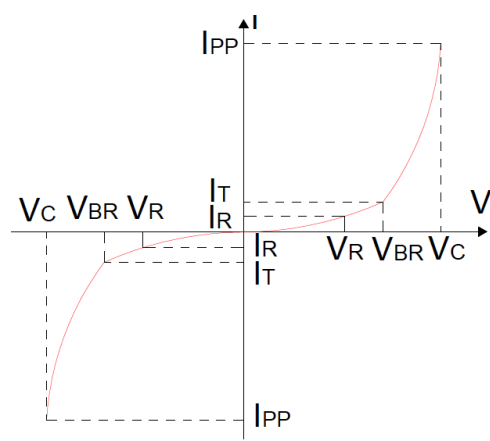

Surge waveform: 10/1000 μ s

V_R : Stand-off voltage – Maximum voltage that can be applied

V_{BR} : Breakdown voltage


V_C : Clamping voltage – Peak voltage measured across the suppressor at a specified I_{PP}

I_R : Reverse leakage current


I_T : Test current

V_F : Forward voltage drop for Uni-directional


Pulse waveform

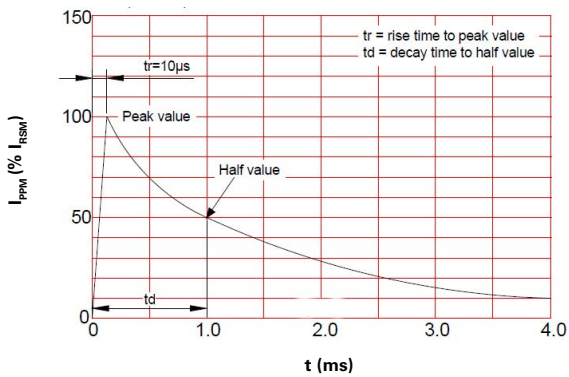

Pulse derating curve

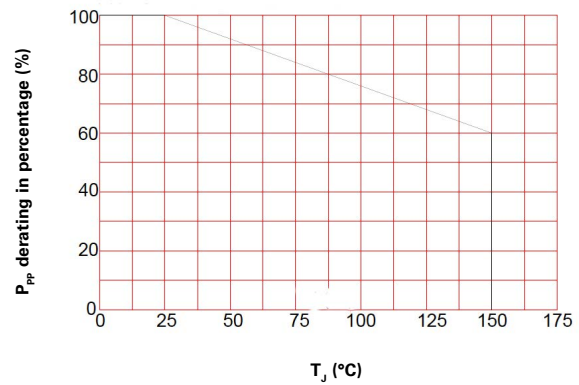

Peak pulse power dissipation curve

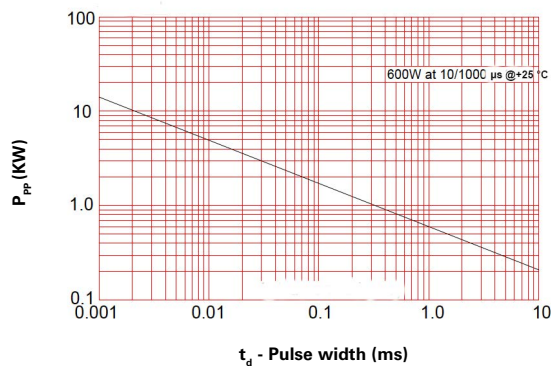

Solder reflow profile

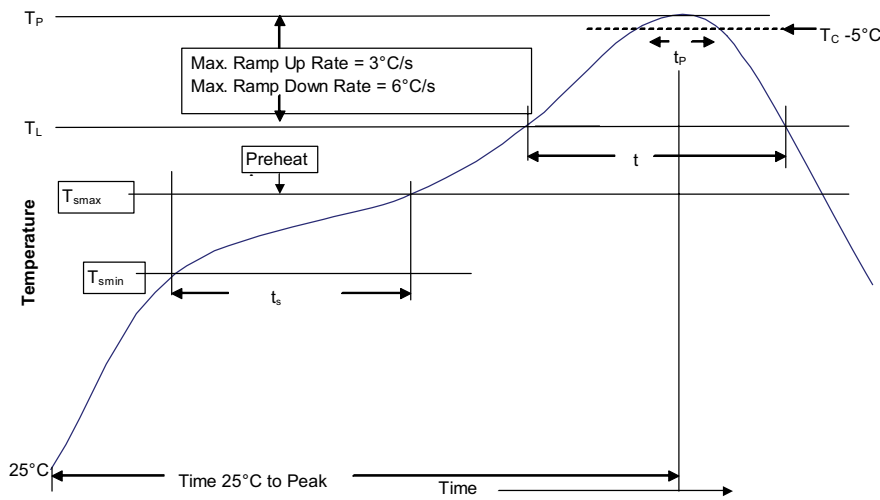


Table 1 - Standard SnPb solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2 - Lead (Pb) free solder (T_C)

Package thickness	Volume mm ³ <350	Volume mm ³ 350 - 2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 – 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Reference J-STD-020

Profile feature	Standard SnPb solder	Lead (Pb) free solder
Preheat and soak		
• Temperature min. (T_{smin})	100 °C	150 °C
• Temperature max. (T_{smax})	150 °C	200 °C
• Time (T_{smin} to T_{smax}) (t_s)	60-120 seconds	60 - 180 seconds
Ramp up rate T_L to T_p	3 °C/ second max.	3 °C/ second max.
Liquidous temperature (T_L)	183 °C	217 °C
Time (t_L) maintained above T_L	60-150 seconds	60-150 seconds
Peak package body temperature (T_p)*	Table 1	Table 2 (+0, -5 °C)
Time (t_p)* within 5 °C of the specified classification temperature (T_C)	20 seconds*	40 seconds*
Ramp-down rate (T_p to T_L)	6 °C/ second max.	6 °C/ second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2024 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1063
September 2024

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.

Follow us on social media to get the
latest product and support information.

