

CYLINDRICAL

FUSE LINKS & FUSE HOLDERS/BASES



gG CYLINDRICAL fuse links

CYL 22x58



8x32



10x38



14x51



22x58

PROTECTING THE WORLD



RATED VOLTAGE
690V AC
500V AC

RATED CURRENT
2A...125A

BREAKING CAPACITY
80kA @ 690V
120kA @ 500V/400V

STANDARDS
IEC/EN 60269-1
IEC/EN 60269-2



Industrial cylindrical fuse links

Cylindrical industrial gG class fuse links for use as general protection against overloads and short circuits, intended as protection for cables, power lines and equipment.

The range comprises the following fuse links:

→ Size 22x58 690V/500V 2A to 125A

Available in standard version and with visual fusing indicator. Also available in striker version intended for use in fuse holders with microswitch.

Manufactured with ceramic body with high withstand to internal pressure and thermal shock, that allow a high breaking capacity. Special design in the melting elements that avoid aging and maintain the characteristics along the time. Contacts made in silver plated copper.



Range

Un	BREAKING CAPACITY	In (A)	REFERENCE	
			WITHOUT INDICATOR	WITH INDICATOR
690V	80kA	2	422002	422102
		4	422004	422104
		6	422006	422106
		8	422008	422108
		10	422010	422110
		12	422012	422112
		16	422016	422116
		20	422020	422120
		25	422025	422125
		32	422032	422132
		40	422040	422140
		50	422050	422150
		63	422063	422163
500V	120kA	80	422080	422180
		100	422000	422100
		125*	422015	422115

Un	BREAKING CAPACITY	In (A)	REFERENCE WITH STRIKER	PACKING Uni /BOX
690V	80kA	2	-	10/50
		4	422204	10/50
		6	422206	10/50
		8	422208	10/50
		10	422210	10/50
		12	422212	10/50
		16	422216	10/50
		20	422220	10/50
		25	422225	10/50
		32	422232	10/50
		40	422240	10/50
		50	422250	10/50
		63	422263	10/50
500V	120kA	80	422280	10/50
		100	422200	10/50
400V	120kA	125*	422215	10/50

* Overrating fuse links



Technical data

Rated voltage	690V +5% 500V +10% 400V +10%
Rated current	2A...125A
Rated breaking capacity	80kA @690V 120kA @500V/400V
Operating class	gG
Rated frequency	42...62Hz
Storage temperature	-40°C ... 90°C
Operating temperature *	-40°C ... 80°C


* For ambient temperatures higher than 25°C it is necessary to apply a derating in maximum current.

Standards

IEC/EN 60269-1
IEC/EN 60269-2
RoHS Compliant



Dimensions

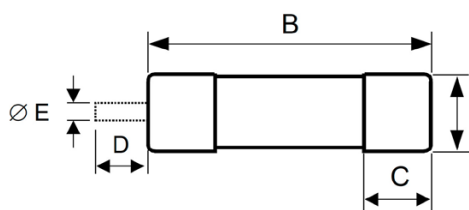

A	B	C	D	E
22,2	58	15,5	8	3,7

Weight 50gr


Power dissipation I^2t Values

I_n	POWER DISSIPATION	PREARcing I^2t	I^2t 690V	I^2t 500V	I^2t 400V
(A)	(W)	(A ² S)	(A ² S)	(A ² S)	(A ² S)
2	0,90	7,0	25	17,6	14,6
4	1,10	45	150	108	90
6	1,30	70	230	166	140
8	1,90	80	260	188	158
10	1,50	120	420	297	248
12	1,80	180	600	431	362
16	3,00	270	880	636	536
20	3,10	500	1600	1162	981
25	3,30	800	2900	2034	1688
32	4,30	1200	4000	2871	2412
40	4,40	2500	8000	5808	4907
50	5,50	5100	20000	13728	11262
63	4,95	10000	39000	26811	22011
80	7,00	15000	-	60000	45471
100	7,95	39800	-	91150	77229
125	10,0	56000	-	145300	120074**


** REF 422215




t-I characteristics

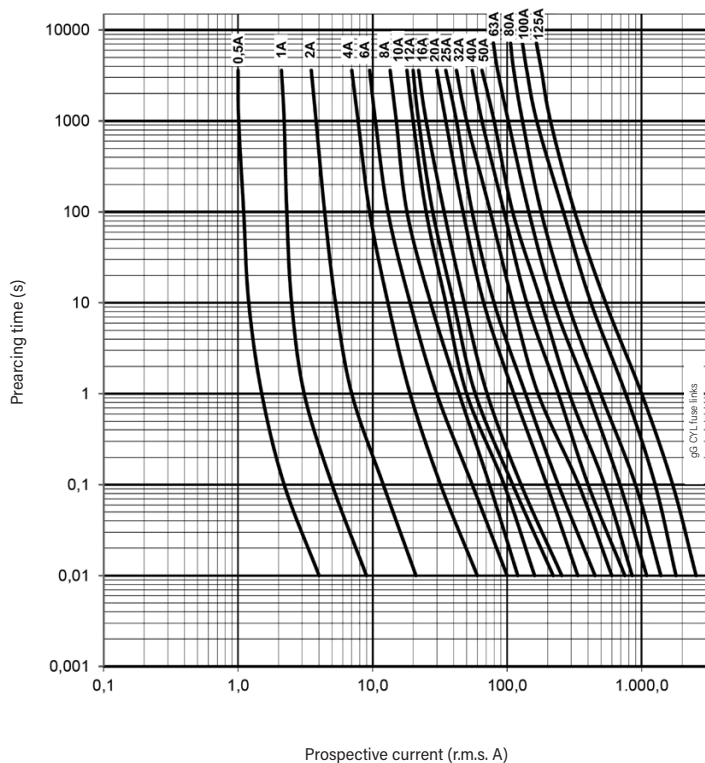


Cut-off characteristics

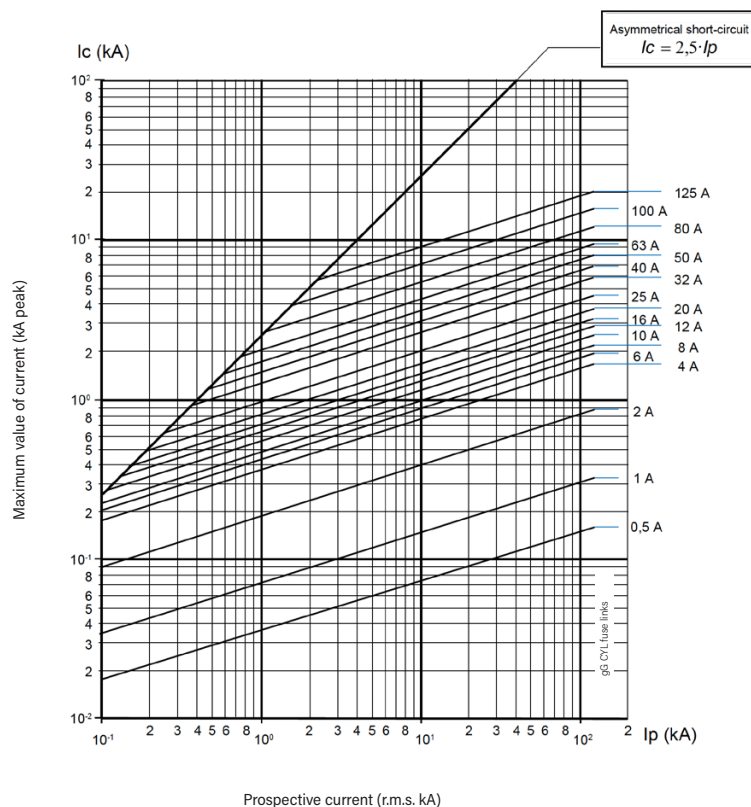

Ambient temperature derating factor

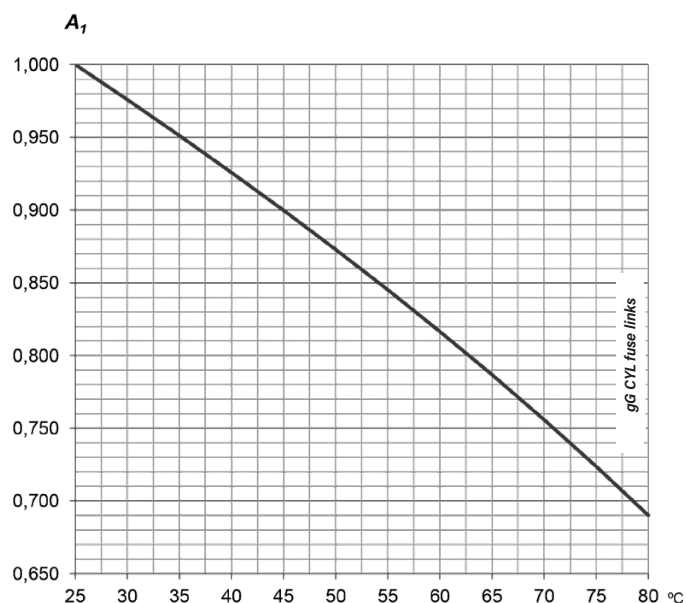

t_a (°C)	A_T
25	1,00
30	0,98
35	0,95
40	0,93
45	0,90
50	0,87
55	0,84
60	0,82
65	0,79
70	0,76
75	0,72
80	0,69

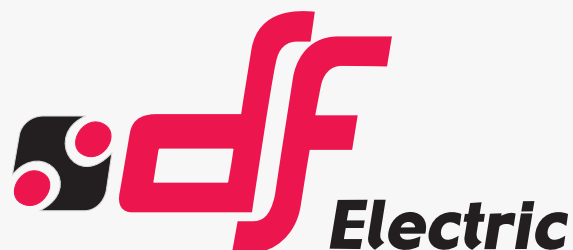

PROTECTING THE WORLD

HEAD OFFICE AND FACTORY


SILICI, 67-69
08940 CORNELLA DE LLOBREGAT
BARCELONA · SPAIN
Tel. +34 93 377 85 85
Fax +34 93 377 82 82

INTERNATIONAL SALES

Tel. +34 93 475 08 64
Fax +34 93 480 07 75
export@dfelectric.es

NATIONAL SALES

Tel. 93 475 08 64
Fax 93 480 07 76
comercial@dfelectric.es

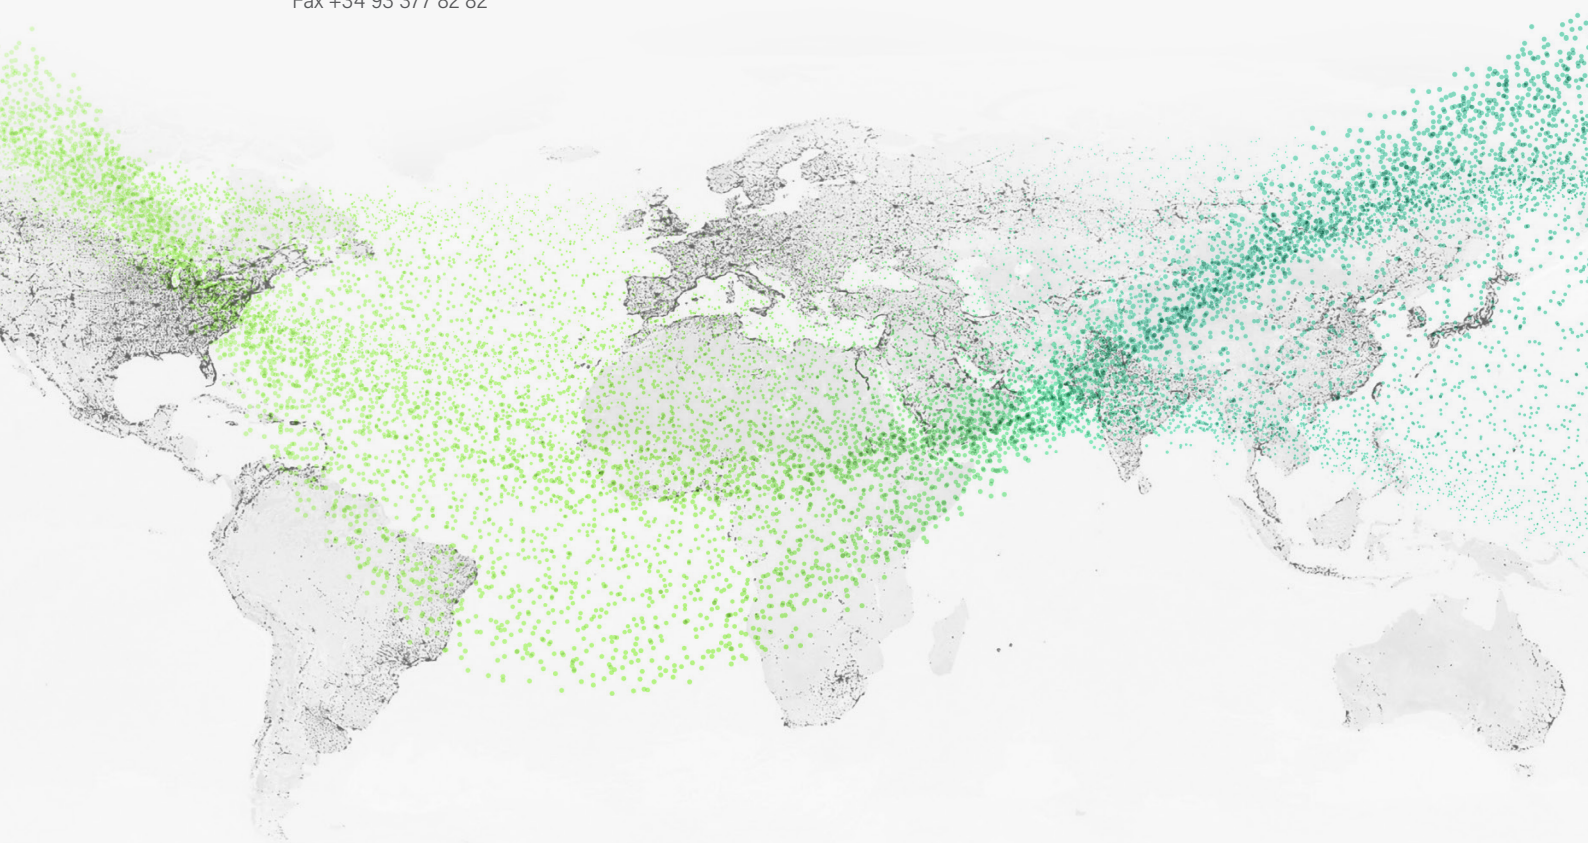

dfelectric.es



According to the waste of electrical and electronic equipment directive, electrical material should not be part of the usual waste. This symbol alerts users that these products should be recycled according to local environmental waste disposal regulations.



The "electro technical expert" logo marked on the products included in this data sheet indicates that the installation of these products must be carried out by expert personnel with specialized knowledge.



To prevent electrical hazards, carry out the installation without voltage.



Safety notice
Please capture the following QR code and read our safety notice carefully before installing our products.



The data reflected in this technical record are subject to the correct installation of the product in accordance with manufacturer's instructions, relevant installation standards and professional practices, maintained and used in applications for which they were made.

The products described in this document have been designed, developed and tested in accordance with specific standard. They are considered components that are integrated as part of installation, machine or equipment. The correct general operation of the referred product is responsibility of the manufacturer of the installation, machine or equipment.

DF ELECTRIC cannot guarantee the characteristics of an installation, machine or equipment that has been designed by a third party. Once a product has been selected, the user must verify that it is appropriate for its application, through the verifications and/or tests that it deems appropriate.

DF ELECTRIC retains the right to change the dimensions, specifications, materials or design of its products at any time with or without notice.

©2025 DF Electric. All rights reserved