

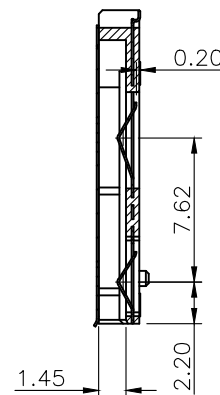
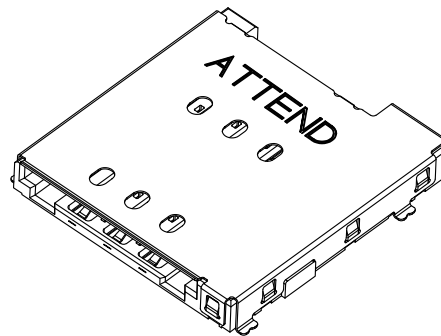
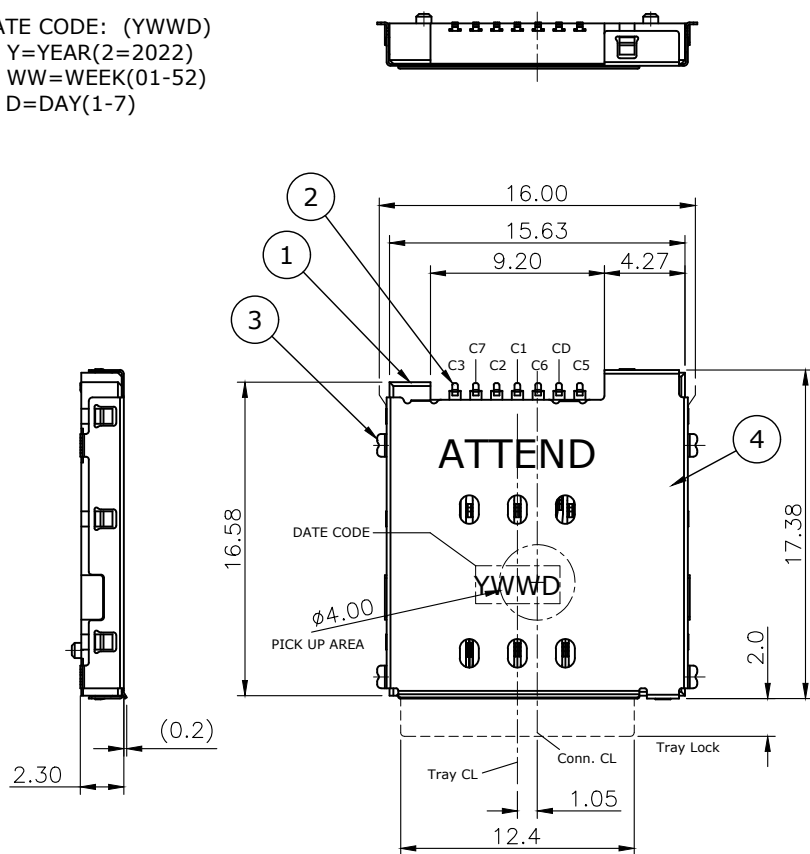


DATE CODE: (YWWD)
Y=YEAR(2=2022)
WW=WEEK(01-52)
D=DAY(1-7)



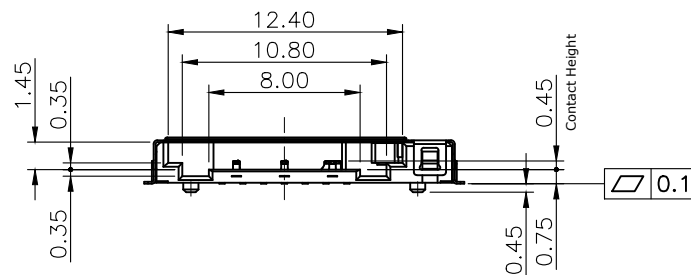


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Michael	2025/03/11
2	ECR2500002	Fros	2025/05/07
3	ECR2500006	Fros	2025/07/23

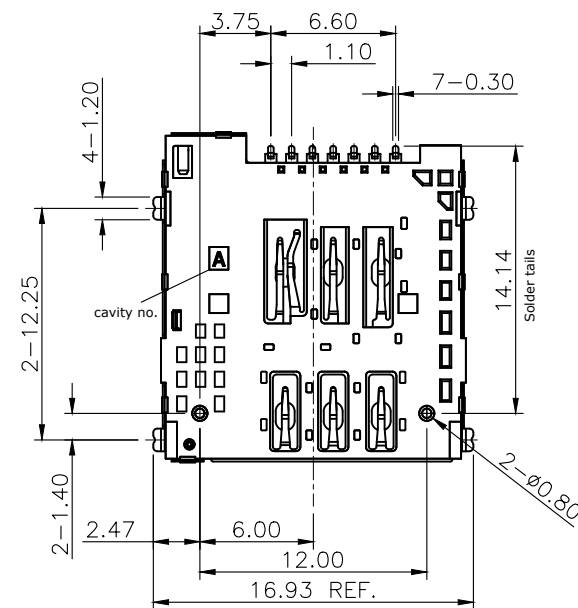


4	SLIDER	LCP, UL94V-0, Black			
3	SHELL	Stainless Steel, Nickel plating			
2	CONTACT	Copper alloy, Gold plating over Nickel			
1	HOUSING	LCP, UL94V-0, Black			
NO. PART NAME		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND www.attend.com.tw			
UNIT: mm	DECIMAL			LINEAR	ANGLES
	X.			±0.50	±5°
	X.X			±0.25	±3°
	X.XX	±0.12	±1°		
DRAWN	Michael	2025/04/01	DRAWN NAME: Nano SIM Socket, 6 Pin, Tray-Push Pull, G/F, Reel		
CHECKED	Fros	2025/04/01			
APPROVED	Ken	2025/04/01	PRODUCT NO.	I15U-A110	
	SCALE 2.5/1	SHEET 1/5	SIZE A4	FILE NAME I15U-A110_B_3	

							REV.	DESCRIPTION		DRAWN	DATE																																																				
Instruction Manual A. Set up Nano SIM card Step 1. Insert the card with angle in the snaps. Snap-1 Snap-2 Snap-3 Snap-4 Step 2. Press another side until it fixes by the snaps. Tray front Fool-proofing beveled corner Fool-proofing track Tray insert direction Inappropriate way of inserting tray may cause irreversible damage. B. Remove Nano SIM card Press the back of the card to make it detach from the snaps. C. Tray insert in connector <table><tr><td colspan="4">UNLESS OTHERWISE SPECIFIED TOLERANCE</td><td colspan="2"> ATTEND www.attend.com.tw </td></tr><tr><td>UNIT:</td><td>DECIMAL</td><td>LINEAR</td><td>ANGLES</td><td colspan="2"></td></tr><tr><td rowspan="3">mm</td><td>X.</td><td>±0.50</td><td>±5°</td><td colspan="2"></td></tr><tr><td>X.X</td><td>±0.25</td><td>±3°</td><td colspan="2"></td></tr><tr><td>X.XX</td><td>±0.12</td><td>±1°</td><td colspan="2"></td></tr><tr><td>DRAWN</td><td>Michael</td><td>2025/03/11</td><td colspan="3">DRAWN NAME:</td></tr><tr><td>CHECKED</td><td>Fros</td><td>2025/03/11</td><td colspan="3">Nano SIM Socket, 6 Pin, Tray-Push Pull, G/F, Reel</td></tr><tr><td>APPROVED</td><td>Ken</td><td>2025/03/11</td><td>PRODUCT NO.</td><td colspan="2">115U-A110</td></tr><tr><td> </td><td>SCALE 2.5/1</td><td>SHEET 3/5</td><td>SIZE A4</td><td>FILE NAME</td><td>115U-A110_B_3</td></tr></table>												UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND www.attend.com.tw		UNIT:	DECIMAL	LINEAR	ANGLES			mm	X.	±0.50	±5°			X.X	±0.25	±3°			X.XX	±0.12	±1°			DRAWN	Michael	2025/03/11	DRAWN NAME:			CHECKED	Fros	2025/03/11	Nano SIM Socket, 6 Pin, Tray-Push Pull, G/F, Reel			APPROVED	Ken	2025/03/11	PRODUCT NO.	115U-A110			SCALE 2.5/1	SHEET 3/5	SIZE A4	FILE NAME	115U-A110_B_3
UNLESS OTHERWISE SPECIFIED TOLERANCE				ATTEND www.attend.com.tw																																																											
UNIT:	DECIMAL	LINEAR	ANGLES																																																												
mm	X.	±0.50	±5°																																																												
	X.X	±0.25	±3°																																																												
	X.XX	±0.12	±1°																																																												
DRAWN	Michael	2025/03/11	DRAWN NAME:																																																												
CHECKED	Fros	2025/03/11	Nano SIM Socket, 6 Pin, Tray-Push Pull, G/F, Reel																																																												
APPROVED	Ken	2025/03/11	PRODUCT NO.	115U-A110																																																											
	SCALE 2.5/1	SHEET 3/5	SIZE A4	FILE NAME	115U-A110_B_3																																																										

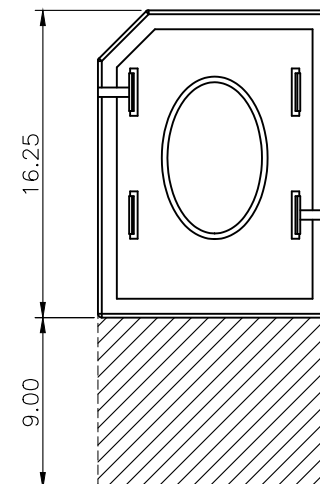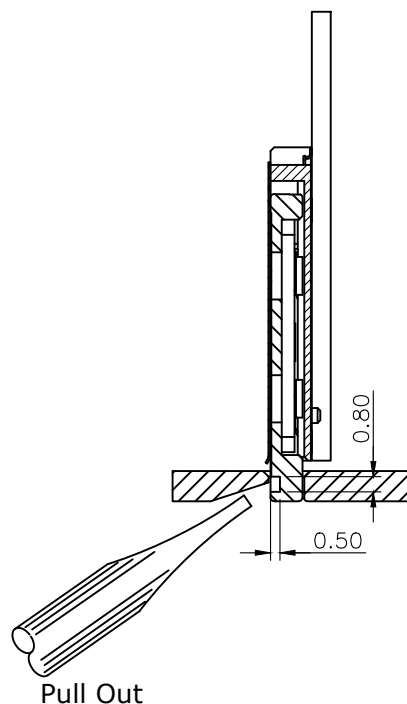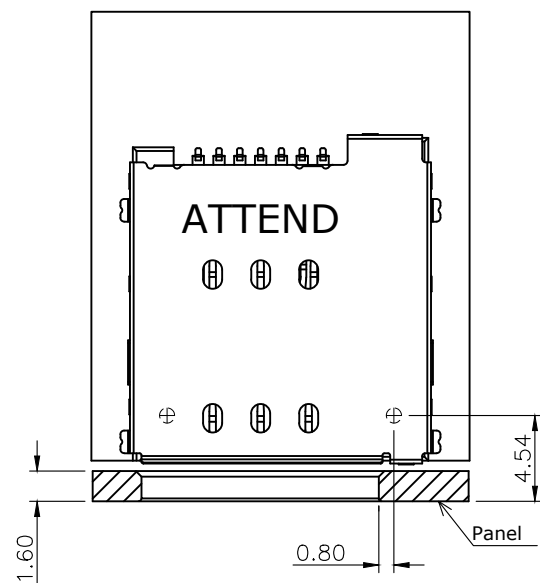

Length and form can be customized within 9.0mm.

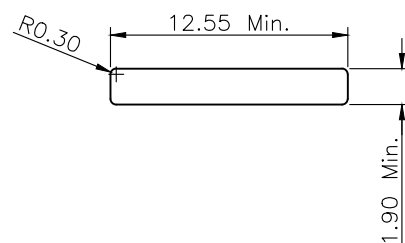

RECOMMENDED PANEL CUT




Tray options

Tray P/N		DESCRIPTION			
115U-T007		Card Tray for 115U-A101/A110, Nano SIM, PBT black, Bag, L16.25			
115U-T008		Card Tray for 115U-A101/A110, Nano SIM, PBT black, Bag, L18.25			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
ATTEND					
www.attend.com.tw					
DRAWN	Michael	2025/03/11	DRAWN NAME: Nano SIM Socket, 6 Pin, Tray-Push Pull, G/F, Reel		
CHECKED	Fros	2025/03/11			
APPROVED	Ken	2025/03/11			
SCALE N/A		SHEET 4/5	SIZE A4	PRODUCT NO.	115U-A110
		FILE NAME		115U-A110_B_3	




www.attend.com.tw

	8	9	10	
REV.	DESCRIPTION		DRAWN	DATE

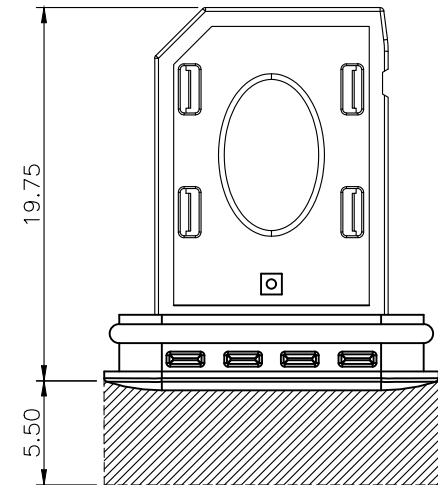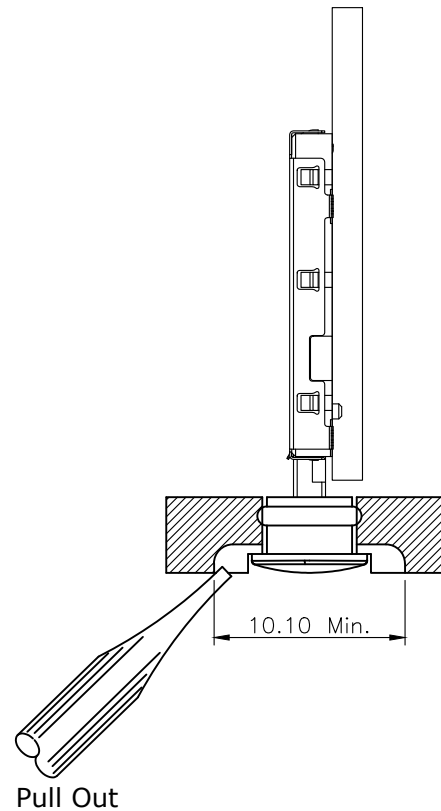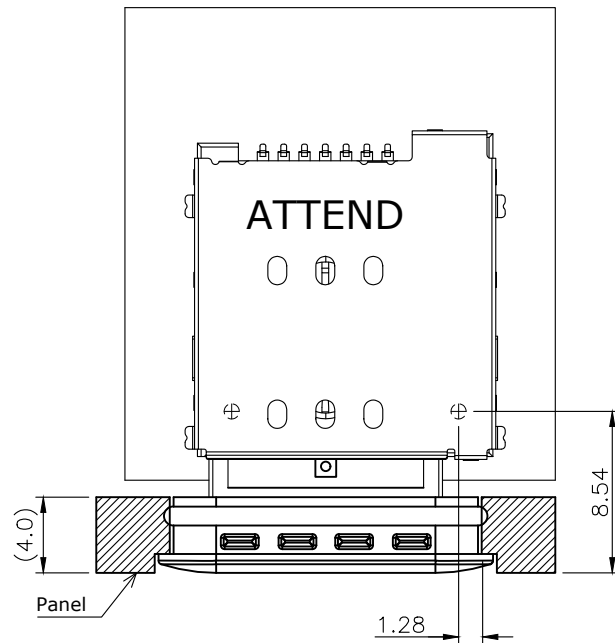

Length and form can be customized within 5.5mm.

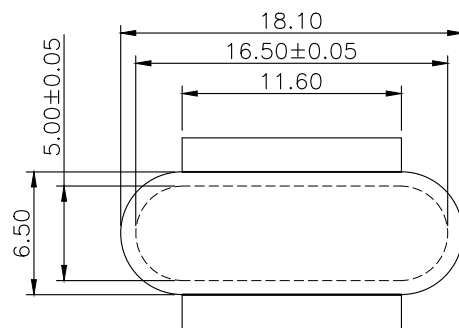

RECOMMENDED PANEL CUT

Tray options

Tray P/N		DESCRIPTION	
115U-T017		Card Tray for 115U-A110, Waterproof, Nano SIM, PBT black, bag. L=20.25	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
			 ATTEND www.attend.com.tw
DRAWN	Michael	2025/03/11	DRAWN NAME: Nano SIM Socket, 6 Pin, Tray-Push Pull, G/F, Reel
CHECKED	Fros	2025/03/11	
APPROVED	Ken	2025/03/11	
 SCALE N/A		SHEET 4/5	SIZE A4
		FILE NAME	115U-A110_B_3

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND www.attend.com.tw	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				www.attend.com.tw	
DRAWN		Michael	2025/03/11	DRAWN NAME: NANO SIM SOCKET, 6 PIN, TRAY-PUSH PULL, G/F, REEL	
CHECKED		Fros	2025/03/11		
APPROVED		Ken	2025/03/11		
 SCALE N/A		 SHEET 4/5	 SIZE A4	PRODUCT NO. 115U-A110 FILE NAME 115U-A110_B_3	