FIBER OPTIC NETWORKS



Qoltec Adapter fiber optic SC/UPC | Simplex | Multimode

Product code: 54138

Adapter fiber optic for connection to multimode fiber. Connectors: SC/UPC Type: Simplex


Product description

It is used to connect two multimode fiber optic cables with SC (Square connector) UPC (Ultra Polished Connector) connectors.

It can be used with fibre optic patchcords, which send high-speed data through a network. The adapter is a part of optical path, it guarantees stability of transmission parameters, and high quality ceramic ferrule, that is polished at an 8-degree angle, assures lower return loss. Openable clips ensure easy assembly and

Cables Simplex which have application in this adapter, are used in cable ducts, cubicles and pipes with low mechanical pressure.

Scheme multimode fiber

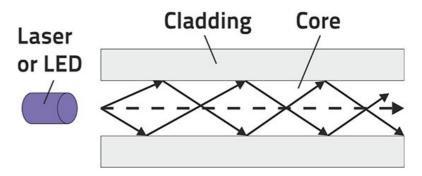

Multimode fiber

Multimode fiber has a larger core diameter that supports many modes of light. Signal is traveling in a multiple light beams. Multimode fiber optic experience greater attenuation so it is better option for short distance.

SC/UPC connectors

SC connectors are mostly used in telecommunication. It is also used in active equipment such as video converters and media. It ensures easy, quick connection and it is resistant for connection defects. The shape of connector assures easy and stable assembly. Beside usage in telecommunication, SC connector is also used in LAN, WAN and CATV networks, measuring techniques and on the railway.

WWW.QOLTEC.COM 1/2

CONIEIDE	NICE CON	JEIDMED	DV A	WADDANITY

Do you want a high quality product? Our solutions will meet your expectations. Each of our adapters is covered by a 24 month warranty effective from the date of purchase.

Technical data

Type connectors SC/UPC Type Simplex Fiber type Multimode Insertion loss <0.3 dB Housing ABS-AR Insider tube Ceramic Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight O,0010 kg		
Type Simplex Fiber type Multimode Insertion loss <0.3 dB Housing ABS-AR Insider tube Ceramic Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight 0,0010 kg	Producer	Qoltec
Fiber type Insertion loss <0.3 dB Housing ABS-AR Insider tube Ceramic Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight O,0010 kg	Type connectors	SC/UPC
Insertion loss 40.3 dB Housing ABS-AR Insider tube Ceramic Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight O,0010 kg	Туре	Simplex
Housing ABS-AR Insider tube Ceramic Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight 0,0010 kg	Fiber type	Multimode
Insider tube Ceramic Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight O,0010 kg	Insertion loss	<0.3 dB
Additional information Easy installation and handling. Can be used in high speed fiber optic transmission networks. Package Polybag Net weight O,0010 kg	Housing	ABS-AR
Can be used in high speed fiber optic transmission networks. Package Polybag Net weight 0,0010 kg	Insider tube	Ceramic
Net weight 0,0010 kg	Additional information	
	Package	Polybag
Gross weight 0,0030 kg	Net weight	0,0010 kg
	Gross weight	0,0030 kg
Warranty 24 months	Warranty	24 months
EAN code 5901878541389	EAN code	5901878541389

WWW.QOLTEC.COM 2/2