


ESD POLYURETHANE COMFORT CHAIR



Catalog number: RS-K9ESD-B

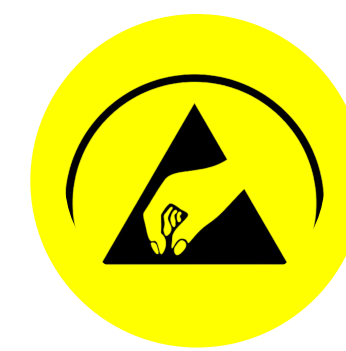

AVAILABLE MODELS (by seat height range)



RS-K9ESD-A

Seat adjustment range:
430-560 mm



RS-K9ESD-B

Seat adjustment range:
510-700 mm



RS-K9ESD-C

Seat adjustment range:
550-800 mm


ESD POLYURETHANE COMFORT CHAIR



Catalog number: RS-K9ESD-B



FUNCTIONS OF ADJUSTMENT

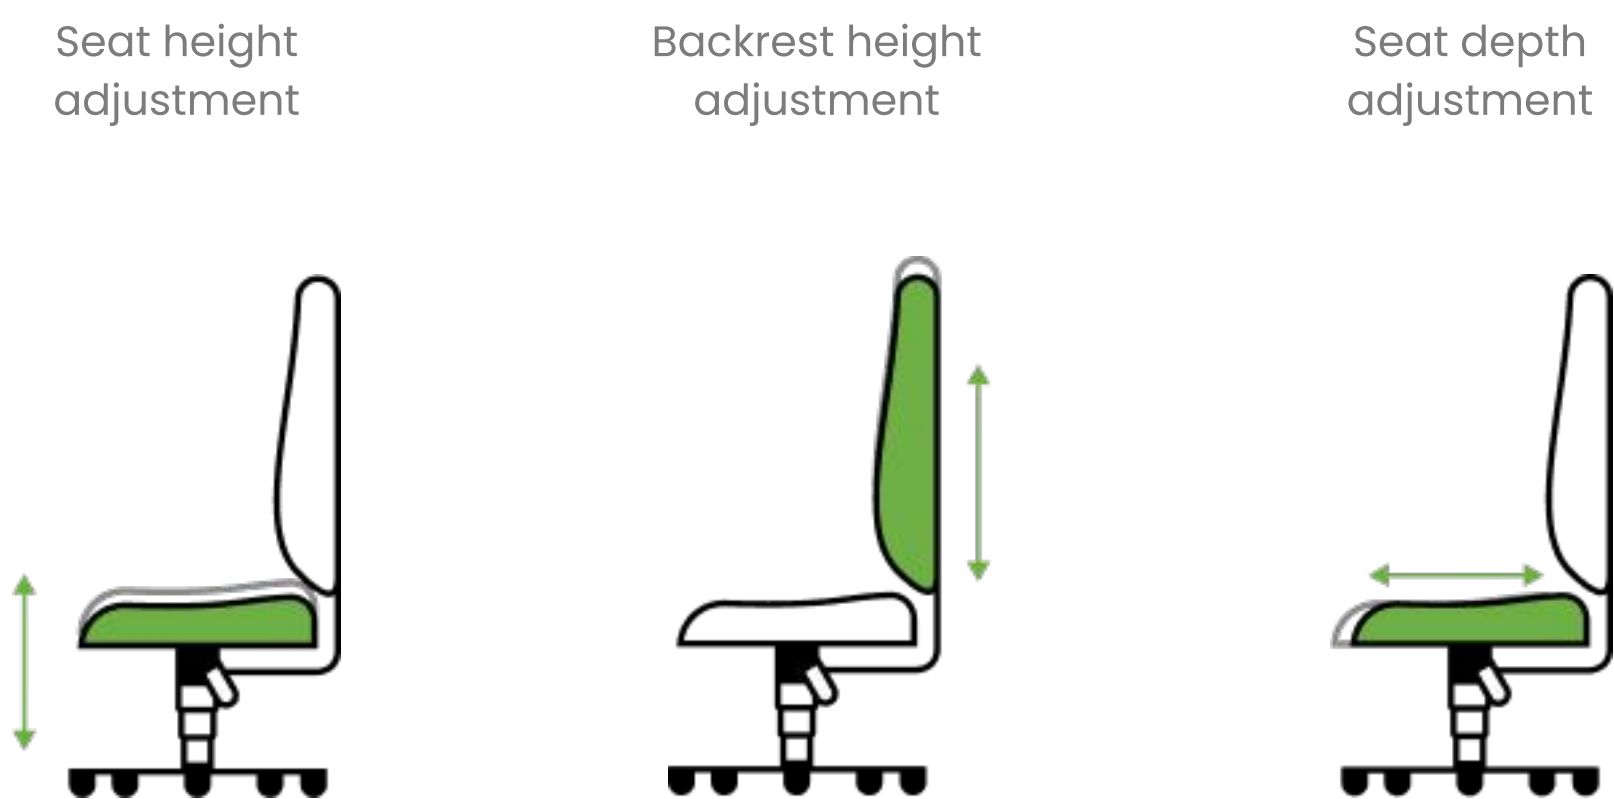

*dimensions shown in mm


Model	Height adjustment range [mm]	Total height [mm]	Total width [mm]	Seat dimensions [mm]	Backrest dimensions [mm]	Load capacity [kg]	Weight [kg]
RS-K9ESD-B	510 – 700	810 – 1055	660	450 – 440	310 – 400	120	11,3

MATERIALS

Material shade in reality may slightly differ from that presented in the catalog.

- Comfort of use:** Soft polyurethane seat and backrest with height adjustment ensures ergonomic comfort during work.
- Safety:** Antistatic properties compliant with ESD standards effectively protect against electrostatic discharge.
- Durability:** Sturdy aluminum base and dirt-resistant polyurethane ensure long-term use in demanding environments.
- Application:** The Antistatic Comfort Polyurethane Chair is an ideal choice for laboratories, service centers, and production environments requiring strict electrostatic control.

Chair compliant with standards:
ANSI/ESD S.20.20.2014, PN-EN 1335-1:2004, PN-EN 1335-2:2009, PN-EN 1335-3:2009, PN-EN 1022:2007, PN-EN 61340-5-1:2024

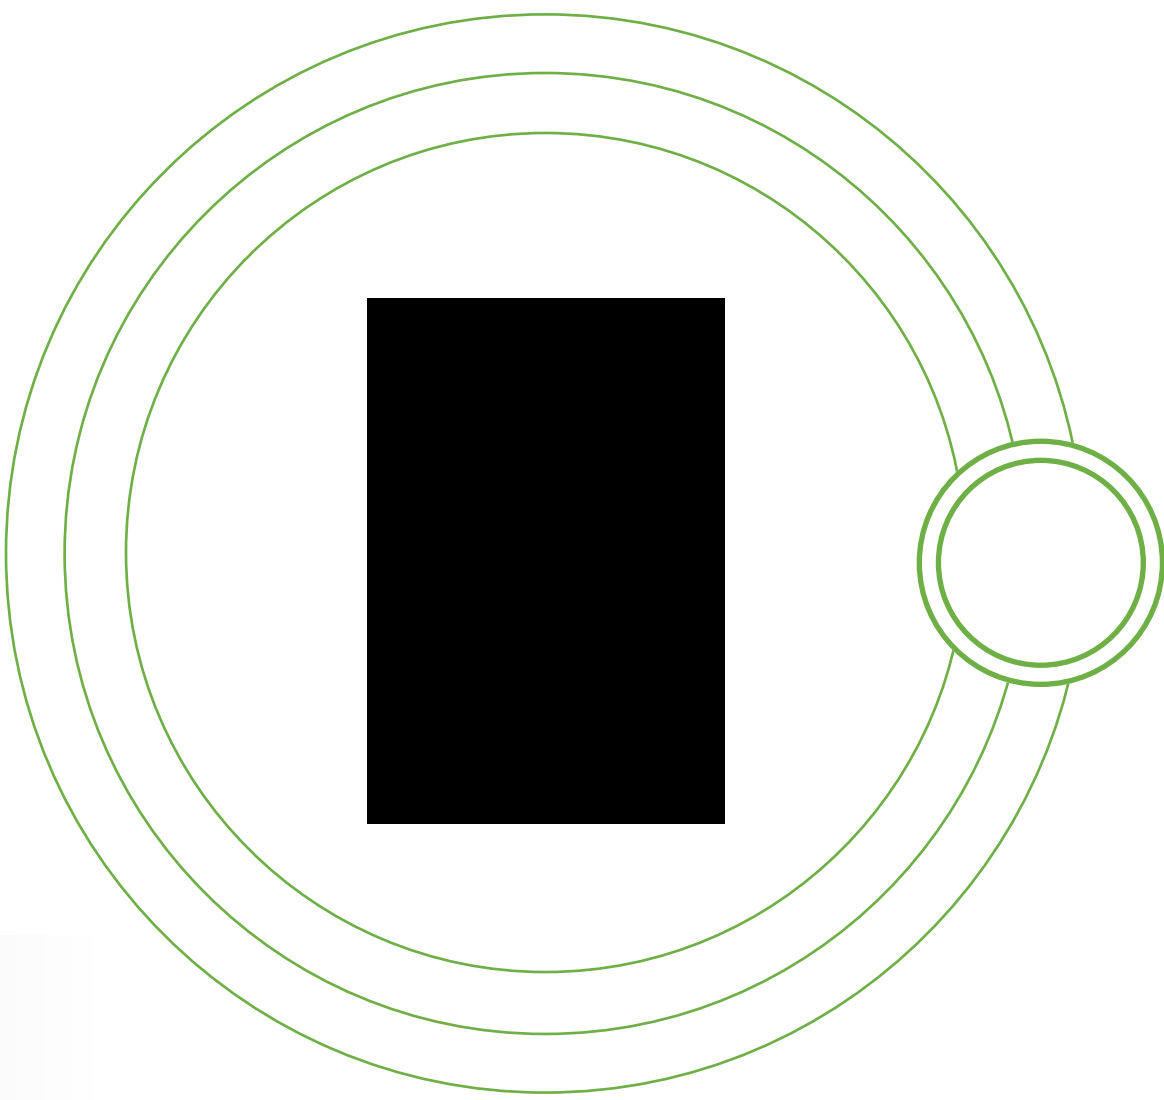

Poliurethane

ACCESSORIES:

RS-KCZ/K1	RS-KCZ/K5	RS-KCZ/K7	RS-KCZ/K13	RS-KCZ/K13-B	RS-KPESD
RS-KZESD/P	RS-KZESD/B	RS-KZESD/R	RP-A300ESD	RP-A300ESD/HD	