

ESD COMFORT CHAIR

Catalog number: RS-K2ESD/S



AVAILABLE MODELS (by seat height range)



RS-K1ESD/S

Seat adjustment range:
505-635 mm



RS-K2ESD/S

Seat adjustment range:
580-770 mm



RS-K3ESD/S


Seat adjustment range:
625-880 mm

ESD COMFORT CHAIR

Catalog number: RS-KIESD/S



FUNCTIONS OF ADJUSTMENT

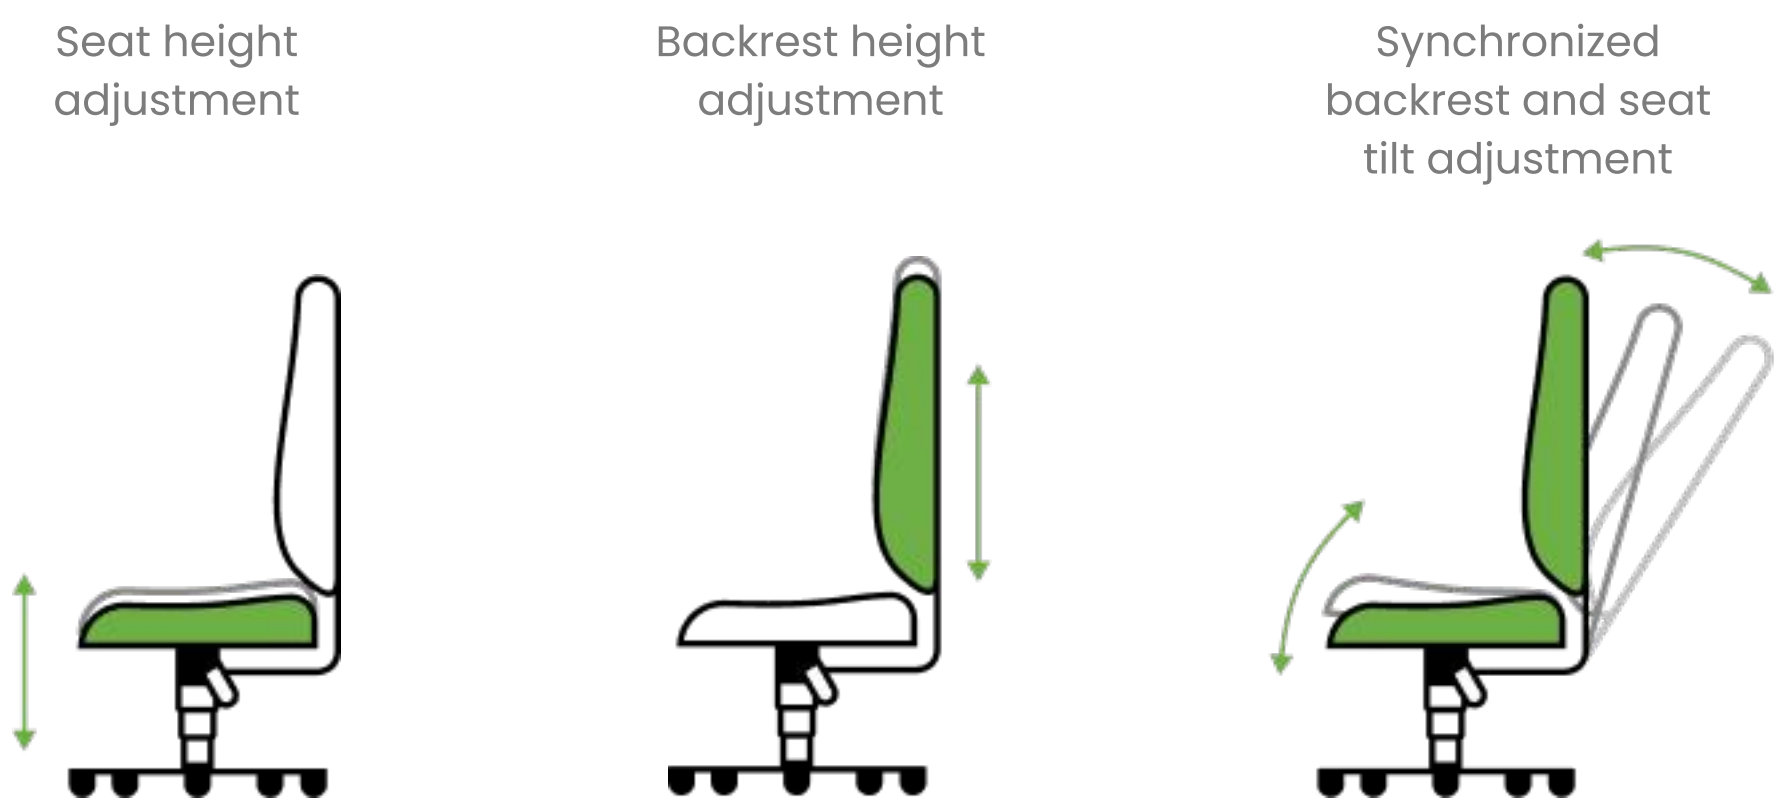

*dimensions shown in mm

Model	Height adjustment range [mm]	Total height [mm]	Total width [mm]	Seat dimensions [mm]	Backrest dimensions [mm]	Backrest tilt angle [°]	Weight [kg]
RS-KIESD/S	505 - 635	980 - 1150	640	455 - 430	500 - 440	30	13,2

FABRICS

Fabric shade in reality may slightly differ from that presented in the catalog.

Electrostatic control: Ideal for environments where electrostatic control is crucial.



Ergonomic Comfort: The ergonomically contoured seat and backrest made of high-resilience foam, along with a synchro mechanism, offer a wide range of adjustments for maximum comfort.

Safety: Covered with a fabric that dissipates electrostatic charges, preventing their accumulation.

Durability: Made from advanced materials, designed for 24/7 continuous use.

Chair compliant with standards:
ANSI/ESD S.20.20.2014, PN-EN 1335-1:2004, PN-EN 1335-2:2009, PN-EN 1335-3:2009, PN-EN 1022:2007, PN-EN 61340-5-1:2024

Premium:



RP-T1 RP-T2 RP-T3

Standard:



RP-T1/S RP-T2/S RP-T3/S

Economic:



RP-T1/EC

Vinyl:



RP-S1

ACCESSORIES:



RS-KCZ/K1



RS-KCZ/K5



RS-KCZ/K7




RS-KCZ/K13



RS-KCZ/K13-B



RS-KPESD



RS-KZESD/P



RS-KZESD/B



RS-KZESD/R



RP-A235ESD



RP-A225ESD/HD