

RONDA-WAS2-C

Asymmetric beam ideal for floor installations
with holder C compatible with LEDiL HEKLA


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 53.9 mm
Height	16 mm
Fastening	socket
Colour	clear
Box size	
Box weight	0 kg
Quantity in Box	420 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
RONDA-WAS2	Single lens	PMMA	clear
RONDA-HLD-C	Holder	PC	clear

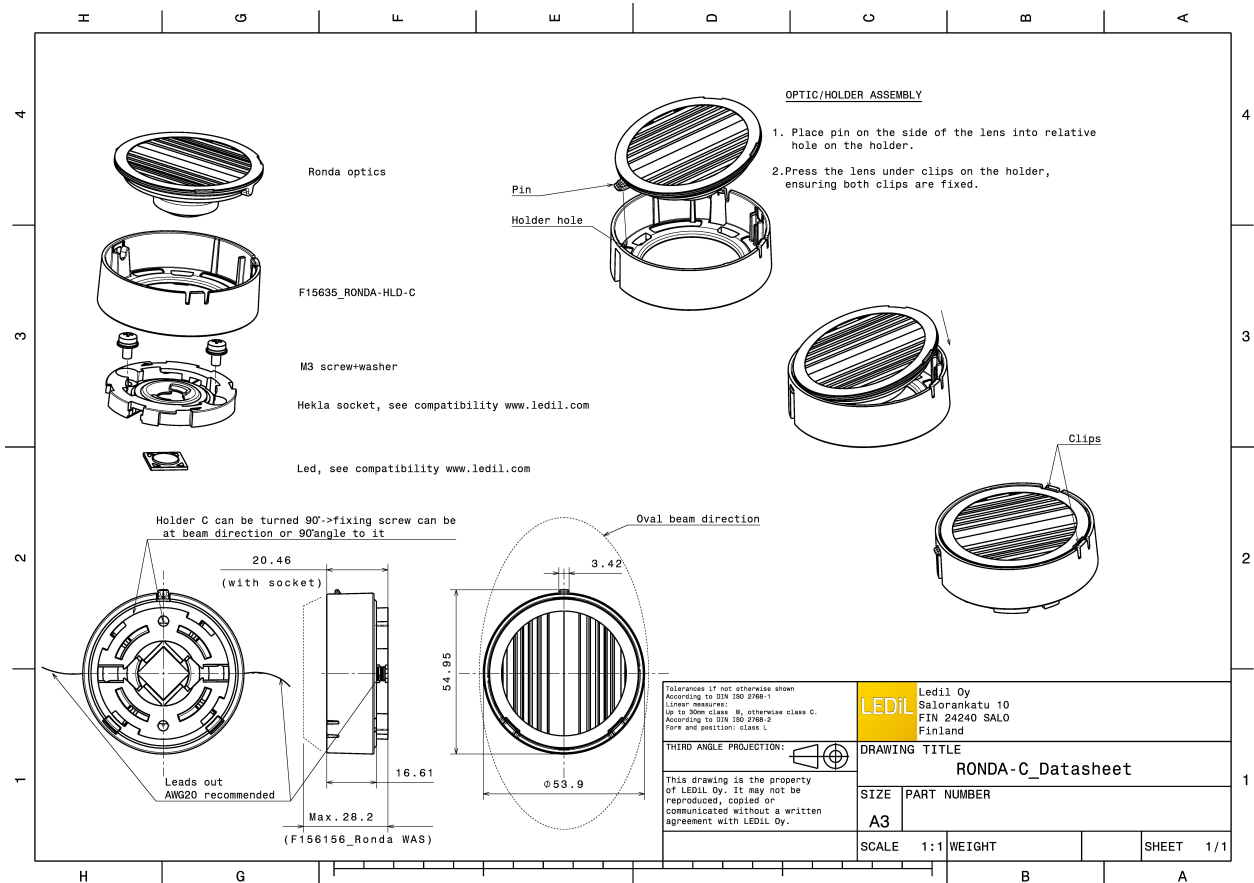

PHOTOMETRIC DATA (MEASURED):



bridgelux.

LED V4 HD
FWHM Asymmetric
Efficiency 91 %
Peak intensity 1.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15253_HEKLA-SOCKET-A

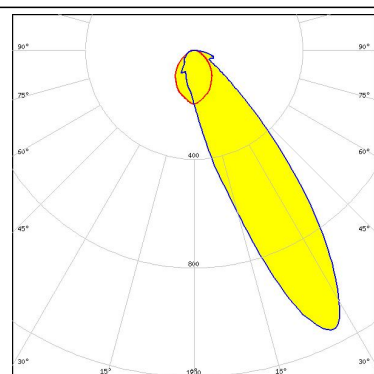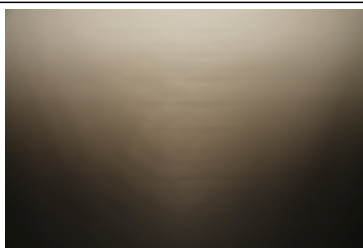



bridgelux.

LED V6 Gen6
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.960 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15253_HEKLA-SOCKET-A

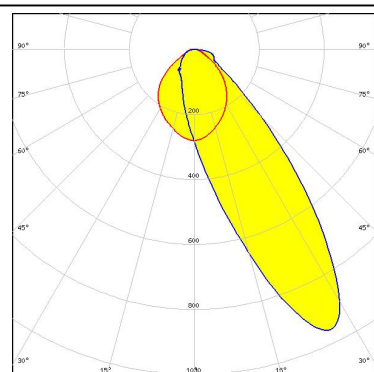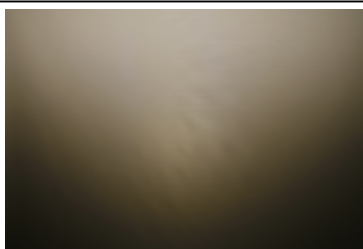



bridgelux.

LED V6 HD
FWHM Asymmetric
Efficiency 91 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

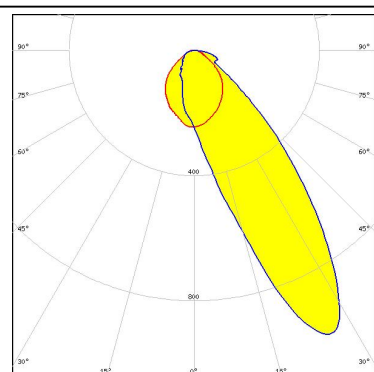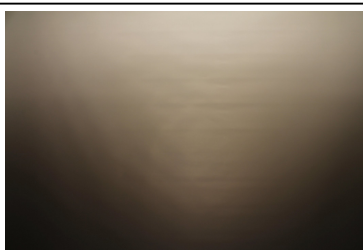

bridgelux.


LED V9 HD
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.860 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

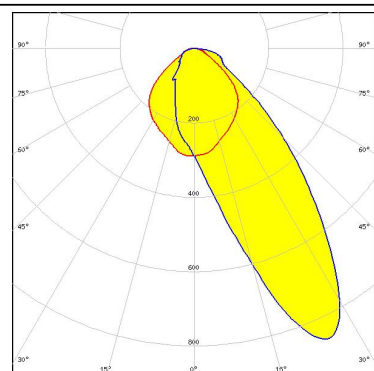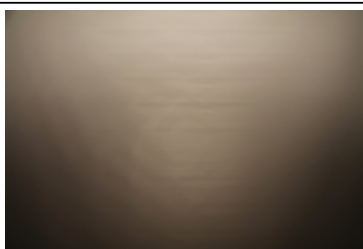


PHOTOMETRIC DATA (MEASURED):




LED VERO10
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.780 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15616_HEKLA-SOCKET-F

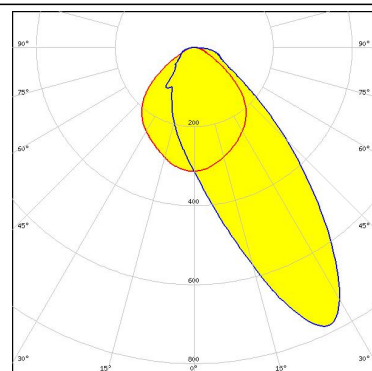

LED Vesta TW 13mm (25W)
FWHM Asymmetric
Efficiency 85 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:


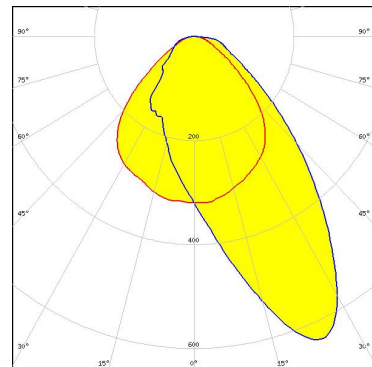


LED Vesta TW 9mm (12W)
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.740 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

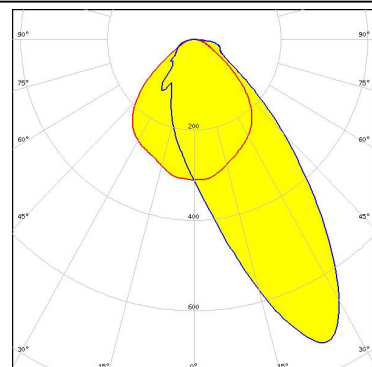

CITIZEN


LED CLC020 Series (Dim-To-Warm)
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.820 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

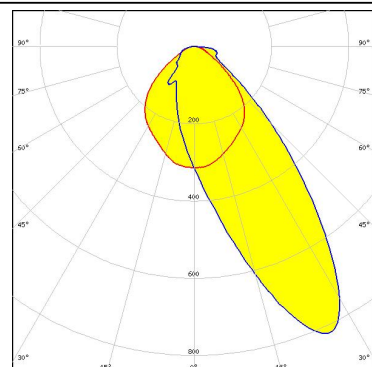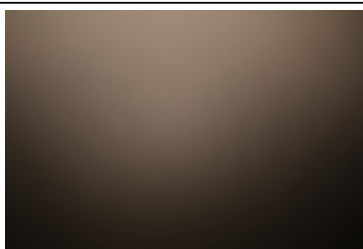

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLL02x/CLU02x (LES10)
 FWHM Asymmetric
 Efficiency 87 %
 Peak intensity 0.770 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

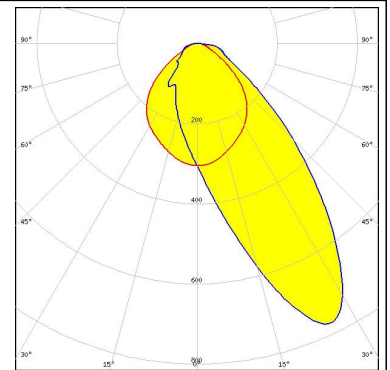


CITIZEN

LED CLL03x/CLU03x
 FWHM Asymmetric
 Efficiency 86 %
 Peak intensity 0.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

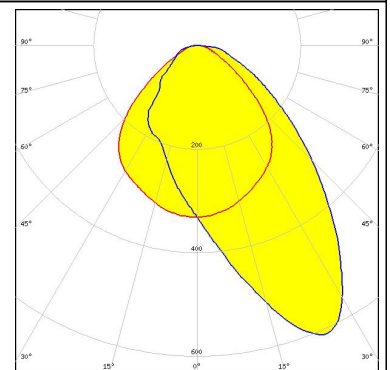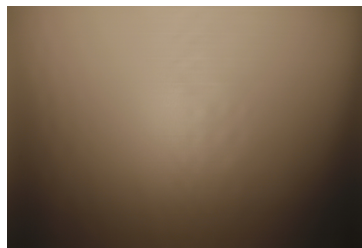


CITIZEN

LED CLU700/701
 FWHM Asymmetric
 Efficiency 88 %
 Peak intensity 0.960 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

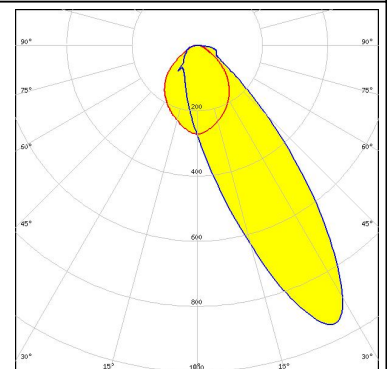

CITIZEN


LED LCN-C01B (Tunable White)
 FWHM Asymmetric
 Efficiency 86 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 481 Typ L8

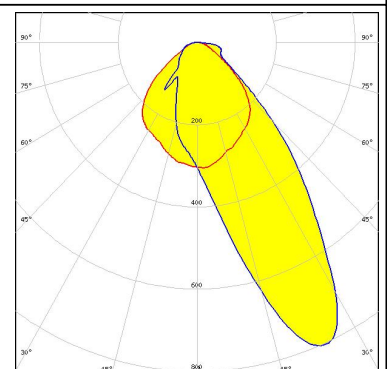



PHOTOMETRIC DATA (MEASURED):





LED CMA1516
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15256_HEKLA-SOCKET-D

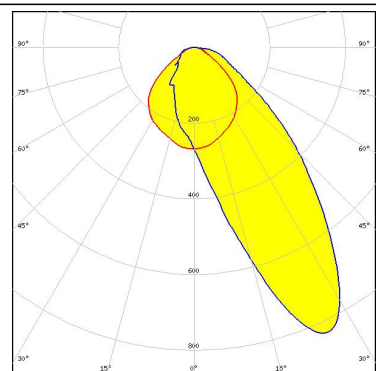



LED CMA1825
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15254_HEKLA-SOCKET-B

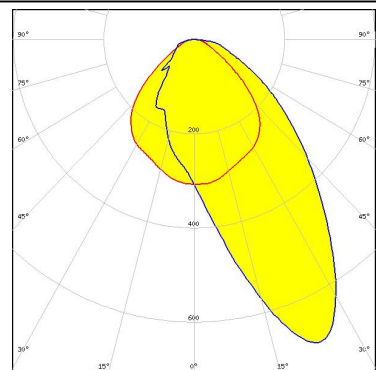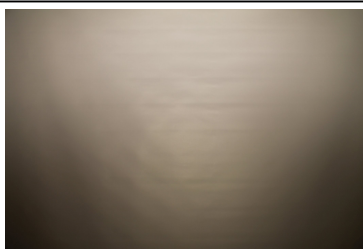

LED CMT14xx
FWHM Asymmetric
Efficiency 91 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

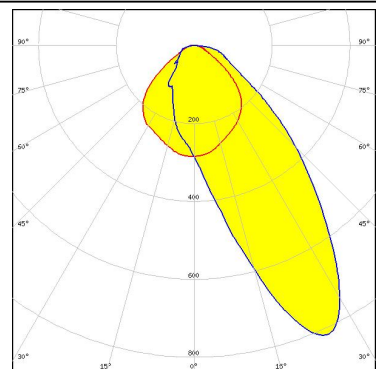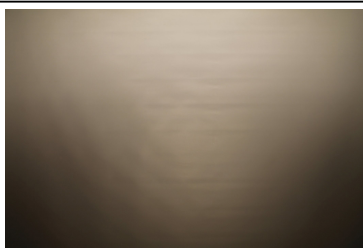


LED CXA/B 13xx
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.970 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15956_HEKLA-SOCKET-J

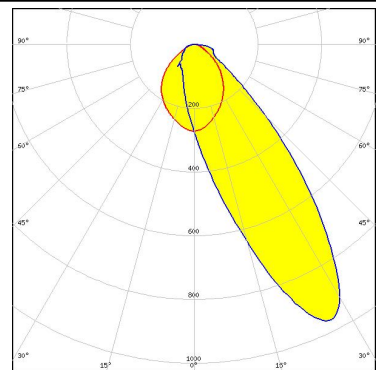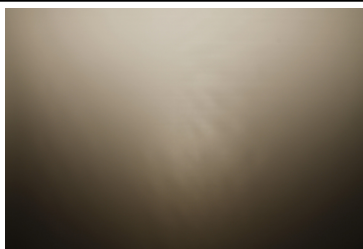


PHOTOMETRIC DATA (MEASURED):





LED CXA/B 15xx
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.810 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15256_HEKLA-SOCKET-D

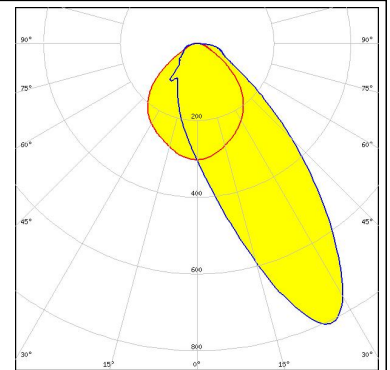


LED LUXEON CoB 1202s
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.940 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

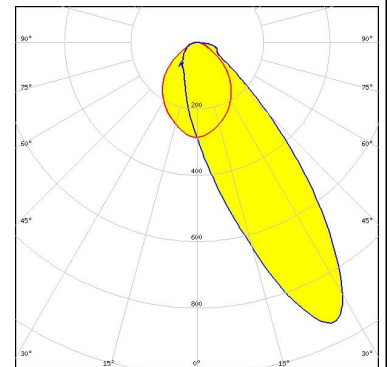

LED LUXEON CoB Dimtone 16x19
FWHM Asymmetric
Efficiency 88 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 499 Typ L8

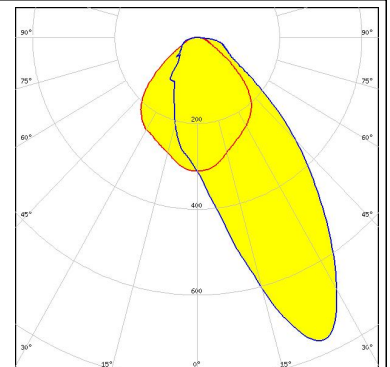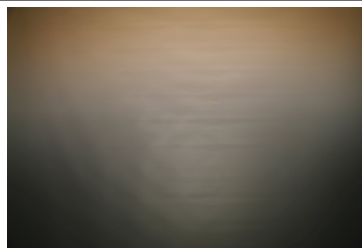


LED CDM-14 (Dim-To-Warm)
FWHM Asymmetric
Efficiency 82 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 491 Typ L8

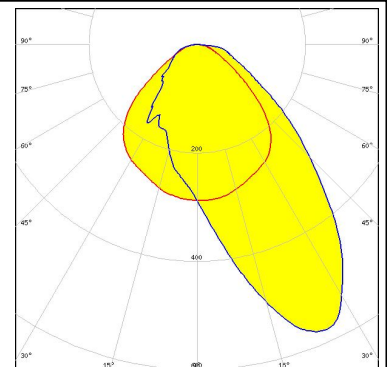


PHOTOMETRIC DATA (MEASURED):




LED CDM-6 (Dim-To-Warm)
 FWHM Asymmetric
 Efficiency 85 %
 Peak intensity 0.840 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 490 Typ L8

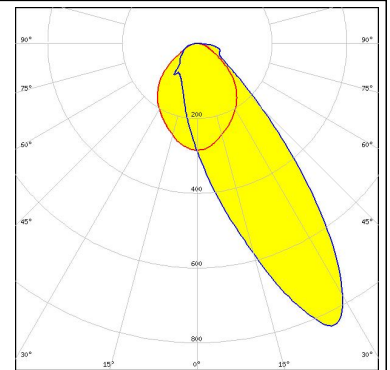


LED CDM-9 (Dim-To-Warm)
 FWHM Asymmetric
 Efficiency 85 %
 Peak intensity 0.750 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 490 Typ L8

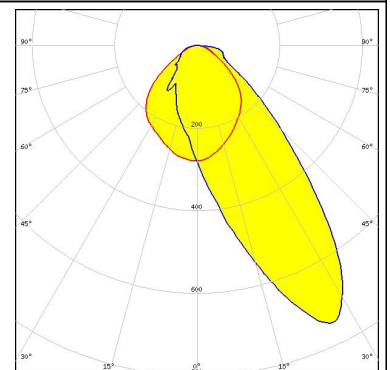

LED CTM-14 (Tunable White)
 FWHM Asymmetric
 Efficiency 83 %
 Peak intensity 0.590 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 442 Typ L8

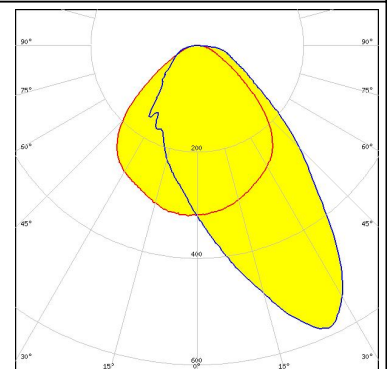


LED CTM-9 (Tunable White)
 FWHM Asymmetric
 Efficiency 85 %
 Peak intensity 0.750 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 495 Typ L8

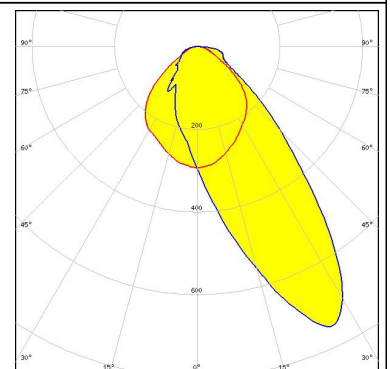


PHOTOMETRIC DATA (MEASURED):




LED CXM-14
FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.610 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

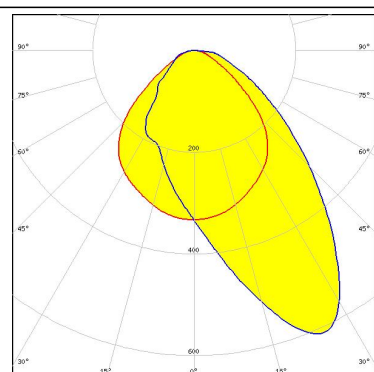


LED CXM-9
FWHM Asymmetric
Efficiency 88 %
Peak intensity 0.770 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

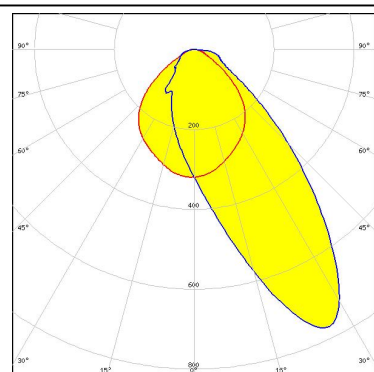

LED NJCWL024Z-V1MT: COB L-Type Tunable White
FWHM Asymmetric
Efficiency 82 %
Peak intensity 0.855 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 497 Typ L8

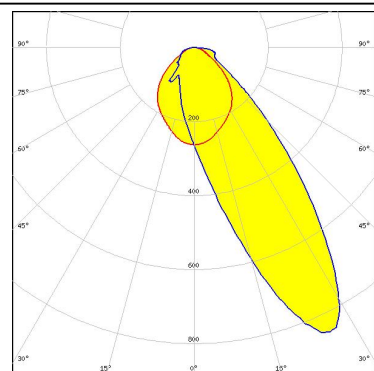



LED NVCWJ024Z-V1MT: COB J-Type Tunable White
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.743 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 498 Typ L8

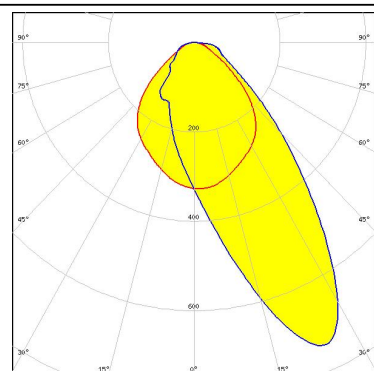

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo SLM L09 CoB
 FWHM Asymmetric
 Efficiency 90 %
 Peak intensity 0.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15858_HEKLA-SOCKET-H

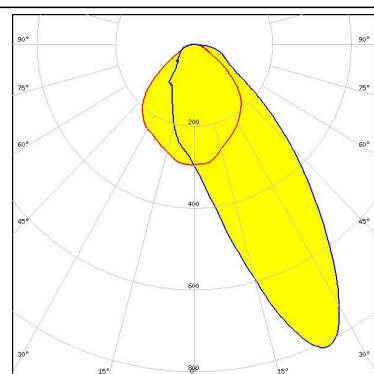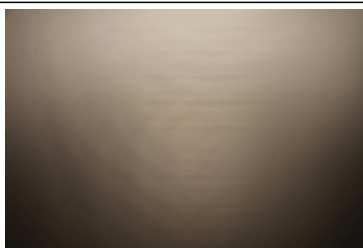



PHILIPS

LED Fortimo SLM L13 CoB
 FWHM Asymmetric
 Efficiency 88 %
 Peak intensity 0.670 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 432 Typ L8

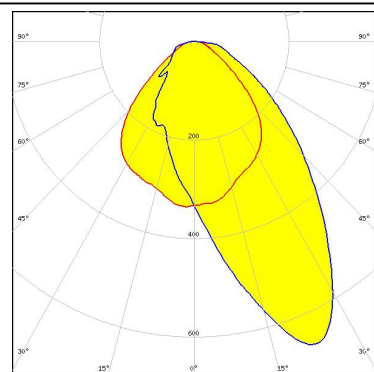



SAMSUNG

LED COB D Series LES 14.5 mm
 FWHM Asymmetric
 Efficiency 87 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

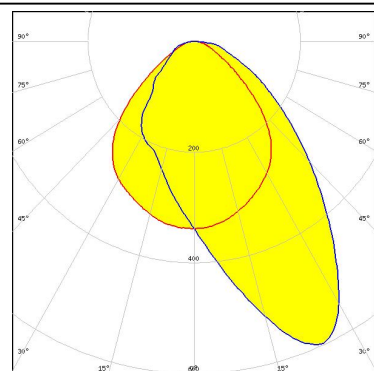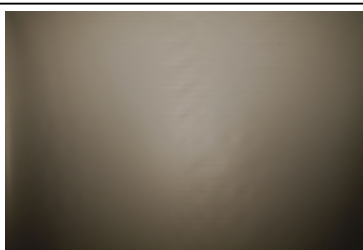

SAMSUNG


LED COB D Series LES 9.8 mm
 FWHM Asymmetric
 Efficiency 87 %
 Peak intensity 0.760 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

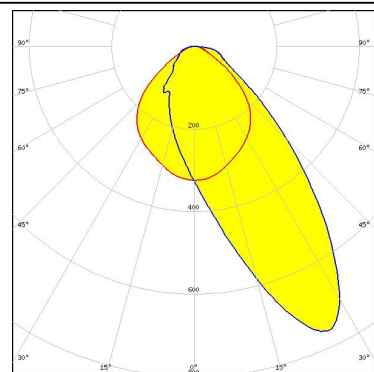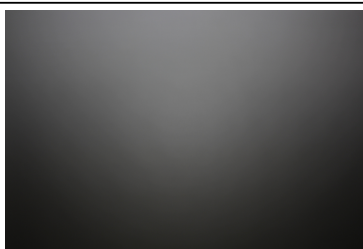

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LC010C
FWHM Asymmetric
Efficiency 87 %
Peak intensity 0.860 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

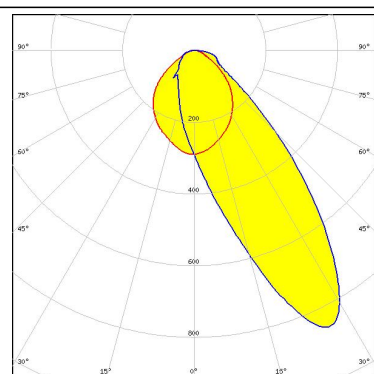


SAMSUNG

LED LC010C G2
FWHM Asymmetric
Efficiency 88 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

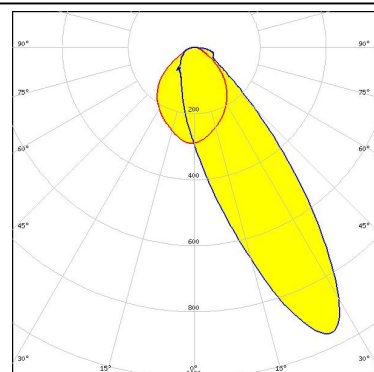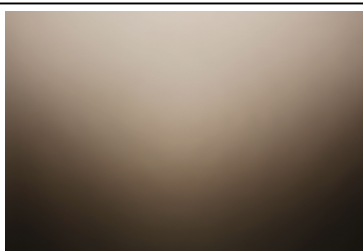



SAMSUNG

LED LC020C
FWHM Asymmetric
Efficiency 88 %
Peak intensity 0.810 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

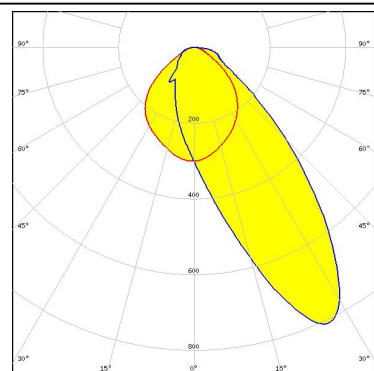

TRIDONIC


LED SLE G7 LES09
FWHM Asymmetric
Efficiency 89 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

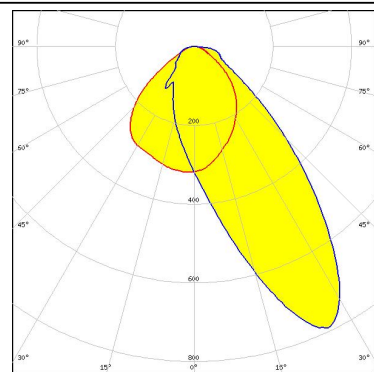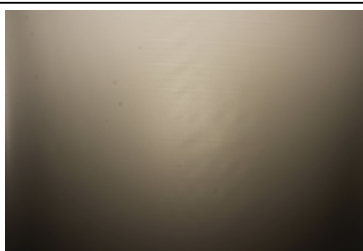

PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED SLE G7 LES13
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

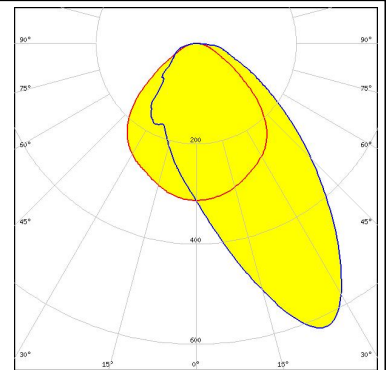



TRIDONIC

LED SLE G7 LES15
FWHM Asymmetric
Efficiency 86 %
Peak intensity 0.600 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

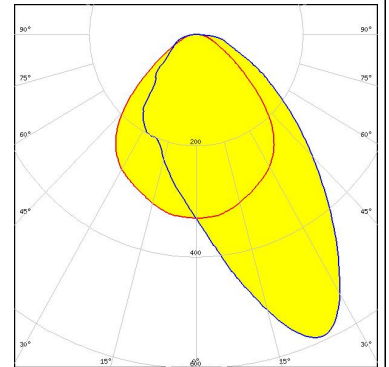

XICATO


LED XTM - 19mm LES
FWHM Asymmetric
Efficiency 83 %
Peak intensity 0.530 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16058_XTM-ADAPTER-50-C

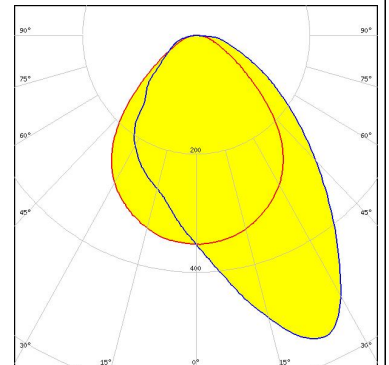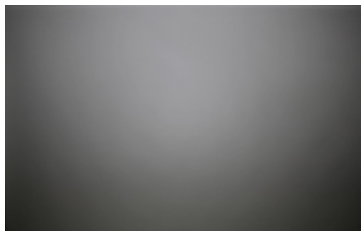


PHOTOMETRIC DATA (SIMULATED):



LED V10 Gen7
FWHM Asymmetric
Efficiency 0 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

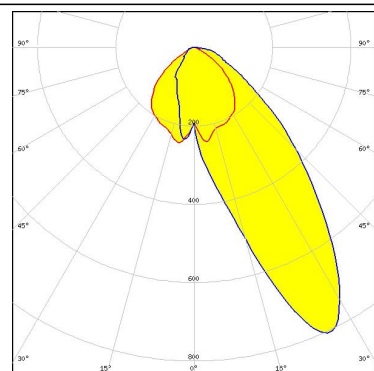


LED COB T-Type
FWHM Asymmetric
Efficiency 83 %
Peak intensity 1.070 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

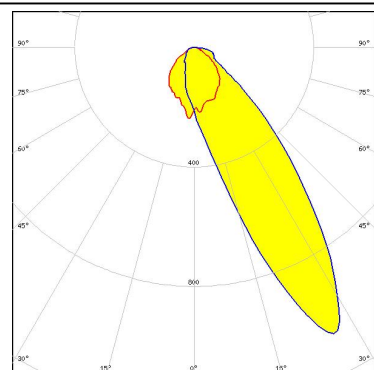


TRIDONIC

LED SLE G6 LES10
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.937 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

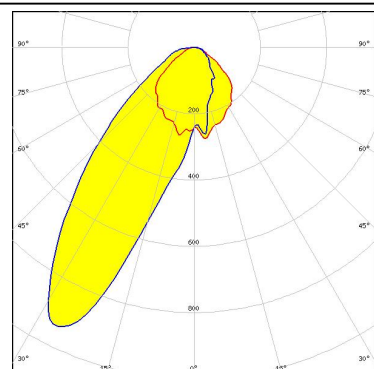

XICATO

LED XTM - 9mm LES
FWHM Asymmetric
Efficiency 92 %
Peak intensity 0.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16058_XTM-ADAPTER-50-C

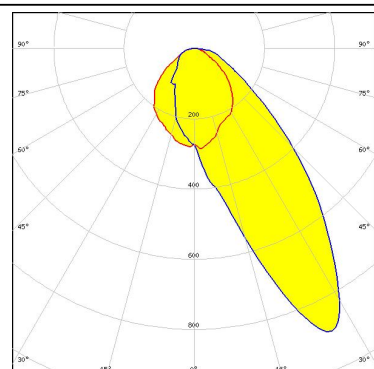

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)