


SKiiP 25NAB066V1

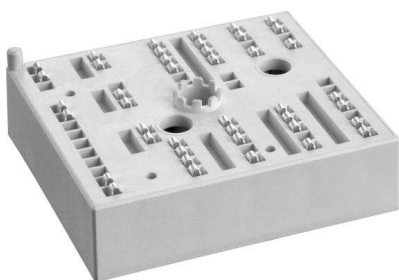

MiniSKiiP®2

3-phase bridge rectifier +
brake chopper + 3-phase
bridge inverter
SKiiP 25NAB066V1

Features


- Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

Typical Applications*

- Inverter up to 10 kVA
- Typical motor power 4,0 kW

Remarks







- Case temperature limited to $T_C = 125^\circ\text{C}$ max.
- Product reliability results are valid for $T_j = 150^\circ\text{C}$
- SC data: $t_p \leq 6 \text{ s}$; $V_{CE} \leq 15 \text{ V}$; $T_j = 150^\circ\text{C}$, $V_{CC} = 360 \text{ V}$
- V_{CEsat} , V_F = chip level

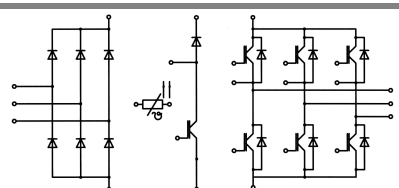

NAB

Absolute Maximum Ratings		$T_S = 25^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT - Inverter, Chopper			
V_{CES}		600	V
I_C	$T_S = 25 (70)^\circ\text{C}$, $T_j = 150^\circ\text{C}$	39 (27)	A
I_C	$T_S = 25 (70)^\circ\text{C}$, $T_j = 175^\circ\text{C}$	43 (32)	A
I_{CRM}	$t_p = 1 \text{ ms}$	60	A
V_{GES}		± 20	V
Diode - Inverter, Chopper			
I_F	$T_S = 25 (70)^\circ\text{C}$, $T_j = 150^\circ\text{C}$	33 (22)	A
I_F	$T_S = 25 (70)^\circ\text{C}$, $T_j = 175^\circ\text{C}$	39 (29)	A
I_{FRM}	$t_p = 1 \text{ ms}$	60	A
Diode - Rectifier			
V_{RRM}		800	V
I_F	$T_S = 70^\circ\text{C}$	46	A
I_{FSM}	$t_p = 10 \text{ ms}$, $\sin 180^\circ$, $T_j = 25^\circ\text{C}$	370	A
i^2t	$t_p = 10 \text{ ms}$, $\sin 180^\circ$, $T_j = 25^\circ\text{C}$	680	A ² s
I_{tRMS}	per power terminal (20 A / spring)	40	A
T_j	IGBT, Diode	-40...+175	$^\circ\text{C}$
T_{stg}		-40...+125	$^\circ\text{C}$
V_{isol}	AC, 1 min.	2500	V

Characteristics		$T_S = 25^\circ\text{C}$, unless otherwise specified		
Symbol	Conditions	min.	typ.	max.
IGBT - Inverter, Chopper				
$V_{CE(sat)}$	$I_{Cnom} = 30 \text{ A}$, $T_j = 25 (150)^\circ\text{C}$		1,45 (1,65)	1,85 (2,05)
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 1 \text{ mA}$		5,8	
$V_{CE(TO)}$	$T_j = 25 (150)^\circ\text{C}$		0,9 (0,85)	1 (0,9)
r_{CE}	$T_j = 25 (150)^\circ\text{C}$		18 (27)	28 (38)
C_{ies}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		1,6	
C_{oes}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		0,19	
C_{res}	$V_{CE} = 25 \text{ V}$, $V_{GE} = 0 \text{ V}$, $f = 1 \text{ MHz}$		0,17	
$R_{CC+EE'}$	spring contact-chip $T_S = 25 (150)^\circ\text{C}$			
$R_{th(j-s)}$	per IGBT		1,35	
$t_{d(on)}$	under following conditions		20	
t_r	$V_{CC} = 300 \text{ V}$, $V_{GE} = -8 \text{ V} / 15 \text{ V}$		20	
$t_{d(off)}$	$I_{Cnom} = 30 \text{ A}$, $T_j = 150^\circ\text{C}$		200	
t_f	$R_{Gon} = R_{Goff} = 12 \Omega$		45	
$E_{on} (E_{off})$	inductive load		0,9 (1,2)	
Diode - Inverter, Chopper				
$V_F = V_{EC}$	$I_F = 30 \text{ A}$, $T_j = 25 (150)^\circ\text{C}$		1,5 (1,5)	1,7 (1,7)
$V_{(TO)}$	$T_j = 25 (150)^\circ\text{C}$		1 (0,9)	
r_T	$T_j = 25 (150)^\circ\text{C}$		16,7 (20)	
$R_{th(j-s)}$	per diode		2,1	
I_{RRM}	under following conditions		46,3	
Q_{rr}	$I_{Fnom} = 30 \text{ A}$, $V_R = 300 \text{ V}$		4	
E_{rr}	$V_{GE} = 0 \text{ V}$, $T_j = 150^\circ\text{C}$		1,1	
	$di_F/dt = 1880 \text{ A/s}$			
Diode - Rectifier				
V_F	$I_{Fnom} = 25 \text{ A}$, $T_j = 25^\circ\text{C}$		1,1	
$V_{(TO)}$	$T_j = 150^\circ\text{C}$		0,8	
r_T	$T_j = 150^\circ\text{C}$		13	
$R_{th(j-s)}$	per diode		1,5	
Temperature Sensor				
R_{ts}	3 %, $T_r = 25 (100)^\circ\text{C}$		1000(1670)	Ω
Mechanical Data				
w			65	g
M_s	Mounting torque	2	2,5	Nm

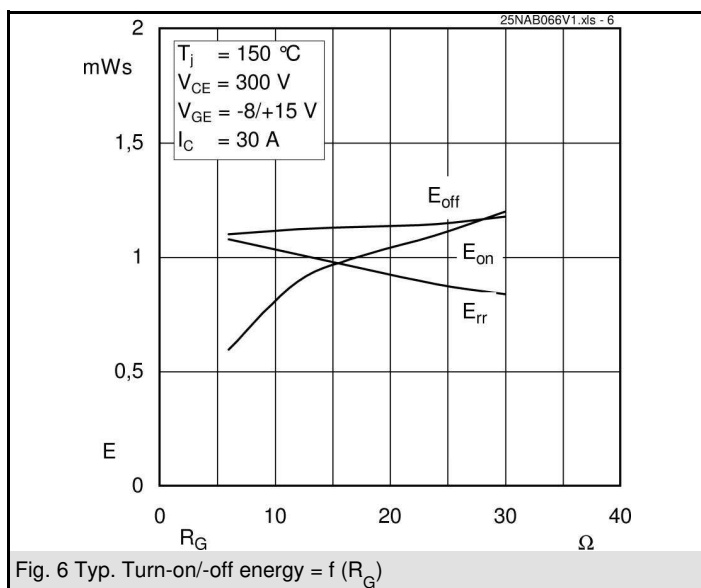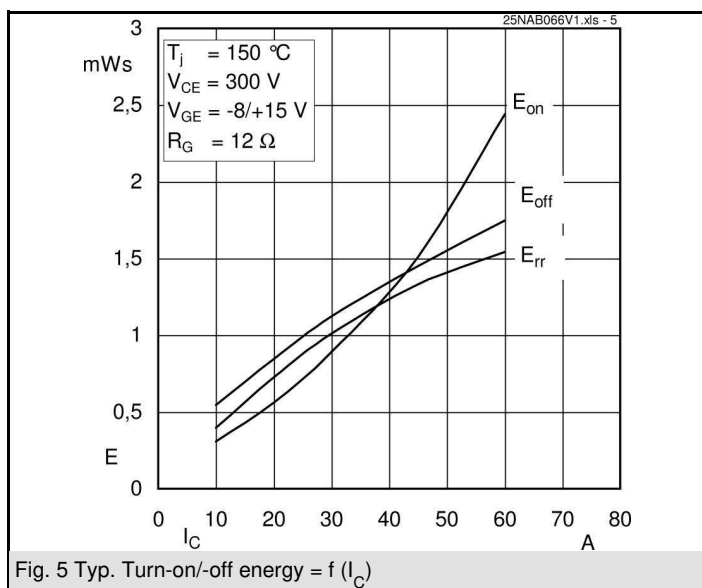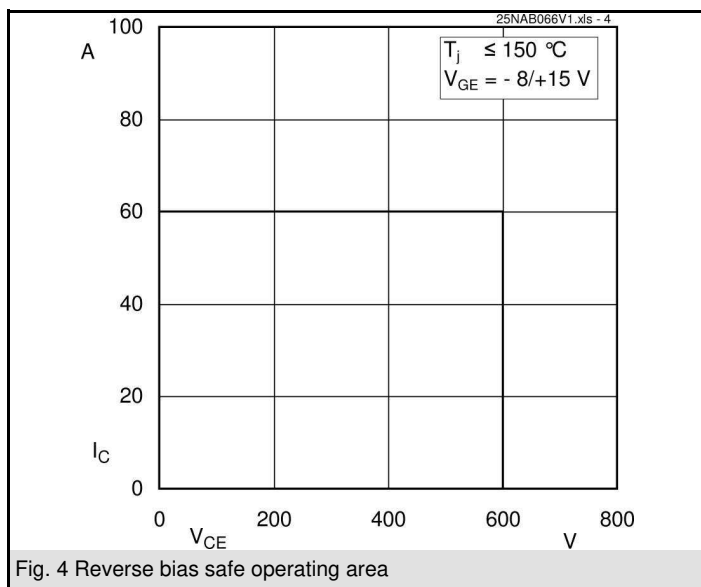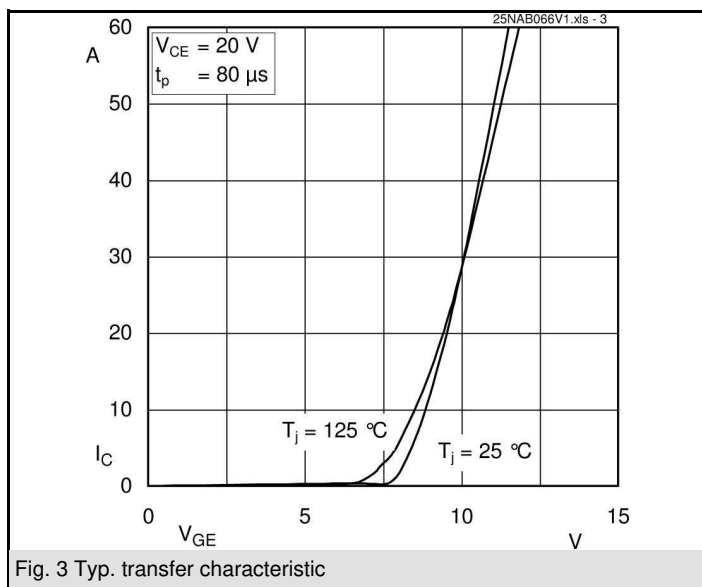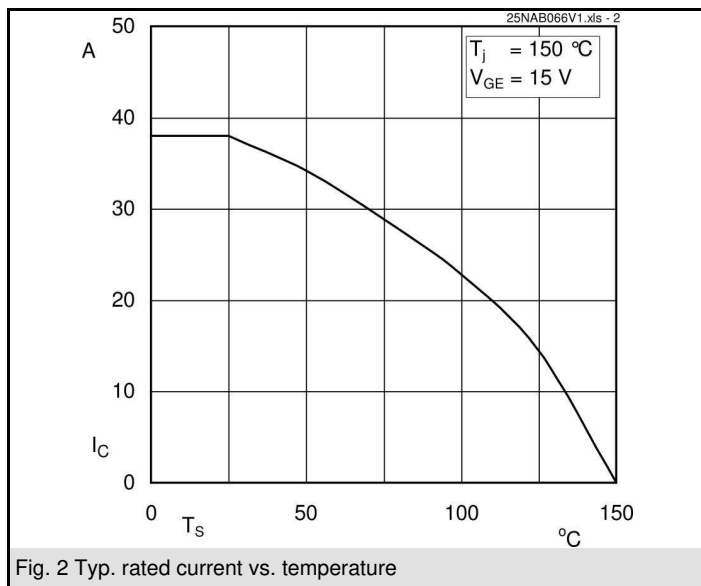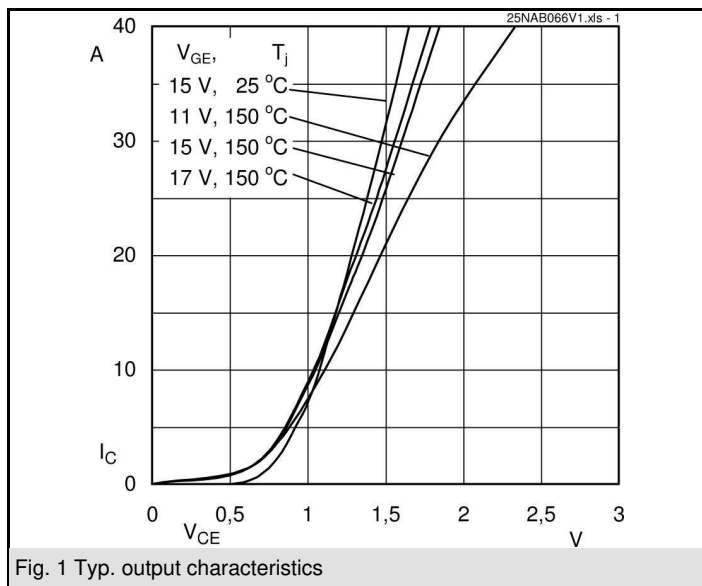

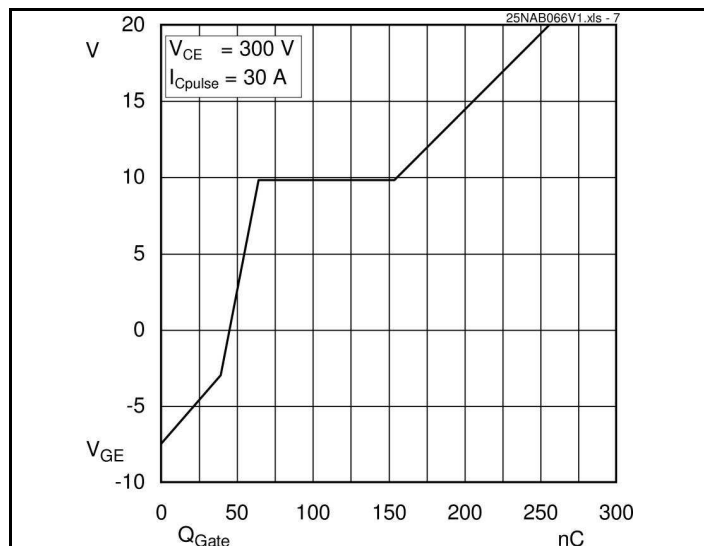


Fig. 7 Typ. gate charge

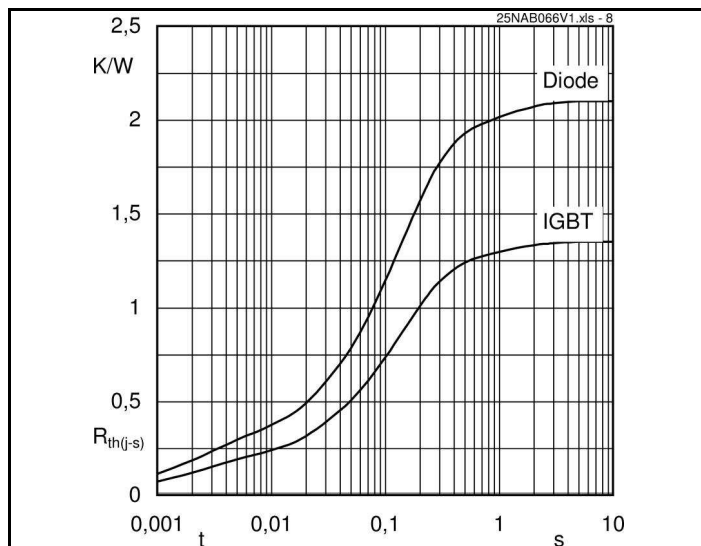


Fig. 8 Typ. thermal impedance

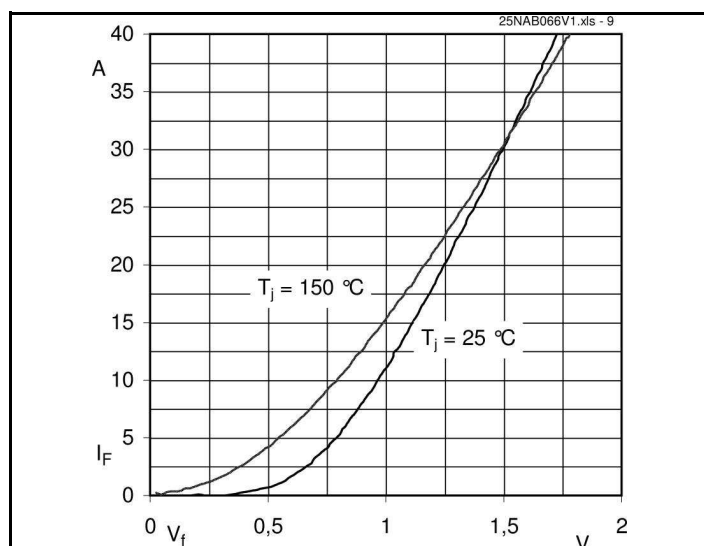


Fig. 9 Typ freewheeling diode forward characteristic

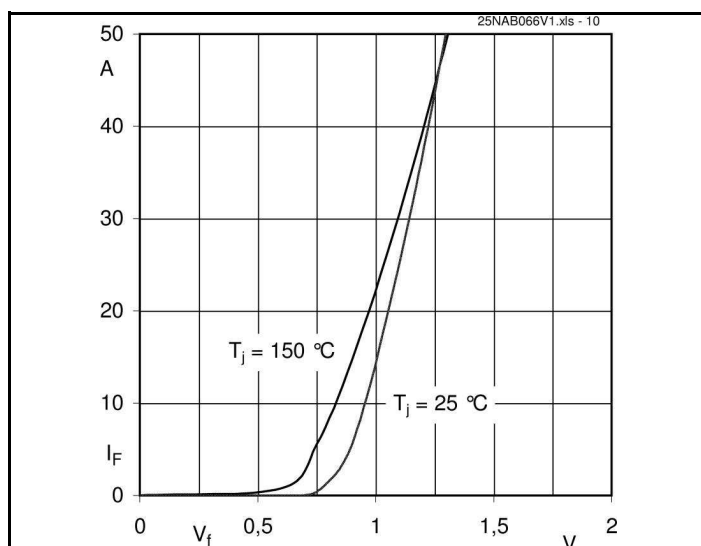


Fig. 10 Typ. input bridge forward characteristic



4

4

4