

A

B





C

D



E

F


TO
R

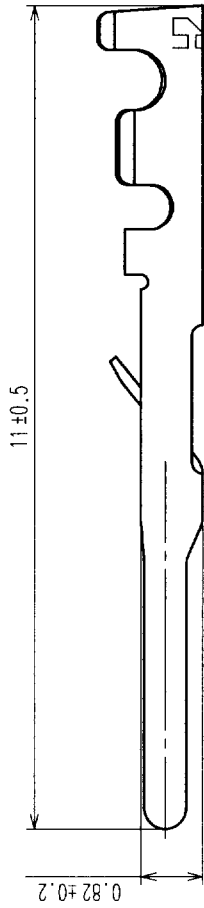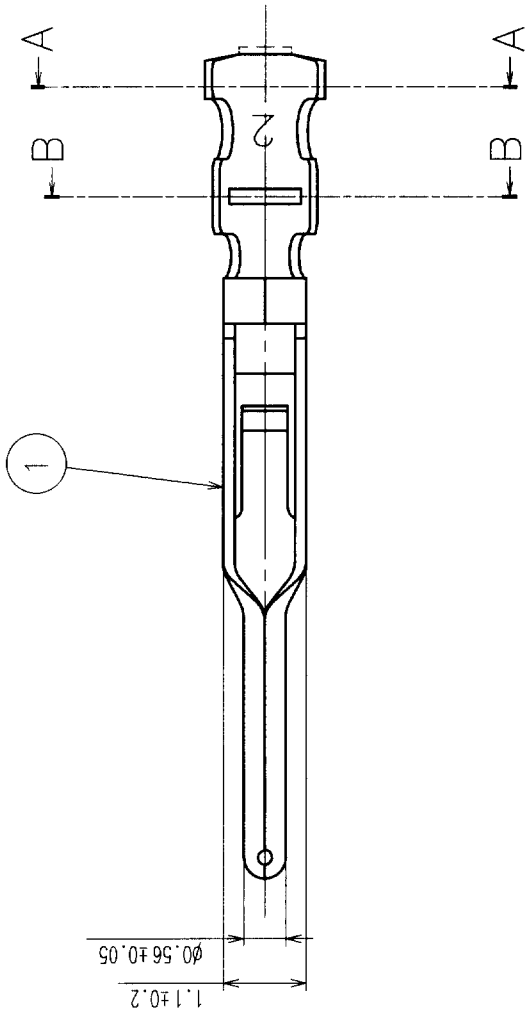

B-B(20:1) A-A(20:1)

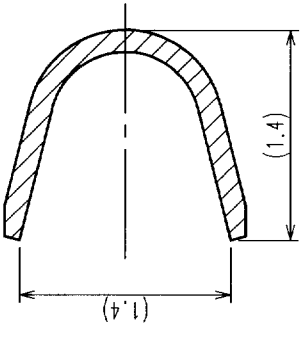

3> FIG.1 RECOMMENDED CABLE PREPARATION DIMENSIONS



- NOTES 1 THIS PRODUCT IS APPLY TO THE WIRE 26-30 AWG(WIRE JACKET DIAMETER Ø1 MAX).
2 APPLICABLE OPERATION CRIMP TOOL:HT102/HR30-1
3> RECOMMENDED CABLE PREPARATION DIMENSIONS ARE SHOWN IN FIG.1.
4 PER PACK:100 CONTACTS

HRS DRAWING FOR REFERENCE

1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING					
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)		DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
		H.Zemba		H.Zemba	E. Kumi	M. Oyashida	
		01.01.05		01.01.05	01.01.05	01.01.10	
DRAWING NO.		PART NO.					
EDC3-112589		HR30-PC-111					
SCALE		CODE NO.					
10 : 1		CL130-0022-3					
UNITS							
mm							
		HIROSE ELECTRIC CO., LTD					