

圖號 DRAWING No. :

品名 NAME: Din Ring

ITEM No. :

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	9	12	17	18	30	35	50

圖面發行章

2015.01.05

研發課

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B	F ±0.25	L ±1.00	E ±0.60	D ±0.30	d1 ±0.30	t
22-16 AWG 0.5-1.5 mm ²		2.7	6.0	11.0	14.0	5.0	3.5	1.6	0.8
		3.2	6.0	11.0	14.0				
		3.7	6.0	11.0	14.0				
		4.3	8.0	12.0	16.0				
		5.3	10.0	13.0	18.0				
		6.5	11.0	15.0	20.5				
		8.4	14.0	16.0	23.0				
		10.5	18.0	18.0	27.0				
16-14 AWG 1.5-2.5 mm ²		3.2	6.0	11.0	14.0	5.0	4.1	2.3	0.8
		3.7	6.0	11.0	14.0				
		4.3	8.0	12.0	16.0				
		5.3	10.0	14.0	19.0				
		6.5	11.0	16.0	21.5				
		8.4	14.0	17.0	24.0				
		10.5	18.0	18.0	27.0				
		12-10 AWG 4-6 mm ²		4.3	8.0				
5.3	10.0			15.0	20.0				
6.5	11.0			16.0	21.5				
8.4	14.0			19.0	26.0				
10.5	18.0			21.0	30.0				
DR12-6NB	13.0		19.0	26.5	36.0				

NOTE: DIN 46234


1. BRAZED SEAM

2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²4. WIRE RANGE: 12-10 AWG / 4-6 mm²

5. MATERIAL THICKNESS: t

TOLERANCE: ±0.05

B	
0-3	+0.00 -0.14
3-6	+0.00 -0.18
6-10	+0.00 -0.22
10-18	+0.00 -0.27
18-30	+0.00 -0.33
30-50	+0.00 -0.38

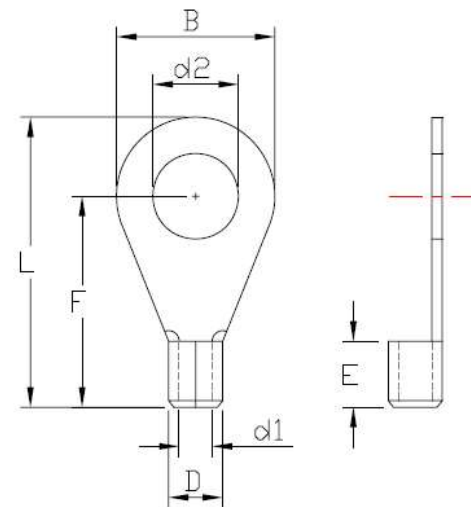


認可 APPROVALS

製圖 DRAFT: TINA

設計 DESIGN: KEN

核可 CHECKED: ANDY

第三視角
THIRD VIEW

MATERIAL

INSULATION: NON

MATERIAL: COPPER

TIN PLATING

單位 UNIT

m/m

比例 SCALE

日期 DATE: 2015.01.05