Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

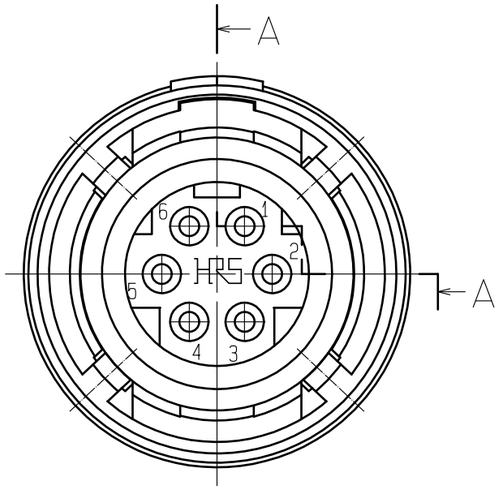

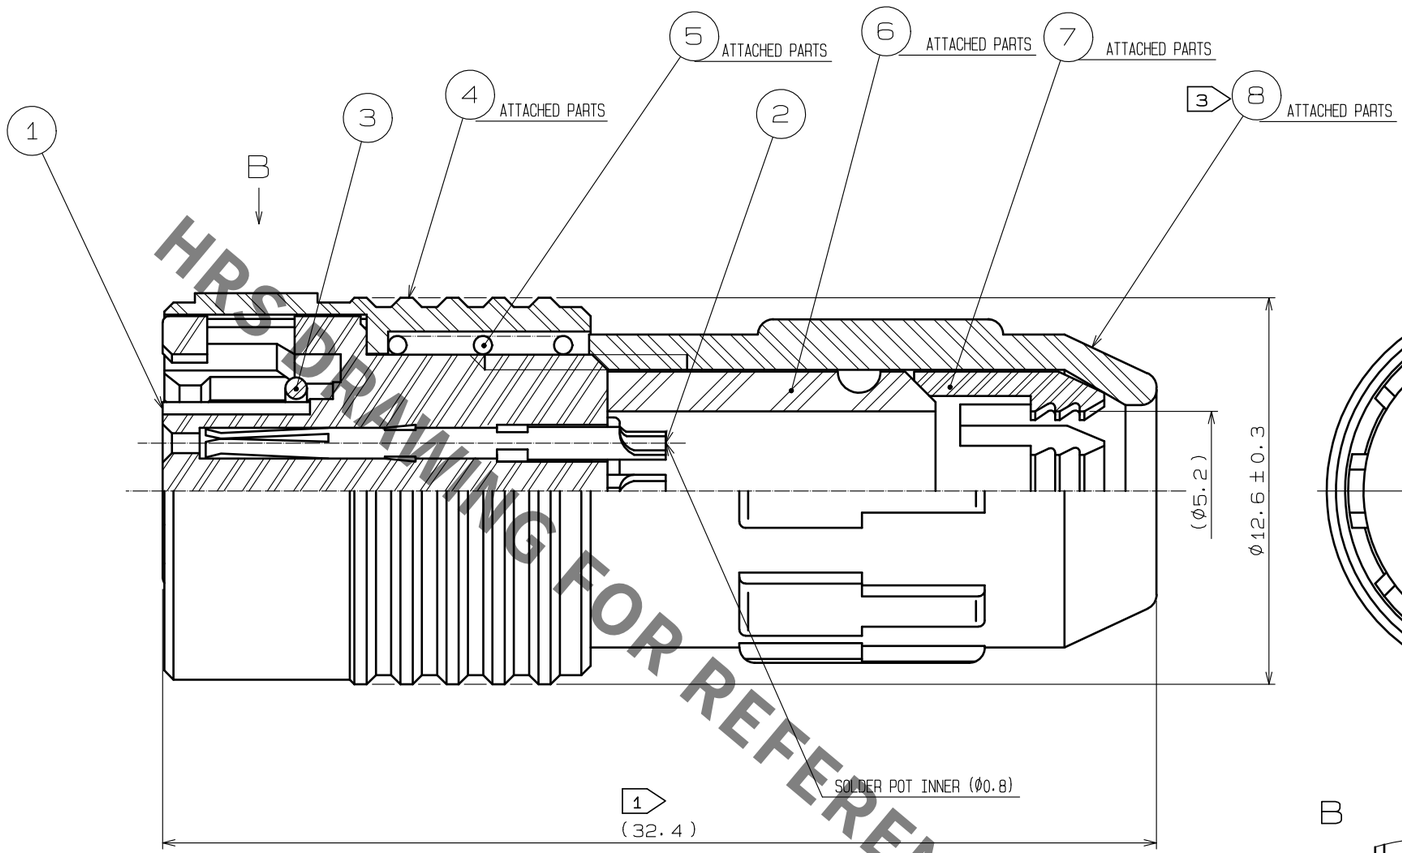

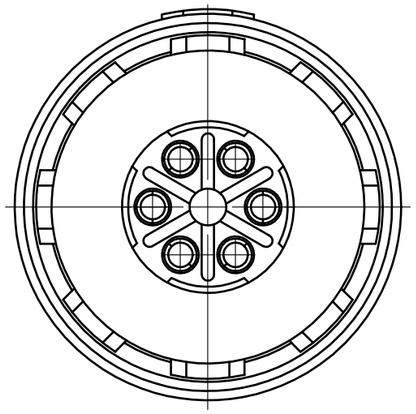



NOTES
1. TOTAL LENGTH BECOMES 29.8±1 WHEN ⑧ IS SCREWED INTO ① COMPLETERY.
2. TABLE FOR ASSEMBLY AND SOLDERING IS AVAILABLE HR30-6P-6S-T01.
3. THE RECOMMENDED CLAMP TORQUE OF REF. No.⑧ TO BE 0.5N·m.
   LOCTITE 263, LOCPRIMER 7649, HENKEL JAPAN IS RECOMMENDED TO PREVENT REF. No.⑧ FROM LOOSENING.
   SPACER FOR ASSEMBLY IS AVAILABLE HR30-6P-T02.
4. SURFACE PLATING : GOLD PLATING 0.2 μm min.
   UNDER PLATING : NICKEL PLATING 2 μm min.
5. THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER, DEPENDING ON THE CABLE STRUCTURE.
   PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
4	PBT	(BLACK) UL94V-0	8	PBT	(BLACK) UL94V-0
3	SIR	(RED)	7	POLYACETAL	NATURAL
2	BRONZE ALLOY	4	6	CR	(BLACK)
1	PPS	(BLACK) UL94V-0	5	STAINLESS STEEL	

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	5 : 1	0				

HIROSE ELECTRIC CO., LTD.

APPROVED	HY. KOBAYASHI	18. 02. 26	DRAWING NO. EDC-112011-31-00
CHECKED	HY. KOBAYASHI	18. 02. 26	PART NO. HR30-6P-6S(31)
DESIGNED	DS. MATSUNE	18. 02. 26	
DRAWN	DS. MATSUNE	18. 02. 26	CODE NO. CL130-0010-4-31 ⓪ 1/1