

6

5





4

3

2

1

Delivery condition

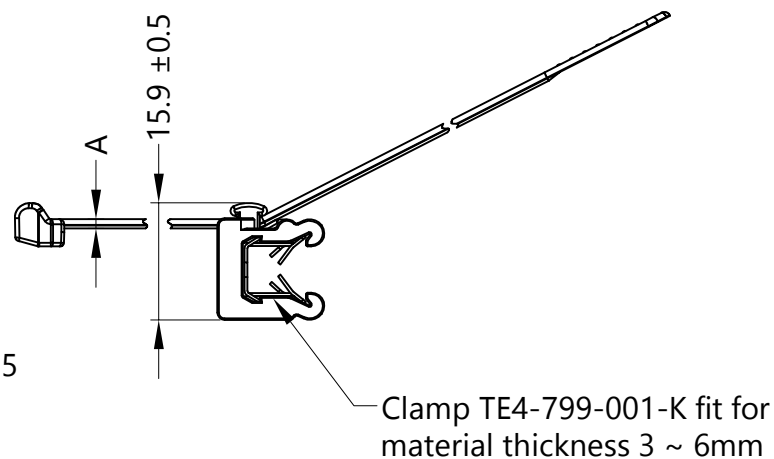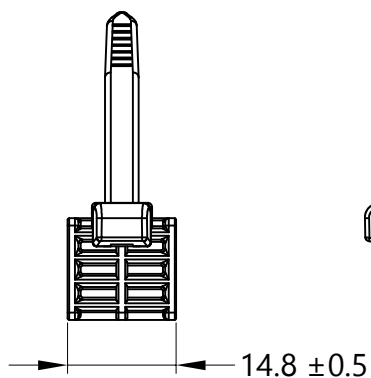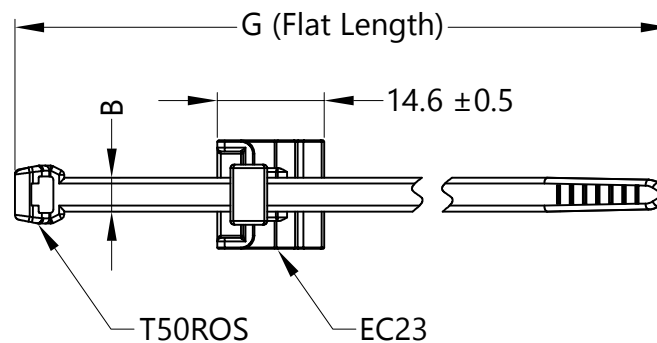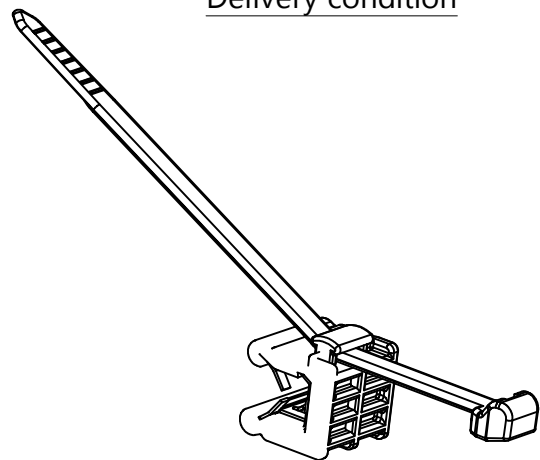

Reference:


1. Cable tie min loop tensile strength 225 newtons (50 lbf)

Notes:

Material: PA 66

A	B	G
1.3 ± 0.2	4.6 ± 0.2	200 ± 5

Revision Level			Revision Record
Drawing	State	Part	ECN #SG10007-02
00.0	Released	.	
Changed	Date (YYYY/MM/DD)		
Simon Ng	2020/06/02		
Approved	Date (YYYY/MM/DD)		
Edward Tan	2020/06/02		



All drawing
revisions are
stored in CAD
PDM database

The copyright of
this drawing is
reserved by
HellermannTyton.

Units
mm

HellermannTyton

www.HellermannTyton.com

Drawn	Date (YYYY/MM/DD)
Mandy Ong	2010/07/07
Approved	Date (YYYY/MM/DD)
Edward Tan	2010/07/07

Title

T50ROSEC23

Drawing-No

04-0827-001-CSH

Scale 1 : 1

Global Project Number
04-0827

Format A4

Sheet 1 / 1