



5SDD 06D6000

Old part no. DV 817-630-60

High Voltage Diode

Properties

- Low forward voltage drop
- Low recovery charge
- High operating temperature
- Low leakage current

Applications

- Rectifier bridges

Key Parameters

V_{RRM}	=	6 000	V
I_{FAVm}	=	662	A
I_{FSM}	=	10 500	A
V_{TO}	=	1.066	V
r_T	=	0.778	mΩ

Types

	V_{RRM}
5SDD 06D6000	6 000 V
Conditions:	$T_j = -40 \div 150\text{ °C}$, half sine waveform, $f = 50\text{ Hz}$

Mechanical Data

F_m	Mounting force	11 ± 1	kN
m	Weight	0.25	kg
D_s	Surface creepage distance	30	mm
D_a	Air strike distance	18.5	mm

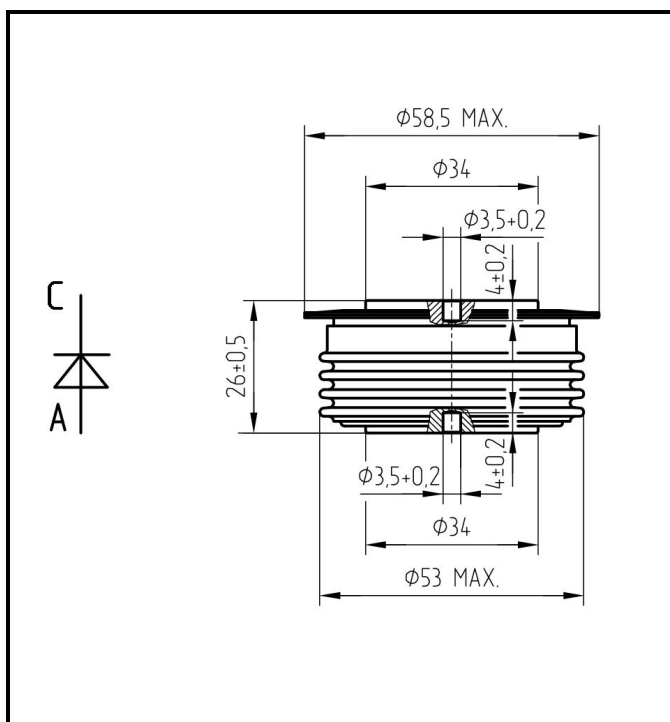


Fig. 1 Case



ABB s.r.o.

Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic

tel.: +420 261 306 250, <http://www.abb.com/semiconductors>

Maximum Ratings			Maximum Limits	Unit
V_{RRM}	Repetitive peak reverse voltage $T_j = -40 \div 150\text{ }^{\circ}\text{C}$		6 000	V
I_{FAVm}	Average forward current $T_c = 85\text{ }^{\circ}\text{C}$		662	A
I_{FRMS}	RMS forward current		1 040	A
I_{RRM}	Repetitive reverse current $V_R = V_{RRM}$		50	mA
I_{FSM}	Non repetitive peak surge current $V_R = 0\text{ V}$, half sine pulse, $T_j = 25\text{ }^{\circ}\text{C}$	$t_p = 8.3\text{ ms}$	12 500	A
		$t_p = 10\text{ ms}$	11 700	A
	Non repetitive peak surge current $V_R = 0\text{ V}$, half sine pulse	$t_p = 8.3\text{ ms}$	11 200	A
		$t_p = 10\text{ ms}$	10 500	A
I^2t	Limiting load integral $V_R = 0\text{ V}$, half sine pulse, $T_j = 25\text{ }^{\circ}\text{C}$	$t_p = 8.3\text{ ms}$	648 000	A^2s
		$t_p = 10\text{ ms}$	684 450	A^2s
	Limiting load integral $V_R = 0\text{ V}$, half sine pulse	$t_p = 8.3\text{ ms}$	522 000	A^2s
		$t_p = 10\text{ ms}$	551 250	A^2s
$T_{jmin} - T_{jmax}$	Operating temperature range		$-40 \div 150$	$^{\circ}\text{C}$
T_{STG}	Storage temperature range		$-40 \div 150$	$^{\circ}\text{C}$

Unless otherwise specified $T_j = 150\text{ }^{\circ}\text{C}$

Characteristics		Value			Unit
		min	typ	max	
V_{T0}	Threshold voltage, $I_{F1} = 1\text{ }040\text{ A}$, $I_{F2} = 3\text{ }120\text{ A}$;			1.066	V
r_T	Forward slope resistance			0.778	m Ω
V_{FM}	Maximum forward voltage $I_{FM} = 900\text{ A}$			1.750	V
Q_{rr}	Recovered charge $V_R = 100\text{ V}$, $I_{FM} = 1\text{ }000\text{ A}$, $di_F/dt = -10\text{ A}/\mu\text{s}$		2 000		μC

Unless otherwise specified $T_j = 150\text{ }^{\circ}\text{C}$

Thermal Parameters			Value	Unit
R_{thjc}	Thermal resistance junction to case	double side cooling	42	K/kW
		anode side cooling	70	
		cathode side cooling	105	
R_{thch}	Thermal resistance case to heatsink	double side cooling	8	K/kW
		single side cooling	16	

Transient Thermal Impedance

Analytical function for transient thermal impedance

$$Z_{thjc} = \sum_{i=1}^5 R_i (1 - \exp(-t / \tau_i))$$

Conditions:

$F_m = 11 \pm 1$ kN, Double side cooled

i	1	2	3	4	5
R_i (K/kW)	23.59	14.17	1.33	2.79	0.12
τ_i (s)	0.4271	0.1337	0.0366	0.0050	0.0009

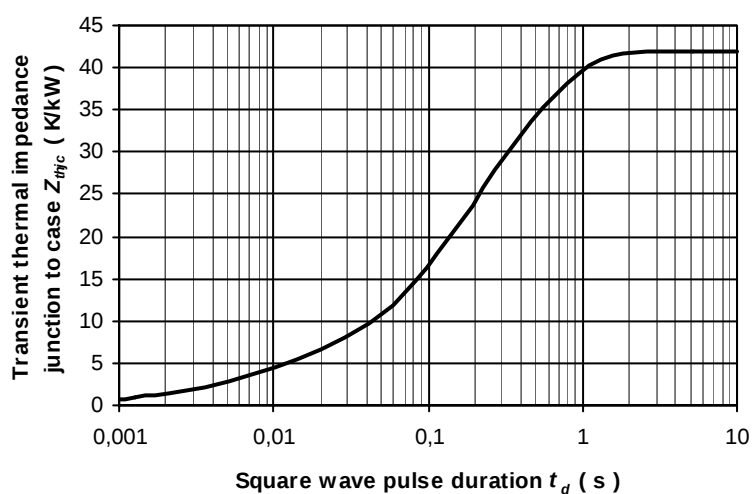


Fig. 2 Dependence transient thermal impedance junction to case on square pulse

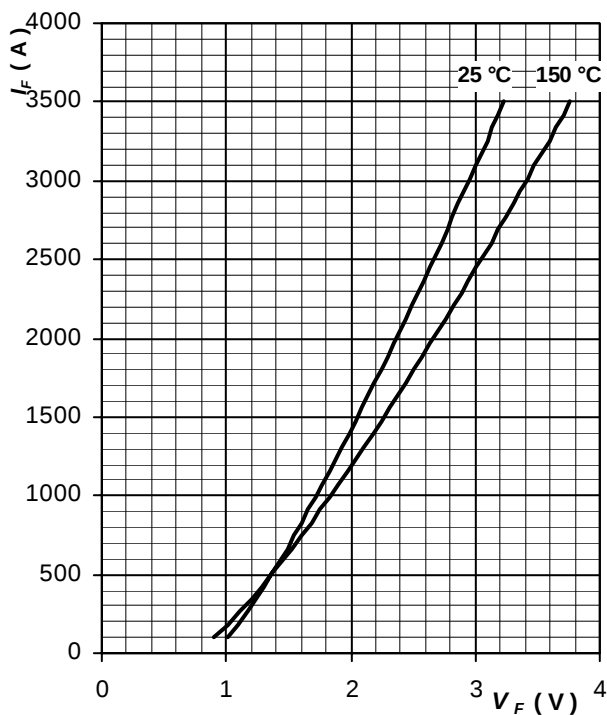


Fig. 3 Maximum forward voltage drop characteristics

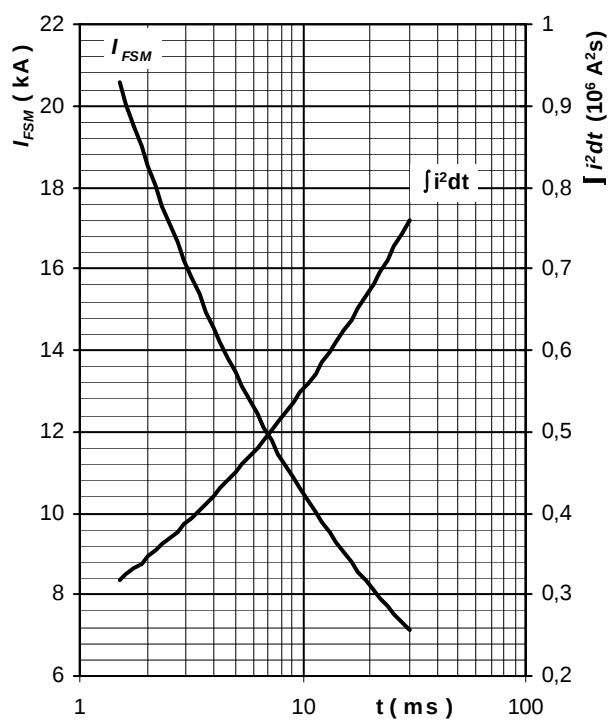


Fig. 4 Surge forward current vs. pulse length,
half sine wave, single pulse,
 $V_R = 0 \text{ V}$, $T_j = T_{jmax}$

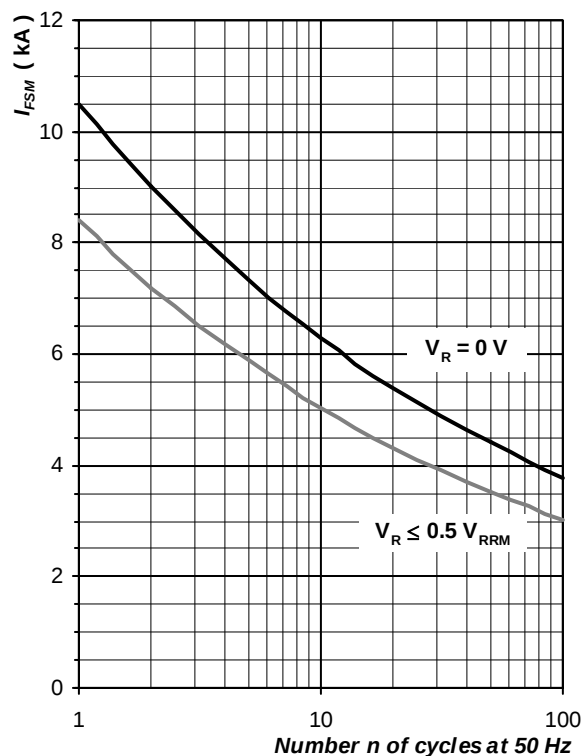


Fig. 5 Surge forward current vs. number
of pulses, half sine wave, $T_j = T_{jmax}$

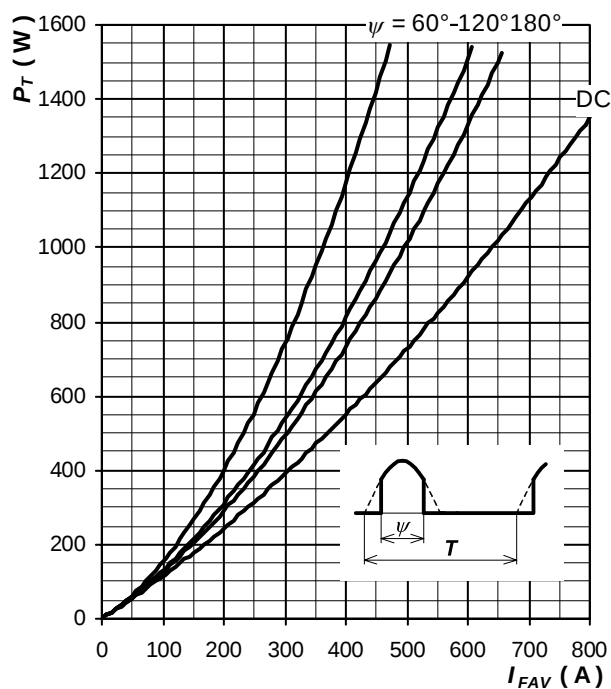


Fig. 6 Forward power loss vs. average forward current, sine waveform, $f = 50$ Hz, $T = 1/f$

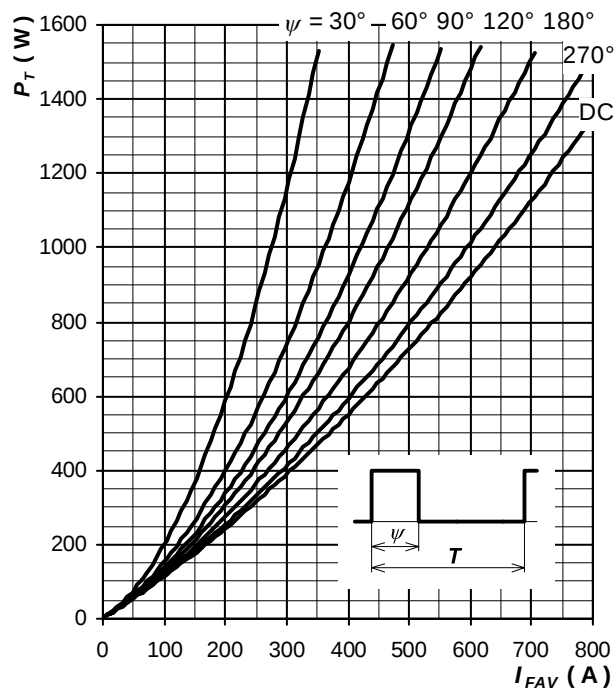


Fig. 7 Forward power loss vs. average forward current, square waveform, $f = 50$ Hz, $T = 1/f$

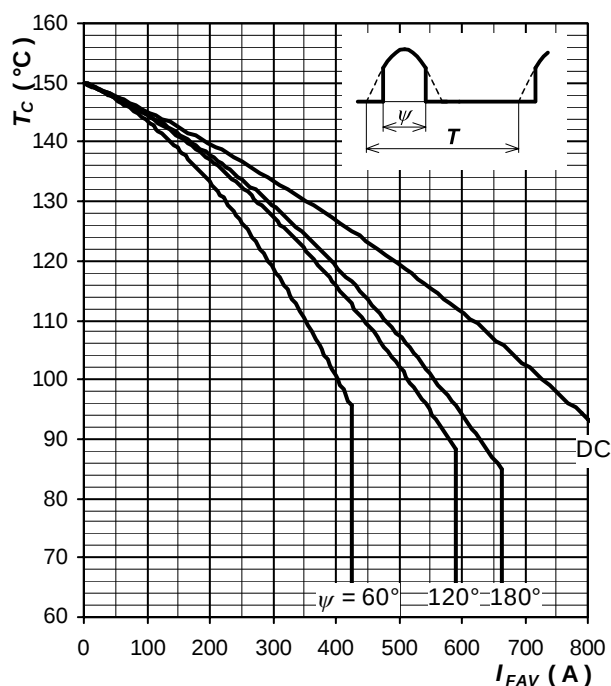


Fig. 8 Max. case temperature vs. aver. forward current, sine waveform, $f = 50$ Hz, $T = 1/f$

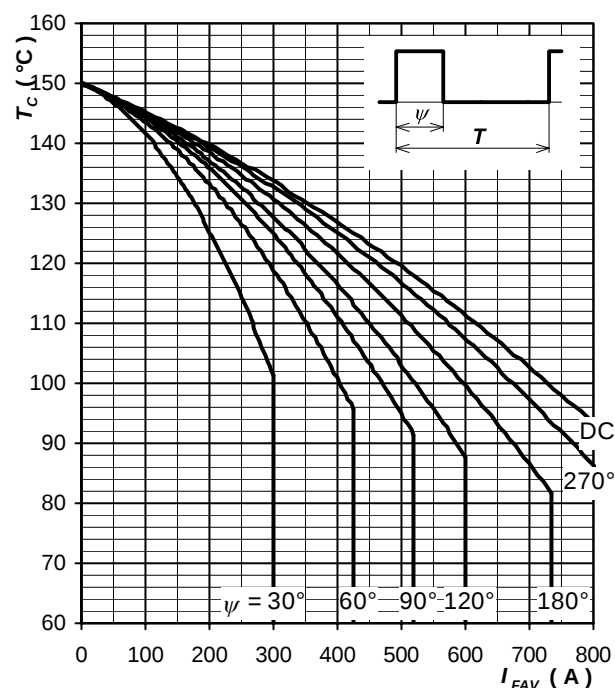


Fig. 9 Max. case temperature vs. aver. forward current, square waveform, $f = 50$ Hz, $T = 1/f$

Notes: