







This document is the property of Amphenol Corporation and is delivered on the understanding that it contains neither recommendations nor instructions for use. It is the user's responsibility to determine the suitability of its use for any particular application. It is not to be used for any purpose other than that for which it was specifically designed. It is not to be used for any purpose other than that for which it was specifically designed. It is not to be used for any purpose other than that for which it was specifically designed. It is not to be used for any purpose other than that for which it was specifically designed.

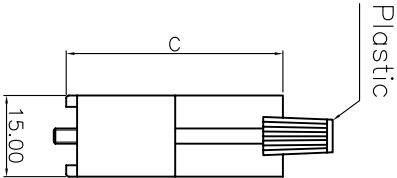

09 pos.
L17DSSK09TP

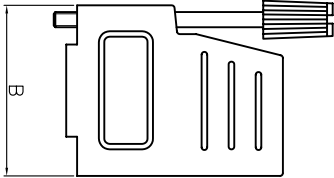

15 pos.
L17DSSK15TP

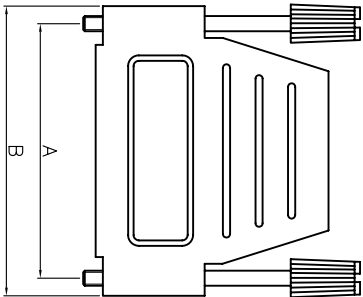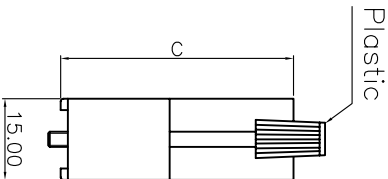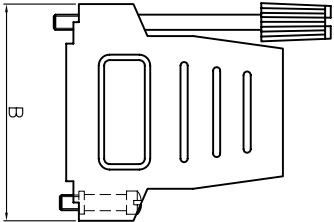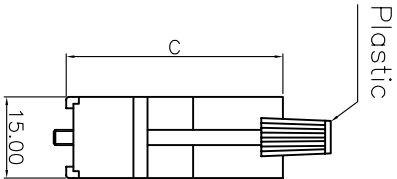

25, 37 pos.
L17DSSK25/37TP

Commercial Part Number	Dimension			Internal Part Number
	A	B	C	
L 17D SSK 09 TP	/	31.5	40.0	R172096
L 17D SSK 15 TP	/	33.3	40.0	R172018
L 17D SSK 25 TP	/	47.0	53.5	R172253
L 17D SSK 37 TP	/	63.5	71.3	/



REVISIONS			
SYM	ECN	DESCRIPTION	DATE
A	HK4729	Release new drawing	10/11/07

D-SUB TECHNICAL DATA

Plastic material:
Thermoplastic, UL94-V0 color black
Cable dimensions: From 3mm up to 11mm
Cable strain relief: cable clamp with self-tapping screws
Temperature range: -40°C to 120°C
Attenuation factor: >40 dB between 30 MHz and 1 GHz

PRODUCT CODE

L 17DSSK XX TP

RoHS Compliance

Series: 17DSSK

Screwlock Top Plastic

Position: 09,15,25,37

UNLESS OTHERWISE SPECIFIED				APPROVAL		DATE	TITLE			
TOLERANCES		U.S.		DRAWN	Iss. prng					
FRACTIONS		0.50		CHECKED	10/11/07					
ANGLES		0.20			10/11/07					
REMOVE SHARP EDGES				DRAWING FILE: L17DSSKXXTP						
SEE NOTES				ANGLE OF PROJECTION						
DIMENSIONS		U.S.		SIZE			DRAWING NO.			
INCHES		MM		A4						
SCALE		NONE		SHEET 1 OF 1			REV.			