

**038  
E 6,3**

**IMPACT Bithalter**  
IMPACT Bitholder



|  | 95 mm | E 6,3 | 6 | Art.-Nr.          | 43 | EAN-Code         |
|--|-------|-------|---|-------------------|----|------------------|
|  |       |       |   | <b>038 295 90</b> |    | 40 07157 63337 8 |

**038  
E 6,3**


**IMPACT Bithalter  
in Blister**  
IMPACT Bitholder  
blistered



|  | 95 mm | E 6,3 | 6 | Art.-Nr.          | 53 | EAN-Code         |
|--|-------|-------|---|-------------------|----|------------------|
|  |       |       |   | <b>038 295 94</b> |    | 40 07157 63077 3 |

**Der Hochleistungs-Bit • nimmt Drehmomentstöße auf • verlängert wesentlich die Standzeiten • reduziert die Anpresskräfte**

*The high performance bit • absorbs torque peaks • substantially extends tool life • reduces contact pressure*

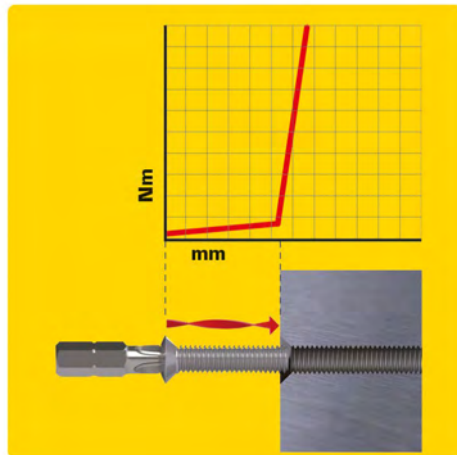

## Harter Schraubfall

### Problem:

Beim Aufsetzen des Schraubenkopfs entsteht schlagartig eine Drehmoment Spitze, welche Schraube und Bit beschädigen kann.

### Lösung:

Felo IMPACT Bits absorbieren Drehmoment Spitzen und verhindern wirkungsvoll Beschädigungen.


## Hard screw joint

### Problem:

The sudden torque peak occurring when the screw head hits the surface of the work piece can damage screw and bit.

### Solution:

Felo IMPACT bits absorb torque peaks and effectively prevent damage.

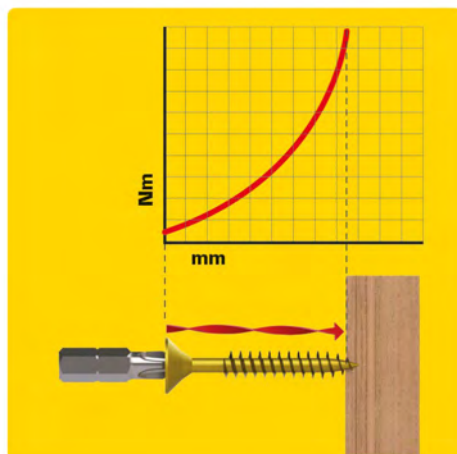

## Weicher Schraubfall

z.B. Verschraubungen in Holz, bei denen das Drehmoment kontinuierlich ansteigt.

### Zusätzlicher Vorteil:

Besonders verschleißfeste Profile erhöhen die Lebensdauer des Bits.

## Soft screw joint

e.g. fastening screws into wood, with torque steadily increasing along the way.

### Extra advantage:

Especially wear-resistant profiles increase life span of the bits.