

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



CHARX connect comfort, AC charging cable, with vehicle charging connector and open cable end, for charging electric vehicles (EV) with alternating current (AC) via type 1 vehicle charging inlets, with protective cap, with locking option for padlock, Type 1, IEC 62196-2, SAE J1772, PSE, PHOENIX CONTACT logo, cable: 5 m, black, straight

Product Description

AC charging cable with vehicle charging connector and free cable end for charging electric vehicles (EV) with alternating current (AC) via type 1 vehicle charging inlets, for installation at charging stations for e-mobility (EVSE)

Your advantages

- Complete product range
- Convenient handling due to the ergonomic, triple award-winning design
- Available with your logo on request – for consistent branding of your charging station
- Longitudinal water tightness reliably prevents water ingress
- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Tested in accordance with automotive standards LV124, LV214, and LV215-2
- Tested in accordance with EV Ready 37 requirements
- Laser-marked mating face in accordance with DIN EN 17186

Commercial Data

Item number	1033865
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	XWBAAA
Product Key	XWBAAA
Catalog Page	Page 25 (C-7-2019)
GTIN	4055626540559
Weight per Piece (including packing)	2.198 kg
Weight per Piece (excluding packing)	2.198 kg
Customs tariff number	85444290
Country of origin	PL

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Technical Data

Product properties

Product type	AC charging cable
Product family	CHARX connect comfort
Application	for charging electric vehicles (EV) with alternating current (AC) via type 1 vehicle charging inlets for installation at charging stations for electromobility (EVSE)
Type	AC charging cable with vehicle charging connector and open cable end
Design	with protective cap with locking option for padlock
Locking type	No locking option for U-lock
Affixed logo	PHOENIX CONTACT logo
Charging mode	Mode 3, Case C
Charging standard	Type 1

Electrical properties

Type of signal transmission	Pulse width modulation
Note on the connection method	Crimp connection, cannot be disconnected
Coding	480 Ω (Lever actuated) 150 Ω (Lever not actuated)
Type of charging current	AC single-phase
Charging power	7.5 kW
Charging current	30 A

Power contact

Number	3 (L1, N, PE)
Rated voltage	250 V AC
Rated current	30 A

Signal contact

Number	2 (CP, CS)
Rated voltage	30 V AC
Rated current	2 A

Dimensions

Vehicle charging connector

Width	58 mm
Height	151.1 mm
Depth	236.1 mm

Vehicle charging connector

Width	58 mm
Height	151.1 mm

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Depth	236.1 mm
-------	----------

Material specifications

Color (Housing)	black (9005)
	black (9005)
	silver gray (7001)
	black (9005)
	black (9005)
	black (9005)
Material (Vehicle charging connector)	Plastic
	TPE-U
	Silver

Cable/line

Cable length	5 m
Wiring certifications	PSE
Cable weight	max. 420 kg/km
Cable type	straight
Cable structure	3 x 6.0 mm ² + 1 x 0.75 mm ²
External cable diameter	16.3 mm
Stripping length of the sheath	60 mm ±15 mm
Cable resistance	≤ 0.00317 Ω/m (based on a power core, at an ambient temperature of 20°C)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 10000
Insertion force	< 75 N
Withdrawal force	< 75 N

Environmental and real-life conditions

Ambient conditions

Degree of protection Vehicle charging inlet	IP44 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
	IP54
Ambient temperature (operation)	-30 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	5000 m (above sea level)

Standards and regulations

Standards

IEC 62196-2

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Standards/regulations	SAE J1772
	PSE


EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable

1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Drawings

Schematic diagram

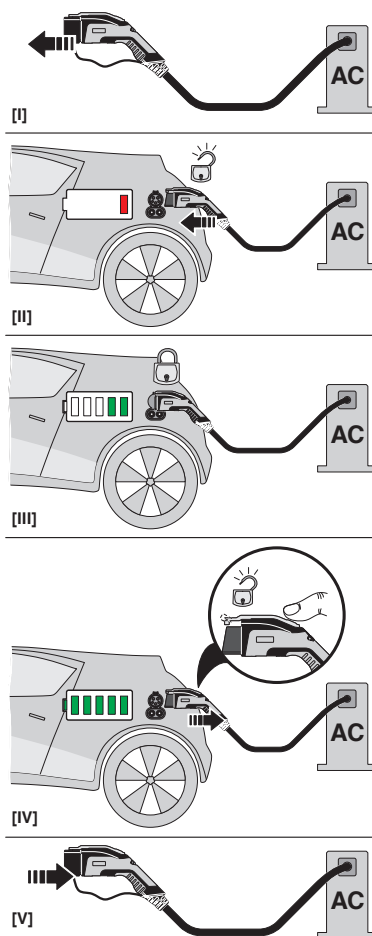


Operating instructions

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable

1033865


<https://www.phoenixcontact.com/pl/produkty/1033865>

Connection diagram

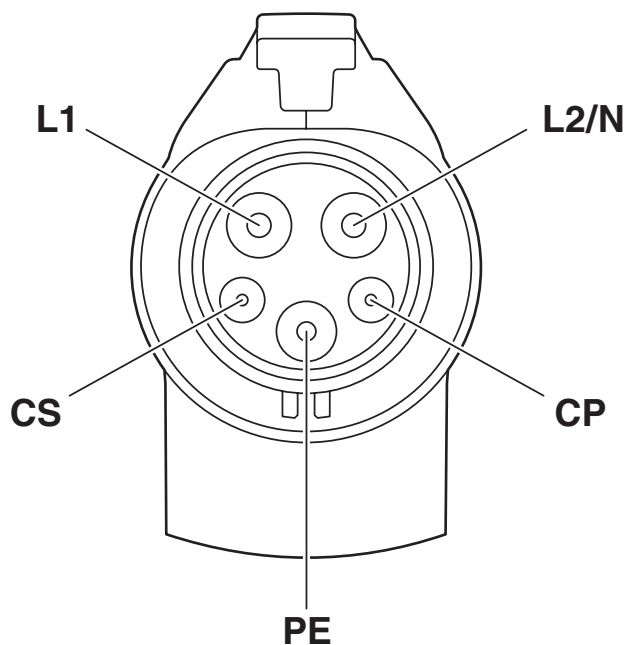

Pin assignment of the Vehicle Connector

Dimensional drawing

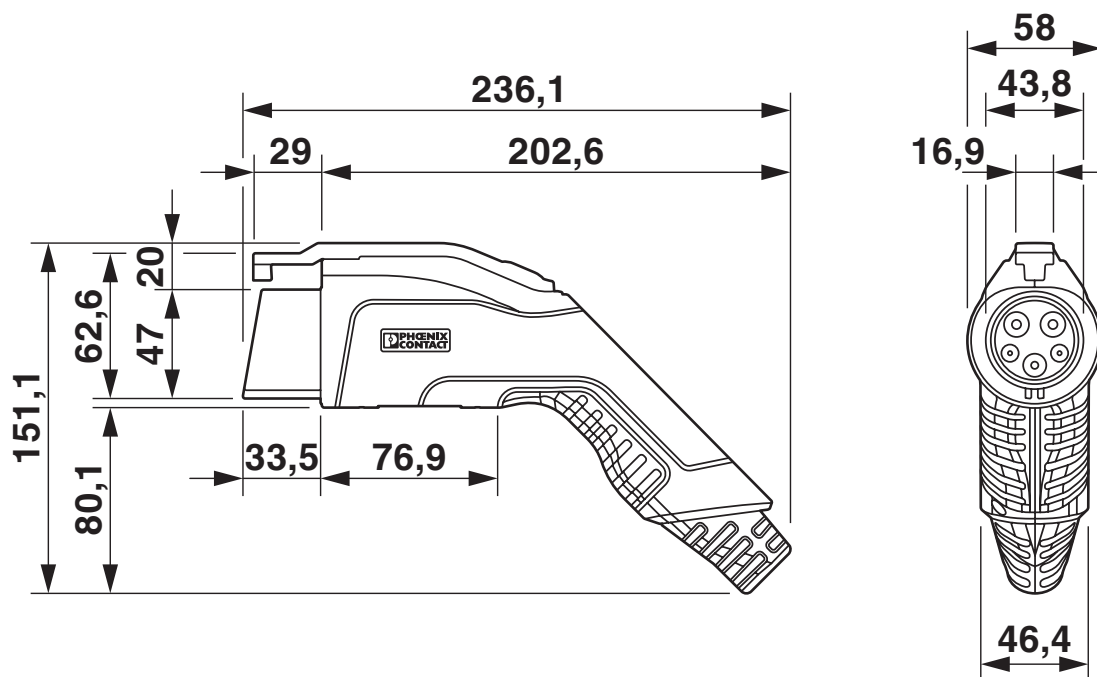

Make sure that the vehicle charging connector is placed in an appropriate charging connector holder, which ensures a minimum protection rating of IP24 in accordance with IEC 61851-1, for the entire time between charging. To create this charging connector holder, use the dimensions of the vehicle charging connector. Detailed dimensions can also be found in the Download area.


EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Schematic diagram

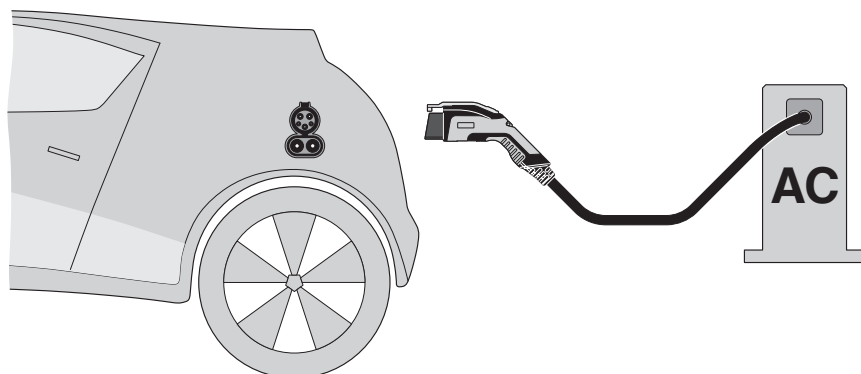

Terminology definition

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Approvals

PSE Approval ID: JET7416-43006-1001				
	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	250 V	30 A	-	-

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Classifications

ECLASS

ECLASS-9.0	27144705
ECLASS-10.0.1	27144705
ECLASS-11.0	27144705

ETIM

ETIM 8.0	EC002897
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865
<https://www.phoenixcontact.com/pl/produkty/1033865>

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 10;
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

EV-T1G3C-1AC30A-5,0M6,0JSBK11 - AC charging cable



1033865

<https://www.phoenixcontact.com/pl/produkty/1033865>

Accessories

EV-T1AC-PARK - Charging connector holder

1624139

<https://www.phoenixcontact.com/pl/produkty/1624139>



CHARX connect, Charging connector holder, Accessories, for vehicle charging connectors on charging stations (EVSE), Type 1, SAE J1772, Front mounting, housing: black

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Sp. z o.o.
ul. Bierutowska 57-59, Budynek nr 3/A
51-317 Wrocław
71/ 39 80 410
pxcpl@phoenixcontact.pl