




1	2	3	4	5	6	7	8	
				REV. A	ECN NO. Initial Release	DATE 2011/07/26	SIGN Kevin Wang	DESCRIPTION



⑦ Sealing Nut




⑥ Seal




⑤ Clamp Ring




④ Gasket




③ Lock Nut
3Key



② Connector Assy




① O-Ring



Pin Assignments
Front View


FPin

MPin

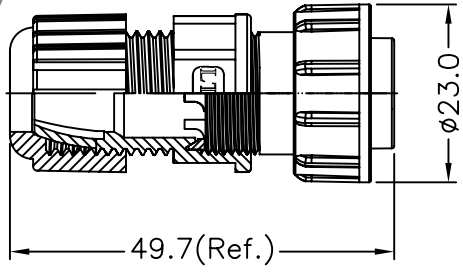

49.7(Ref.)

ø23.0




Conn.

ALTW
DCC. DEPT.
CONFIDENTIAL
2011.07.28
ISSUED

ALTW
CONFIDENTIAL
2011.07.26
R&D DEPT.

Note:

- * @C Important Dimension.
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * O-Ring: EPDM, Black
- * Lock Nut: Nylon+GF, Black
- * Gasket: Silicone, Black
- * Clamp Ring: Nylon, Black
- * Seal: EPDM, Black
- * Sealing Nut: Nylon, Black
- * Cable OD Max : ø9.6mm

UNIT:mm		TITLE HyBrid Assy.,Middle,3Key 3FPin(10A)+5MPin(2A)	Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO LTWCBU-08BFDA-TL7001	DRAWN BY Kevin Wang	DATE 2011/07/26
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE Free	SHEET 1 OF 1	DWG NO LTWCBU-08BFDA-TL7001	CHECKED BY Micky	DATE 2011/07/26	
REV. A		SIZE A4	@C :Inspection Item	CUSTOMER	APPROVED BY Victor	DATE 2011/07/26	

1

2

3

4

5

6

7

8 FMW10702-01-01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.