


1

Resistor - Weerstand - Résistance - Widerstand - Resistencia - Motstand - Vastus - Resistenze
 $\diamond R1... R4: 470$

(Yellow, Purple, Brown) -(Geel, Paars, Bruin) -(Jaune, Violet, Brun) -(Gelb, Violet, Braun) -(Gul, Lila, Brun) -(Keltainen, Purppura, Punainen, Ruskea) -(Amarillo, Morado, Marrón) -(Amarelo, Violeta, Castanho) -(Giallo, Viola, Marrone)



$\diamond R5, R6: 4K7$

(Yellow, Purple, Red) -(Geel, Paars, Rood) -(Jaune, Violet, Rouge) -(Gelb, Violet, Rot) -(Gul, Lila, Röd) -(Keltainen, Purppura, Punainen) -(Amarillo, Morado, Rojo) -(Amarelo, Violeta, Encarnado) -(Giallo, Viola, Rosso)


$\diamond R7: 47$

(Yellow, Purple, Black) -(Geel, Paars, Zwart) -(Jaune, Violet, Noir) -(Gelb, Violet, Schwarz) -(Gul, Lila, Svart) -(Keltainen, Purppura, Musta) -(Amarillo, Morado, Negro) -(Amarelo, Violeta, Preto) -(Giallo, Viola, Nero)

2

DIODE


$\diamond D1: BAT85$
 Watch the polarity!
 Att. la polarité!



3


DIODE

$\diamond D2: 1N4007$
 Watch the polarity!
 Att. la polarité!

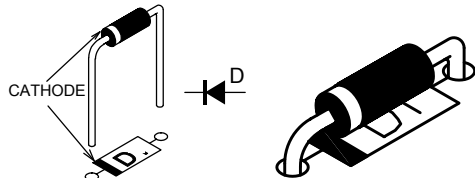


4

$\diamond SW1...SW4$



5


IC Socket - IC voet - Support de CI - IC Fuß - Soproto del CI - IC Sockel - Mikropiirkanta - IC sokkel - Zoccolo IC



6

Capacitor


$\diamond C1: 1\mu F (105)$



7

LED


$\diamond LD1... LD4: 3mm$



8

Transistor


$\diamond T1: BC547$




9

LS

$\diamond LS1: TV3$



10

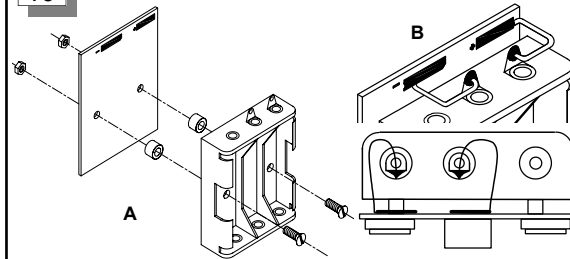

11

IC - CI

$\diamond IC1$

